BIG WHITE®
2027

SLV LIGHTING CATALOGUE



SLV

EXPERIENCE LIGHT

PROFESSIONAL LIGHTING SOLUTIONS FOR YOUR DAY-TO-DAY PROJECTS

With SLVtec®, we bring together our technical expertise in a standalone portfolio for professional, project-based lighting. SLVtec® stands for functional and energy-efficient lighting solutions that have been specially developed for industrial, office and retail applications.

SLVtec® products combine uncompromising quality with innovative features, high availability and quick, straightforward installation. Whether it's a new build, a refurbishment or a special application: with SLVtec®, you can tackle any project with confidence and efficiency.

PLANNED FROM AN ECONOMIC PERSPECTIVE

High efficiency, a long service life and reliable product quality ensure predictable project and operating costs.

AVAILABLE SOON

High stock availability and fast delivery times ensure reliable project scheduling.

EASY TO INSTALL

Intelligent mounting systems, tool-free cabling and innovative quick-release connectors make installation quick and easy, saving time and effort.

FLEXIBLY ADAPTED

Multi-lumen and multi-colour functions allow for a wide range of options and make it easier to adapt to different project requirements.

BROWSE ONLINE NOW AND ORDER THE NEW CATALOGUE – AT SLV.COM

OUR HIGHLIGHTS




EASYLIGHT & RETRO

LED continuous-row lighting systems with up to 200 lm/W, 100,000 h service life and tool-free installation



TUBULAR

Robust wet-room lights with IP66 & IP69K ratings, HACCP compliance and up to 160 lm/W with a service life of 100,000 hours



P LINE WORK LIGHT

Office lighting with a UGR < 19, separate up/downlight controls and a service life of 100,000 hours

OUR BIG WHITE® 2027

YOUR PORTFOLIO FOR MODERN LIGHTING PROJECTS

Nowadays, lighting projects require more than just products. You need flexible solutions that work reliably, can be installed quickly and are optimally tailored to the requirements of modern projects. That is precisely what BIG WHITE® 2027 stands for.

As SLV's ultimate portfolio showcase, this year's catalogue brings together tried-and-tested classics with innovative new products – designed for electricians, planners and partners. From indoor and outdoor lighting to residential and commercial applications, here you'll find the perfect lighting solution for each of your projects. In day-to-day project work, the time and budget for bespoke solutions are often lacking. That is why we offer you a wide range of ready-to-use lighting solutions that simplify your planning and significantly speed up your installations. The BIG WHITE® 2027 highlights include new products such as MEDO® SLIM, MEDO® HYVE, the new LED STRIPS range, ENOLA® 2.0 and the innovative curved 48 V track system. They epitomise SLV's commitment to bringing you functional performance, contemporary design and easy-to-install solutions, all from a single source.



Smart lighting is also becoming increasingly important. With SLVconnect®, you have access to an easily integrable smart lighting portfolio featuring products that fit seamlessly into your customers' existing smart home systems – for future-proof lighting concepts that make life easier. Our values – which have characterised SLV for decades – remain at the heart of what we do: reliable quality, practical solutions and strong partnerships. Many products are also available as handy sets comprising a light and a light bulb – making ordering easier and offering attractive price savings.

5-year guarantee	German engineering	Delivery within 24 hours in Germany | 48 hours in the EU	98% product availability

BIG WHITE® 2027 is more than just a catalogue. It is a practical tool, designed to help you implement lighting solutions efficiently, reliably and with maximum planning certainty.

SLVconnect®

SMART LIGHTING THAT INTEGRATES SEAMLESSLY INTO EXISTING SYSTEMS.

SLVconnect® is our smart lighting portfolio, designed for easy integration into existing systems. Thanks to open standards and compatible ecosystems, you can effortlessly integrate SLVconnect® into any of your customers existing smart home environments – with no additional planning effort and with hassle-free installation. This is how you can offer your customers reliable, smart lighting solutions and complete every project efficiently.

WHY SLVconnect®?


Open & flexible
Compatible with leading smart home ecosystems and gateways.

Easy to integrate
Ideal for existing installations – with no need to change systems.

Easy to retrofit
Transforms conventional lighting into smart lighting solutions.

Designed for professionals
Professional lighting expertise meets modern connectivity.

HOW IT WORKS

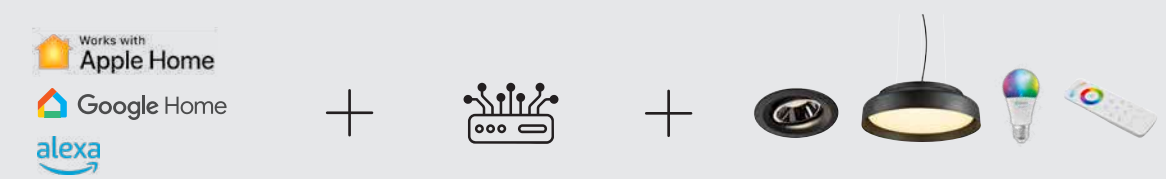

Your smart home system + Gateway / Hub + SLVconnect®

THE SLVconnect® PORTFOLIO

The perfect solution for every requirement – from smart light bulbs to integrated lights:

Smart light bulbs

- Quick retrofit solutions
- Tunable white and RGBW options

Smart converters

- Connecting existing installations to smart ecosystems
- Compatible with DALI and phase dimming

Smart lights

- Integrated smart lighting solutions
- Integrated smart features

SMART LIGHTING FOR MODERN PROJECTS

With SLVconnect®, you can add smart lighting control to new and existing installations – it's easy to integrate with no added fuss. This enables you to offer your customers greater convenience and flexibility, and set your projects apart with modern connected lighting solutions.



Greater convenience. Less effort.

- Control via app, voice or automation
- Customised lighting scenarios
- Smart routines for everyday life
- Integration into existing infrastructures



Energy-efficient and reliable

- Light only when it is needed
- Smart timing and automation
- Efficient LED technology
- Faster installation
- Reliable system operation



Safety and greater control

- Presence simulation when nobody's in
- Automated indoor and outdoor lighting
- Remote access and control
- Compatible with leading ecosystems


FROM CONVENTIONAL TO SMART

With SLVconnect®, you can seamlessly integrate professional lighting solutions into modern smart home environments – for intelligent lighting concepts that are easy to plan, install on the customer's premises and expand at any time.


NAVIGATION

CATEGORY OVERVIEW
Find the right light in the overview at the start of each chapter or in the application index

You can see the complete overview from page 922 onwards.



NUMERICAL & ALPHABETICAL INDEX
You can also find your light quickly in the numerical or alphabetical index.



PRODUCT CATEGORIES
New icons and colour codes allow you to navigate quickly to the relevant section.



REACH YOUR GOAL FASTER

RECOMMENDATIONS
Discover the right accessories and compatible light bulbs for your selected products.



Better value as a set at slv.com

COMBINE TO SAVE
Many products are also available as handy sets comprising a light and a light bulb.

DISCOVER MORE ONLINE
At slv.com, you'll find our complete product range, including all the key product information, digital planning aids and stock availability, right through to configurators and costing tools.

PLEASE NOTE: all measurements are given in **cm**.

INDOOR

 Recessed lights 8
 Ceiling lights 124
 Pendant lights 170
 Wall and ceiling lights 274
 Table and floor lights 396

 48 V system 420
 Low-voltage cable system 468
 Single-phase high-voltage track 478
 Three phase high-voltage track 530
 Profile solutions and LED strips 606

OUTDOOR

 Mobile lights and floor lights 634
 Spotlights 730
 Ceiling lights 752
 Wall and ceiling lights 766
 Recessed lights 862
 Recessed floor lights 870

ACCESSORIES

 Light bulbs 894
 Accessory parts 906

NAVIGATION


Application index 922
Numerical index 959
Alphabetical index 977




1009562 42


FOCUS NOW OR NEVER


INDOOR | RECESSED LIGHTS



UNIVERSAL DOWNLIGHT SLIM | 12



UNIVERSAL DOWNLIGHT FIX | 12



UNIVERSAL DOWNLIGHT MOVE | 12



KADUX | 14



KADUX | 15



KADUX | 15



KADUX | 15





SOCKET

KADUX | 16–17



NUMINOS® | 18–26



NUMINOS® MOVE | 28–36



NUMINOS® GIMBLE | 38–46





DYSKO | 57



SOCKET

NEW TRIA® | 58–63, 66–73



NEW TRIA® UNIVERSAL | 64–65



SOCKET

NEW TRIA® | 86



SOCKET

NEW TRIA® | 87





GLENOS® PRO | 87



MEDO® | 88–89



HORN MINI | 90



SOCKET

HORN | 91–93



SOCKET

HORN 1 | 92



SOCKET

HORN T | 93



HORN MAGNA



SENSER 2.0 | 94–101



DOWNLIGHT VARIO | 102–103

VERLUX | 104



DL 126 | 105



PIKA | 105





OCULUS | 107

OCCULDAS | 107

NEW



ENOLA® 2.0 | 108–109

NEW



ENOLA® 2.0 | 108–109



KARPO | 110

NEW



GRIP! | 111



GRIP! | 111





PLASTRA | 113



VARU | 113





DOLIX OUT | 114–115



KINI | 115

AKALO D83 | 115

FRAME BASIC | 116–117



FRAME CURVE | 117

NOTAPO | 119



DOWNUNDER PUR | 120–121



MOBALA | 121


WORO | 121



PATTA-I | 122



PATTA-I | 122–123






PATTA-F | 123

UNIVERSAL DOWNLIGHT SLIM
RL, PHASE







220-240 V ~50/60 Hz | 185 mA
Total Wattage: 6 W
Material: Aluminium/Plastic PC

- Airtight and suitable for installation in insulation
- Complies with the requirements of RE2020 and NF C15-100




	2700 K	3000 K	4000 K
6 W	560 lm	590 lm	580 lm

Variant	Prod. no.
● black	**1012624**
○ white	**1012623**

UNIVERSAL DOWNLIGHT FIX
RL, LED, PHASE, IP65







220-240 V ~50/60 Hz | 60 mA
Total Wattage: 5 W / 7 W
Material: Steel/PC plastic

- Airtight and suitable for installation in insulation.
- Tested for use in specified fire-retardant suspended ceilings
- Lockable springs for easier installation




	2700 K	3000 K	4000 K	6500 K
5 W	470 lm	490 lm	500 lm	490 lm
7 W	670 lm	680 lm	690 lm	680 lm

Variant	Prod. no.
● black	**1011209**
○ white	**1011208**

UNIVERSAL DOWNLIGHT MOVE
RL, LED, PHASE







220-240 V ~50/60 Hz | 60 mA
Total Wattage: 5 W / 7 W
Material: Steel/PC plastic

- Tested for use in specified fire-retardant suspended ceilings,
- Lockable springs for easier installation



	2700 K	3000 K	4000 K	6500 K
5 W	470 lm	490 lm	500 lm	490 lm
7 W	670 lm	680 lm	690 lm	680 lm

Variant	Prod. no.
● black	**1011211**
○ white	**1011210**

UNIVERSAL DOWNLIGHT
COVER, RIGID, ROUND, IP65



IP20/ IP65

Ø: 8.8 cm
H: 0.5 cm
Material: Polycarbonate (PC)

- IP65 in conjunction with the universal downlight module

Variant	Prod. no.
● black	**1008067**
○ white	**1008068**
● gold	**1008070**
◑ chrome	**1008069**

UNIVERSAL DOWNLIGHT
COVER, RIGID, SQUARE, IP65



IP20/ IP65

L: 8.8 cm
W: 8.8 cm
H: 0.6 cm
Material: Plastic PC

- IP65 in conjunction with the universal downlight module

Variant	Prod. no.
● black	**1008096**
○ white	**1008095**
● gold	**1008098**
◑ chrome	**1008097**

UNIVERSAL DOWNLIGHT
COVER, PIVOTING, ROUND, IP20



IP20

Ø: 8.8 cm
H: 0.4 cm
Material: Polycarbonate (PC)

Variant	Prod. no.
● black	**1007091**
○ white	**1007092**
● gold	**1007191**
◑ aluminium	**1007093**


UNIVERSAL DOWNLIGHT
COVER, PIVOTING, SQUARE, IP20



IP20


L: 8.8 cm
W: 8.8 cm
H: 0.4 cm
Material: Polycarbonate (PC)


Variant	Prod. no.
● black	**1007184**
○ white	**1007185**
● gold	**1007194**
◑ aluminium	**1007186**

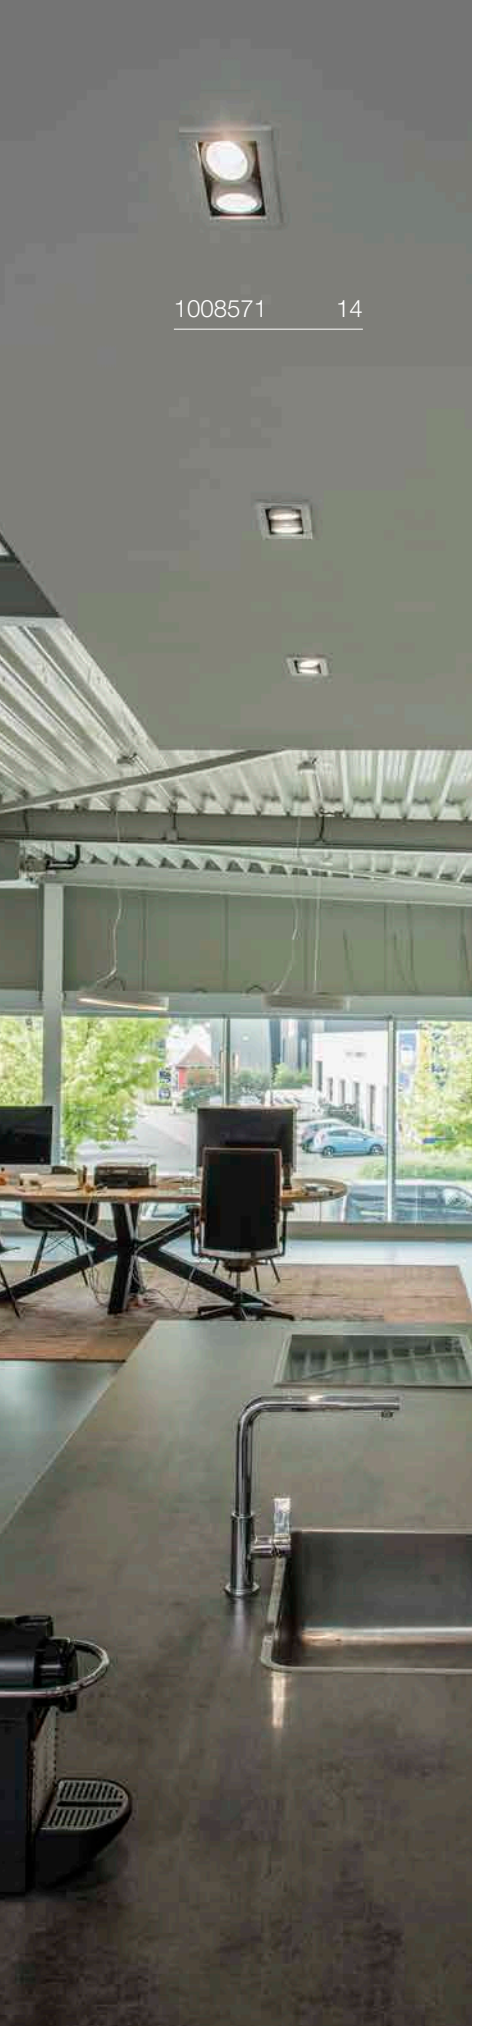

KADUX
DL, SINGLE, DALI







220-240 V ~50/60 Hz | 700 mA
Total wattage: 27 W
Material: Aluminium/Steel


LED INSIDE CRI 90

1008567 **1008568**	Down	3000 K 3050 lm
1008569 **1008570**	Down	4000 K 3350 lm

Variant	Prod. no.
● black 3000 K	**1008568**
● black 4000 K	**1008570**
○ white 3000 K	**1008567**
○ white 4000 K	**1008569**

KADUX
DL, DOUBLE, DALI



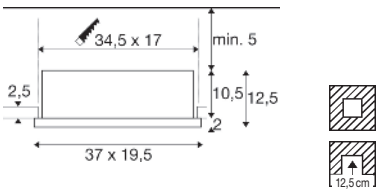



220-240 V ~50/60 Hz | 1400 mA
Total wattage: 54 W
Material: Aluminium/Steel


LED INSIDE CRI 90

1008571	Down	3000 K 3150 lm
1008572	Down	3000 K 3250 lm
1008573	Down	4000 K 3400 lm
1008574	Down	4000 K 3400 lm

Variant	Prod. no.
● black 3000 K	**1008572**
● black 4000 K	**1008574**
○ white 3000 K	**1008571**
○ white 4000 K	**1008573**

KADUX
DL, SINGLE, PHASE



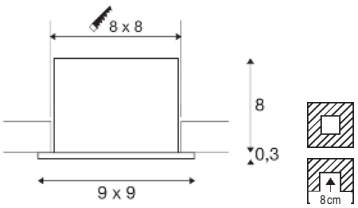



220-240 V ~50/60 Hz | 350 mA
Total wattage: 8.3 W
Material: Aluminium/Acrylic

• Spring clips


INSIDE CRI 90

	3000 K 770 lm

Variant	Prod. no.
● black	**1007551**
○ white	**1007552**

KADUX
DL, DOUBLE, PHASE



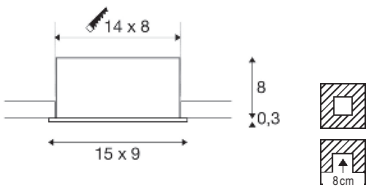



220-240 V ~50/60 Hz | 350 mA
Total Wattage: 14 W
Material: Aluminium/Steel

• Spring clips


INSIDE CRI 90

Down	3000 K 775 lm
Down	3000 K 775 lm

Variant	Prod. no.
● black	**1007559**
○ white	**1007560**

KADUX
DL, TRIPLE, PHASE



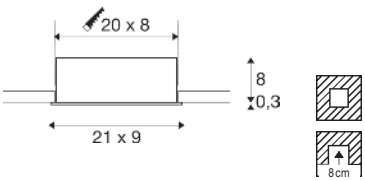



220-240 V ~50/60 Hz | 350 mA
Total Wattage: 20 W
Material: Aluminium/Steel

• Spring clips


INSIDE CRI 90

Down	3000 K 775 lm
Down	3000 K 775 lm
Down	3000 K 775 lm

Variant	Prod. no.
● black	**1007567**
○ white	**1007568**

KADUX
EL, SINGLE, QPAR51





IP20 30°

220-240 V ~50/60 Hz
Material: Aluminium/Steel

- Spring clips

SOCKET INSIDE 50 W

Base: 1xGU10

Variant	Prod. no.
● black	**115510**
○ white	**115511**

GU10 | 6 W | 36°
360 lm | 2200 K-2700 K | EEC = G

Prod. no.: **1005273**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

KADUX
EL, DOUBLE, QPAR51





IP20 30°

220-240 V ~50/60 Hz
Material: Aluminium/Steel

- Spring clips

SOCKET INSIDE 50 W

Base: 2xGU10


Variant	Prod. no.
● black	**115520**
○ white	**115521**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077**

KADUX
EL, TRIPLE, QPAR51





IP20 30°

220-240 V ~50/60 Hz
Material: Aluminium/Steel

- Spring clips

SOCKET INSIDE 50 W

Base: 3xGU10


Variant	Prod. no.
● black	**115530**
○ white	**115531**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077**

KADUX
EL, SINGLE, QPAR111





IP20 20°

220-240 V ~50/60 Hz
Material: Aluminium/Steel

- Spring clips

SOCKET INSIDE 75 W

Base: 1xGU10

Variant	Prod. no.
● black	**115540**
○ white	**115541**


GU10 | 12 W | 55°
670 lm | 2700 K | EEC = G

C,L

Prod. no.: 1005297

KADUX
EL, DOUBLE, QPAR111





IP20 20°

220-240 V ~50/60 Hz
Material: Aluminium/Steel

- Spring clips

SOCKET INSIDE 75 W

Base: 2xGU10

Variant	Prod. no.
● black	**115550**
○ white	**115551**


GU10 | 8 W | 38°
680 lm | 2700 K | EEC = F

C,L

Prod. no.: 1005274

NUMINOS® XS
DL








200 mA
Power Consumption: 6.9 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant
All XS versions


Product	Prod. no.
Decorative reflector	
gold	**1010125**
copper	**1010126**



● Black



● Black



○ white



● Black



○ white

Note:
Suitable drivers and reducer rings can be found on pages 50-55.

			UGR	Prod. no.	
2700 K	900 lm	20°	19	**1009271**	
		40°	22	**1009274**	
		55°	25	**1009277**	
3000 K	950 lm	20°	19	**1009289**	
		40°	22	**1009292**	
		55°	25	**1009295**	
4000 K	1000 lm	20°	19	**1009307**	
		40°	22	**1009310**	
		55°	25	**1009313**	
2700 K	900 lm	20°	19	**1009280**	
		40°	22	**1009283**	
		55°	25	**1009286**	
3000 K	950 lm	20°	19	**1009298**	
		40°	22	**1009301**	
		55°	25	**1009304**	
4000 K	1000 lm	20°	19	**1009316**	
		40°	22	**1009319**	
		55°	25	**1009322**	
2700 K	900 lm	20°	19	**1009281**	
		40°	22	**1009284**	
		55°	25	**1009287**	
3000 K	950 lm	20°	19	**1009299**	
		40°	22	**1009302**	
		55°	25	**1009305**	
4000 K	1000 lm	20°	19	**1009317**	
		40°	22	**1009320**	
		55°	25	**1009323**	


Configure further items and colours at slv.com

DIFFUSERS

				
	Elliptical diffuser	**Prismatic diffuser**	**Frosted diffuser**	**Honeycomb diffuser**
			XS	
Prod. no.	**1005612**	**1005613**	**1005614**	**1005615**

NUMINOS® S
DL








200 mA
Power Consumption: 6.7 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant
All S Versions


Product	Prod. no.
Decorative reflector	
gold	**1010127**
copper	**1010128**



● Black



● Black



○ white



● Black



○ white

Note:
Suitable drivers and reducer rings can be found on pages 50-55.

			UGR	Prod. no.	
2700 K	1000 lm	20°	19	1009433	
		40°	19	1009436	
		55°	22	1009439	
3000 K	1050 lm	20°	19	1009451	
		40°	19	1009454	
		55°	22	1009457	
4000 K		20°	19	1009469	
		40°	19	1009472	
		55°	22	1009475	
2700 K	1000 lm	20°	19	1009442	
		40°	19	1009445	
		55°	22	1009448	
3000 K	1050 lm	20°	19	1009460	
		40°	19	1009463	
		55°	22	1009466	
4000 K		20°	19	1009478	
		40°	19	1009481	
		55°	22	1009484	
2700 K	1000 lm	20°	19	1009443	
		40°	19	1009446	
		55°	22	1009449	
3000 K	1050 lm	20°	19	1009461	
		40°	19	1009464	
		55°	22	1009467	
4000 K		20°	19	1009479	
		40°	19	1009482	
		55°	22	1009485	


Configure further items and colours at slv.com

DIFFUSERS

				
	Elliptical diffuser	Prismatic diffuser	Frosted diffuser	Honeycomb diffuser
		S		
Prod. no.	1010682	1010680	1010681	1010679

NUMINOS® M
DL








350 mA
Power consumption: 12 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant
All M Versions


Product	Prod. no.
Decorative reflector	
gold	**1010129**
copper	**1010130**



● Black



● Black



○ white



● Black



○ white

Note:
Suitable drivers and reducer rings can be found on pages 50-55.

			UGR	Prod. no.	
2700 K	1700 lm	20°	19	1009595	
		40°	19	1009598	
		55°	22	1009601	
3000 K	1800 lm	20°	19	1009613	
		40°	19	1009616	
		55°	22	1009619	
4000 K	1900 lm	20°	19	1009631	
		40°	19	1009634	
		55°	22	1009637	
2700 K	1700 lm	20°	19	1009604	
		40°	19	1009607	
		55°	22	1009610	
3000 K	1800 lm	20°	19	1009622	
		40°	19	1009625	
		55°	22	1009628	
4000 K	1900 lm	20°	19	1009640	
		40°	19	1009643	
		55°	22	1009646	
2700 K	1700 lm	20°	19	1009605	
		40°	19	1009608	
		55°	22	1009611	
3000 K	1800 lm	20°	19	1009623	
		40°	19	1009626	
		55°	22	1009629	
4000 K	1900 lm	20°	19	1009641	
		40°	19	1009644	
		55°	22	1009647	


Configure further items and colours at slv.com

DIFFUSERS

	Elliptical diffuser	Prismatic diffuser	Frosted diffuser	 Honeycomb diffuser
	M			
Prod. no.	1010686	1010684	1010685	1010683

NUMINOS® L
DL








500 mA
Power Consumption: 17 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant
All L Versions


Product	Prod. no.
Decorative Reflector	
gold	**1010131**
copper	**1010132**



● Black



● Black



○ white



● Black



○ white

Note:
Suitable drivers and reducer rings can be found on pages 50-55.

				Prod. no.	
2700 K	2400 lm	20°	19	1009757	
		40°	22	1010160	
		55°	22	1009762	
3000 K	2500 lm	20°	19	1009774	
		40°	22	1009777	
		55°	22	1009780	
4000 K	2700 lm	20°	19	1009792	
		40°	22	1009795	
		55°	22	1009798	
2700 K	2400 lm	20°	19	1009765	
		40°	22	1009768	
		55°	22	1009771	
3000 K	2500 lm	20°	19	1009783	
		40°	22	1009786	
		55°	22	1009789	
4000 K	2700 lm	20°	19	1009801	
		40°	22	1009804	
		55°	22	1009807	
2700 K	2400 lm	20°	19	1009766	
		40°	22	1009769	
		55°	22	1009772	
3000 K	2500 lm	20°	19	1009784	
		40°	22	1009787	
		55°	22	1009790	
4000 K	2700 lm	20°	19	1009802	
		40°	22	1009805	
		55°	22	1009808	


Configure further items and colours at slv.com

DIFFUSERS

				
	Elliptical diffuser	**Prismatic diffuser**	**Frosted diffuser**	**Honeycomb diffuser**
		L		
Prod. no.	**1010690**	**1010688**	**1010689**	**1010687**

NUMINOS® XL
DL






IP20 IK02 50 000 h L90B10 10 cm INSIDE CRI 90

700 mA
Power consumption: 24 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant
All XL Versions


Product	Prod. no.
Decorative reflector	
gold	**1010133**
copper	**1010134**



● Black



● Black



○ white



● Black



○ white

Note:
Suitable drivers and reducer rings can be found on pages 50-55.

				Prod. no.	
2700 K	3500 lm	20°	19	1009918	
		40°	19	1009921	
		55°	22	1009924	
3000 K	3600 lm	20°	19	1009936	
		40°	19	1009939	
		55°	22	1009942	
4000 K	3800 lm	20°	19	1009954	
		40°	19	1009957	
		55°	22	1009960	
2700 K	3500 lm	20°	19	1009927	
		40°	19	1009930	
		55°	22	1009933	
3000 K	3600 lm	20°	19	1009945	
		40°	19	1009948	
		55°	22	1009951	
4000 K	3800 lm	20°	19	1009963	
		40°	19	1009966	
		55°	22	1009969	
2700 K	3500 lm	20°	19	1009928	
		40°	19	1009931	
		55°	22	1009934	
3000 K	3600 lm	20°	19	1009946	
		40°	19	1009949	
		55°	22	1009952	
4000 K	3800 lm	20°	19	1009964	
		40°	19	1009967	
		55°	22	1009970	


Configure further items and colours at slv.com

DIFFUSERS

				
	Elliptical diffuser	**Prismatic diffuser**	**Frosted diffuser**	**Honeycomb diffuser**
		XL		
Prod. no.	**1010694**	**1010692**	**1010693**	**1010691**

NUMINOS® MOVE XS
DL










200 mA
Power consumption: 6.9 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant
All XS Versions


Product	Prod. no.
Decorative reflector	
gold	**1010125**
copper	**1010126**



● Black



● Black



○ white



● Black



○ white

Note:
Leaf springs are included with the product and can be replaced.

Suitable drivers and reducer rings can be found on pages 50-55.

			UGR	Prod. no.	
2700 K	900 lm	20°	19	1009325	
		40°	22	1009328	
		55°	25	1009331	
3000 K	950 lm	20°	19	1009343	
		40°	22	1009346	
		55°	25	1009349	
4000 K	1000 lm	20°	19	1009361	
		40°	22	1009364	
		55°	25	1009367	
2700 K	900 lm	20°	19	1009334	
		40°	22	1009337	
		55°	25	1009340	
3000 K	950 lm	20°	19	1009352	
		40°	22	1009355	
		55°	25	1009358	
4000 K	1000 lm	20°	19	1009370	
		40°	22	1009373	
		55°	25	1009376	
2700 K	900 lm	20°	19	1009335	
		40°	22	1009338	
		55°	25	1009341	
3000 K	950 lm	20°	19	1009353	
		40°	22	1009356	
		55°	25	1009359	
4000 K	1000 lm	20°	19	1009371	
		40°	22	1009374	
		55°	25	1009377	








Configure further items and colours at slv.com

DIFFUSERS

	Elliptical diffuser	Prismatic diffuser	Frosted diffuser	Honeycomb diffuser
	XS			
Prod. no.	1005612	1005613	1005614	1005615

NUMINOS® MOVE S
DL










200 mA
Power Consumption: 6.7 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant

All S Versions


Product	Prod. no.
Decorative reflector	
● gold	**1010127**
● copper	**1010128**



● Black



● Black



○ white



● Black



○ white

Note:
Leaf springs are included with the product and can be replaced.

Suitable drivers and reducer rings can be found on pages 50-55.

			UGR	Prod. no.	
2700 K	1000 lm	20°	19	1009487	
		40°	19	1009490	
		55°	22	1009493	
3000 K	1050 lm	20°	19	1009505	
		40°	19	1009508	
		55°	22	1009511	
4000 K		20°	19	1009523	
		40°	19	1009526	
		55°	22	1009529	
2700 K	1000 lm	20°	19	1009496	
		40°	19	1009499	
		55°	22	1009502	
3000 K	1050 lm	20°	19	1009514	
		40°	19	1009517	
		55°	22	1009520	
4000 K		20°	19	1009532	
		40°	19	1009535	
		55°	22	1009538	
2700 K	1000 lm	20°	19	1009497	
		40°	19	1009500	
		55°	22	1009503	
3000 K	1050 lm	20°	19	1009515	
		40°	19	1009518	
		55°	22	1009521	
4000 K		20°	19	1009533	
		40°	19	1009536	
		55°	22	1009539	


Configure further items and colours at slv.com

DIFFUSERS

	Elliptical diffuser	Prismatic diffuser	Frosted diffuser	 Honeycomb diffuser
		S		
Prod. no.	1010682	1010680	1010681	1010679

NUMINOS® MOVE M
DL










350 mA
Power Consumption: 12 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant
All M Versions


Product	Prod. no.
Decorative reflector	
● gold	**1010129**
● copper	**1010130**



● Black



● Black



○ white



● Black



○ white

Note:
Suitable drivers and reducer rings can be found on pages 50-55.

			UGR	Prod. no.	
2700 K	1700 lm	20°	19	1009649	
		40°	19	1009652	
		55°	22	1009655	
3000 K	1800 lm	20°	19	1009667	
		40°	19	1009670	
		55°	22	1009673	
4000 K	1900 lm	20°	19	1009685	
		40°	19	1009688	
		55°	22	1009691	
2700 K	1700 lm	20°	19	1009658	
		40°	19	1009661	
		55°	22	1009664	
3000 K	1800 lm	20°	19	1009676	
		40°	19	1009679	
		55°	22	1009682	
4000 K	1900 lm	20°	19	1009694	
		40°	19	1009697	
		55°	22	1009700	
2700 K	1700 lm	20°	19	1009659	
		40°	19	1009662	
		55°	22	1009665	
3000 K	1800 lm	20°	19	1009677	
		40°	19	1009680	
		55°	22	1009683	
4000 K	1900 lm	20°	19	1009695	
		40°	19	1009698	
		55°	22	1009701	


Configure further items and colours at slv.com

DIFFUSERS

	Elliptical diffuser	Prismatic diffuser	Frosted diffuser	 Honeycomb diffuser
	M			
Prod. no.	1010686	1010684	1010685	1010683

NUMINOS® MOVE L
DL










500 mA
Power Consumption: 17 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant

All L Versions


Product	Prod. no.
Decorative reflector	
● gold	**1010131**
● copper	**1010132**



● Black



● Black



○ white



● Black



○ white

Note:
Suitable drivers and reducer rings can be found on pages 50-55.

				Prod. no.	
2700 K	2400 lm	20°	19	1009810	
		40°	22	1009813	
		55°	22	1009816	
3000 K	2500 lm	20°	19	1009828	
		40°	22	1009831	
		55°	22	1009834	
4000 K	2700 lm	20°	19	1009846	
		40°	22	1009849	
		55°	22	1009852	
2700 K	2400 lm	20°	19	1009819	
		40°	22	1009822	
		55°	22	1009825	
3000 K	2500 lm	20°	19	1009837	
		40°	22	1009840	
		55°	22	1009843	
4000 K	2700 lm	20°	19	1009855	
		40°	22	1009858	
		55°	22	1009861	
2700 K	2400 lm	20°	19	1009820	
		40°	22	1009823	
		55°	22	1009826	
3000 K	2500 lm	20°	19	1009838	
		40°	22	1009841	
		55°	22	1009844	
4000 K	2700 lm	20°	19	1009856	
		40°	22	1009859	
		55°	22	1009862	


Configure further items and colours at slv.com

DIFFUSERS

				
	Elliptical diffuser	Prismatic diffuser	Frosted diffuser	Honeycomb diffuser
	L			
Prod. no.	1010690	1010688	1010689	1010687

NUMINOS® MOVE XL
DL










700 mA
Power Consumption: 24 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant
All XL Versions


Product	Prod. no.
Decorative reflector	
gold	**1010133**
copper	**1010134**



● Black



● Black



○ white



● Black



○ white

Note:
Suitable drivers and reducer rings can be found on pages 50-55.

				Prod. no.	
2700 K	3500 lm	20°	19	1009972	
		40°	19	1009975	
		55°	22	1009978	
3000 K	3600 lm	20°	19	1009990	
		40°	19	1009993	
		55°	22	1009996	
4000 K	3800 lm	20°	19	1010008	
		40°	19	1010011	
		55°	22	1010014	
2700 K	3500 lm	20°	19	1009981	
		40°	19	1009984	
		55°	22	1009987	
3000 K	3600 lm	20°	19	1009999	
		40°	19	1010002	
		55°	22	1010005	
4000 K	3800 lm	20°	19	1010017	
		40°	19	1010020	
		55°	22	1010023	
2700 K	3500 lm	20°	19	1009982	
		40°	19	1009985	
		55°	22	1009988	
3000 K	3600 lm	20°	19	1010000	
		40°	19	1010003	
		55°	22	1010006	
4000 K	3800 lm	20°	19	1010018	
		40°	19	1010021	
		55°	22	1010024	


Configure further items and colours at slv.com

DIFFUSERS

				
	Elliptical diffuser	Prismatic diffuser	Frosted diffuser	Honeycomb diffuser
		XL		
Prod. no.	1010694	1010692	1010693	1010691

NUMINOS® GIMBLE XS
DL










200 mA
Power Consumption: 6 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant
All XS Versions


Product	Prod. no.
Decorative reflector	
● gold	**1010125**
● copper	**1010126**



● Black



● Black



○ white



● Black



○ white

Note:
Leaf springs are included with the product and can be replaced.

Suitable drivers and reducer rings can be found on pages 50-55.

			UGR	Prod. no.	
2700 K	900 lm	20°	19	**1010026**	
		40°	22	**1010029**	
		55°	25	**1010032**	
3000 K	950 lm	20°	19	**1010044**	
		40°	22	**1010047**	
		55°	25	**1010050**	
4000 K	1000 lm	20°	19	**1010062**	
		40°	22	**1010065**	
		55°	25	**1010068**	
2700 K	900 lm	20°	19	**1010035**	
		40°	22	**1010038**	
		55°	25	**1010041**	
3000 K	950 lm	20°	19	**1010053**	
		40°	22	**1010056**	
		55°	25	**1010059**	
4000 K	1000 lm	20°	19	**1010071**	
		40°	22	**1010074**	
		55°	25	**1010077**	
2700 K	900 lm	20°	19	**1010036**	
		40°	22	**1010039**	
		55°	25	**1010042**	
3000 K	950 lm	20°	19	**1010054**	
		40°	22	**1010057**	
		55°	25	**1010060**	
4000 K	1000 lm	20°	19	**1010072**	
		40°	22	**1010075**	
		55°	25	**1010078**	


Configure further items and colours at slv.com

DIFFUSERS

				
	Elliptical diffuser	**Prismatic diffuser**	**Frosted diffuser**	**Honeycomb diffuser**
		XS		
Prod. no.	**1005612**	**1005613**	**1005614**	**1005615**

NUMINOS® GIMBLE S
DL










200 mA
Power Consumption: 6.7 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant
All S Versions


Product	Prod. no.
Decorative reflector	
gold	**1010127**
copper	**1010128**



● Black



● Black



○ white



● Black



○ white

Note:
Leaf springs are included with the product and can be replaced.

Suitable drivers and reducer rings can be found on pages 50-55.

			UGR	Prod. no.	
2700 K	1000 lm	20°	19	1009379	
		40°	19	1009382	
		55°	22	1009385	
3000 K	1050 lm	20°	19	1009397	
		40°	19	1009400	
		55°	22	1009403	
4000 K		20°	19	1009415	
		40°	19	1009418	
		55°	22	1009421	
2700 K	1000 lm	20°	19	1009388	
		40°	19	1009391	
		55°	22	1009394	
3000 K	1050 lm	20°	19	1009406	
		40°	19	1009409	
		55°	22	1009412	
4000 K		20°	19	1009424	
		40°	19	1009427	
		55°	22	1009430	
2700 K	1000 lm	20°	19	1009389	
		40°	19	1009392	
		55°	22	1009395	
3000 K	1050 lm	20°	19	1009407	
		40°	19	1009410	
		55°	22	1009413	
4000 K		20°	19	1009425	
		40°	19	1009428	
		55°	22	1009431	


Configure further items and colours at slv.com

DIFFUSERS

				
	Elliptical diffuser	Prismatic diffuser	Frosted diffuser	Honeycomb diffuser
		S		
Prod. no.	1010682	1010680	1010681	1010679

NUMINOS® GIMBLE M
DL










350 mA
Power Consumption: 12 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant
All M Versions


Product	Prod. no.
Decorative reflector	
● gold	**1010129**
● copper	**1010130**



● Black



● Black



○ white



● Black



○ white

Note:
Suitable drivers and reducer rings can be found on pages 50-55.

				Prod. no.	
2700 K	1700 lm	20°	19	1009541	
		40°	19	1009544	
		55°	22	1009547	
3000 K	1800 lm	20°	19	1009559	
		40°	19	1009562	
		55°	22	1009565	
4000 K	1900 lm	20°	19	1009577	
		40°	19	1009580	
		55°	22	1009583	
2700 K	1700 lm	20°	19	1009550	
		40°	19	1009553	
		55°	22	1009556	
3000 K	1800 lm	20°	19	1009568	
		40°	19	1009571	
		55°	22	1009574	
4000 K	1900 lm	20°	19	1009586	
		40°	19	1009589	
		55°	22	1009592	
2700 K	1700 lm	20°	19	1009551	
		40°	19	1009554	
		55°	22	1009557	
3000 K	1800 lm	20°	19	1009569	
		40°	19	1009572	
		55°	22	1009575	
4000 K	1900 lm	20°	19	1009587	
		40°	19	1009590	
		55°	22	1009593	


Configure further items and colours at slv.com

DIFFUSERS

				
	Elliptical diffuser	**Prismatic diffuser**	**Frosted diffuser**	**Honeycomb diffuser**
		M		
Prod. no.	**1010686**	**1010684**	**1010685**	**1010683**

NUMINOS® GIMBLE L
DL










500 mA
Power Consumption: 17 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant
All L Versions


Product	Prod. no.
Decorative reflector	
● gold	**1010131**
● copper	**1010132**



● Black



● Black



○ white



● Black



○ white

Note:
Suitable drivers and reducer rings can be found on pages 50-55.

			UGR	Prod. no.	
2700 K	2400 lm	20°	19	1009703	
		40°	22	1009706	
		55°	22	1009709	
3000 K	2500 lm	20°	19	1009721	
		40°	22	1009724	
		55°	22	1009727	
4000 K	2700 lm	20°	19	1009739	
		40°	22	1009742	
		55°	22	1009745	
2700 K	2400 lm	20°	19	1009712	
		40°	22	1009715	
		55°	22	1009718	
3000 K	2500 lm	20°	19	1009730	
		40°	22	1009733	
		55°	22	1009736	
4000 K	2700 lm	20°	19	1009748	
		40°	22	1009751	
		55°	22	1009754	
2700 K	2400 lm	20°	19	1009713	
		40°	22	1009716	
		55°	22	1009719	
3000 K	2500 lm	20°	19	1009731	
		40°	22	1009734	
		55°	22	1009737	
4000 K	2700 lm	20°	19	1009749	
		40°	22	1009752	
		55°	22	1009755	


Configure further items and colours at slv.com

DIFFUSERS

				
	Elliptical diffuser	**Prismatic diffuser**	**Frosted diffuser**	**Honeycomb diffuser**
		L		
Prod. no.	**1010690**	**1010688**	**1010689**	**1010687**

NUMINOS® GIMBLE XL
DL










700 mA
Power consumption: 24 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant
All XL Versions


Product	Prod. no.
Decorative reflector	
● gold	**1010133**
● copper	**1010134**



● Black



● Black



○ white



● Black



○ white

Note:
Suitable drivers and reducer rings can be found on pages 50-55.

				Prod. no.	
2700 K	3500 lm	20°	19	1009864	
		40°	19	1009867	
		55°	22	1009870	
3000 K	3600 lm	20°	19	1009882	
		40°	19	1009885	
		55°	22	1009888	
4000 K	3800 lm	20°	19	1009900	
		40°	19	1009903	
		55°	22	1009906	
2700 K	3500 lm	20°	19	1009873	
		40°	19	1009876	
		55°	22	1009879	
3000 K	3600 lm	20°	19	1009891	
		40°	19	1009894	
		55°	22	1009897	
4000 K	3800 lm	20°	19	1009909	
		40°	19	1009912	
		55°	22	1009915	
2700 K	3500 lm	20°	19	1009874	
		40°	19	1009877	
		55°	22	1009880	
3000 K	3600 lm	20°	19	1009892	
		40°	19	1009895	
		55°	22	1009898	
4000 K	3800 lm	20°	19	1009910	
		40°	19	1009913	
		55°	22	1009916	

Configure further items and colours at slv.com

DIFFUSOREN

				
	Elliptical diffuser	**Prismatic diffuser**	**Frosted diffuser**	**Honeycomb diffuser**
		XL		
Prod. no.	**1010694**	**1010692**	**1010693**	**1010691**

Driver assignment XS, S

			
	LED DRIVER 21W | 200mA	LED DRIVER 10W | 200mA dimmable	LED DRIVER 23W | 200mA DALI dimmable
	XS S		
			
Material	Polycarbonate (PC)		
Colour	white		
Prim. voltage	220-240 V ~50/60 Hz		
Sec. voltage	15-45V DC	26-38V DC	2.5-46V DC
Output Current	200mA		
Number of sec. outputs	1		
Output from	3 W	4.7 W	0.5 W
Output up to	9 W	7.6 W	9.2 W
Ambient temp. min	-20°C	-25°C	-20°C
Ambient temp. max.	45°C	50°C	
Thermal protection	110°C		
IP protection class	IP20		
Dimmable	–	PHASE C	DALI
Length	13.8 cm	12.2 cm	13.9 cm
Width	4.4 cm	4.1cm	3 cm
Height	2.3 cm	2.3 cm	2.1 cm
Prod. no.	**1010695**	**1010699**	**1010703**

Driver assignment M

		
LED DRIVER 21W | 350mA	LED DRIVER 20W | 350mA dimmable	LED DRIVER 23W | 350mA DALI dimmable
	M	
	IP20	

Material	Polycarbonate (PC)		
Colour	white		
Prim. voltage	220-240 V ~50/60 Hz		
Sec. voltage	15-45V DC	26-38V DC	2.5-46V DC
Output current	350mA		
Number of sec. outputs	1		
Output from	5.3 W	9.1 W	0.87 W
Output up to	15.8 W	13.3 W	16.1 W
Ambient temp. min	-20°C	-25°C	-20°C
Ambient temp. max.	45°C	50°C	
Thermal protection	110°C		
IP protection class	IP20		
Dimmable	–	PHASE C	DALI
Length	19.2 cm	13.8 cm	21 cm
Width	5.9 cm	4 cm	5.7 cm
Height	2.3 cm	3 cm	2.1 cm
Prod. no.	**1010696**	**1010700**	**1010704**

Driver Assignment L

		
LED DRIVER 21W | 500mA	LED DRIVER 20W | 500mA dimmable	LED DRIVER 36W | 500mA DALI dimmable
	L	
	IP20	

Material	Polycarbonate (PC)		
Colour	white		
Prim. voltage	220-240 V ~50/60 Hz		
Sec. voltage	15-45V DC	26-38V DC	2.5-50V DC
Output current	700 mA	500 mA	250/350/500/700mA
Number of sec. outputs	1		
Output from	7.5 W	9.1 W	1.25 W
Output up to	22.5 W	19 W	25 W
Ambient temp. min	-20°C	-25°C	-20°C
Ambient temp. max.	45°C	50°C	
Thermal protection	110°C		
IP protection class	IP20		
Dimmable	–	PHASE C	DALI
Length	19.2 cm	13.8 cm	24 cm
Width	5.9 cm	4 cm	5.7 cm
Height	2.3 cm	3 cm	2.1 cm
Prod. no.	**1010697**	**1010701**	**1010705**

Driver Assignment XL

		
LED DRIVER 30W | 700mA	LED DRIVER 30W | 700mA dimmable	LED DRIVER 30W | 700mA DALI dimmable
	XL	
	IP20	

Material	Polycarbonate (PC)		
Colour	white		
Prim. voltage	220-240 V ~50/60 Hz		
Sec. voltage	27-45V DC	26-42V DC	2.5-50V DC
Output current	1050 mA	700 mA	1050 mA
Number of sec. outputs	1		
Output from	18.9 W	18.2 W	1.75 W
Output up to	31.5 W	29.4 W	35 W
Ambient temp. min	-25°C	-20°C	-25°C
Ambient temp. max.	45°C		50°C
Thermal protection	110°C		
IP protection class	IP20		
Dimmable	–	PHASE C	DALI
Length	19.2 cm	13.8 cm	24 cm
Width	5.9 cm	4 cm	5.7 cm
Height	2.3 cm	3 cm	2.1 cm
Prod. no.	**1010698**	**1010702**	**1010706**



Reducer ring, round








Material	steel	steel	steel	steel	steel
External Ø	16 cm	16 cm	24 cm	24 cm	24 cm
Height	5.3 cm	5.3 cm	5.3 cm	5.3 cm	5.3 cm
Internal Ø	7 cm	10 cm	12 cm	15 cm	18 cm
Ceiling cut-out	8.5 -13 cm	12 -15 cm	14 -18 cm	17- 20 cm	20 - 22 cm
Material thickness	3 cm	3 cm	3 cm	3 cm	3 cm
Prod. no. black	**1006135**	**1006139**	**1006143**	**1006147**	**1006151**
Prod. no. white	**1006136**	**1006140**	**1006144**	**1006148**	**1006152**

Reducer ring, square



Material	Steel	Steel	Steel	Steel	Steel
Length	16 cm	16 cm	24 cm	24 cm	24 cm
Width	16 cm	16 cm	24 cm	24 cm	24 cm
Height	5.3 cm	5.3 cm	5.3 cm	5.3 cm	5.3 cm
Internal Ø	7 cm	10 cm	12 cm	15 cm	18 cm
Ceiling cut-out	8.5 -13 cm	12 -15 cm	14 -18 cm	17- 20 cm	20 - 22 cm
Material thickness	3 cm	3 cm	3 cm	3 cm	3 cm
Prod. no. black	**1006137**	**1006141**	**1006145**	**1006149**	**1006153**
Prod. no. white	**1006138**	**1006142**	**1006146**	**1006150**	**1006154**


CONFIGURE YOUR NUMINOS®

SELECT YOUR SYSTEM COLOUR

NUMINOS® DL

NUMINOS® MOVE

NUMINOS® GIMBLE




Black — Black / white / Chrome

white — Black / white / Chrome

NUMINOS® PD

NUMINOS® CL


NUMINOS® SPOT



Black white

NUMINOS® TRACK

NUMINOS® ZOOM



Black white

The NUMINOS® lighting system delivers consistent lighting performance and a contemporary design across all applications – from hotels and offices to commercial and residential spaces. From application and technology through to the finest design details, the modular downlights and spotlights can be configured precisely to meet the requirements of your project and the conditions of the space. Thanks to consistent lighting quality throughout the system, all NUMINOS variants can be seamlessly combined within a project, regardless of the installation type. The more complex your project, the more you will benefit from the NUMINOS® lighting system.

Discover NUMINOS® Lights also suitable for the 48V system pp. 442–449

SIZE

XS S M L XL

PERFORMANCE

XS 200mA
Power Consumption: 7 W

S 200mA
Power Consumption: 7 W

M 350mA
Power Consumption: 12 W

L 500mA
Power Consumption: 17 W

XL 700mA
Power Consumption: 24 W

DIFFUSERS

ELLIPTICAL

Vertically distributed light, reduced glare, perfect for use in corridors

PRISMATIC

Wide beam, reduced glare, ideal for lights at specific distances

FROSTED

Wide beam, superior illumination, perfect for low ceilings

HONEYCOMB

Narrow beam, reduced glare, perfect for computer work

S M L XL

S 200mA
Power Consumption: 11W

M 350mA
Power Consumption: 20W

L 500mA
Power Consumption: 28W

XL 700mA
Power Consumption: 36W


S M L XL

NUMINOS® Zoom only available in size M



DYSKO
DL, ROUND, PHASE





C IP20 IK02 36° 360° 90° 50000h L80B10

220-240 V ~50/60 Hz | 150 mA
Total Wattage: 6.4 W
Material: Aluminium

- Including external LED driver


LED INSIDE CRI 90

2700 K
750 lm

Variant	Prod. no.
black	**1010355**
black/gold	**1010353**
white/black	**1010354**

DYSKO
PD, PHASE





C IP20 IK02 36° 50000h L80B10 200 cm

220-240 V ~50/60 Hz | 100 mA
Total Wattage: 4.4 W
Material: Aluminium

- Including external LED driver

LED INSIDE CRI 90


2700 K
500 lm

Variant	Prod. no.
black/gold	**1010359**
white/black	**1010360**


NEW TRIA® 68
DL, PHASE



1



2



1



● Black




○ white

2



● Black



○ white



220-240V ~50/60Hz | 200mA
Total Wattage: 8.3W
Material: Aluminium

- Material thickness of mounting surface: max. 20 mm






IP				Prod. no.	
IP 20	2700 K	705 lm	38°	**1007386**	
	2700 K	705 lm	60°	**1007388**	
	3000 K	750 lm	38°	**1007390**	
	3000 K	750 lm	60°	**1007392**	
IP 20	2700 K	705 lm	38°	**1007385**	
	2700 K	705 lm	60°	**1007387**	
	3000 K	750 lm	38°	**1007389**	
	3000 K	750 lm	60°	**1007391**	
IP 20	2700 K	705 lm	38°	**1007394**	
	2700 K	705 lm	60°	**1007396**	
	3000 K	750 lm	38°	**1007398**	
	3000 K	750 lm	60°	**1007400**	
IP 20	2700 K	705 lm	38°	**1007393**	
	2700 K	705 lm	60°	**1007395**	
	3000 K	750 lm	38°	**1007397**	
	3000 K	750 lm	60°	**1007399**	

NEW TRIA® 68
DL, PHASE





C,L 50.000h L80B10 INSIDE CRI 90

220-240V ~50/60Hz | 200mA
Total Wattage: 8.3 W
Material: Aluminium

- Material thickness of mounting surface: max. 20 mm




● Black



○ white

NEW TRIA® 75
DL, ROUND, PHASE





C,L IP20 30° 50.000h L80B10 INSIDE CRI 90

220-240V ~50/60Hz | 200mA
Total Wattage: 8.3W
Material: Aluminium

- Material thickness of mounting surface: max. 20 mm




● Black



○ white

IP		lm		Prod. no.	
IP 20/ IP 65*	2700 K	460 lm	38°	**1007406**	
	3000 K	500 lm	38°	**1007408**	
IP 20/ IP 65*	2700 K	530 lm	38°	**1007405**	
	3000 K	570 lm	38°	**1007407**	

*IP65 room side

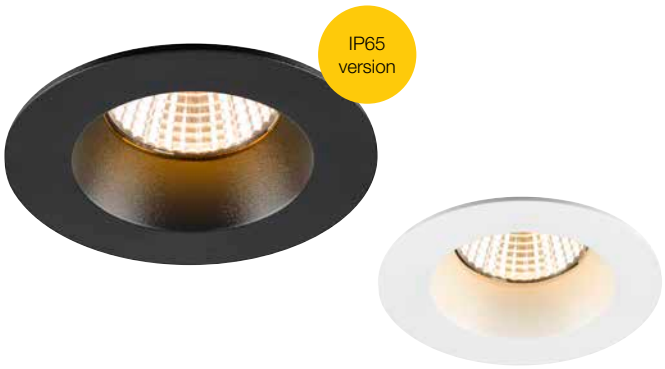

IP		lm		Prod. no.	
IP 20	2700 K	705 lm	38°	**1007402**	
	3000 K	750 lm	38°	**1007404**	
IP 20	2700 K	705 lm	38°	**1007401**	
	3000 K	750 lm	38°	**1007403**	




NEW TRIA® 68
DL, DTW, PHASE


DIM TO WARM



1



2



C.L IP20 30° 50.000h L80B10 LED INSIDE CRI 90

220-240V ~50/60Hz | 250mA
Total Wattage: 11W
Material: Aluminium

- Material thickness of mounting surface: max. 20 mm

1



● Black




○ white

2



● Black




○ white





IP		lm		Prod. no.	
IP 20	1800 K – 3000 K	70 lm – 700 lm	38°	**1007424**	
			60°	**1007426**	
IP 20	1800 K – 3000 K	70 lm – 700 lm	38°	**1007423**	
			60°	**1007425**	
IP 20	1800 K – 3000 K	70 lm – 700 lm	38°	**1007428**	
			60°	**1007430**	
IP 20	1800 K – 3000 K	70 lm – 700 lm	38°	**1007427**	
			60°	**1007429**	

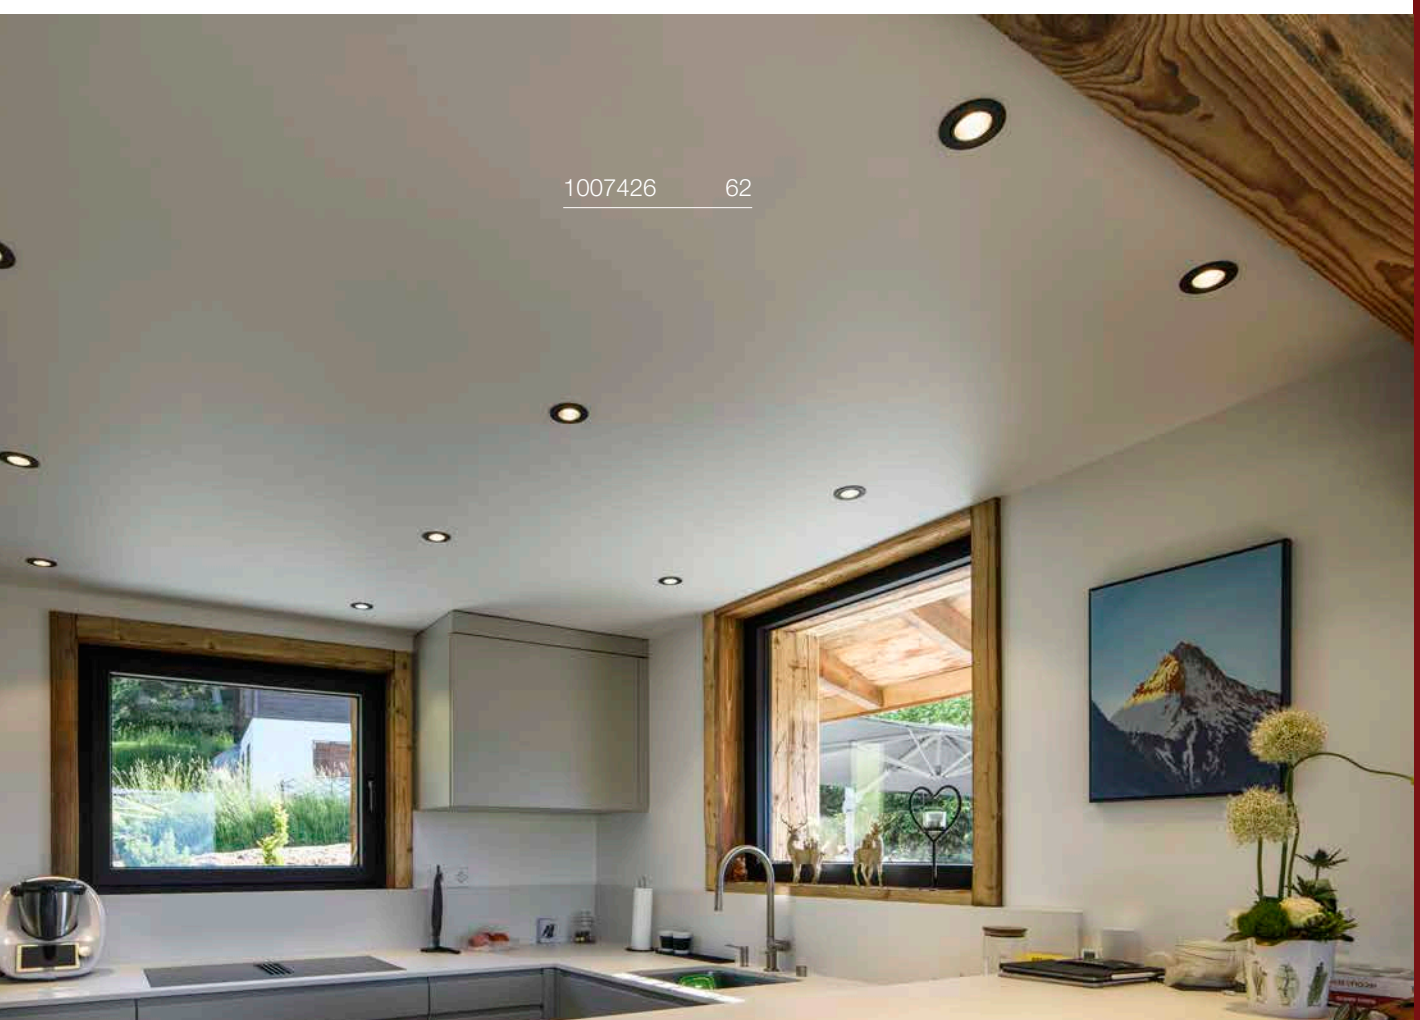


NEW TRIA®
UNIVERSAL 68
DL, PHASE


CCT




1



2



3



C.L IP20 50.000h L80B10 LED INSIDE

220-240V ~50/60Hz | 100-180mA
Total Wattage: 8.6W
Material: Aluminium

- Material thickness of mounting surface: max. 20 mm

1



● Black




○ white

2



● Black



○ white

3



● Black



○ white









	IP				Prod. no.	
30°	IP 20	2500 K 3000 K 4000 K	540 lm 600 lm 600 lm	38°	**1007434**	
				60°	**1007436**	
30°	IP 20	2500 K 3000 K 4000 K	540 lm 600 lm 600 lm	38°	**1007433**	
				60°	**1007435**	
30°	IP 20	2500 K 3000 K 4000 K	540 lm 600 lm 600 lm	38°	**1007438**	
				60°	**1007440**	
30°	IP 20	2500 K 3000 K 4000 K	540 lm 600 lm 600 lm	38°	**1007437**	
				60°	**1007439**	
–	IP 20 IP 65*	2500 K 3000 K 4000 K	370 lm 410 lm 410 lm	38°	**1007442**	
–	IP 20 IP 65*	2500 K 3000 K 4000 K	370 lm 410 lm 410 lm	38°	**1007441**	

*IP65 room side

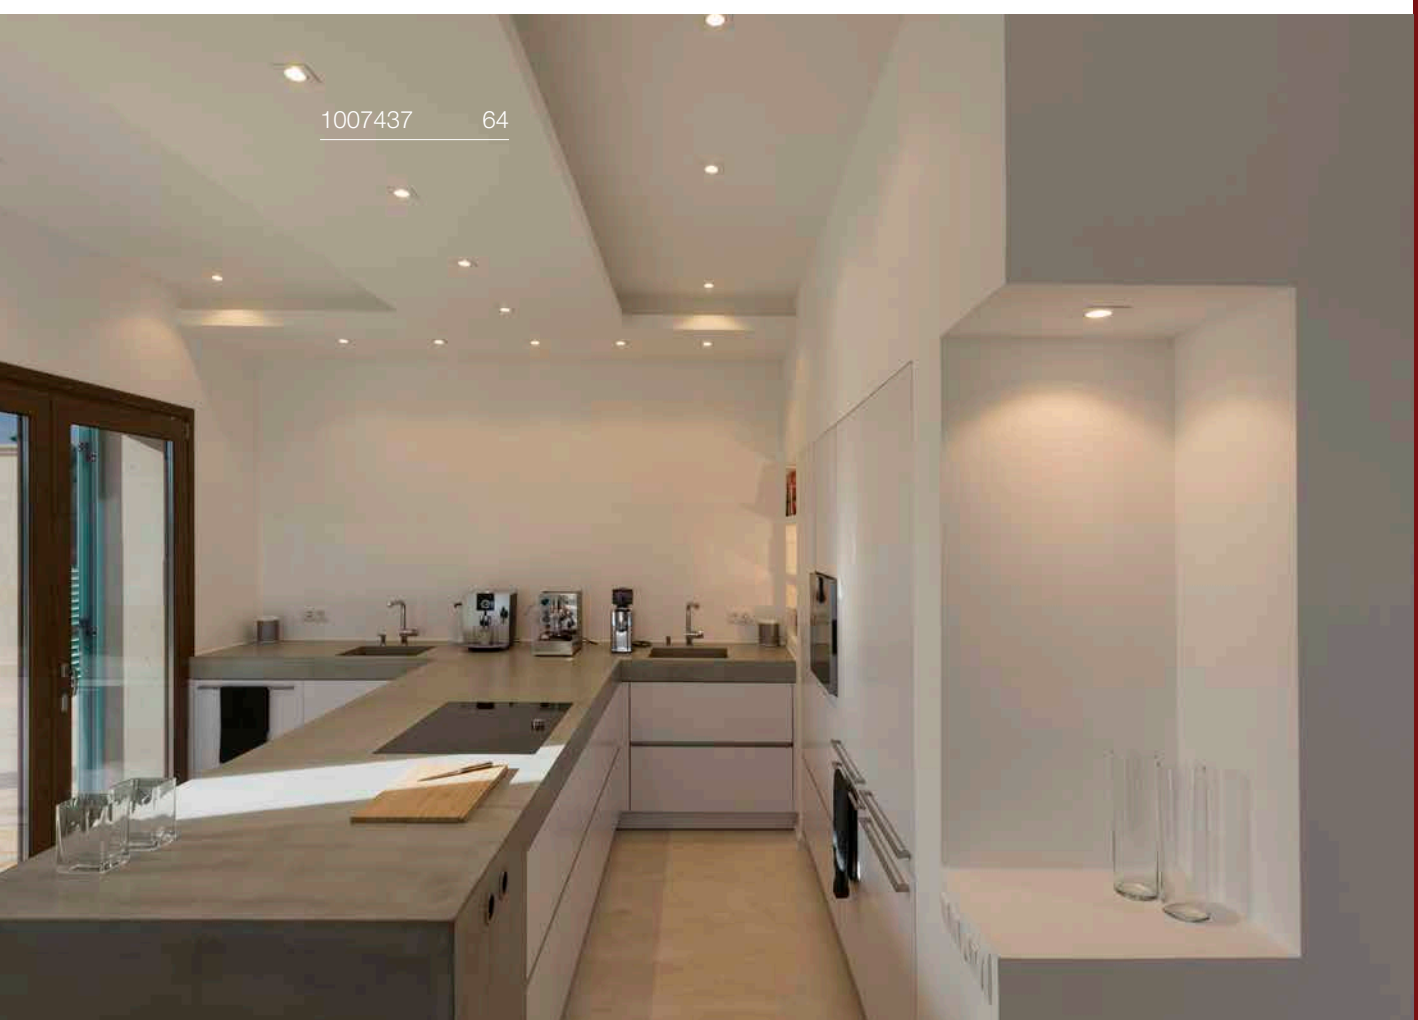

NEW TRIA® 68
DL, PHASE, AIRTIGHT





C,L | IP20/IP23 | IK02 | 20° | L80B10 | UGR 22 | LED INSIDE | CRI 90

220-240 V ~50/60 Hz | 180 mA
Total Wattage: 7.5 W
Material: Aluminium/PC


• Meets the requirements of RE2020



● Black




○ white

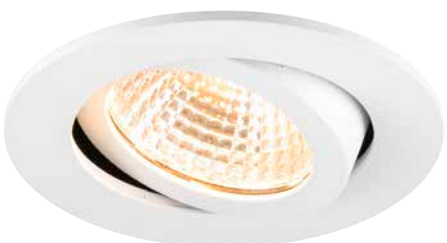



	IP		lm		UGR	Prod. no.	
20°	IP 20/IP 23	2700 K	591 lm	36°	22	**1009021**	
		3000 K	621 lm			**1009023**	
20°	IP 20/IP 23	2700 K	591 lm	36°	22	**1009020**	
		3000 K	621 lm			**1009022**	

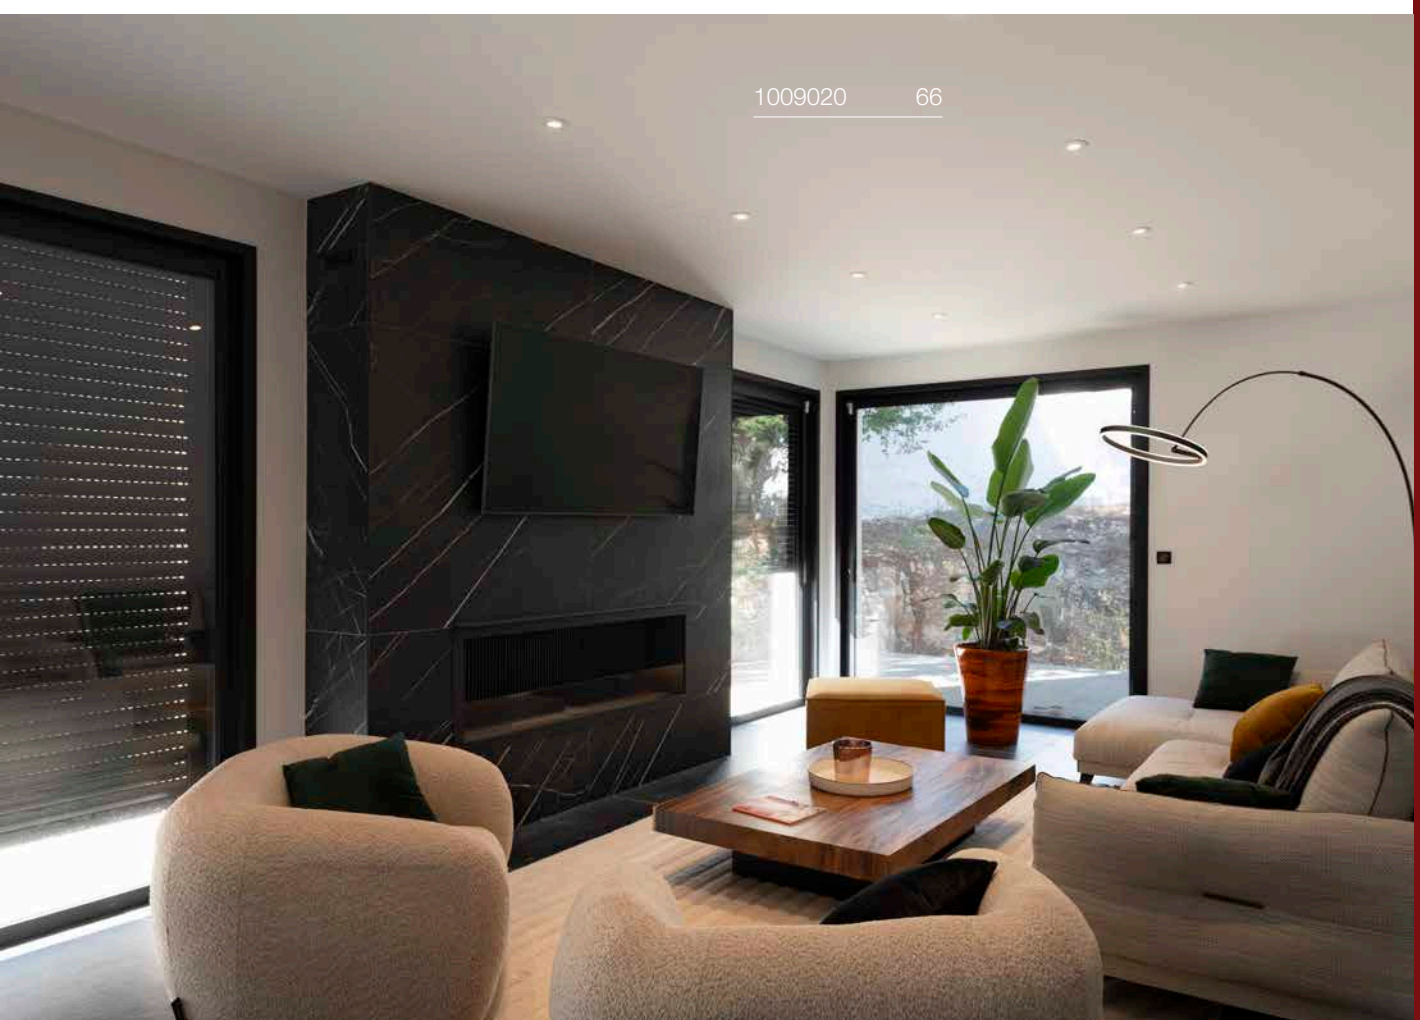

NEW TRIA® 68
DL, QPAR51



1



- Black



- white




- Aluminium

2



- Black




- white




- Aluminium

1



2





220-240V ~50/60Hz
Material: Aluminium

- Material thickness of mounting surface: max. 20 mm

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F




Prod. no.: **1005077**








	IP		Prod. no.	
	IP 20	Base: 1xGU10	**1007369**	
	IP 20	Base: 1xGU10	**1007368**	
	IP 20	Base: 1xGU10	**1007370**	
	IP 20	Base: 1xGU10	**1007372**	
	IP 20	Base: 1xGU10	**1007371**	
	IP 20	Base: 1xGU10	**1007373**	

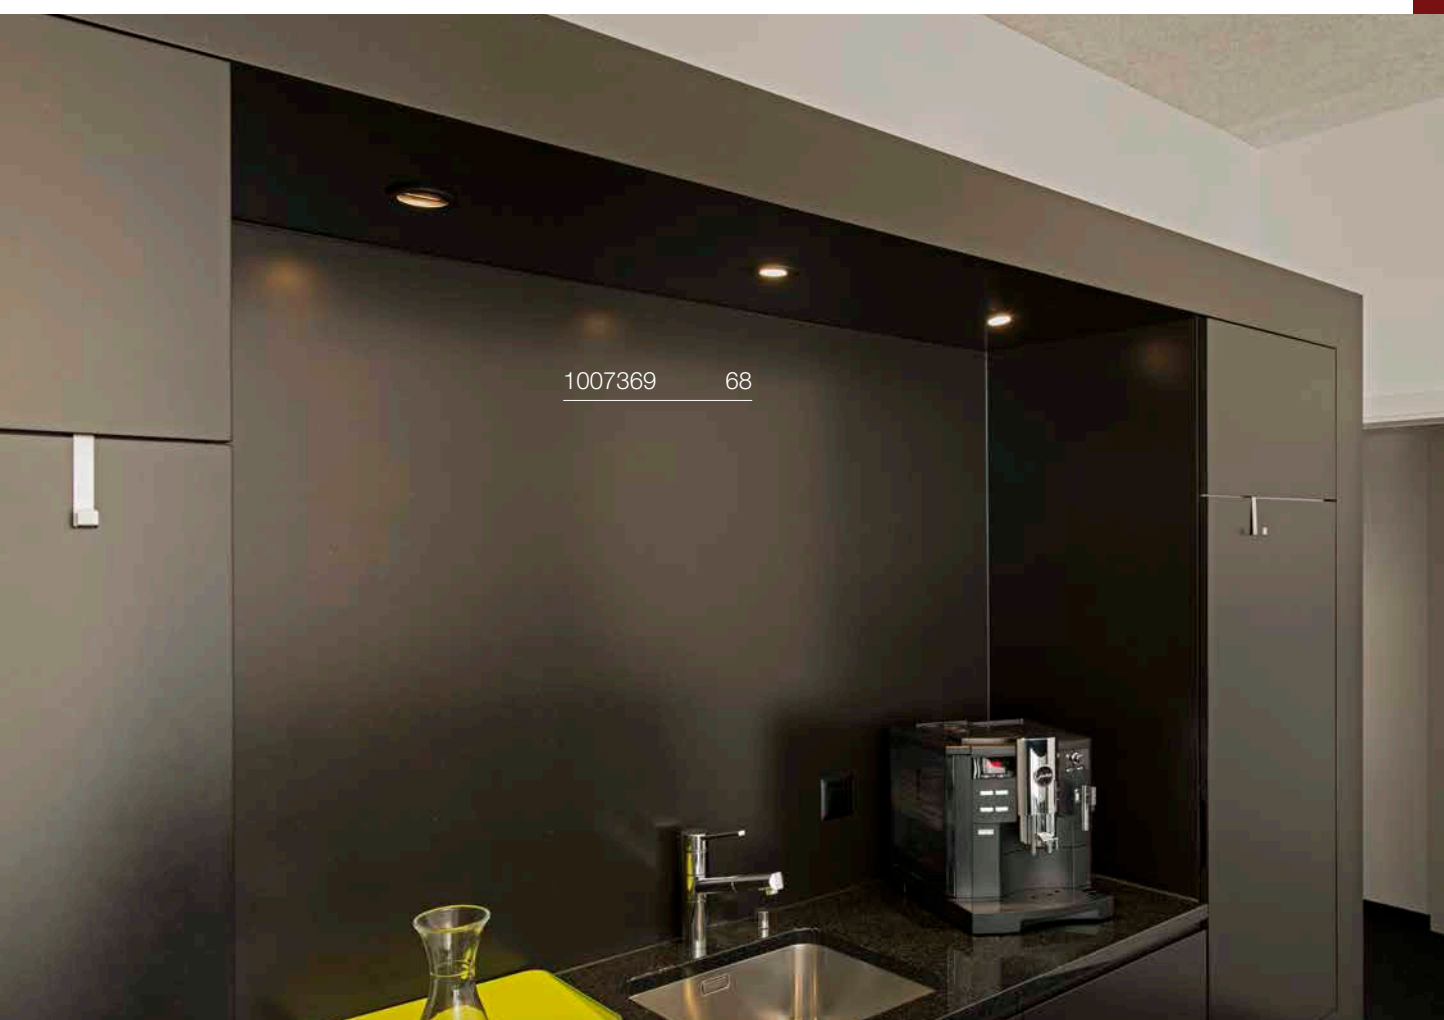


NEW TRIA® 75 / XL
DL, QPAR51




1




2



3



4





220-240V ~50/60Hz
Material: Aluminium

- Material thickness of mounting surface: max. 20 mm

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077**

1



- Black
- white
- Aluminium

2



- Black
- white
- Aluminium

3




- Black, XL
- white, XL
- Aluminium, XL

4



- Black, XL
- white, XL
- Aluminium, XL

	IP		Prod. no.	
	IP 20	Base: 1xGU10	**1007375**	
	IP 20	Base: 1xGU10	**1007374**	
	IP 20	Base: 1xGU10	**1007376**	
	IP 20	Base: 1xGU10	**1007378**	
	IP 20	Base: 1xGU10	**1007377**	
	IP 20	Base: 1xGU10	**1007379**	

	IP 20	Base: 1xGU10	**1007625**	
	IP 20	Base: 1xGU10	**1007624**	
	IP 20	Base: 1xGU10	**1007626**	
	IP 20	Base: 1xGU10	**1007628**	
	IP 20	Base: 1xGU10	**1007627**	
	IP 20	Base: 1xGU10	**1007629**	










NEW TRIA® 45
DL, ROUND



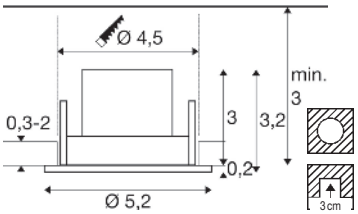

IP20/ IP44 | IK02 | 24° | 25° | 50000 h L80B10 | UGR 22

220-240 V ~50/60 Hz | 350 mA
Total Wattage: 4 W

• Including external LED driver


LED INSIDE | CRI 90

1009002 **1009003**	Down	2700 K 360 lm
1009004 **1009005**	Down	3000 K 360 lm

Variant	Prod. no.
● black 2700 K	**1009003**
● black 3000 K	**1009005**
○ white 2700 K	**1009002**
○ white 3000 K	**1009004**

NEW TRIA® 155
DL, DOUBLE, QPAR51



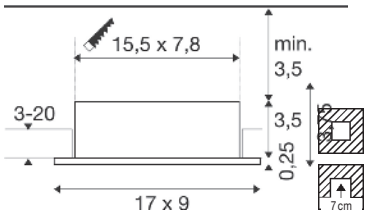

IP20 | 30°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE | 10 W

Base: 2xGU10

Variant	Prod. no.
● black	**1008510**
○ white	**1008509**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

Prod. no.: **1005079**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

NEW TRIA® 155
DL, DOUBLE



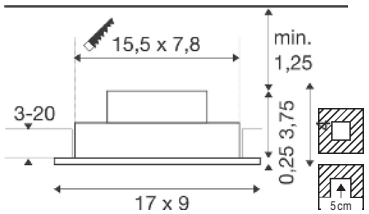

C,L | IP20 | 38° | 30° | 50000 h L80B10

220-240 V ~50/60 Hz | 350 mA
Total Wattage: 13.6 W
Material: Aluminium

LED INSIDE | CRI 90

1008511 **1008512**	Down	2700 K 1220 lm
1008513 **1008514**	Down	3000 K 1280 lm

Variant	Prod. no.
● black 2700 K	**1008512**
● black 3000 K	**1008514**
○ white 2700 K	**1008511**
○ white 3000 K	**1008513**


COMBINE OTHER ITEMS FROM THE FOLLOWING PAGES






GU10 base or LED module

+

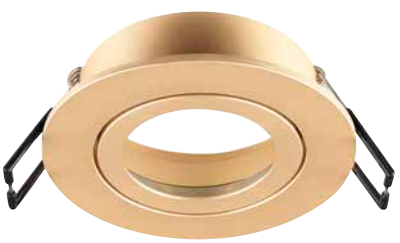



Mounting ring available in black, white, pink gold and aluminium

=

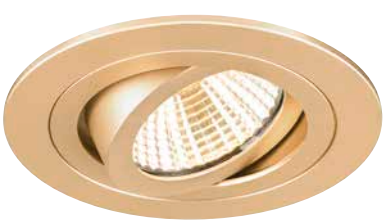

GU10
LED CONNECTION BOX
WITH BASE, MAX. 10W





IP20

220-240 V ~50/60 Hz
Material: Plastic

SOCKET INSIDE 10 W

Base: 1xGU10

Variant	Prod. no.
● black	**1007283**


GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

C,L

Prod. no.: **1005080**

NEW TRIA®
DL, LED MODULE, PHASE





C,L IP20 50000h L80B10

220-240 V ~50/60 Hz | 200 mA
Total Wattage: 8.3 W
Material: Aluminium


LED INSIDE CRI 90

	2700 K
1007381	705 lm
1007382	
1007383	3000 K
1007384	750 lm

Variant	Prod. no.
● black 2700 K | 38°	**1007381**
● black 2700 K | 60°	**1007382**
● black 3000 K | 38°	**1007383**
● black 3000 K | 60°	**1007384**

NEW TRIA®
DL, LED MODULE, DTW, PHASE





C,L IP20 50000h L80B10

220-240 V ~50/60 Hz | 250 mA
Total Wattage: 11 W
Material: Aluminium


LED INSIDE DIM TO WARM CRI 90

	1800 K	3000 K
1007421	70 lm	700 lm
1007422		

Variant	Prod. no.
● black 38°	**1007421**
● black 60°	**1007422**

NEW TRIA® UNIVERSAL
DL, LED MODULE, PHASE





C,L IP20 50000h L80B10

220-240 V ~50/60 Hz | 100 - 180 mA
Total Wattage: 8.6 W
Material: Aluminium

LED INSIDE DIM TO WARM CRI 90

	2500 K	3000 K	4000 K
1007431	540 lm	600 lm	600 lm
1007432			

Variant	Prod. no.
● black 38°	**1007431**
● black 60°	**1007432**



NEW TRIA® 68
RING, ROUND, GU10/LED MODULES



IP20

Ø: 8.2 cm
H: 2.6 cm
Material: Aluminium

- Installation Diameter: 68 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.
● black	**1007332**
○ white	**1007333**
● aluminium	**1007335**
● Pink gold	**1007334**

NEW TRIA® 68
RING, SQUARE, GU10/LED MODULES



IP20

L: 8.2 cm
W: 8.20 cm
H: 2.6 cm
Material: Aluminium

- Installation Diameter: 68 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.
● black	**1007329**
○ white	**1007328**
● aluminium	**1007330**
● Pink gold	**1007331**

NEW TRIA® 68
RING, ROUND,
GU10/LED MODULES



IP20

Ø: 8.2 cm
H: 4.4 cm
Material: Aluminium

- Installation Diameter: 68 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.
● black	**1007451**
○ white	**1007453**

NEW TRIA® 68
RING, ROUND,
GU10/LED MODULES



IP65

Ø: 8.2 cm
H: 3.4 cm
Material: Aluminium

- Installation Diameter: 68 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.
● black	**1007345**
○ white	**1007346**

NEW TRIA® 68
RING, SQUARE,
GU10/LED MODULES



IP65

L: 8.2 cm
W: 8.20 cm
H: 3.4 cm
Material: Aluminium

- Installation Diameter: 68 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.
● black	**1007347**
○ white	**1007348**

NEW TRIA® 68
RING, ROUND,
GU10/LED MODULES



IP65

Ø: 8.3 cm
H: 3.55 cm
Material: Aluminium

- Installation Diameter: 68 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.
● black	**1007336**
○ white	**1007337**

NEW TRIA® 68
RING, SQUARE,
GU10/LED MODULES



IP65

L: 8.3 cm
W: 8.30 cm
H: 3.55 cm
Material: Aluminium

- Installation Diameter: 68 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.
● black	**1007338**
○ white	**1007339**


POISSONNERIE
À RESERVER
PLATEAU DE FRUITS DE MER
- 8 huîtres creuses
- 8 crevettes roses
- 4 bulots
- 1 homard canadien
80€/2 pers
60€/1pers
+ mayonnaise
+ citron
+ vinaigre échalote
turbot, soles, calamars
accompagnés de mer,
thon, saint-jacques....
à commander
selon arrivage
À EMPORTER
LES HUÎTRES
- OUVERTES ou FERMÉES -
FINES DE CLAIRE
PRAT AR COM
St VAAST
SAUMON
CRUSTACÉS
HOMARD BRETON
HOMARD CANADIEN
COQUILLES St JACQUES
PINCES DE CRABE
BIGORNEAUX
CROUSTILLES POISSON
FRUITS DE MER
BISQUE DE HOMARD
SOUPE DE POISSON
ROUILLE & CROUTONS
COQUILLETTES
- CRÉVETTES
- LANGOUSTINE
SAUCES
- GRAVLAX
- BEURRE BLANC
- AIOLI
MAYONNAISE

NEW TRIA® 75
RING, ROUND,
GU10/LED MODULES



IP20

Ø: 9.3 cm
H: 2.6 cm
Material: Aluminium

- Installation Diameter: 75 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.
● black	**1007343**
○ white	**1007342**
◐ aluminium	**1007351**
◐ Pink gold	**1007344**

NEW TRIA® 75
RING, SQUARE,
GU10/LED MODULES



IP20

L: 9 cm
W: 9.00 cm
H: 2.6 cm
Material: Aluminium

- Installation Diameter: 75 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.
● black	**1007340**
○ white	**1007349**
◐ aluminium	**1007350**
◐ Pink gold	**1007341**

NEW TRIA® 75 XL
RING, ROUND,
GU10/LED MODULES



IP20

Ø: 11 cm
H: 2.6 cm
Material: Aluminium

- Installation Diameter: 75 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.
● black	**1007631**
○ white	**1007630**
◐ aluminium	**1007632**
◐ Pink gold	**1007633**

NEW TRIA® 75
RING, ROUND,
GU10/LED MODULES



IP20

Ø: 8.2 cm
H: 4.9 cm
Material: Aluminium

- Installation Diameter: 75 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.
● black	**1007449**
○ white	**1007450**

NEW TRIA® 75
RING, ROUND,
GU10/LED MODULES



IP20

Ø: 8.2 cm
H: 4.3 cm
Material: Aluminium

- Installation Diameter: 75 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.
● black	**1007488**
○ white	**1007489**

NEW TRIA® 75 XL
RING, SQUARE,
GU10/LED MODULES



IP20

L: 11 cm
W: 11.00 cm
H: 2.6 cm
Material: Aluminium

- Installation Diameter: 75 mm
- Material thickness of mounting surface: max. 20 mm


Variant	Prod. no.
● black	**1007635**
○ white	**1007634**
◐ aluminium	**1007636**
◐ Pink gold	**1007637**

CREATE YOUR NEW TRIA 95 DOWNLIGHT



LED module

+

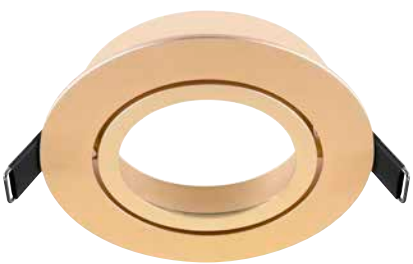

Version-95 mounting rings available in black, white, pink gold and aluminium


=



1007412 + 1007444 81

NEW TRIA®
DL, LED MODULE, PHASE





C;L IP20 50000h L80B10

220-240 V ~50/60 Hz | 350 mA
Total Wattage: 13.3 W
Material: Aluminium

LED INSIDE CRI 90

1007409	2700 K
1007411	1130 lm
1007410	3000 K
1007412	1200 lm

Variant	Prod. no.
● black 2700 K | 38°	**1007409**
● black 3000 K | 38°	**1007410**
● black 3000 K | 60°	**1007412**
○ white 2700 K | 60°	**1007411**

NEW TRIA® 95
RING, ROUND, LED MODULES



IP20

Ø: 11 cm
H: 2.6 cm
Material: Aluminium

- Installation Diameter: 95 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.
● black	**1007444**
○ white	**1007443**
● aluminium	**1007445**
● Pink gold	**1007447**

NEW TRIA® 95
RING, ROUND, LED MODULES



IP20

Ø: 10.3 cm
H: 5.5 cm
Material: Aluminium

- Installation Diameter: 95 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.
● black	**1007452**
○ white	**1007454**

NEW TRIA® 95
RING, SQUARE, LED MODULES



IP20

L: 11 cm
W: 11.00 cm
H: 2.6 cm
Material: Aluminium


- Installation Diameter: 95 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.
● black	**1007446**
○ white	**1007448**



NEW TRIA®
DL, DOUBLE, LED MODULE, PHASE





C,L IP20 38° 50000 h L80B10

220-240 V ~50/60 Hz | 350 mA
Total Wattage: 13.6 W
Material: Aluminium

LED INSIDE CRI 90

1008005	2700 K 1220 lm
1008006	3000 K 1280 lm

Variant	Prod. no.
● black 2700 K	**1008005**
● black 3000 K	**1008006**

NEW TRIA® 155
RING, DOUBLE, SQUARE GU10/ LED MODULE



IP20

L: 17 cm
W: 9.00 cm
H: 3.75 cm
Material: Aluminium

• Spring clips

Variant	Prod. no.
● black	**1008007**
○ white	**1008008**
● aluminium	**1008009**

CONFIGURE YOUR NEW TRIA®

For greater flexibility, the NEW TRIA offers the option of configuring customised sets from the modular system in addition to the existing sets. Simply choose the right options and benefit from rapid installation.


CHOOSE YOUR PREFERRED MOUNTING RING ...

1. Installation diameter: 68, 75, 95 mm
2. Pivoting, rotating and pivoting, IP65
3. Colour
   black, white, pink gold or aluminium
4. round or square

CHOOSE YOUR PREFERRED MODULE...

5. Colour temperature
   2700K or 3000K, 1800 — 3000K or CCT 2500 / 3000 / 4000K
6. Beam angle
   38° / 60°

DONE!

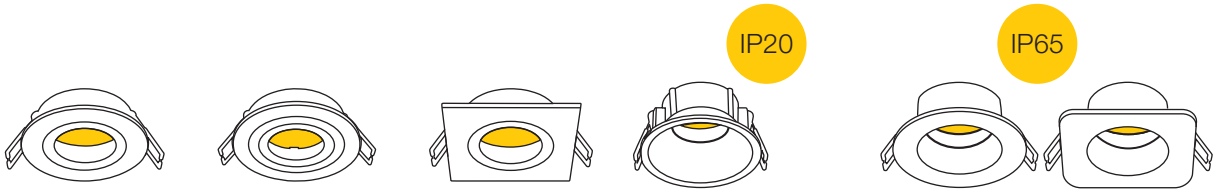


Mounting ring

Available as a pivoting, rotating and pivoting, or IP65 version
with 68, 75 or 95 mm installation diameter

Available in black, white, pink gold or aluminium

Available in round or square design

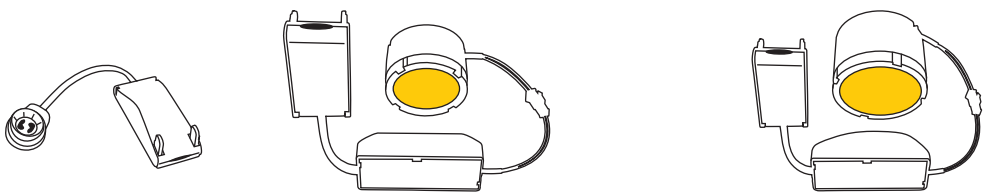

GU10 LED MODULE LED MODULE


NEW TRIA® 68 **NEW TRIA® 75** **NEW TRIA® 95**

Colour temperature
2700 / 3000K, DTW 1800 - 3000K or multi CCT

Beam angle
38° / 60°

Colour temperature
2700 / 3000K


Beam angle
38° / 60°

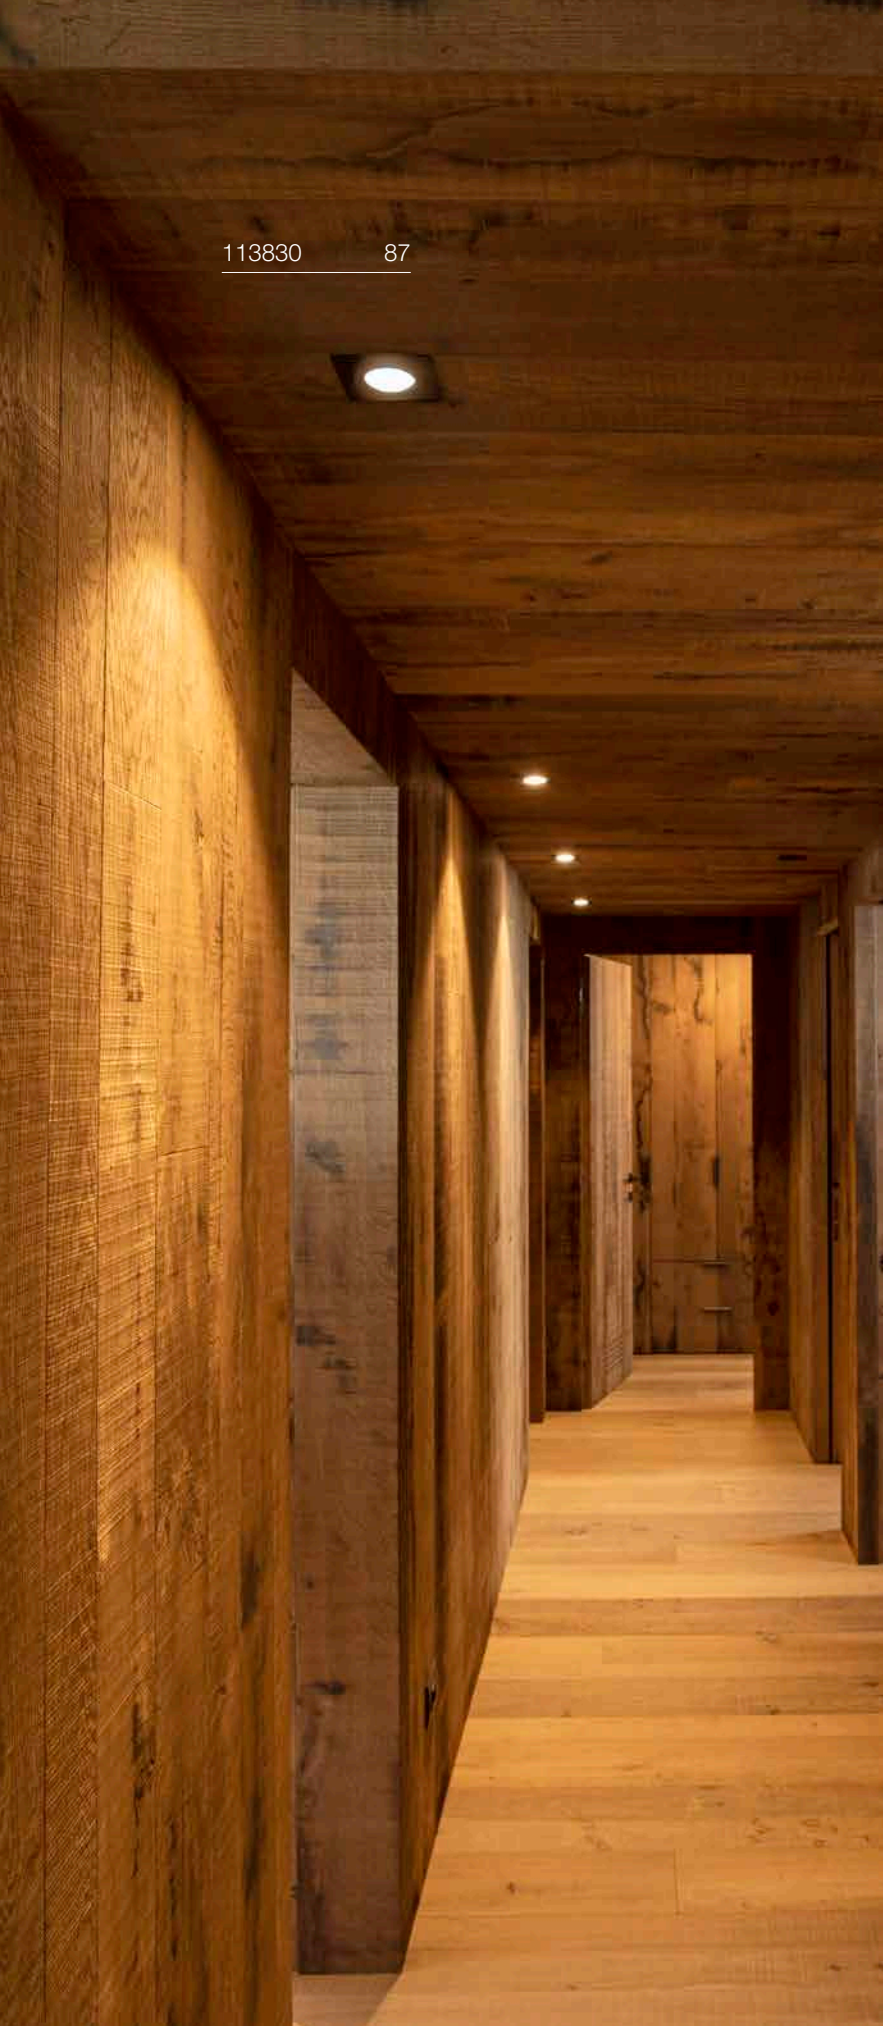

113830 87

NEW TRIA® 150
DL, ROUND, QPAR111







220-240 V ~50/60 Hz
Material: Aluminium

- Leaf springs

SOCKET INSIDE 75 W

Base: 1xGU10


Variant	Prod. no.
● black	**113550**
○ white	**113540**

GU10 | 12 W | 55°
670 lm | 2700 K | EEC = G

Prod. no.: **1005297**

NEW TRIA® 300
DL, ANGULAR, QPAR111





IP20 360° 30°

220-240 V ~50/60 Hz
Material: Aluminium

• Leaf springs

SOCKET INSIDE 75 W

Base: 1xGU10

Variant	Prod. no.
● black	**113830**
○ white	**113541**


GU10 | 8 W | 38°
680 lm | 2700 K | EEC = F

C,L

Prod. no.: 1005274

NEW TRIA®
DL, DOUBLE, QPAR111





IP20 360° 30°

220-240 V ~50/60 Hz
Material: Aluminium

• Spring clips

SOCKET INSIDE 75 W

Base: 2xGU10

Variant	Prod. no.
● black	**113840**
○ white	**113841**
◔ aluminium	**111382**


GU10 | 13 W | 10°
900 lm | 2700 K | EEC = G

C

Prod. no.: 1005275

GLENOS® PRO
RL, 1,2 M, DALI, UGR19






Dali Touch IP20 IK02 75° 100.000 h L80B20 UGR 19 30

220-240 V ~0/50/60 Hz | 750 mA
Total Wattage: 30 W
Material: Aluminium/Plastic PC

LED INSIDE CRI 90


1010521 **1010522**	3000 K 3650 lm
1010523 **1010524**	4000 K 3900 lm

Variant	Prod. no.
● black 3650 lm | 3000 K	**1010522**
● black 3900 lm | 4000 K	**1010524**
◔ white/black 3650 lm | 3000 K	**1010521**
◔ white/black 3900 lm | 4000 K	**1010523**

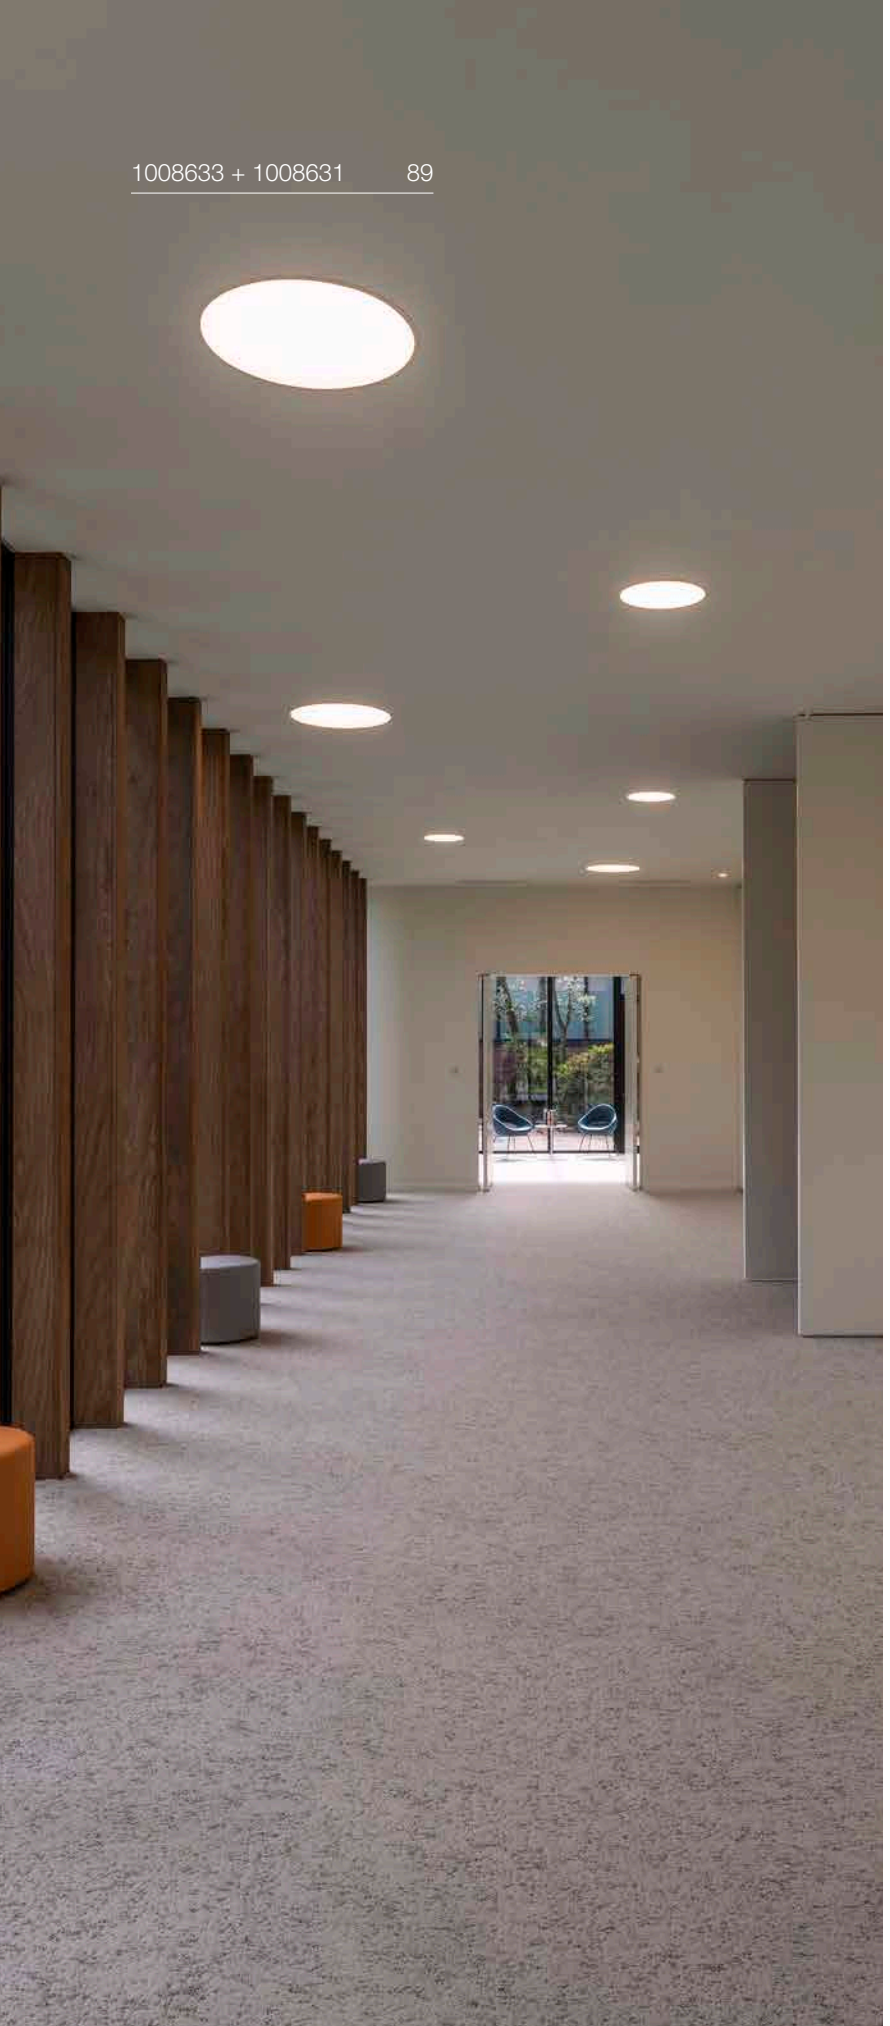

MEDO® 30
RL, FRAME



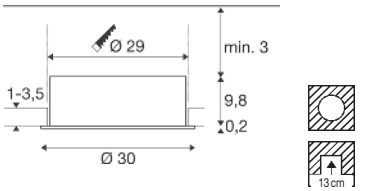



250 mA
Power consumption: 8 W
Material: Steel




Down	3000 K	4000 K
	1150 lm	1200 lm

Variant	Prod. no.
○ white	**1008629**

Product	Prod. no.
LED driver 10 W | 180-270 mA PHASE	
○ white	**1008660**
LED driver 15 W | 100-700 mA DALI	
○ white	**1008666**
Strain relief for non-dimmable drivers, standard	
○ white	**1008670**
Strain relief for non-dimmable drivers, through-wirable	
○ white	**1008671**
Strain relief for DALI dimmable drivers, standard	
○ white	**1008672**
Strain relief for DALI dimmable drivers, through-wirable	
○ white	**1008673**
LED driver 21 W | 150-500 mA	
○ white	**1008699**

MEDO® 40
RL, FRAME



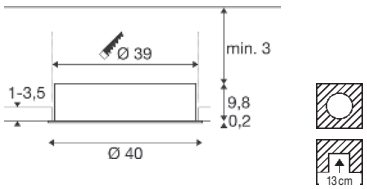

IP20 | 80° | 50000 h L80B10 | UGR 19

500 mA
Power Consumption: 16 W
Material: Steel

LED INSIDE | CCT | CRI 90


	3000 K	4000 K
Down	2350 lm	2450 lm

Variant	Prod. no.
○ white	**1008631**

Product	Prod. no.
LED driver 20 W | 350-500 mA PHASE	
○ white	**1008663**
LED driver 23 W | 100-700 mA DALI	
○ white	**1008667**
Strain relief for non-dimmable drivers, standard	
○ white	**1008670**
Strain relief for non-dimmable drivers, through-wirable	
○ white	**1008671**
Strain relief for DALI dimmable drivers, standard	
○ white	**1008672**
Strain relief for DALI dimmable drivers, through-wirable	
○ white	**1008673**
LED driver 21 W | 150-500 mA	
○ white	**1008699**

MEDO® 60
RL, FRAME



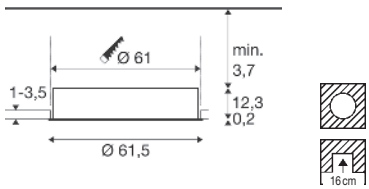

IP20 | 80° | 50000 h L80B10 | UGR 19

1000 mA
Power Consumption: 33 W
Material: Steel

LED INSIDE | CCT | CRI 90


	3000 K	4000 K
Down	4600 lm	4600 lm

Variant	Prod. no.
○ white	**1008633**

Product	Prod. no.
LED driver 40 W | 700-1050 mA PHASE	
○ white	**1008665**
LED driver 53 W | 650-1400 mA DALI	
○ white	**1008669**
Strain relief for non-dimmable drivers, standard	
○ white	**1008670**
Strain relief for non-dimmable drivers, through-wirable	
○ white	**1008671**
Strain relief for DALI dimmable driver 1008669, standard	
○ white	**1008674**
LED driver 44 W | 700-1050 mA	
○ white	**1008701** ●
Strain relief for DALI dimmable driver 1008669, through-wirable	
○ white	**1008702** ●

MEDO® 90
RL, FRAME



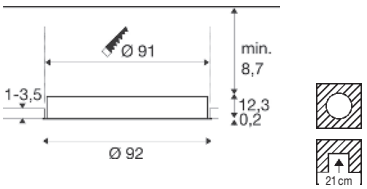

IP20 | 80° | 50000 h L80B10 | UGR 19


1000 mA
Power consumption: 66 W
Material: Aluminium

LED INSIDE | CCT | CRI 90

	3000 K	4000 K
Down	9200 lm	9500 lm


Variant	Prod. no.
○ white	**1008635**

Product	Prod. no.
LED driver 40 W | 700-1050 mA PHASE	
○ white	**1008665**
LED driver 53 W | 650-1400 mA DALI	
○ white	**1008669**
Strain relief for non-dimmable drivers, standard	
○ white	**1008670**
Strain relief for non-dimmable drivers, through-wirable	
○ white	**1008671**
Strain relief for DALI dimmable driver 1008669, standard	
○ white	**1008674**
LED driver 44 W | 700-1050 mA	
○ white	**1008701** ●
Strain relief for DALI dimmable driver 1008669, through-wirable	
○ white	**1008702** ●

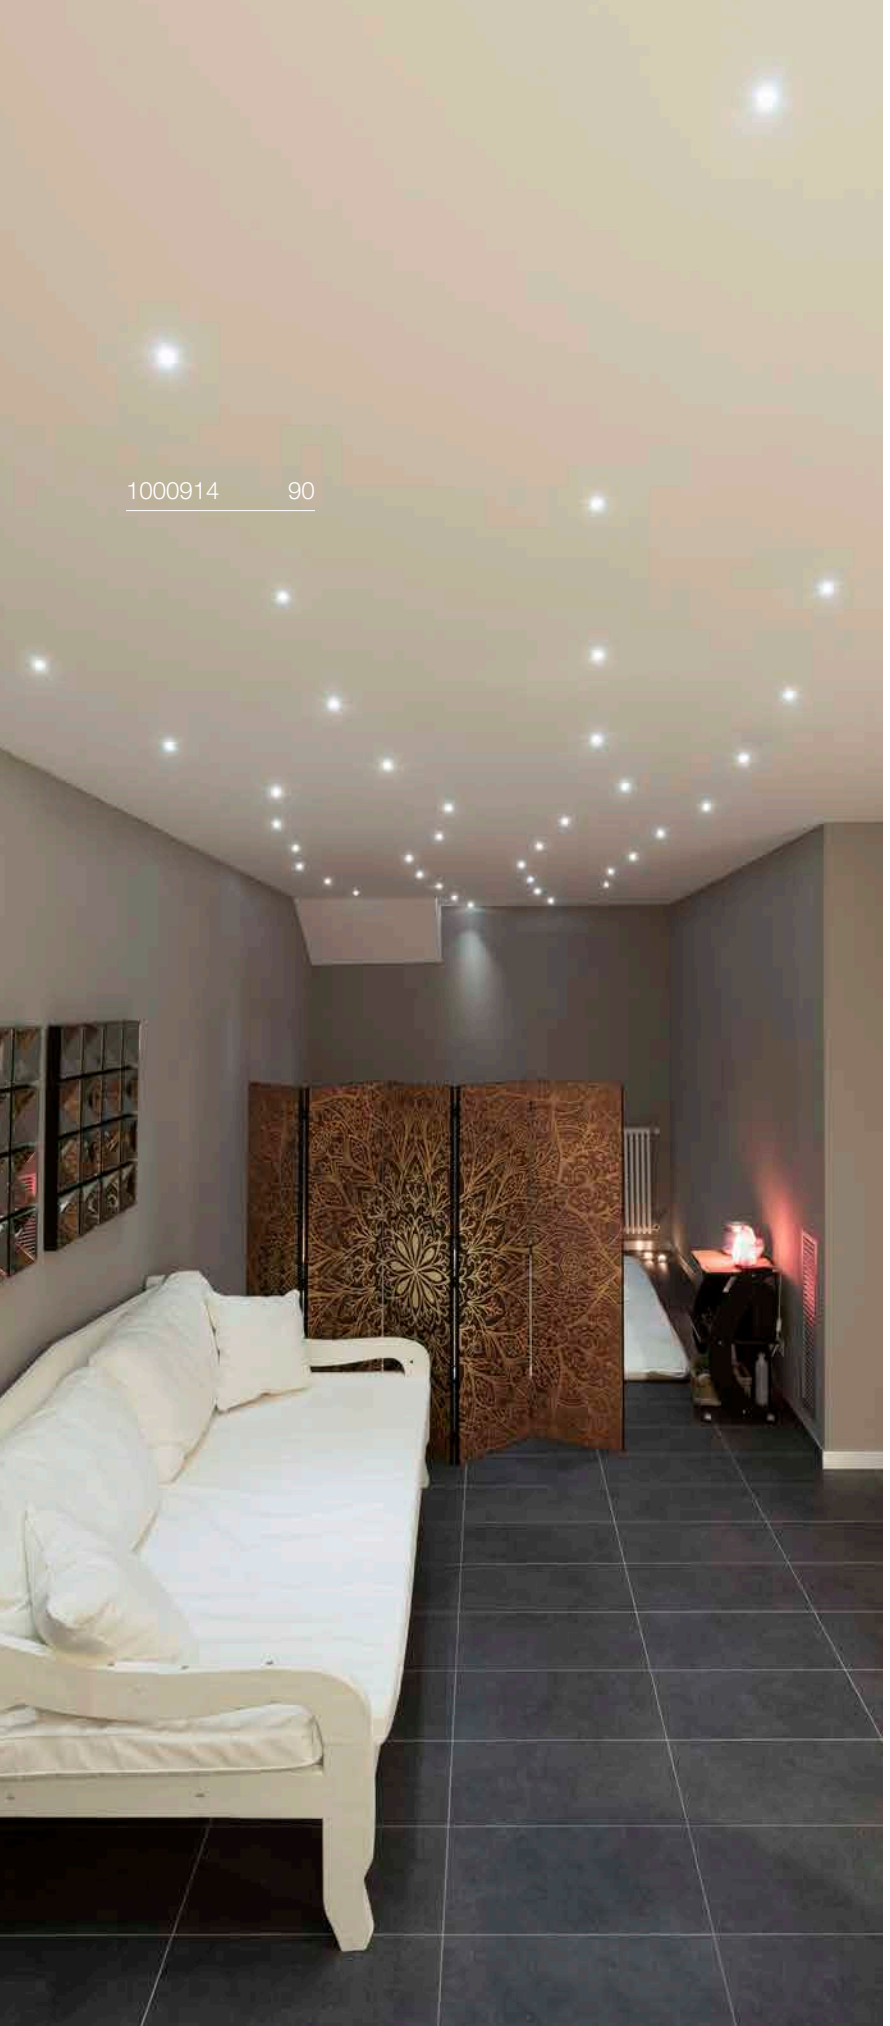

HORN MINI
EL







350 mA
Power Consumption: 1 W
Material: Aluminium/Polycarbonate (PC)

- Spring clips
- inc. AMP plug
- Different light colour with golden reflector

LED INSIDE CRI 90

1000914	3000 K
1000915	70 lm
	2900 K
1000917	70 lm


Variant	Prod. no.
black/gold 2900 K	**1000917**
● black 3000 K	**1000915**
○ white 3000 K	**1000914**

⊕

Product	Prod. no.
LED driver 4 W | 350 mA	
○ white	**1008656**

HORN
DL, SINGLE, QPAR51





IP20 | 30° | 20

220-240 V ~50/60 Hz
Material: Aluminium

• Spring clips

SOCKET INSIDE | 25 W

Base: 1xGU10


Variant	Prod. no.
● black	**113140**
○ white	**113141**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077**

HORN
DL, DOUBLE, QPAR51





IP20 | 30° | 20

220-240 V ~50/60 Hz
Material: Aluminium

• Spring clips

SOCKET INSIDE | 25 W

Base: 2xGU10

Variant	Prod. no.
● black	**1006121**
○ white	**1006122**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

HORN
DL, SINGLE, ASYMMETRICAL, QPAR51





IP20/IP44 | IK02 | 20

220-240 V ~50/60 Hz
Material: Aluminium

• Spring clips

SOCKET INSIDE | 25 W

Base: 1xGU10

Variant	Prod. no.
● black	**113150**
○ white	**113151**


GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005076**



HORN
DL, SINGLE, QPAR51





IP20/ IP44 | IK02 | 20

220-240 V ~50/60 Hz
Material: Aluminium

- Spring clips

SOCKET INSIDE 25 W

Base: 1xGU10


Variant	Prod. no.
● black	**113160**
○ white	**113161**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077**

HORN 1
EL, SINGLE, QPAR51





IP20

220-240 V ~50/60 Hz
Material: Steel

- Spring clips

SOCKET INSIDE 50 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 5.4 cm

Variant	Prod. no.
● black	**112910**
○ white	**112911**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

HORN
DL, GU10, BLOWER DOOR TESTED





IP20/ IP44 · IK02

220-240 V ~50/60 Hz
Material: Aluminium

- Spring clips
- The downlight is compliant with RT2012 standards.

SOCKET INSIDE · 25 W

Base: 1xGU10

Variant	Prod. no.
● black	**1005435**
○ white	**1005436**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

HORN T
EL, QPAR111





IP20 · 15°

220-240 V ~50/60 Hz
Material: Steel

- Spring clips

SOCKET INSIDE · 75 W

Base: 1xGU10


Variant	Prod. no.
● black	**113170**
○ white	**113171**

GU10 | 12 W | 55°
670 lm | 2700 K | EEC = G

Prod. no.: **1005297**

HORN MAGNA
EL





IP20 · 25° · 30000 h L70B50 · 30

500 mA
Power Consumption: 9 W
Material: Aluminium/Polycarbonate (PC)


- Spring clips
- Different light colour with golden reflector
- open cable end

LED INSIDE · CRI 80

1002591	3000 K 550 lm
1002592	3000 K 445 lm
1002594	3000 K 570 lm


Variant	Prod. no.
● black/gold 570 lm	**1002594**
● black 445 lm	**1002592**
○ white 550 lm	**1002591**

Product	Prod. no.
Honeycomb module	
● black	**1002596**
LED driver 21 W | 500 mA including strain relief	
○ white	**1007226**
LED driver 20 W | 350 mA/500 mA Phase control dimmable including strain relief	
○ white	**1007227**
LED driver 25 W | 150-700 mA DALI dimmable including strain relief	
○ white	**1007229**

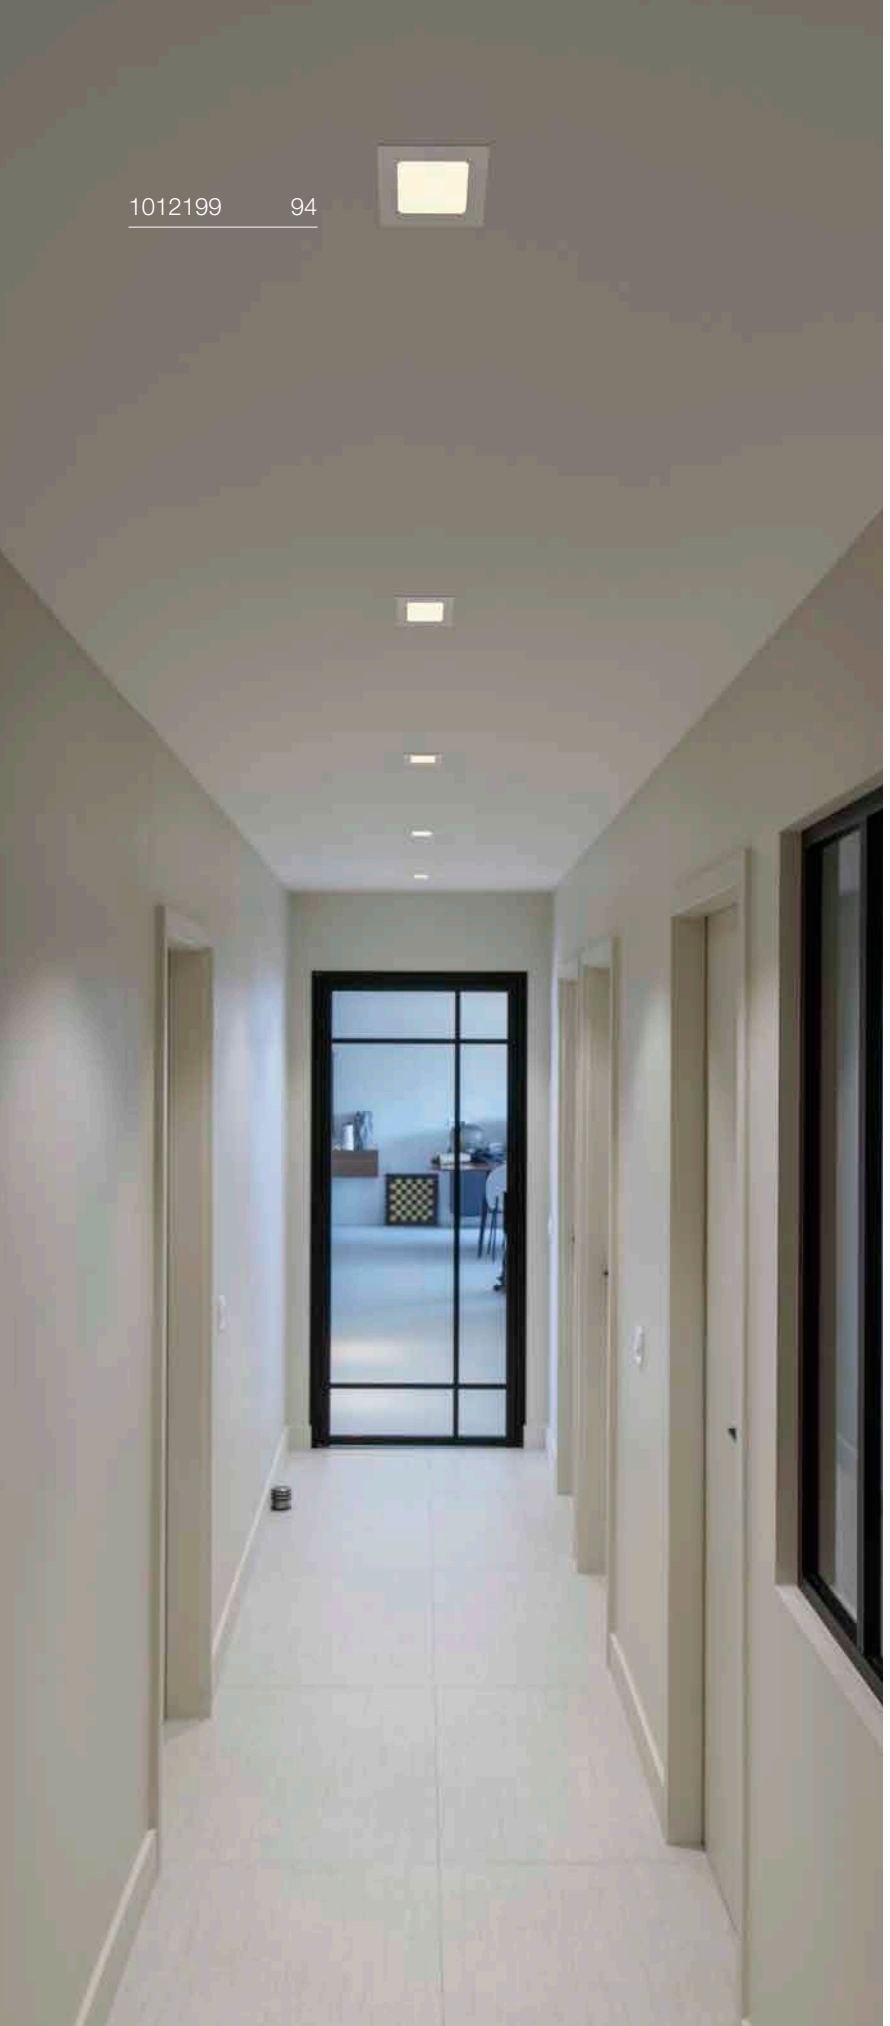

SENSER 2.0 12
RL, SQUARE, PHASE

NEW





220-240 V ~50/60 Hz | 350 mA
Total Wattage: 8.4 W
Material: Aluminium/Plastic PC




	3000 K	4000 K
1012199 Down	650 lm	650 lm

Variant	Prod. no.
○ white	**1012199** ●

SENSER 2.0 18
RL, SQUARE, PHASE



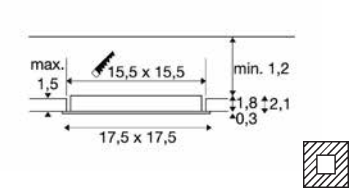

C | IP20 | IK02 | 90° | 50000 h L80B10

220-240 V ~50/60 Hz | 350 mA
Total Wattage: 12 W
Material: Aluminium/Plastic PC


LED INSIDE | CCT | CRI 90

	3000 K	4000 K
1012201 Down	1100 lm	1150 lm

Variant	Prod. no.
○ white	**1012201** ●

SENSER 2.0 24
RL, SQUARE, PHASE





C | IP20 | IK02 | 90° | 50000 h L80B10 | UGR 22


220-240 V ~50/60 Hz | 350 mA
Total Wattage: 20 W
Material: Aluminium/Plastic PC


LED INSIDE | CCT | CRI 90

	3000 K	4000 K
1012203 Down	1900 lm	2000 lm

Variant	Prod. no.
○ white	**1012203** ●

SENSER 2.0 30
RL, SQUARE, PHASE

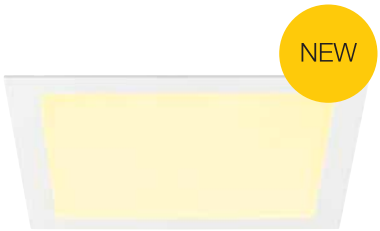

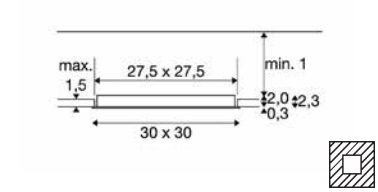


C | IP20 | IK02 | 90° | 50000 h L80B10 | UGR 19

220-240 V ~50/60 Hz | 500 mA
Total Wattage: 25 W
Material: Aluminium/Plastic PC

LED INSIDE | CCT | CRI 90


	3000 K	4000 K
1012205 Down	2550 lm	2700 lm

Variant	Prod. no.
○ white	**1012205** ●

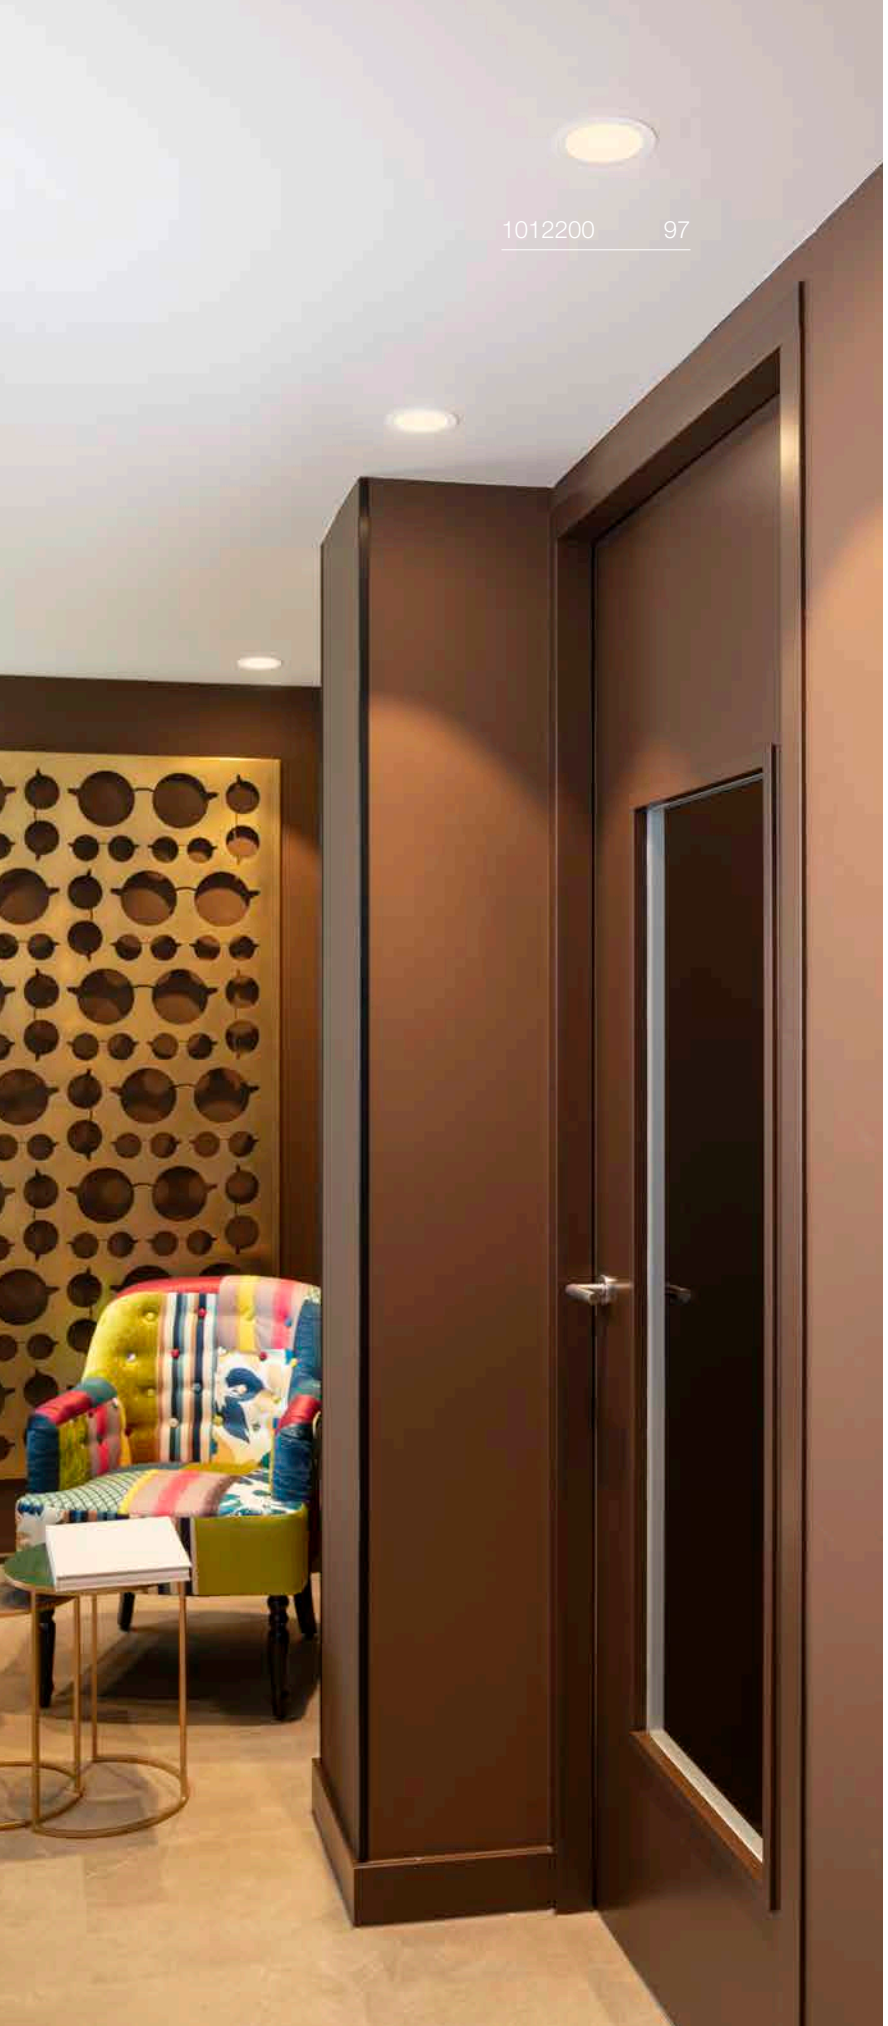

SENSER 2.0 12
RL, ROUND, PHASE

NEW





220-240 V ~50/60 Hz | 350 mA
Total Wattage: 8 W
Material: Aluminium/Plastic PC




	3000 K	4000 K
1012198 Down	600 lm	650 lm

Variant	Prod. no.
○ white	**1012198** ●

SENSER 2.0 18
RL, ROUND, PHASE

NEW

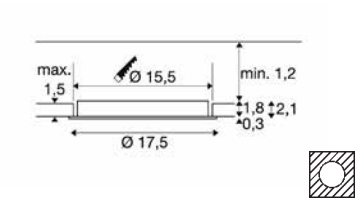

IP20 IK02 90° 50000 h L80B10

220-240 V ~50/60 Hz | 350 mA
Total Wattage: 12 W
Material: Aluminium/Plastic PC


LED INSIDE CCT CRI 90

	3000 K	4000 K
1012200 Down	1100 lm	1200 lm

Variant	Prod. no.
○ white	**1012200** ●

SENSER 2.0 24
RL, ROUND, PHASE

NEW

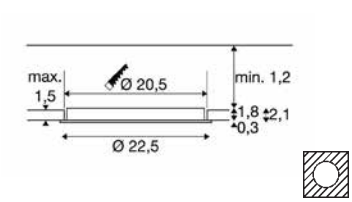

IP20 IK02 90° 50000 h L80B10 UGR 25

220-240 V ~50/60 Hz | 350 mA
Total Wattage: 18 W
Material: Aluminium/Plastic PC


LED INSIDE CCT CRI 90

	3000 K	4000 K
1012202 Down	1800 lm	1900 lm

Variant	Prod. no.
○ white	**1012202** ●

SENSER 2.0 30
RL, ROUND, PHASE

NEW

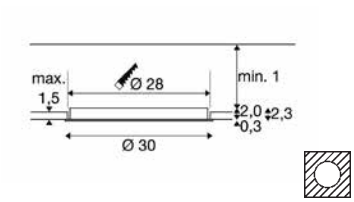

IP20 IK02 90° 50000 h L80B10 UGR 22

220-240 V ~50/60 Hz | 500 mA
Total Wattage: 25 W
Material: Aluminium/Plastic PC


LED INSIDE CCT CRI 90

	3000 K	4000 K
1012204 Down	2450 lm	2600 lm

Variant	Prod. no.
○ white	**1012204** ●

SENSER 2.0 12
RL, SQUARE, DALI

NEW





220-240 V ~50/60 Hz | 350 mA
Total Wattage: 7 W
Material: Aluminium/Plastic PC




	3000 K	4000 K
1012207 Down	650 lm	650 lm

Variant	Prod. no.
○ white	**1012207** ●

SENSER 2.0 18
RL, SQUARE, DALI








220-240 V ~50/60 Hz | 350 mA
Total Wattage: 12 W
Material: Aluminium/Plastic PC




		3000 K	4000 K
1012229	Down	1100 lm	1150 lm

Variant	Prod. no.
○ white	**1012229** ●

SENSER 2.0 24
RL, SQUARE, DALI

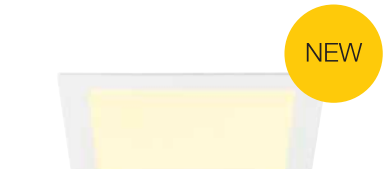

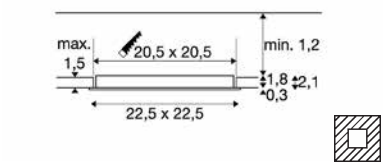





220-240 V ~50/60 Hz | 500 mA
Total Wattage: 18 W
Material: Aluminium/Plastic PC




		3000 K	4000 K
1012210	Down	1900 lm	2000 lm

Variant	Prod. no.
○ white	**1012210** ●

SENSER 2.0 30
RL, SQUARE, DALI









220-240 V ~50/60 Hz | 500 mA
Total Wattage: 24 W
Material: Aluminium/Plastic PC



		3000 K	4000 K
1012212	Down	2550 lm	2700 lm

Variant	Prod. no.
○ white	**1012212** ●






SENSER 2.0 12
RL, ROUND, DALI

NEW







220-240 V ~50/60 Hz | 350 mA
Total Wattage: 7 W
Material: Aluminium/Plastic PC




	3000 K	4000 K
1012206 Down	600 lm	650 lm

Variant	Prod. no.
○ white	**1012206** ●

SENSER 2.0 18
RL, ROUND, DALI

NEW

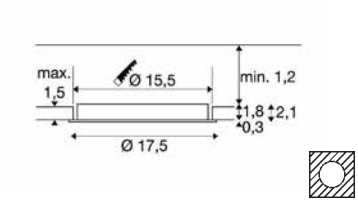

Dali IP20 IK02 90° 50000 h L80B10

220-240 V ~50/60 Hz | 350 mA
Total Wattage: 12 W
Material: Aluminium/Plastic PC


LED INSIDE CCT CRI 90

	3000 K	4000 K
1012208 Down	1100 lm	1200 lm

Variant	Prod. no.
○ white	**1012208** ●

SENSER 2.0 24
RL, ROUND, DALI

NEW

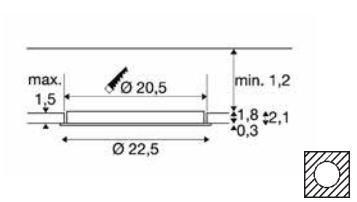

Dali IP20 IK02 90° 50000 h L80B10 UGR 25

220-240 V ~50/60 Hz | 500 mA
Total Wattage: 18 W
Material: Aluminium/Plastic PC


LED INSIDE CCT CRI 90

	3000 K	4000 K
1012209 Down	1800 lm	1900 lm

Variant	Prod. no.
○ white	**1012209** ●

SENSER 2.0 30
RL, ROUND, DALI

NEW

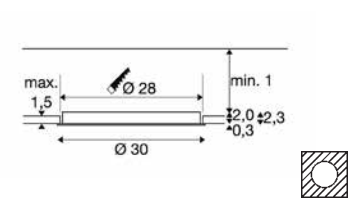

Dali IP20 IK02 90° 50000 h L80B10 UGR 22

220-240 V ~50/60 Hz | 500 mA
Total Wattage: 24 W
Material: Aluminium/Plastic PC

LED INSIDE CCT CRI 90

	3000 K	4000 K
1012211 Down	2450 lm	2600 lm

Variant	Prod. no.
○ white	**1012211** ●




DOWNLIGHT VARIO 220

22 830/840 WH ML

NEW









220-240 V ~50/60 Hz | 100 / 190 mA
Total Wattage: 9 W / 18 W
Material: Plastic PC

- For installation in ceiling cut-outs measuring 65–195 mm
- Also suitable for surface mounting
- BEG-eligible




9 W	3000 K 1150 lm	4000 K 1200 lm
18 W	3000 K 2200 lm	4000 K 2250 lm

Variant	Prod. no.
○ white	**1010397**

DOWNLIGHT VARIO 290
28 830/840 WH ML



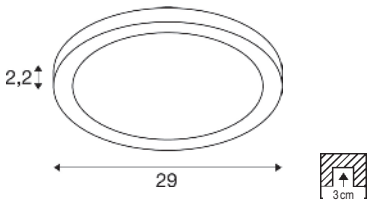

IP20 IK03 110° 50000 h L80B50 21

220-240 V ~50/60 Hz | 80 / 170 mA
Total Wattage: 11 W / 23 W
Material: Plastic PC

- For installation in ceiling cut-outs measuring 65–265 mm
- Also suitable for surface mounting
- BEG-eligible


LED INSIDE CCT CRI 80

	3000 K	4000 K
11 W	1550 lm	1600 lm
23 W	2950 lm	3000 lm

Variant	Prod. no.
○ white	**1010398** ●

DOWNLIGHT VARIO 220
22 830/840 WH ML PIR





IP20 IK03 110° 50000 h L80B50 30

220-240 V ~50/60 Hz | 90 / 180 mA
Total Wattage: 9 W / 18 W
Material: Plastic PC

- For installation in ceiling cut-outs measuring 65–195 mm
- Also suitable for surface mounting
- BEG-eligible


LED INSIDE CCT CRI 80

	3000 K	3500 K	4000 K
9 W	1150 lm	1175 lm	1200 lm
18 W	2200 lm	2225 lm	2250 lm

Variant	Prod. no.
○ white	**1010399** ●

DOWNLIGHT VARIO 290
28 830/840 WH ML PIR



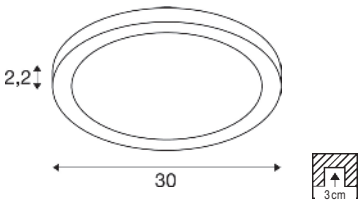

IP20 IK03 110° 50000 h L80B50 21

220-240 V ~50/60 Hz | 80 / 160 mA
Total Wattage: 11 W / 23 W
Material: Plastic PC

- For installation in ceiling cut-outs measuring 65–265 mm
- Also suitable for surface mounting
- BEG-eligible


LED INSIDE CCT CRI 80

	3000 K	3500 K	4000 K
11 W	1550 lm	1575 lm	1600 lm
23 W	2950 lm	3500 K	4000 K
		2975 lm	3000 lm

Variant	Prod. no.
○ white	**1010400** ●

VERLUX
EL, SQUARE, PHASE



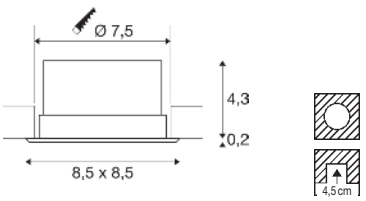

IP20 IK02 80° 35000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total Wattage: 11 W
Material: Aluminium/Plastic


- Spring clips
- Material thickness of mounting surface: max. 20 mm

LED INSIDE CRI 80

3000 K
940 lm

Variant	Prod. no.
○ white	**112682**

VERLUX
EL, SQUARE, PHASE

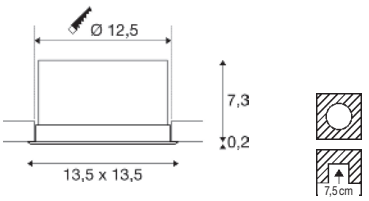

IP20 IK02 80° 35000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total Wattage: 22 W
Material: Aluminium/Plastic

- Spring clips
- Material thickness of mounting surface: max. 20 mm


LED INSIDE

3000 K
1800 lm

Variant	Prod. no.
○ white	**112692**

DL 126
EL





IP20 | 90° | 60 000 h L70B50

12 V
Power consumption: 2.8 W
Material: Aluminium/Plastic

- Spring clips

LED INSIDE | CRI 80


3000 K
170 lm

Variant	Prod. no.
white	**112221**
chrome	**112222**
grey	**112225**

Product	Prod. no.
LED power supply 12 V | 24 W, round	
white	**1008651**

PIKA
DL, ROUND, QPAR51, RIGID





IP20 | 50

220-240 V ~50/60 Hz
Material: Aluminium

- Spring clips

SOCKET INSIDE | 10 W

Base: 1xGU10


Variant	Prod. no.
white	**1000714**
brass	**1000716**
chrome	**1000715**
grey	**1000717**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: 1005077

PIKA
DL, ROUND, QPAR51, PIVOTING





IP20 | 30° | 50

220-240 V ~50/60 Hz
Material: Aluminium

- Spring clips

SOCKET INSIDE | 10 W

Base: 1xGU10

Variant	Prod. no.
white	**1000718**
brass	**1000720**
chrome	**1000719**
grey	**1000721**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: 1005077

SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469


117311 107

OCULUS
CL, MOVE, PHASE





C IP20 100° 30° 40000 h L80B20

220-240 V ~50/60 Hz | 250 mA
Total Wattage: 11 W
Material: Aluminium


- Spring clips
- Additional frosted lens included

LED INSIDE | DIM TO WARM | CRI 90

2000 K	3000 K
36 lm	780 lm

Variant	Prod. no.
● black	**1004668**
○ white	**1004669**

OCCULDAS 14
EL, INDIRECT, PHASE



C IP20 IK02 120° 25000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total Wattage: 15 W
Material: Aluminium/Steel


- Spring clips

LED INSIDE | CRI 80

	3000 K
117331	810 lm

Variant	Prod. no.
○ white	**117331**

OCCULDAS 23
EL, INDIRECT, PHASE



C IP20 IK02 120° 30000 h L70B50

220-240 V ~50/60 Hz | 700 mA
Total Wattage: 23 W
Material: Aluminium/Steel

- Spring clips

LED INSIDE | CRI 80


	3000 K
117311	1500 lm

Variant	Prod. no.
○ white	**117311**

ENOLA® 2.0 S
RL, SINGLE, GU10 MINI, PAR11

NEW







220-240 V ~50/60 Hz
Material: Aluminium/Steel/Plastic PC

SOCKET INSIDE 5 W

Base: 1xGU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.
● black	**1011919**
○ white	**1011920**

GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F

C,L


Prod. no.: **1011670**

Product	Prod. no.
ENOLA® 2.0 S, Deco Ring	
● black	**1011753**
○ white	**1011754**
● gold	**1011755**
● copper	**1011756**

ENOLA® 2.0 S
RL, DOUBLE, GU10 MINI, PAR11

NEW







220-240 V ~50/60 Hz
Material: Aluminium/Steel/Plastic PC

SOCKET INSIDE 5 W

Base: 2xGU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.
● black	**1011921**
○ white	**1011922**

GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F

C,L

Prod. no.: **1011670**

Product	Prod. no.
ENOLA® 2.0 S, Deco Ring	
● black	**1011753**
○ white	**1011754**
● gold	**1011755**
● copper	**1011756**

ENOLA® 2.0 S
DECORATIVE RING

NEW




Ø: 3.9 cm
H: 1.1 cm
Material: Plastic PC

Variant	Prod. no.
● black	**1011753**
○ white	**1011754**
● gold	**1011755**
● copper	**1011756**

ENOLA® 2.0 M
RL, SINGLE, GU10, QPAR51

NEW





IP20 IK02 340° 90° 50

220-240 V ~50/60 Hz
Material: Aluminium/Steel/Plastic PC

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.
● black	**1011899**
○ white	**1011900**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: **1005077**

SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F


Prod. no.: **1012469**

Product	Prod. no.
ENOLA® 2.0/BIMA 2.0 M, Deco Ring	
● black	**1011749**
○ white	**1011750**
● gold	**1011751**
● copper	**1011752**

ENOLA® 2.0 M
RL, DOUBLE, GU10, QPAR51

NEW





IP20 IK02 340° 90° 50

220-240 V ~50/60 Hz
Material: Aluminium/Steel/Plastic PC

SOCKET INSIDE 10 W

Base: 2xGU10 | max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.
● black	**1011901**
○ white	**1011902**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: **1005077**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

Product	Prod. no.
ENOLA® 2.0/BIMA 2.0 M, Deco Ring	
● black	**1011749**
○ white	**1011750**
● gold	**1011751**
● copper	**1011752**


ENOLA® 2.0/BIMA 2.0 M
DECORATIVE RING

NEW




Ø: 5.4 cm
H: 2 cm
Material: Plastic PC

Variant	Prod. no.
● black	**1011749**
○ white	**1011750**
● gold	**1011751**
● copper	**1011752**

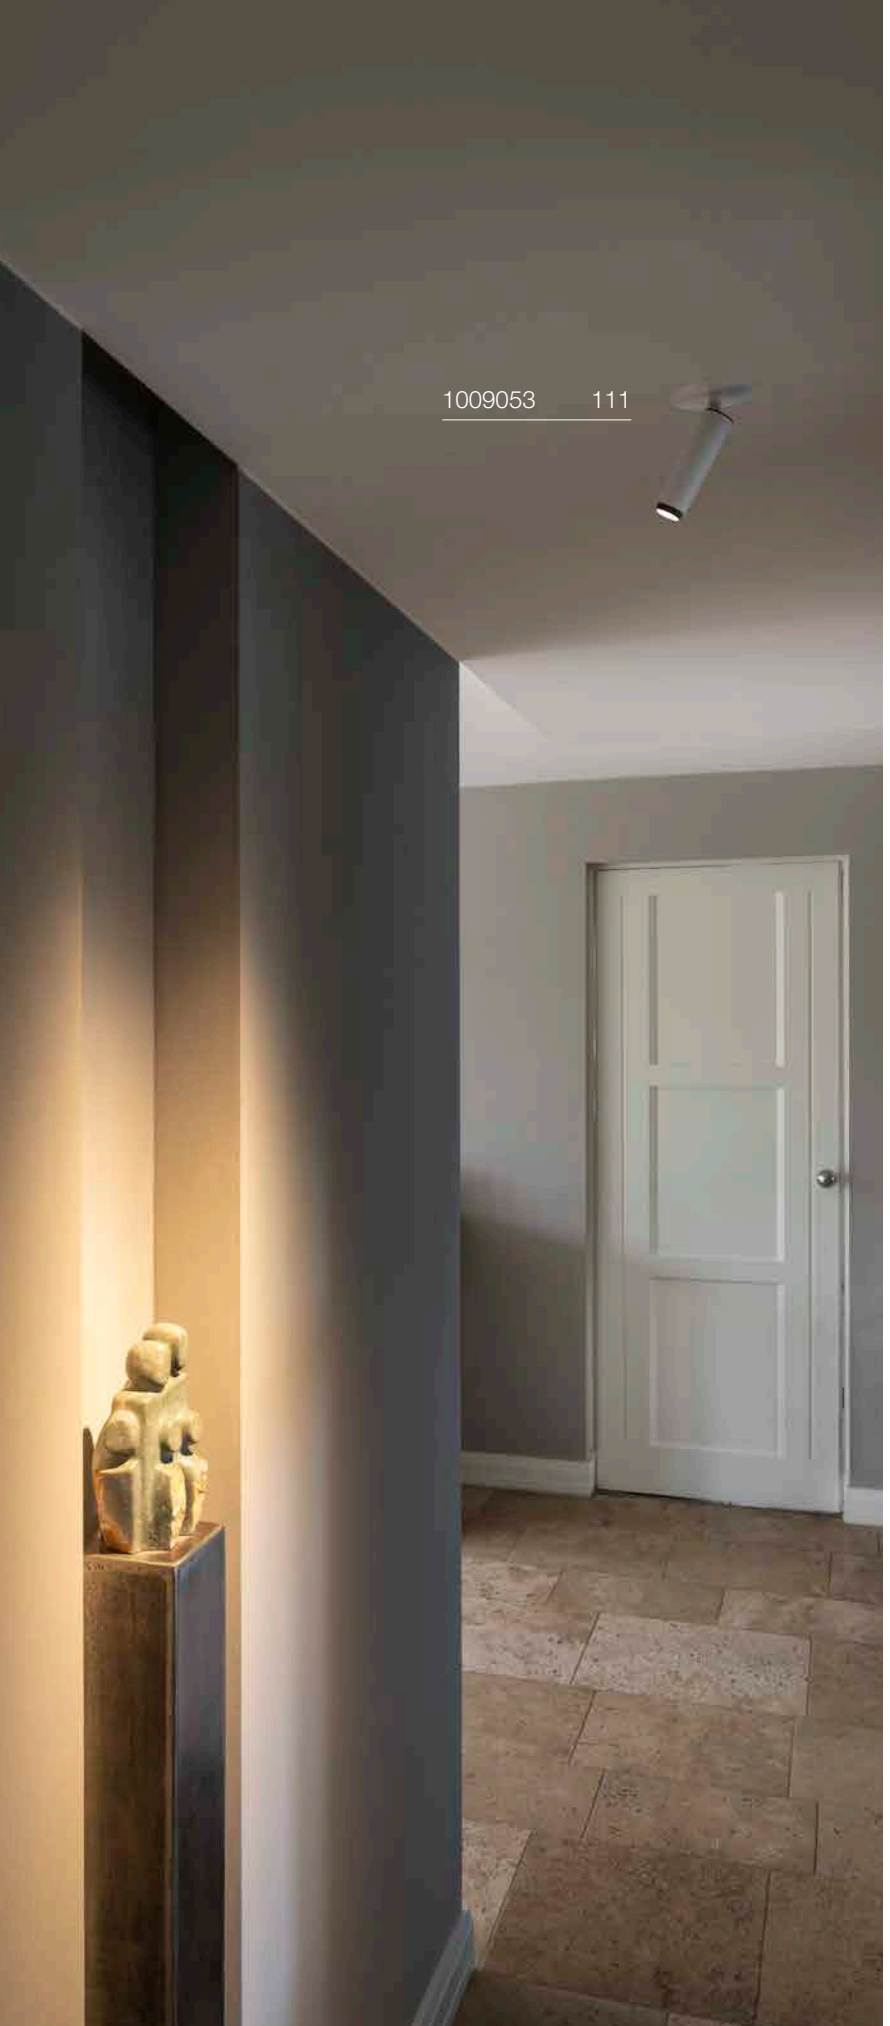

KARPO 30
EL







500 mA
Power Consumption: 7.5 W
Material: Aluminium/Steel

- When connecting several lights, make sure they are connected in series!
- When using different drivers, the lights can be combined with the Veleto system.
- Driver not included

LED INSIDE CRI 90

	3000 K
152380	450 lm
	3000 K
152381	470 lm


Variant	Prod. no.
● black	**152380**
○ white	**152381**

Product	Prod. no.
LED driver 21 W | 500 mA including strain relief	
○ white	**1007226**
LED driver 20 W | 350 mA/500 mA Phase control dimmable including strain relief	
○ white	**1007227**
LED driver 25 W | 150-700 mA DALI dimmable including strain relief	
○ white	**1007229**

GRIP! S
WL, RECESSED, Ø 3,0 CM

NEW





Switch · IP20 · 29° · 310° · 35° · 50000h L80B10

220-240 V ~50/60 Hz | 12 V
Total Wattage: 4.2 W
Material: Aluminium

- Honeycomb accessories included
- Includes a USB-C charger and dimmer switch

LED INSIDE · CRI 90

	2700 K 190 lm


Variant	Prod. no.
black/gold	**1012364**
white/black	**1012363**
bronze/black	**1012365**

Product	Prod. no.
GRIP! S, Deco Ring + Spacer	
white	**1011829**
black	**1011830**
nickel	**1011831**
gold	**1011832**
HONEYCOMB + Spacer	
black	**1011837**

GRIP! S
EL, PHASE, Ø 3,0 CM

GERMAN DESIGN AWARD WINNER 2025





C,L · IP20 · IK02 · 29° · 340° · 90° · 50000h L80B10 · UGR 25

220-240 V ~50/60 Hz | 250 mA
Total Wattage: 10 W
Material: Steel

- Honeycomb accessories included
- Including external LED driver

LED INSIDE · CRI 90


1009052 **1009054** **1009056** **1009058**	Down	2700 K 590 lm
1009053 **1009055** **1009057** **1009059**	Down	3000 K 620 lm

Variant	Prod. no.
black/gold 590 lm | 2700 K	**1009054**
black/gold 620 lm | 3000 K	**1009055**
white/black 590 lm | 2700 K	**1009052**
white/black 620 lm | 3000 K	**1009053**
gold/black 590 lm | 2700 K	**1009058**
gold/black 620 lm | 3000 K	**1009059**
bronze/black 590 lm | 2700 K	**1009056**
bronze/black 620 lm | 3000 K	**1009057**

GRIP! M
EL, PHASE, Ø 4,3 CM

GERMAN DESIGN AWARD WINNER 2025





C · IP20 · IK02 · 42° · 340° · 90° · 50000h L80B10 · UGR 25

220-240 V ~50/60 Hz | 350 mA
Total Wattage: 14 W
Power Consumption: 17 W
Material: Steel

- Honeycomb accessories included
- Including external LED driver

LED INSIDE · CRI 90

1009084 **1009086** **1009088** **1009090**	Down	2700 K 1460 lm
1009085 **1009087** **1009089** **1009091**	Down	3000 K 1460 lm

Variant	Prod. no.
black/gold 2700 K	**1009086**
black/gold 3000 K	**1009087**
white/black 2700 K	**1009084**
white/black 3000 K	**1009085**
gold/black 2700 K	**1009090**
gold/black 3000 K	**1009091**
bronze/black 2700 K	**1009088**
bronze/black 3000 K	**1009089**


Product	Prod. no.
GRIP! M, Deco Ring	
white	**1011833**
black	**1011834**
nickel	**1011835**
gold	**1011836**
HONEYCOMB + Spacer	
black	**1011838**

148071 113



PLASTRA
RL, ROUND, QPAR51





IP20

220-240 V ~50/60 Hz
Material: Plaster/Steel

- Spring clips

SOCKET INSIDE 35 W

Base: 1xGU10

Variant	Prod. no.
○ white	**148070**


GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: 1005076

PLASTRA
RL, SQUARE, QPAR51





IP20

220-240 V ~50/60 Hz
Material: Plaster/Steel

- Spring clips

SOCKET INSIDE 35 W

Base: 1xGU10

Variant	Prod. no.
○ white	**148071**


GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: 1005076

VARU
EL, QPAR51





IP20/ IP65 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Glass

- Spring clips

SOCKET INSIDE 5 W


Base: 1xGU10 max. Ø: 5.1 cm

Variant	Prod. no.
● black	**1001930**
○ white	**1001931**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F


C,L

Prod. no.: 1005077

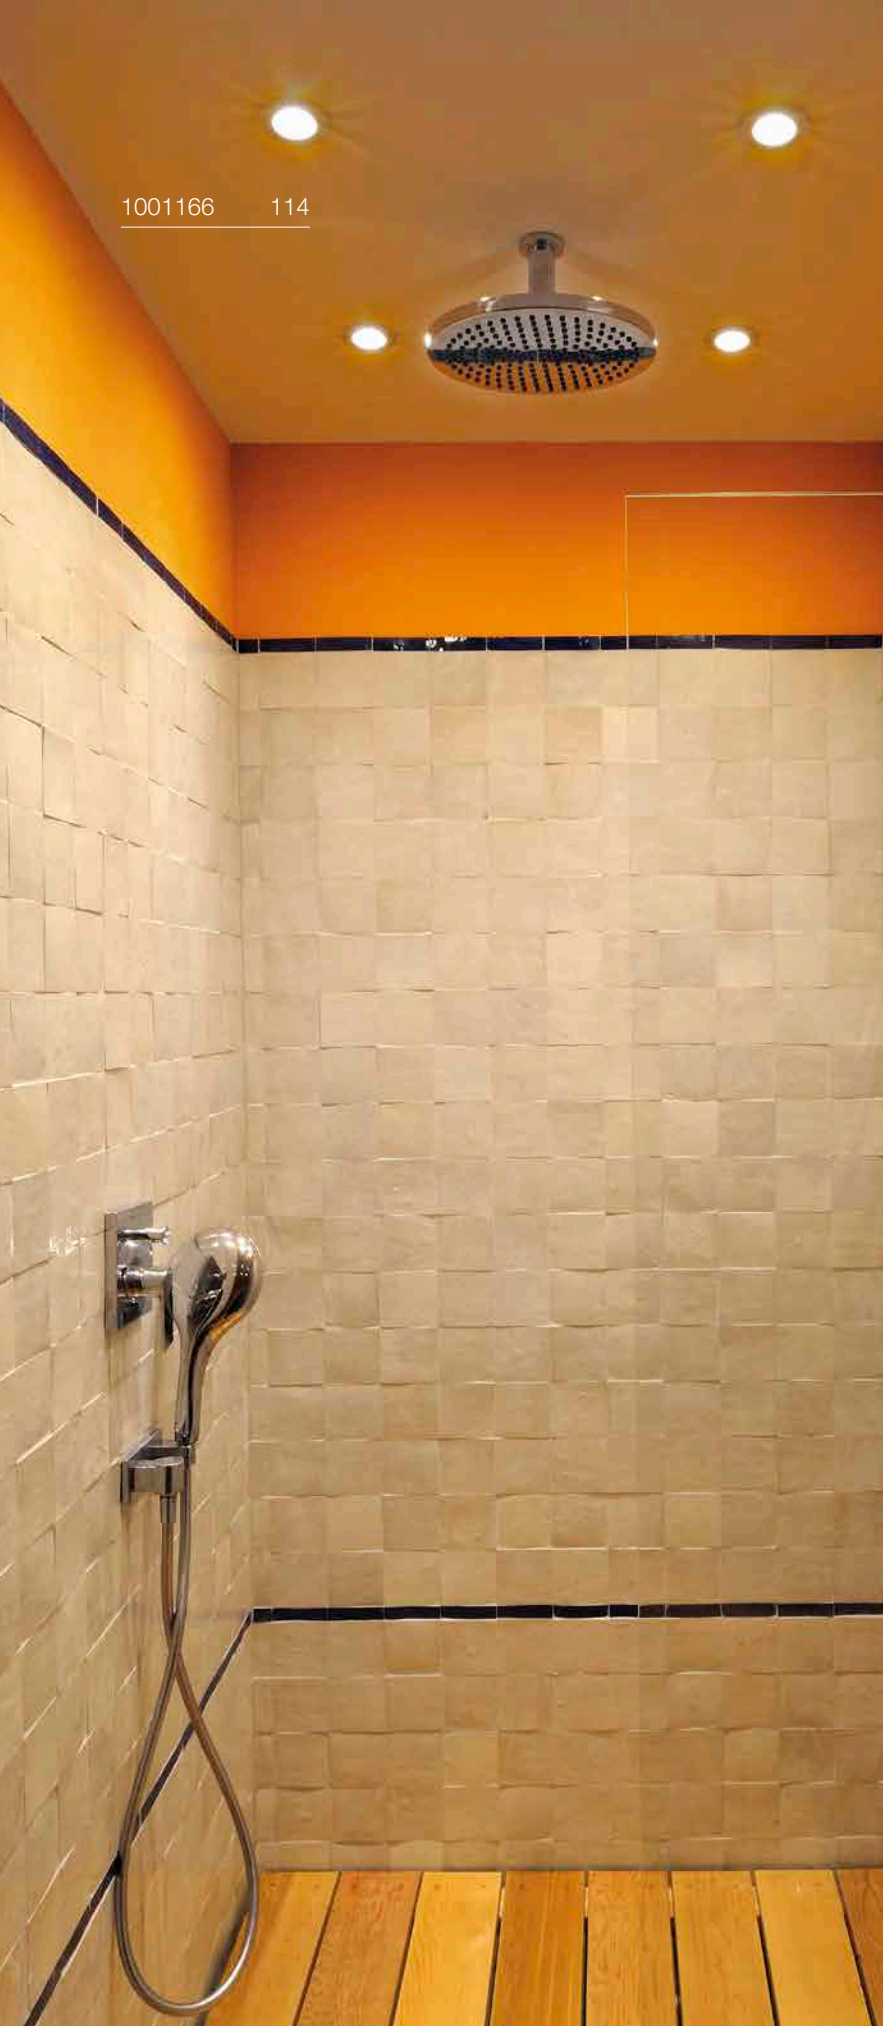

DOLIX OUT
EL, ROUND, QPAR51





IP65 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Glass

- Spring clips

SOCKET INSIDE 50 W

Base: 1xGU10

Variant	Prod. no.
white	**1001165**
silver	**1001168**
chrome	**1001166**
grey	**1001167**


GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: **1005077**

DOLIX OUT
EL, SQUARE, QPAR51





IP65 IK02 50

220-240 V ~50/60 Hz
Material: Aluminium/Glass

- Spring clips

SOCKET INSIDE 10 W

Base: 1xGU10

Variant	Prod. no.
○ white	**1001169**
○ silver	**1001172**
● grey	**1001171**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: **1005077**


SMART

GU10 | 5 W | 100°
300 lm | 2000 K-6500 K | EEC = G

Prod. no.: **1012470**

KINI
EL, PHASE





C,L IP65 IK02 60° 30000 h L70B50

220-240 V ~50/60 Hz | 260 mA
Total Wattage: 12 W
Material: Aluminium/Polycarbonate (PC)

- Spring clips


LED INSIDE CRI 80

3000 K
850 lm

Variant	Prod. no.
○ white	**1000833**

AKALO D83
EL





C,L IK02 90° 30000 h L70B50 UGR 28


220-240 V ~50/60 Hz | 120 mA
Total Wattage: 9 W
Material: Aluminium/Polycarbonate (PC)

- Spring clips

LED INSIDE CCT CRI 80


3000 K	4000 K	5700 K
800 lm	880 lm	850 lm

Variant	Prod. no.
○ white	**1001264**

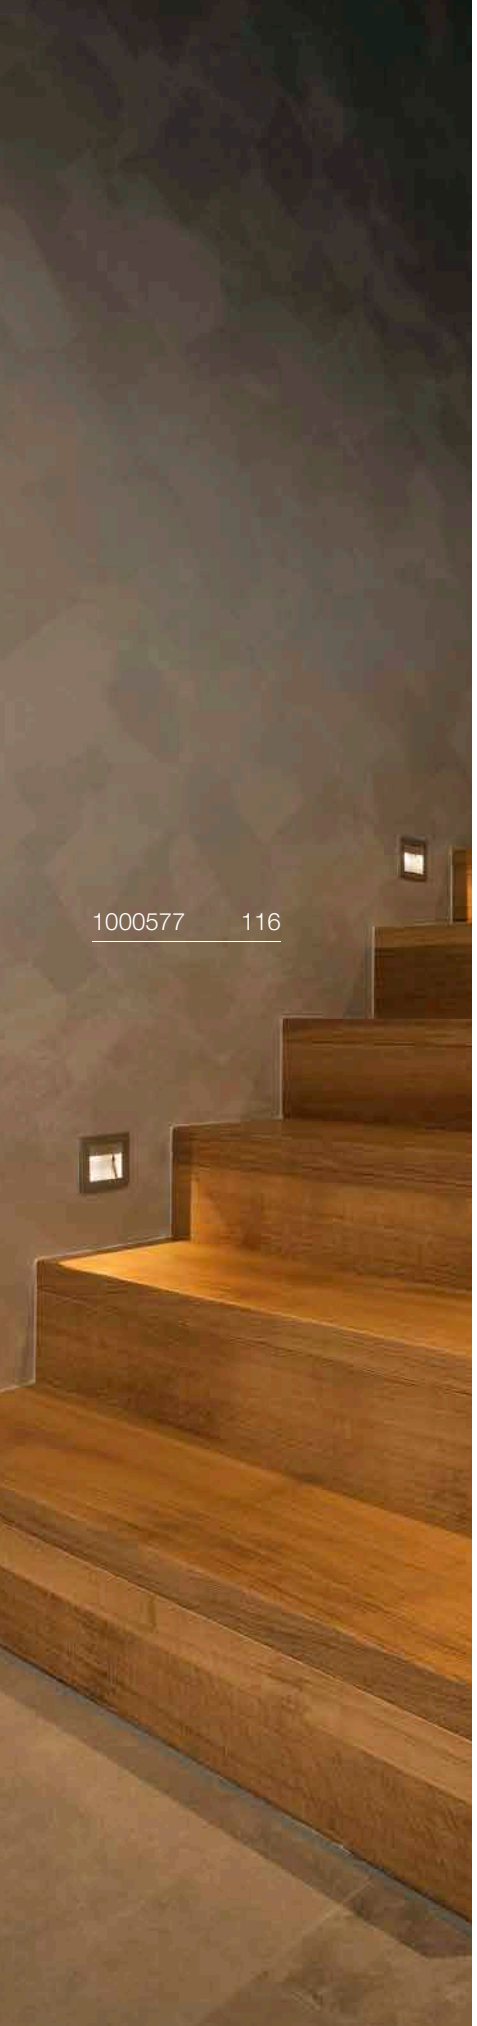

1000577 116

FRAME BASIC
RL



IP20 90° 50000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total Wattage: 8.3 W
Material: Aluminium/Acrylic


- Spring clips

INSIDE CRI 80

3000 K
600 lm

Variant	Prod. no.
● black	**112720**
○ white	**112721**

FRAME BASIC
RL, HV



IP20 60000 h L70B50

100-240 V ~50/60 Hz | 350 mA
Total Wattage: 3 W
Material: Aluminium

- Leaf springs

INSIDE CRI 90

2700 K
170 lm


Variant	Prod. no.
○ white	**1000576**
● grey	**1000577**

⊕

Product	Prod. no.
Flush frame	
● gold	**112780**
Wall box	
● black	**112781**

FRAME BASIC
RL





IP20 | 30000h L70B50

350 mA
Power Consumption: 1 W
Material: Aluminium/Glass

- Leaf springs
- When connecting several lights, make sure they are connected in series!
- AMP connector included / driver not included

LED INSIDE | CRI 90


3000 K
40 lm

Variant	Prod. no.
○ white	**113262**
● grey	**111262**

Product	Prod. no.
Flush frame	
● gold	**112780**
Wall Box	
● black	**112781**
LED driver 4W 350mA	
○ white	**1008656**

FRAME CURVE
EL





IP20 | 60000h L70B50

100-240 V ~50/60 Hz | 350 mA
Total Wattage: 3 W
Material: Aluminium

- Leaf springs

LED INSIDE | CRI 90


2700 K
140 lm

Variant	Prod. no.
○ white	**1000574**
● grey	**1000575**

Product	Prod. no.
Flush Frame	
● gold	**112780**
Wall Box	
● black	**112781**

FRAME CURVE
EL





IP20 | 30000h L70B50

350 mA
Power consumption: 1 W
Material: Aluminium

- When connecting several lights, make sure they are connected in series!
- When using different drivers, the lights can be combined with the Veleto system.
- AMP connector included / driver not included

LED INSIDE | CRI 90


3000 K
60 lm


Variant	Prod. no.
○ white	**113292**
● grey	**111292**


Product	Prod. no.
Flush Frame	
● gold	**112780**
Wall Box	
● black	**112781**
LED driver 4W 350mA	
○ white	**1008656**


1002980 119

NOTAPO S
RL







700 mA
Power Consumption: 2.2 W
Material: Aluminium

- Leaf springs
- When connecting several lights, make sure they are connected in series!
- Open cable end





	3000 K
	6 lm

Variant	Prod. no.
○ white	**1002979**

Product	Prod. no.
NOTAPO | mounting frame	
● black	**1002981**
LED driver 25 W | 150-700 mA DALI dimmable including strain relief	
○ white	**1007229**
LED Driver 4 W | 700 mA	
○ white	**1008657**

NOTAPO L
RL







700 mA
Power Consumption: 2.2 W
Material: Aluminium


- Leaf springs
- When connecting several lights, make sure they are connected in series!
- Open cable end



	3000 K
	6 lm


Variant	Prod. no.
○ white	**1002980**

Product	Prod. no.
NOTAPO | mounting frame	
● black	**1002981**
LED driver 25 W | 150-700 mA DALI dimmable including strain relief	
○ white	**1007229**
LED Driver 4 W | 700 mA	
○ white	**1008657**

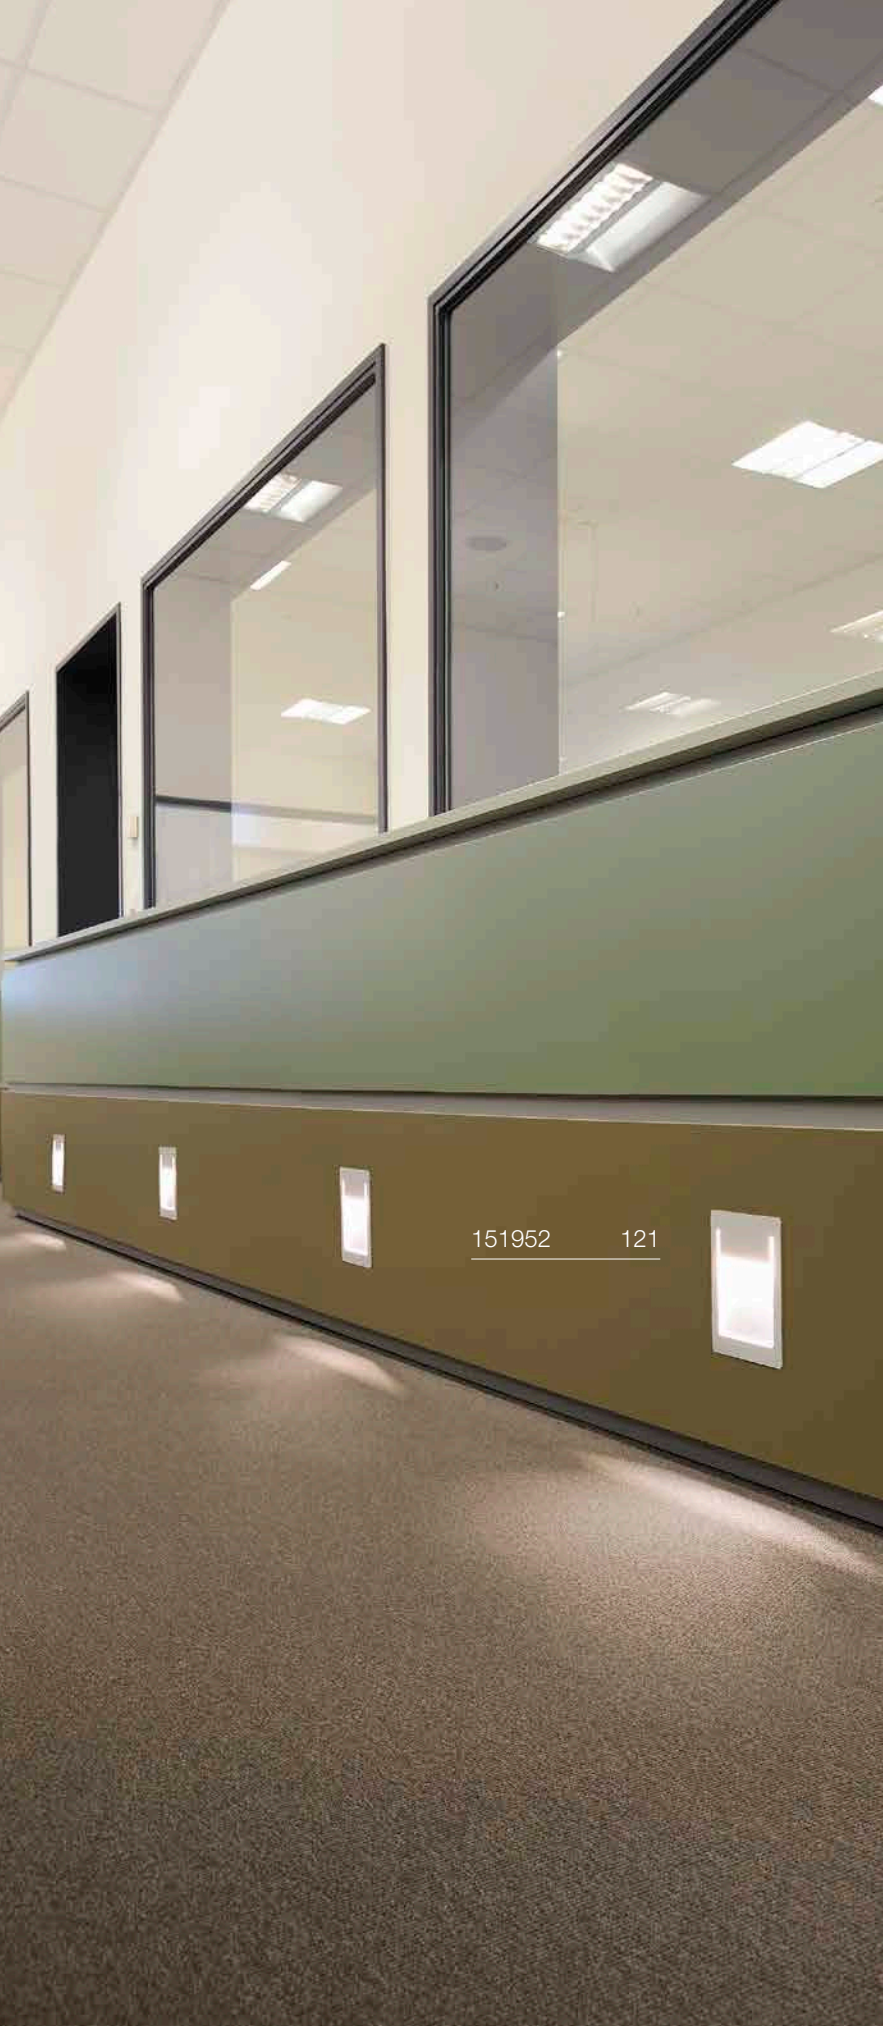

DOWNUNDER PUR 80
EL





IP20

350 mA
Power Consumption: 3.6 W
Material: Aluminium/Steel

- When connecting several lights, make sure they are connected in series!
- Leaf springs
- Low-voltage secondary socket

LED INSIDE CRI 80


Down	3000 K
	180 lm

Variant	Prod. no.
○ white	**151950**

Product	Prod. no.
Mounting frame	
● grey	**151960**
LED driver 4 W | 350 mA	
○ white	**1008656**

DOWNUNDER PUR 150
EL





IP20

500 mA
Power Consumption: 5.2 W
Material: Aluminium/Steel

- When connecting several lights, make sure they are connected in series!
- Leaf springs
- Low-voltage secondary socket

LED INSIDE CRI 80


	3000 K
Down	230 lm

Variant	Prod. no.
○ white	**151952**

Product	Prod. no.
Mounting frame	
● grey	**151962**
LED driver 20 W | 350 mA/500 mA Phase control dimmable including strain relief	
○ white	**1007227**
LED driver 25 W | 150-700 mA DALI dimmable including strain relief	
○ white	**1007229**

MOBALA
EL





IP20 30000 h L70B50

100-240 V ~50/60 Hz | 24 V
Power consumption: 1.3 W
Material: Aluminium

- The mounting frame (1002984) or wall box (1002983) are required for assembly.
- Leaf springs

LED INSIDE CRI 80


	3000 K
	14 lm

Variant	Prod. no.
○ white	**1002982**

Product	Prod. no.
MOBALA | wall box	
● black	**1002983**
MOBALA | mounting frame	
● black	**1002984**

WORO
EL





IP20 30000 h L70B50 35

350 mA
Power Consumption: 1.2 W
Material: Steel

- When connecting several lights, make sure they are connected in series!
- This item is suitable for installation in cavity walls and flush-mounted sockets for switches/sockets.
- Leaf springs
- Open cable end

LED INSIDE CRI 80


	3000 K
	50 lm

Variant	Prod. no.
○ white	**1002922**

Product	Prod. no.
LED driver 3W | 350mA	
○ white	**1005248**
LED driver 4 W | 350 mA	
○ white	**1008656**

PATTA-I
EL, ROUND, PHASE





C,L · IP20/IP65 · IK02 · 38° · 30000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total Wattage: 7.3 W
Material: Aluminium/Glass

- Spring clips and leaf springs are included with the product


LED INSIDE · DIM TO WARM · CRI 95

1800 K	-	3000 K
44 lm	-	440 lm

Variant	Prod. no.
● black 44 lm	**1002098**
○ white 44 lm	**1002099**
● aluminium 440 lm	**1002100**

PATTA-I
DL, ANGULAR, PHASE





IP20 · 38° · 30000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total Wattage: 7.3 W
Material: Aluminium/Glass

- Spring clips and leaf springs are included with the product


LED INSIDE · DIM TO WARM · CRI 95

1800 K	-	3000 K
44 lm	-	440 lm

Variant	Prod. no.
● black	**1002101**
○ white	**1002102**

PATTA-I
EL, ROUND, PHASE





C,L · IP20/IP65 · 38° · 40000 h L70B50

220-240 V ~50/60 Hz | 250 mA
Total Wattage: 10 W
Material: Aluminium/Glass

- Spring clips


LED INSIDE · CRI 90

3000 K
870 lm

Variant	Prod. no.
● black	**114420**
○ white	**114421**
● aluminium	**114426**

PATTA-I
EL, SQUARE, PHASE





C,L | IP20/IP65 | 38° | 40000 h L70B50

220-240 V ~50/60 Hz | 250 mA
Total Wattage: 10 W
Material: Aluminium/Glass

- Spring clips


LED INSIDE | CRI 90

	3000 K
	870 lm

Variant	Prod. no.
● black	**114430**
○ white	**114431**
◍ aluminium	**114436**

PATTA-F
EL, ROUND, PHASE





C,L | IP20/IP65 | IK02 | 38° | 40000 h L70B50

220-240 V ~50/60 Hz | 250 mA
Total Wattage: 11 W
Material: Aluminium/Glass

- Spring clips


LED INSIDE | CRI 80

	3000 K
114440	745 lm
	3000 K
114441	860 lm

Variant	Prod. no.
● black 745 lm	**114440**
○ white 860 lm	**114441**

PATTA-F
EL, SQUARE, PHASE





C,L | IP20/IP65 | IK02 | 38° | 40000 h L70B50

220-240 V ~50/60 Hz | 250 mA
Total Wattage: 11 W
Material: Aluminium/Glass

- Spring clips

LED INSIDE | CRI 80

	3000 K
114450	745 lm
	3000 K
114451	860 lm

Variant	Prod. no.
● black 745 lm	**114450**
○ white 860 lm	**114451**

1009049 144



INDOOR | CEILING LIGHTS



SOCKET

SUN | 126



SOCKET

MIX match

VARYT | 127



LED

TRILEDO | 128





LED

TRILEDO | 128



SOCKET

TRILEDO | 129





SOCKET

TRILEDO | 128



LED

NUMINOS® | 130–137

NEW



SOCKET

ENOLA® 2.0 | 136–141



NEW

LED

SOCKET

GRIP! | 144–147



LED

OCULUS | 148



SOCKET

ASTO TUBE | 149



LED

OCCULDAS | 150–151



SOCKET

ALTRA DICE | 151



SOCKET

ALTRA DICE | 151





SOCKET

KARDAMOD | 153



SOCKET

FENDA | 155



SOCKET

TENORA | 157



SOCKET

SOPRANA | 157



SOCKET

PLASTRA | 158



LED

PLASTRA | 158



SOCKET

PLASTRA 105 | 158

SOCKET

PLASTRA 104 | 159

LED

FERA 25 |159



LED

DECONA | 160–163

NEW



LED

MOTUNA | 163



LED

MARONA | 163

NEW



LED

OVANA |164– 165

NEW



LED

GLENOS® 2.0 | 167



LED


GLENOS® PRO |167

LED

PANEL 60 | 169

SUN 20
CL, E27





IP20 IK02

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 60 W

Base: 1xE27 | max. Ø: 4.5 cm | L: 12 cm


Variant	Prod. no.
● black	**1008125**
● gold	**1008126**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no. **1005289**

SUN 30
CL, E27





IP20 IK02

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 60 W

Base: 1xE27 | max. Ø: 4.5 cm | L: 14 cm


Variant	Prod. no.
● black	**1008127**
● gold	**1008128**

E27 | 11 W | 330°
1250 lm | 2700 K | EEC = E

Prod. no. **1008162**

VARYT
CL, E14





IP44 IK02

220-240 V ~50/60 Hz
Material: aluminium

• IP44 in combination with one of the shades

SOCKET INSIDE 6 W

Base: 1xE14 | max. Ø: 11 cm | L: 3.8 cm

Variant	Prod. no.
black	**1008099**
white	**1008100**
brass	**1008102**
chrome	**1008101**
copper	**1008103**

E14 | 4 W | 320°
380 lm | 2700 K | EEC = F

C,L

Prod. no. **1005284**

VARYT
GLOBE GLASS SHADE



IK02

Ø: 12 cm
H: 12.8 cm

Variant	Prod. no.
white	**1008119**

VARYT
DIAMOND GLASS SHADE



IK02

Ø: 12 cm
H: 12.7 cm
Material: glass

Variant	Prod. no.
smoky grey	**1007858**
amber	**1008023**

VARYT
LINED GLASS SHADE



IK02

Ø: 12 cm
H: 13 cm
Material: glass

Variant	Prod. no.
white	**1007859**

VARYT
PLEATED GLASS SHADE




IK02

Ø: 11.5 cm
H: 13.5 cm
Material: glass

Variant	Prod. no.
white	**1007860**

TRILEDO
CL, SINGLE, ROUND





IP20 38° 350° 20° 50000h L80B10

220-240 V ~50/60 Hz | 160 mA
Total wattage: 6.4 W
Material: aluminium


INSIDE CRI 90

	3000 K
Down	580 lm

Variant	Prod. no.
● black	**113930**
○ white	**113931**

TRILEDO
CL, SINGLE, SQUARE





IP20 38° 350° 20° 50000h L80B10

220-240 V ~50/60 Hz | 160 mA
Total wattage: 6.4 W
Material: aluminium


INSIDE CRI 90

	3000 K
Down	580 lm

Variant	Prod. no.
● black	**113940**
○ white	**113941**

TRILEDO CL
CL, DOUBLE, SQUARE





IP20 38° 350° 30° 50000h L80B10

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium


INSIDE CRI 90

	3000 K
Down	1280 lm

Variant	Prod. no.
● black	**1002003**
○ white	**1002008**

TRILEDO
CL, SINGLE, ROUND, QPAR51





IP20 350° 20°

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 10 W

Base: 1xGU10	max. Ø: 5.1 cm	L: 5.5 cm


Variant	Prod. no.
● black	**1002010**
○ white	**1002011**
◍ aluminium	**1002012**

GU10 | 6 W | 36°
360 lm | 2200 K-2700 K | EEC = G

Prod. no. 1005273

TRILEDO
CL, SINGLE, SQUARE, QPAR51





IP20 350° 20°

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 10 W

Base: 1xGU10	max. Ø: 5.1 cm	L: 5.5 cm

Variant	Prod. no.
● black	**1002013**
○ white	**1002015**
◍ aluminium	**1002004**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no. 1005077


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no. 1012469

TRILEDO
CL, DOUBLE, SQUARE, QPAR51





IP20 350° 20°

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 10 W

Base: 2xGU10	max. Ø: 5.1 cm	L: 5.5 cm

Variant	Prod. no.
● black	**1002005**
○ white	**1002006**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no. 1005077


SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no. 1012469

NUMINOS® S
CL







220-240 V ~50/60 Hz | 200 mA
Total wattage: 8 W
Material: aluminium

Variant
All S versions
All S versions DALI




Note:
Decorative ring also available in white, gold and copper

Product	Prod. no.
Front ring S	
○ white	**1006167**
● copper	**1008140**
● gold	**1008144**



● black





○ white

					Prod. no.	
C	2700 K	950 lm	24°	16	**1004122**	
			36°	16	**1004123**	
			60°	19	**1004124**	
	3000 K	1050 lm	24°	16	**1004130**	
			36°	16	**1004131**	
			60°	19	**1004132**	
	4000 K	1100 lm	24°	16	**1004138**	
			36°	16	**1004139**	
			60°	19	**1004140**	
Dali Touch	2700 K	950 lm	24°	16	**1004410**	
			36°	16	**1004411**	
			60°	19	**1004412**	
	3000 K	1050 lm	24°	16	**1004418**	
			36°	16	**1004419**	
			60°	19	**1004420**	
	4000 K	1100 lm	24°	16	**1004426**	
			36°	16	**1004427**	
			60°	19	**1004428**	
C	2700 K	950 lm	24°	16	**1004126**	
			36°	16	**1004127**	
			60°	19	**1004128**	
	3000 K	1050 lm	24°	16	**1004134**	
			36°	16	**1004135**	
			60°	19	**1004136**	
	4000 K	1100 lm	24°	16	**1004142**	
			36°	16	**1004143**	
			60°	19	**1004144**	
Dali Touch	2700 K	950 lm	24°	16	**1004414**	
			36°	16	**1004415**	
			60°	19	**1004416**	
	3000 K	1050 lm	24°	16	**1004422**	
			36°	16	**1004423**	
			60°	19	**1004424**	
	4000 K	1100 lm	24°	16	**1004430**	
			36°	16	**1004431**	
			60°	19	**1004432**	

NUMINOS® M
CL







220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium

Variant
All M versions
All M versions DALI


Note:
Decorative ring also available in white, gold and copper



Product	Prod. no.
Front ring M	
○ white	**1006168**
● copper	**1008141**
● gold	**1008145**



● black




○ white

					Prod. no.	
C	2700 K	1750 lm	24°	16	**1004218**	
			36°	16	**1004219**	
			60°	22	**1004220**	
	3000 K	1800 lm	24°	16	**1004226**	
			36°	16	**1004227**	
			60°	22	**1004228**	
	4000 K	1950 lm	24°	16	**1004234**	
			36°	16	**1004235**	
			60°	22	**1004236**	
Dali Touch	2700 K	1750 lm	24°	16	**1004506**	
			36°	16	**1004507**	
			60°	22	**1004508**	
	3000 K	1800 lm	24°	16	**1004514**	
			36°	16	**1004515**	
			60°	22	**1004516**	
	4000 K	1950 lm	24°	16	**1004522**	
			36°	16	**1004523**	
			60°	22	**1004524**	
C	2700 K	1750 lm	24°	16	**1004222**	
			36°	16	**1004223**	
			60°	22	**1004224**	
	3000 K	1800 lm	24°	16	**1004230**	
			36°	16	**1004231**	
			60°	22	**1004232**	
	4000 K	1950 lm	24°	16	**1004238**	
			36°	16	**1004239**	
			60°	22	**1004240**	
Dali Touch	2700 K	1750 lm	24°	16	**1004510**	
			36°	16	**1004511**	
			60°	22	**1004512**	
	3000 K	1800 lm	24°	16	**1004518**	
			36°	16	**1004519**	
			60°	22	**1004520**	
	4000 K	1950 lm	24°	16	**1004526**	
			36°	16	**1004527**	
			60°	22	**1004528**	

NUMINOS® L
CL








● black

IP20 24° 50 000 h L90B10 78 LED INSIDE CRI 90

220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: aluminium



○ white

Variant
All L versions
All L versions DALI

Note:
Decorative ring also available in white, gold and copper





Product	Prod. no.
Front ring L	
○ white	**1006169**
● copper	**1008142**
● gold	**1008146**

					Prod. no.	
C	2700 K	2300 lm	24°	16	**1004314**	
			36°	16	**1004315**	
			60°	19	**1004316**	
	3000 K	2400 lm	24°	16	**1004322**	
			36°	16	**1004323**	
			60°	19	**1004324**	
	4000 K	2600 lm	24°	16	**1004330**	
			36°	16	**1004331**	
			60°	19	**1004332**	
Dali Touch	2700 K	2300 lm	24°	16	**1004602**	
			36°	16	**1004603**	
			60°	19	**1004604**	
	3000 K	2400 lm	24°	16	**1004610**	
			36°	16	**1004611**	
			60°	19	**1004612**	
	4000 K	2600 lm	24°	16	**1004618**	
			36°	16	**1004619**	
			60°	19	**1004620**	
C	2700 K	2300 lm	24°	16	**1004318**	
			36°	16	**1004319**	
			60°	19	**1004320**	
	3000 K	2400 lm	24°	16	**1004326**	
			36°	16	**1004327**	
			60°	19	**1004328**	
	4000 K	2600 lm	24°	16	**1004334**	
			36°	16	**1004335**	
			60°	19	**1004336**	
Dali Touch	2700 K	2300 lm	24°	16	**1004606**	
			36°	16	**1004607**	
			60°	19	**1004608**	
	3000 K	2400 lm	24°	16	**1004614**	
			36°	16	**1004615**	
			60°	19	**1004616**	
	4000 K	2600 lm	24°	16	**1004622**	
			36°	16	**1004623**	
			60°	19	**1004624**	

NUMINOS® XL
CL








220-240 V ~50/60 Hz | 700 mA
Total wattage: 28 W
Material: aluminium

Variant
All XL versions
All XL versions DALI



● black




○ white

Note:
Decorative ring also available in white, gold and copper



Product	Prod. no.
Front ring XL	
○ white	**1006170**
● copper	**1008143**
● gold	**1008147**


					Prod. no.	
C	2700 K	3550 lm	24°	16	**1005687**	
			36°	16	**1005688**	
		3150 lm	60°	22	**1005689**	
	3000 K	3550 lm	24°	16	**1005693**	
			36°	16	**1005694**	
		3150 lm	60°	22	**1005695**	
	4000 K	3900 lm	24°	16	**1005699**	
			36°	16	**1005700**	
		3500 lm	60°	22	**1005701**	
Dali Touch	2700 K	3550 lm	24°	16	**1005759**	
			36°	16	**1005760**	
		3150 lm	60°	22	**1005761**	
	3000 K	3550 lm	24°	16	**1005765**	
			36°	16	**1005766**	
		3150 lm	60°	22	**1005767**	
	4000 K	3900 lm	24°	16	**1005771**	
			36°	16	**1005772**	
		3500 lm	60°	22	**1005773**	
C	2700 K	3550 lm	24°	16	**1005690**	
			36°	16	**1005691**	
		3150 lm	60°	22	**1005692**	
	3000 K	3550 lm	24°	16	**1005696**	
			36°	16	**1005697**	
		3150 lm	60°	22	**1005698**	
	4000 K	3900 lm	24°	16	**1005702**	
			36°	16	**1005703**	
		3500 lm	60°	22	**1005704**	
Dali Touch	2700 K	3550 lm	24°	16	**1005762**	
			36°	16	**1005763**	
		3150 lm	60°	22	**1005764**	
	3000 K	3550 lm	24°	16	**1005768**	
			36°	16	**1005769**	
		3150 lm	60°	22	**1005770**	
	4000 K	3900 lm	24°	16	**1005774**	
			36°	16	**1005775**	
		3500 lm	60°	22	**1005776**	

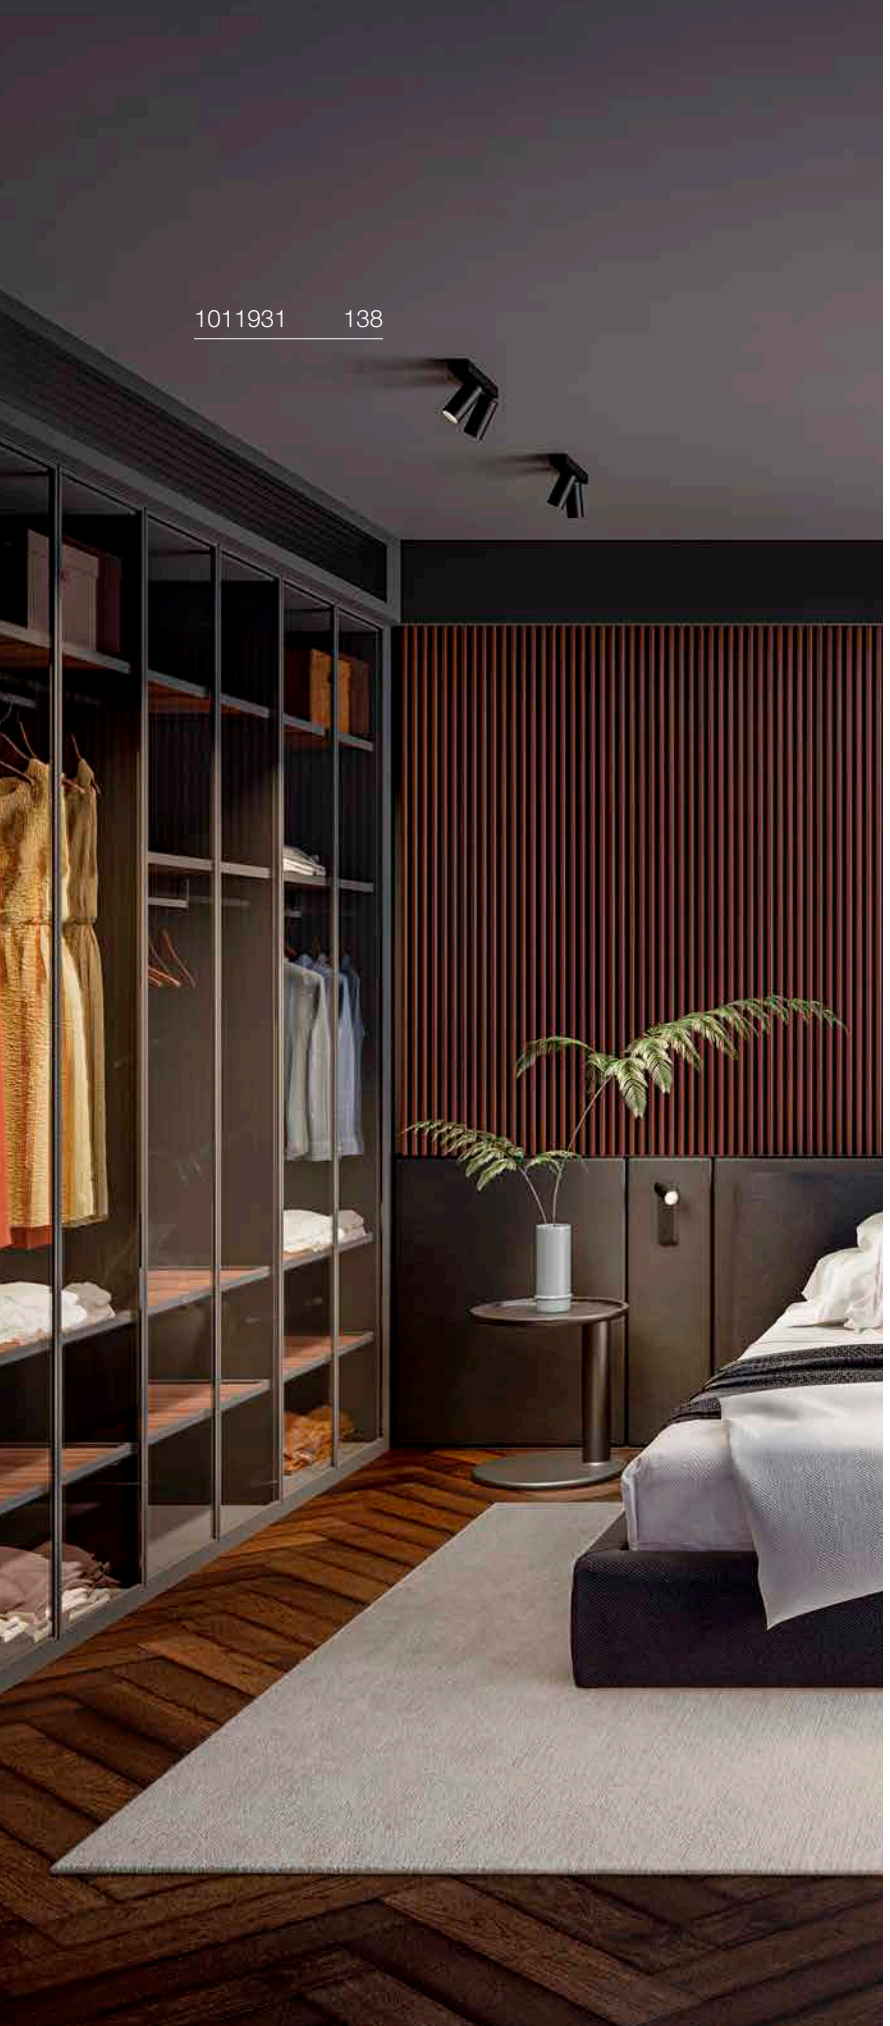

ENOLA® 2.0 S
CL, DOUBLE, GU10 MINI, PAR11

NEW





IP20 IK02 340° 90° 50

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 5 W

Base: 2xGU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.
● black	**1011931**
○ white	**1011932**

GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F


C,L

Prod. no. **1011670**

Product	Prod. no.
ENOLA® 2.0 S, Deco Ring	
● black	**1011753**
○ white	**1011754**
● gold	**1011755**
● copper	**1011756**

ENOLA® 2.0 S
CL, DOUBLE, GU10 MINI, PAR11, LONG







220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 5 W

Base: 2xGU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.
● black	**1011911**
○ white	**1011912**


GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F

Prod. no.: **1011670**

Product	Prod. no.
ENOLA® 2.0 S, Deco Ring	
● black	**1011753**
○ white	**1011754**
● gold	**1011755**
● copper	**1011756**

ENOLA® 2.0 S
CL, TRIPLE, GU10 MINI, PAR11, LONG







220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 5 W

Base: 3xGU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.
● black	**1011913**
○ white	**1011914**

GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F

Prod. no.: **1011670**

Product	Prod. no.
ENOLA® 2.0 S, Deco Ring	
● black	**1011753**
○ white	**1011754**
● gold	**1011755**
● copper	**1011756**

ENOLA® 2.0 S
DECO RING



Ø: 3.9 cm
H: 1.1 cm
Material: plastic PC


Variant	Prod. no.
● black	**1011753**
○ white	**1011754**
● gold	**1011755**
● copper	**1011756**



ENOLA® 2.0 M
CL, SINGLE, GU10, QPAR51

NEW





IP20 IK02

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 10 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
● black	**1011719**
○ white	**1011720**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no. **1005077**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F


Prod. no. **1012469**

Product	Prod. no.
ENOLA® 2.0/BIMA 2.0 M, DECO RING	
● black	**1011749**
○ white	**1011750**
● gold	**1011751**
● copper	**1011752**

ENOLA® 2.0 M
CL, DOUBLE, GU10, QPAR51

NEW





IP20 IK02 340° 90° 50

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 10 W

Base: 2xGU10 max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.
● black	**1011897**
○ white	**1011898**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no. **1005077**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F


Prod. no. **1012469**

Product	Prod. no.
ENOLA® 2.0/BIMA 2.0 M, DECO RING	
● black	**1011749**
○ white	**1011750**
gold	**1011751**
copper	**1011752**

ENOLA® 2.0 M
CL, DOUBLE, GU10, QPAR51, LONG

NEW





IP20 IK02 340° 90° 50

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 10 W

Base: 2xGU10 max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.
● black	**1011885**
○ white	**1011886**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no. **1005077**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F


Prod. no. **1012469**

Product	Prod. no.
ENOLA® 2.0/BIMA 2.0 M, DECO RING	
● black	**1011749**
○ white	**1011750**
gold	**1011751**
copper	**1011752**

ENOLA® 2.0 M
CL, TRIPLE, GU10, QPAR51, LONG

NEW





IP20 IK02 340° 90° 50

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 10 W

Base: 3xGU10 max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.
● black	**1011887**
○ white	**1011888**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no. **1005077**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no. **1012469**


Product	Prod. no.
ENOLA® 2.0/BIMA 2.0 M, DECO RING	
● black	**1011749**
○ white	**1011750**
gold	**1011751**
copper	**1011752**


1011889 143
1011887 141

ENOLA® 2.0 M
CL, QUAD., GU10, QPAR51, LONG

NEW





IP20 IK02 340° 90° 50

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 10 W

Base: 4xGU10 | max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.
● black	**1011889**
○ white	**1011890**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no. **1005077**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F


Prod. no. **1012469**

Product	Prod. no.
ENOLA® 2.0/BIMA 2.0 M, Deco Ring	
● black	**1011749**
○ white	**1011750**
gold	**1011751**
copper	**1011752**

ENOLA® 2.0 M
CL, SIX., GU10, QPAR51, LONG

NEW





IP20 IK02 340° 90° 50

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 10 W

Base: 6xGU10 | max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.
● black	**1011891**
○ white	**1011892**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no. **1005077**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no. **1012469**

Product	Prod. no.
ENOLA® 2.0/BIMA 2.0 M, Deco Ring	
● black	**1011749**
○ white	**1011750**
gold	**1011751**
copper	**1011752**

ENOLA® 2.0/BIMA 2.0 M
DECO RING

NEW




Ø: 5.4 cm
H: 2 cm
Material: plastic PC

Variant	Prod. no.
● black	**1011749**
○ white	**1011750**
gold	**1011751**
copper	**1011752**

GRIP! S
CL, SINGLE, PHASE, Ø 3,0 CM





IP20 IK02 29° 340° 90°

50 000 h L80B10 UGR 25

220-240 V ~50/60 Hz | 260 mA
Total wattage: 11 W
Material: aluminium

- Honeycomb accessories included

INSIDE CRI 90


1009043 **1009041** **1009039** **1009037**	3000 K 650 lm
1009042 **1009040** **1009038** **1009036**	2700 K 600 lm

Variant	Prod. no.
black/gold 600 lm | 2700 K	**1009038**
black/gold 650 lm | 3000 K	**1009039**
white/black 600 lm | 2700 K	**1009036**
white/black 650 lm | 3000 K	**1009037**
gold/black 600 lm | 2700 K	**1009042**
gold/black 650 lm | 3000 K	**1009043**
bronze/black 600 lm | 2700 K	**1009040**
bronze/black 650 lm | 3000 K	**1009041**

Product	Prod. no.
HONEYCOMB + Spacer	
black	**1011837**

GRIP! S
CL, DOUBLE, PHASE, Ø 3,0 CM





IP20 IK02 29° 340° 90°

50 000 h L80B10 UGR 25

220-240 V ~50/60 Hz | 260 mA
Total wattage: 21 W
Material: aluminium

- Honeycomb accessories included

INSIDE CRI 90

1009051 **1009049** **1009047** **1009045**	3000 K 650 lm
1009050 **1009048** **1009046** **1009044**	2700 K 600 lm

Variant	Prod. no.
black/gold 600 lm | 2700 K	**1009046**
black/gold 650 lm | 3000 K	**1009047**
white/black 600 lm | 2700 K	**1009044**
white/black 650 lm | 3000 K	**1009045**
gold/black 600 lm | 2700 K	**1009050**
gold/black 650 lm | 3000 K	**1009051**
bronze/black 600 lm | 2700 K	**1009048**
bronze/black 650 lm | 3000 K	**1009049**

Product	Prod. no.
HONEYCOMB + Spacer	
black	**1011837**

GRIP! S
CL, DOUBLE, PHASE, Ø 3,0 CM



NEW


Ø: 2.7 cm
H: 1.1 cm
Material: aluminium

- Front panel with spacer
- No honeycomb insert included

Variant	Prod. no.
black	**1011830**
white	**1011829**
gold	**1011832**
nickel	**1011831**

GRIP! M
CL, SINGLE, PHASE, Ø 4,3 CM





220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium


- Honeycomb accessories included

Variant	Prod. no.
black/gold 1450 lm | 2700 K	**1009070**
black/gold 1540 lm | 3000 K	**1009071**
white/black 1450 lm | 2700 K	**1009068**
white/black 1540 lm | 3000 K	**1009069**
gold/black 1450 lm | 2700 K	**1009074**
gold/black 1540 lm | 3000 K	**1009075**
bronze/black 1450 lm | 2700 K	**1009072**
bronze/black 1540 lm | 3000 K	**1009073**

Product	Prod. no.
HONEYCOMB + Spacer	
black	**1011838**

GRIP! M
CL, DOUBLE, PHASE, Ø 4,3 CM





220-240 V ~50/60 Hz | 350 mA
Total wattage: 28 W
Material: aluminium

- Honeycomb accessories included

Variant	Prod. no.
black/gold 1460 lm | 2700 K	**1009078**
black/gold 1520 lm | 3000 K	**1009079**
white/black 1460 lm | 2700 K	**1009076**
white/black 1520 lm | 3000 K	**1009077**
gold/black 1460 lm | 2700 K	**1009082**
gold/black 1520 lm | 3000 K	**1009083**
bronze/black 1460 lm | 2700 K	**1009080**
bronze/black 1520 lm | 3000 K	**1009081**

Product	Prod. no.
HONEYCOMB + Spacer	
black	**1011838**

GRIP! M
DECO RING



Ø: 4 cm
H: 1.4 cm
Material: aluminium

- Front panel with spacer
- No honeycomb insert included

Variant	Prod. no.
black	**1011834**
white	**1011833**
gold	**1011836**
nickel	**1011835**


3000 K	2700 K
1540 lm	1450 lm
1009075	**1009074**
1009073	**1009072**
1009071	**1009070**
1009069	**1009068**

3000 K	2700 K
1520 lm	1460 lm
1009083	**1009082**
1009081	**1009080**
1009079	**1009078**
1009077	**1009076**



GRIP! L
CL, SINGLE, QPAR51, Ø 5,7 CM





IP20 IK02 340° 90°

220-240 V ~50/60 Hz
Material: aluminium

- Honeycomb accessories included

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
black/gold	**1009093**
white/black	**1009092**
gold/black	**1009095**
bronze/black	**1009094**


GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no. **1005076**

Product	Prod. no.
GRIP! L, Deco Ring	
white	**1008496**
black	**1008497**
nickel	**1008498**
gold	**1008499**
HONEYCOMB + Spacer	
black	**1011839**

GRIP! L
CL, DOUBLE, QPAR51, Ø 5,7 CM





IP20 IK02 340° 90°

220-240 V ~50/60 Hz
Material: aluminium

- Honeycomb accessories included

SOCKET INSIDE 6 W

Base: 2xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
black/gold	**1009097**
white/black	**1009096**
gold/black	**1009099**
bronze/black	**1009098**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F


Prod. no. **1005079**

Product	Prod. no.
GRIP! L, Deco Ring	
white	**1008496**
black	**1008497**
nickel	**1008498**
gold	**1008499**
HONEYCOMB + Spacer	
black	**1011839**

GRIP! L
CL, QPAR51, Ø 5,7 CM

NEW





IP20 IK02

220-240 V ~50/60 Hz
Material: aluminium

- Honeycomb accessories included

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
black/gold	**1011847**
white/black	**1011846**
gold/black	**1011849**
bronze/black	**1011848**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

Prod. no. **1005080**

SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no. **1012469**

Product	Prod. no.
GRIP! L, Deco Ring	
white	**1008496**
black	**1008497**
nickel	**1008498**
gold	**1008499**

OCULUS CL
DTW, PVD





IP20 IK02 100° 40 000 h L80B20

220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: aluminium


INSIDE DIM TO WARM CRI 90

	2000 K - 3000 K
Down	36 lm - 780 lm

Variant	Prod. no.
brass	**1008619**
dark bronze	**1008618**
dark copper	**1008620**

OCULUS
CL, PHASE





IP20 IK02 100° 25 000 h L70B50

220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: aluminium

• Additional frosted lens included


INSIDE DIM TO WARM CRI 90

	2000 K - 3000 K
	36 lm - 780 lm

Variant	Prod. no.
black	**1004666**
white	**1004667**

ASTO TUBE
CL, SINGLE, GU10





IP20

220-240 V ~50/60 Hz
Material: aluminium

• Decorative rings available as accessories

SOCKET INSIDE 10 W

Base: 1xGU10

Variant	Prod. no.
● black	**1006439**
○ white	**1006440**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no. **1005077**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no. **1012469**


Product	Prod. no.
Decorative reflector	
chrome	**1006449**
gold	**1006450**
copper	**1006451**
black/chrome	**1007190**

ASTO TUBE
DECORATIVE REFLECTOR




Ø: 6.8 cm
H: 4 cm
Material: polycarbonate (PC)

Variant	Prod. no.
black/chrome	**1007190**
gold	**1006450**
chrome	**1006449**
copper	**1006451**

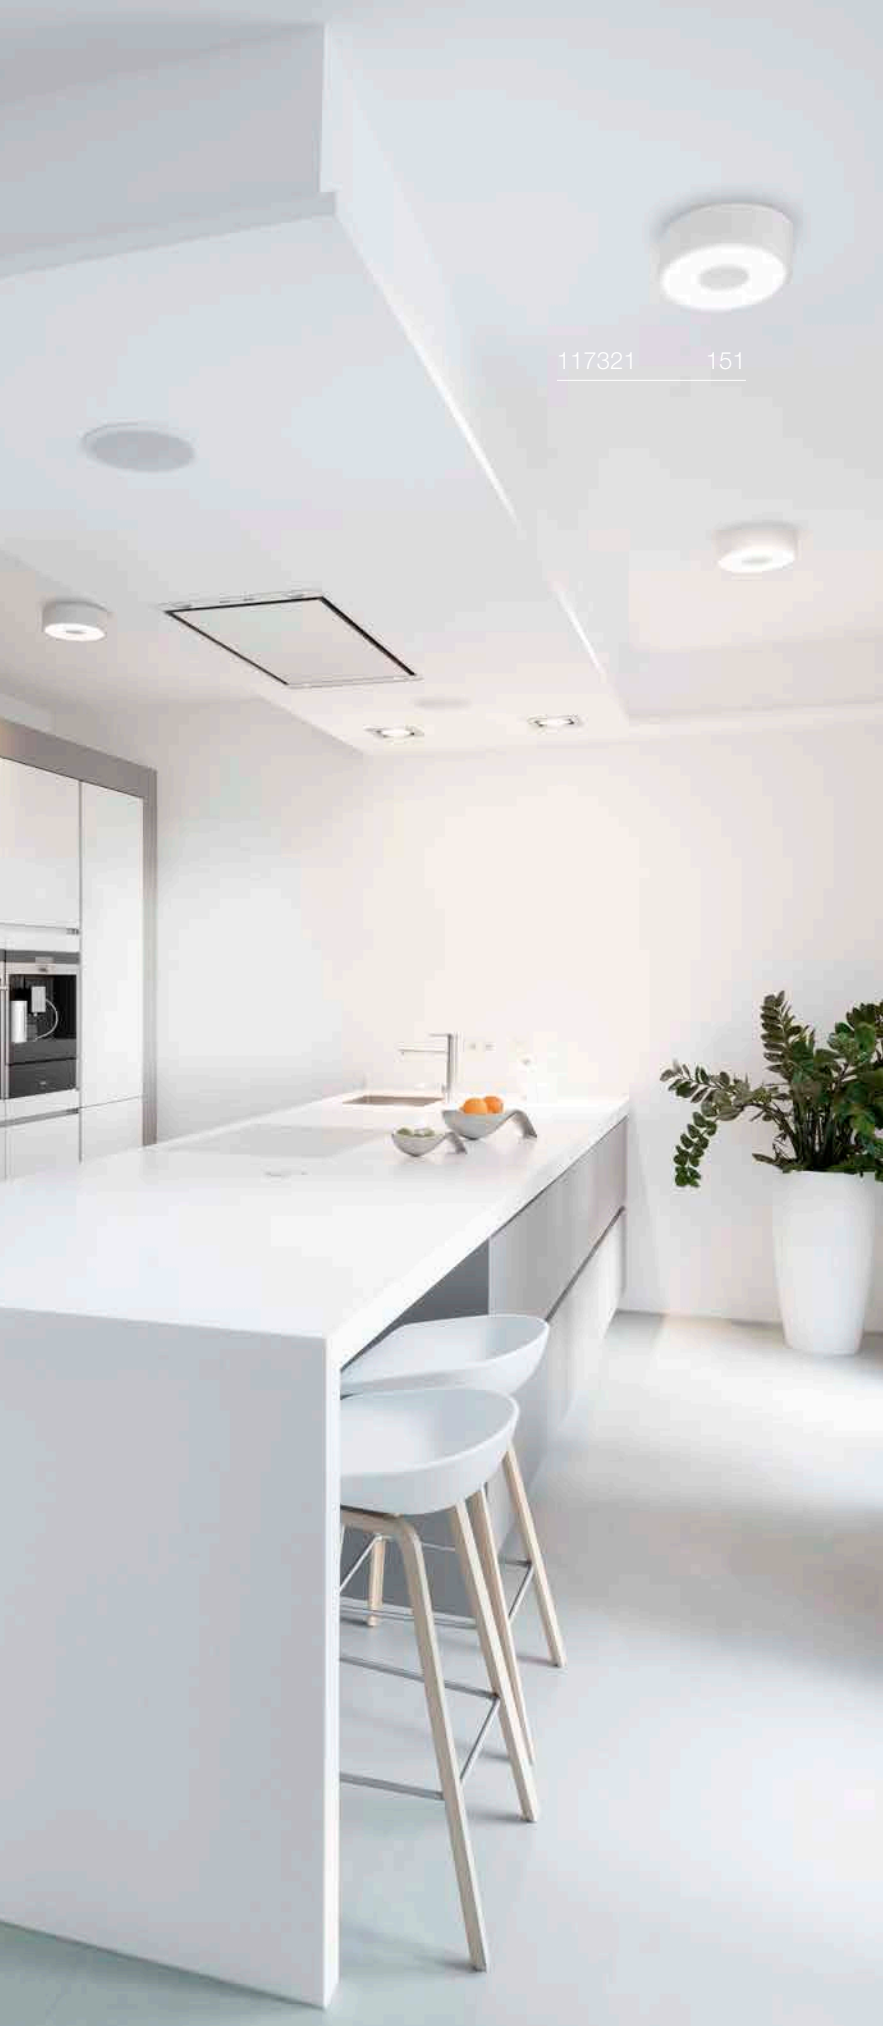

OCCULDAS 13
CL, INDIRECT, PHASE







220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: aluminium




3000 K
810 lm

Variant	Prod. no.
○ white	**117351**

OCCULDAS 23
CL, INDIRECT, PHASE





IP20 IK02 120° 30000h L70B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 24 W
Material: aluminium/steel


LED INSIDE CRI 80

3000 K
1500 lm

Variant	Prod. no.
○ white	**117321**

ALTRA DICE
CL, QPAR51





IP20

220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE 35 W

Base: 1xGU10

Variant	Prod. no.
● black	**1002216**
○ white	**151511**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no. **1005077**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no. **1012469**

ALTRA DICE
CW, DOUBLE, QPAR51





IP20 350° 180°

220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE 50 W

Base: 2xGU10

Variant	Prod. no.
○ white	**151531**

GU10 | 6 W | 36°
360 lm | 2200 K-2700 K | EEC = G


C

Prod. no. **1005273**



KARDAMOD
CL, SINGLE, SQUARE, QPAR111





IP20

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 75 W

Base: 1xGU10

Variant	Prod. no.
● black	**117100**
○ white	**117101**


GU10 | 13 W | 10°
900 lm | 2700 K | EEC = G

C

Prod. no. 1005275

KARDAMOD
CL, DOUBLE, SQUARE, QPAR111





IP20

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 75 W

Base: 2xGU10

Variant	Prod. no.
● black	**117110**
○ white	**117111**

GU10 | 12 W | 55°
670 lm | 2700 K | EEC = G


C,L

Prod. no. 1005297


OPEN
AYRTON SENNA

FENDA
CEILING ROSETTE, E27





IP20

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 60 W

Base: 1xE27

Variant	Prod. no.
● black	**155550**
○ white	**155551**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

C

Prod. no. **1005303**

FENDA
30 CM, ROUND



Ø: 30 cm
H: 20 cm
Material: textile/steel

Variant	Prod. no.
black/copper	**155592**
○ white	**155582**
grey	**1004774**
beige	**155583**

FENDA
45 CM, ROUND



Ø: 45.5 cm
H: 28 cm
Material: textile/steel

Variant	Prod. no.
black/copper	**156122**
○ white	**156111**
grey	**1004775**
beige	**156113**

Product	Prod. no.
Acrylic glass cover for FENDA Ø 45.5 cm	
○ white	**156100**

FENDA
70 CM, ROUND

Ø: 70 cm
H: 36 cm
Material: textile/steel

- Not suitable for Fenda Bow

Variant	Prod. no.
black/copper	**1000580**
○ white	**1000579**


Product	Prod. no.
Acrylic glass cover, for FENDA Ø 70 cm	
○ white	**1000957**



156050 157

TENORA
CL, E27





IP20

220-240 V ~50/60 Hz
Material: steel/textile

SOCKET INSIDE 23 W

Base: 3XE27 | L: 14.8 cm

Variant	Prod. no.
● black	**156050**
○ white	**156051**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no. **1005303**


SMART

E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no. **1012471**

SOPRANA
CL, E27





IP20

220-240 V ~50/60 Hz
Material: steel/textile

SOCKET INSIDE 60 W

Base: 3XE27


Variant	Prod. no.
● beige	**155373**

E27 | 13 W | 220°
1300 lm | 2700 K | EEC = F

Prod. no. **1005302**

PLASTRA
CL, QPAR51





IP20

220-240 V ~50/60 Hz
Material: plaster/steel

SOCKET INSIDE 35 W

Base: 1xGU10

Variant	Prod. no.
○ white	**148004**


GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no. **1005076**

PLASTRA
CL, PHASE





C,L 110° 30000h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: plaster/glass


INSIDE

3000 K
990 lm

Variant	Prod. no.
○ white	**148005**

PLASTRA 105
CL, E27





IP20

220-240 V ~50/60 Hz
Material: plaster/glass

SOCKET INSIDE 25 W

Base: 2xE27 max. Ø: 5.1 cm | L: 14 cm


Variant	Prod. no.
○ white	**148001**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

C

Prod. no. **1005289**

PLASTRA 104
CL, E27



IP20


220-240 V ~50/60 Hz
Material: plaster/glass

SOCKET INSIDE 25 W

Base: 2xE27 | max. Ø: 5.1 cm | L: 14 cm

Variant	Prod. no.
○ white	**148002**

FERA 25
CL, DALI



Dali | Touch | IP20 | 90° | 30000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: aluminium


LED INSIDE | CCT | CRI 80

3000 K	4000 K
1580 lm	1650 lm

Variant	Prod. no.
● black	**1002968**
○ white	**1002967**

FERA 25
CL





IP20 | 100° | 20000 h L70B50

220-240 V ~50/60 Hz | 550 mA
Total wattage: 23 W
Material: aluminium/polystyrene (PS)

LED INSIDE | CRI 80

3000 K
1800 lm


Variant	Prod. no.
● black	**1001939**
○ white	**161461**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no. **1005289**

DECONA 30
CL, PHASE





IP44 IK06 50000h L80B50 UGR 25

220-240 V ~50/60 Hz | 230 mA
Total wattage: 18 W
Material: aluminium/PC


INSIDE CCT CRI 90

1008580	2700 K 1560 lm	3000 K 1560 lm
1008578	2700 K 1450 lm	3000 K 1450 lm
1008579	2700 K 1530 lm	3000 K 1530 lm
1008577	2700 K 1600 lm	3000 K 1600 lm

Variant	Prod. no.
black/gold 1560 lm	**1008580**
black 1450 lm	**1008578**
white/gold 1530 lm	**1008579**
white 1600 lm	**1008577**

DECONA 30
CL, PHASE





C IP44 IK06 50000h L80B50 UGR 25


220-240 V ~50/60 Hz | 230 mA
Total wattage: 17 W
Material: aluminium/PC

INSIDE CCT CRI 90

1008920	3000 K 1680 lm	4000 K 1760 lm
1008918	3000 K 1650 lm	4000 K 1710 lm
1008919	3000 K 1710 lm	4000 K 1800 lm
1008917	3000 K 1900 lm	4000 K 2000 lm

Variant	Prod. no.
black/gold 1680 lm	**1008920**
black 1650 lm	**1008918**
white/gold 1710 lm	**1008919**
white 1900 lm	**1008917**

DECONA 30
CL, SENSOR



IP44 IK06 50000h L80B50 UGR 25 FR


220-240 V ~50/60 Hz | 220 mA
Total wattage: 17 W
Material: aluminium/PC

INSIDE CCT CRI 90

	2700 K 1680 lm	3000 K 1840 lm

Variant	Prod. no.
white	**1008925**

DECONA 30
CL, SENSOR



IP44 IK06 50000h L80B50 UGR 25 FR

220-240 V ~50/60 Hz | 220 mA
Total wattage: 17 W
Material: aluminium/PC

LED INSIDE CCT CRI 90


3000 K	4000 K
1880 lm	1970 lm

Variant	Prod. no.
○ white	**1008926**

Product	Prod. no.
Mounting frame 310 mm	
○ white	**1008585**
Suspension kit 1.50 m	
○ white	**1008588**

DECONA 42
CL, PHASE





C IP44 IK06 50000h L80B50 UGR 25


220-240 V ~50/60 Hz | 300 mA
Total wattage: 23 W
Material: aluminium/PC

LED INSIDE CCT CRI 90

	2700 K	3000 K
1008584	2170 lm	2170 lm
1008582	2260 lm	2260 lm
1008583	2020 lm	2020 lm
1008581	2140 lm	2140 lm

Variant	Prod. no.
◐ black/gold 2170 lm	**1008584**
● black 2260 lm	**1008582**
◑ white/gold 2020 lm	**1008583**
○ white 2140 lm	**1008581**

DECONA 42
CL, SENSOR



IP44 IK06 50000h L80B50 UGR 25 FR

220-240 V ~50/60 Hz | 305 mA
Total wattage: 23 W
Material: aluminium/PC


LED INSIDE CCT CRI 90

2700 K	3000 K
2450 lm	2710 lm

Variant	Prod. no.
○ white	**1008927**

DECONA 42
CL, PHASE





C IP44 IK06 50000h L80B50 UGR 25


220-240 V ~50/60 Hz | 300 mA
Total wattage: 23 W
Material: aluminium/PC

LED INSIDE CCT CRI 90

	3000 K	4000 K
1008924	2550 lm	2680 lm
1008922	2540 lm	2680 lm
1008923	2600 lm	2730 lm
1008921	2770 lm	2930 lm

Variant	Prod. no.
● black/gold 2550 lm	**1008924**
● black 2540 lm	**1008922**
◐ white/gold 2600 lm	**1008923**
○ white 2770 lm	**1008921**

DECONA 42
CL, SENSOR



IP44 IK06 50000h L80B50 UGR 25 FR

220-240 V ~50/60 Hz | 305 mA
Total wattage: 23 W
Material: aluminium/PC

LED INSIDE CCT CRI 90

	3000 K	4000 K
	2680 lm	2850 lm

Variant	Prod. no.
○ white	**1008928**

DECONA
MOUNTING FRAME 310 MM



Ø: 31.3 cm
H: 7.5 cm
Material: aluminium

Variant	Prod. no.
○ white	**1008585**

DECONA
MOUNTING FRAME 430 MM




Ø: 43.3 cm
H: 7.5 cm
Material: aluminium

Variant	Prod. no.
○ white	**1008586**

MOTUNA
CW, PHASE

NEW






C | IP20 | 130° | 50000 h L80B20

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Power consumption: 8 W
Material: aluminium

MARONA
CL, PHASE





C,L | IP20 | 120° | 30000 h L70B50

220-240 V ~50/60 Hz | 430 mA
Total wattage: 15 W
Material: polymethylacrylate (PMMA)/steel

DECONA
SUSPENSION KIT 1,50 M



IK06 | 150 cm

Material: steel

Variant	Prod. no.
● black	**1008587**
○ white	**1008588**

LED INSIDE | CRI 90

1010365	2700 K	1000 lm
1010217	2700 K	750 lm

Variant	Prod. no.
black/gold 750 lm	**1010217** ●
white/gold 1000 lm	**1010365** ●

LED INSIDE

	3000 K	1200 lm


Variant	Prod. no.
● grey	**155156**



OVANA 30
CL, LED, ZIGBEE, TW

NEW





IP20 | 02 | 105° | 50 000 h L80B10 | UGR 22 | 50

zigbee

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: steel/polycarbonate (PE)


LED INSIDE | DIM TO WARM | CRI 90

	2200 K	6500 K
1012000 Down	1120 lm	1260 lm
1011999 Down	920 lm	1030 lm

Variant	Prod. no.
● black 920 lm	**1011999**
○ white 1120 lm	**1012000**

OVANA 44
CL, LED, ZIGBEE, TW





IP20 | 02 | 115° | 50000 h L80B10 | UGR 22 | 50 | zigbee

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: steel/polycarbonate (PE)


LED INSIDE | DIM TO WARM | CRI 90

	2200 K	6500 K
1012002 Down	1710 lm	1900 lm
1012001 Down	1490 lm	1650 lm

Variant	Prod. no.
● black 1490 lm	**1012001**
○ white 1710 lm	**1012002**

OVANA 30
CL, LED, PHASE, CCT





C,L | IP20 | 02 | 105° | 50000 h L80B10 | UGR 22 | 50

220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: steel/polycarbonate (PE)


LED INSIDE | CCT | CRI 90

	2700 K	3000 K	4000 K
1011994 Down	1200 lm	1320 lm	1330 lm
1011993 Down	990 lm	1030 lm	1040 lm

Variant	Prod. no.
● black 990 lm	**1011993**
○ white 1200 lm	**1011994**

OVANA 44
CL, LED, PHASE, CCT





C,L | IP20 | 02 | 115° | 50000 h L80B10 | UGR 22 | 50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: steel/polycarbonate (PE)

LED INSIDE | CCT | CRI 90

	2700 K	3000 K	4000 K
1011996 Down	1860 lm	1870 lm	1900 lm
1011995 Down	1620 lm	1650 lm	1680 lm


Variant	Prod. no.
● black 1620 lm	**1011995**
○ white 1860 lm	**1011996**



GLENOS® 2.0
CL, 1,2 M, DALI, UGR22

NEW





Dali | Touch | IP20 | 100 000 h L80B20 | UGR 22 | 50

200-240 V ~0/50/60 Hz | 450 mA
Total wattage: 17 W
Material: aluminium


LED INSIDE | CRI 80

1012165	4000 K 2100 lm
1012164	4000 K 2400 lm
1012163	3000 K 2050 lm
1012162	3000 K 2350 lm

Variant	Prod. no.
● black 2050 lm | 3000 K	**1012163**
● black 2100 lm | 4000 K	**1012165**
○ white 2350 lm | 3000 K	**1012162**
○ white 2400 lm | 4000 K	**1012164**

GLENOS® PRO
CL, 1,2 M, DALI, UGR19





Dali | Touch | IP20 | IK02 | 75° | 100 000 h L80B20 | UGR 19 | 30

220-240 V ~0/50/60 Hz | 750 mA
Total wattage: 30 W
Material: aluminium/plastic PC


LED INSIDE | CRI 90

1010520 **1010519**	4000 K 3900 lm
1010518 **1010517**	3000 K 3650 lm

Variant	Prod. no.
● black 3650 lm | 3000 K	**1010518**
● black 3900 lm | 4000 K	**1010520**
◑ white/black 3650 lm | 3000 K	**1010517**
◑ white/black 3900 lm | 4000 K	**1010519**


1010425 169

PANEL 60
CL, ROUND, PHASE



C,L · IP20 · IK02 · 90° · 50000 h L80B10 · UGR 19


220-240 V ~50/60 Hz | 750 mA
Total wattage: 29 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90

3000 K	4000 K
3050 lm	3300 lm

Variant	Prod. no.
○ white	**1010422**
● grey	**1010423**

PANEL 60
CL, ROUND, DALI



Dali · Touch · IP20 · IK02 · 90° · 50000 h L80B10 · UGR 19

220-240 V ~50/60 Hz | 750 mA
Total wattage: 29 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90

3000 K	4000 K
3050 lm	3300 lm

Variant	Prod. no.
○ white	**1010424**
● grey	**1010425**


1010366 197


1007703 223

INDOOR | PENDANT LIGHTS



SOCKET

HAVEN | 175



LED

QUIMERA | 177



SOCKET

MIX match

VARYT | 179





SOCKET

WUD | 181



SOCKET

SUN | 182



SOCKET

OLYPSO | 183



SOCKET

MAGICO |185



LED

NUMINOS® | 186–193



LED

GRIP! S | 195



LED

MOTUNA | 197



LED

OVANA 44 | 197



LED

SLVconnect®
OVANA 44 | 197



LED

MEDO® 2 SLIM |
198–201



LED

MEDO® HYVE |
202–203



LED

MEDO® RING |
206–207



LED

MEDO® PRO | 208–213



LED

SOCKET

LALU® SET | 216–221



LED

DYSKO | 221



LED

ONE FLAT | 223



LED

ONE VERTICAL | 224



LED

ONE CUBE | 225



LED

ONE CUBE UP/DOWN |
225



LED

ONE | 227–229



LED

ONE DOUBLE | 231



LED

ONE TRIPLE | 231



LED

ONE LINEAR | 233



LED

LINIUS | 234–237



SOCKET

PANTILO ROPE | 239



SOCKET

PANTILO OVAL | 240



SOCKET

PANTILO | 240



SOCKET

PANTILO CONVEX | 241



SOCKET

LIGHT EYE® | 243



SOCKET

ENOLA® 2.0 | 244–245



SOCKET

ASTO TUBE | 247



LED

GLENOS® 2.0 | 248–249



LED

GLENOS® PRO | 249



LED

WORKLIGHT PRO | 251



LED

WORKLIGHT | 251

LED

PANEL | 253



LED

GRIP! FLAT | 255



LED

OCULUS | 257



SOCKET

FITU | 258



SOCKET

FENDA | 260–261



LED

HELIA | 264–265



SOCKET

PARA CONE | 265



SOCKET

PHELIA | 267



SOCKET

FORCHINI | 268–269



SOCKET

ROTOBALL | 271



SOCKET

PARA DOME | 273




SOCKET

PARA 380 PD | 273



HAVEN 35
PD, E27

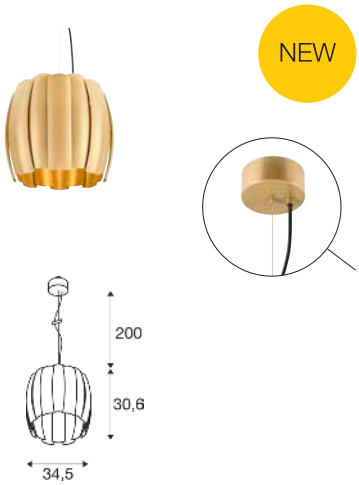

IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 40 W

Base: 1xE27

Variant	Prod. no.
● black	**1011684**
○ white	**1011685**
● gold	**1011686**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no. **1005303**

HAVEN 50
PD, E27



IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 40 W

Base: 1xE27

Variant	Prod. no.
● black	**1011681**
○ white	**1011682**
● gold	**1011683**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F


Prod. no. **1005303**



1008033 177



QUIMERA
PD, PHASE

GERMAN DESIGN AWARD WINNER 2025





IP20 | IK03 | 360° | 50000 h L80B50 | 150 cm

220-240 V ~50/60 Hz | 700 mA
Total wattage: 8.5 W
Material: aluminium/glass

LED INSIDE | CCT | CRI 90

	2700 K	3000 K
Indirect	330 lm	350 lm


Variant	Prod. no.
brass	**1008033**
dark bronze	**1008032**
dark copper	**1008034**



1008118 + 1008023 179

VARYT
PD, E14





IP20 IK02 150 cm

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1xE14 | max. Ø: 11 cm | L: 3.8 cm

Variant	Prod. no.
black	1008114
white	1008115
brass	1008117
chrome	1008116
copper	1008118

E14 | 4 W | 320°
380 lm | 2700 K | EEC = F

C,L

Prod. no.: 1005284

Product	Prod. no.
Glass shade for PD, WL, CL, TL	
smoky grey	1007858
white	1007859
white	1007860
amber	1008023
Glass shade for CL, WL, TL, PD	
white	1008119

VARYT
GLOBE GLASS SHADE



IK02

Ø: 12 cm
H: 12.8 cm
Material: glass

Variant	Prod. no.
white	1008119

VARYT
DIAMOND GLASS SHADE



IK02

Ø: 12 cm
H: 12.7 cm
Material: glass

Variant	Prod. no.
smoky grey	1007858
amber	1008023

VARYT
LINED GLASS SHADE



IK02

Ø: 12 cm
H: 13 cm
Material: glass

Variant	Prod. no.
white	1007859

VARYT
PLEATED GLASS SHADE



IK02

Ø: 11.5 cm
H: 13.5 cm
Material: glass

Variant	Prod. no.
white	1007860



1008047 181

WUD
PD, E27, HALF ROUND





IP20 | 180 cm | 180 cm

220-240 V ~50/60 Hz
Material: steel/wood

- open cable end

SOCKET INSIDE | 60 W

Base: 1xE27

Variant	Prod. no.
natural	**1008045**


E27 | 8 W | 330°
400 lm | 1900 K |

Prod. no. 1008159

Product	Prod. no.
Fitu | Single ceiling rosette	
black	**132600**
white	**132601**
gold	**1002163**
chrome	**132605**
1-phase light adapter	
black	**143120**
white	**143121**
grey	**143124**
3-phase light adapter	
black	**145990**
grey	**145994**
white	**1001542**
Recessed ceiling rosette	
black	**1004674**
white	**1004675**
Surface-mounted ceiling rosette	
black	**1004744**

WUD
PD, E27, CLYLINDRICAL





IP20 | 180 cm | 180 cm

220-240 V ~50/60 Hz
Material: steel/wood

- open cable end

SOCKET INSIDE | 60 W

Base: 1xE27

Variant	Prod. no.
natural	**1008047**


E27 | 6 W | 330°
570 lm | 2200 K | EEC = F

Prod. no. 1008152

Product	Prod. no.
Fitu | Single ceiling rosette	
black	**132600**
white	**132601**
gold	**1002163**
chrome	**132605**
1-phase light adapter	
black	**143120**
white	**143121**
grey	**143124**
3-phase light adapter	
black	**145990**
grey	**145994**
white	**1001542**
Recessed ceiling rosette	
black	**1004674**
white	**1004675**
Surface-mounted ceiling rosette	
black	**1004744**

SUN 20
PD, E27





IP20 400

220-240 V ~50/60 Hz
Material: aluminium

• open cable end

SOCKET INSIDE 40 W

Base: 1xE27 | max. Ø: 4.5 cm | L: 12 cm

Variant	Prod. no.
● black	**1008139**
● gold	**1008138**


E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no. 1005289

Product	Prod. no.
Fitu | Single ceiling rosette	
● black	**132600**
○ white	**132601**
● gold	**1002163**
◑ chrome	**132605**
1-phase light adapter	
● black	**143120**
○ white	**143121**
● grey	**143124**
3-phase light adapter	
● black	**145990**
● grey	**145994**
○ white	**1001542**

SUN 30
PD, E27





IP20 400

220-240 V ~50/60 Hz
Material: aluminium

• open cable end

SOCKET INSIDE 40 W

Base: 1xE27 | max. Ø: 4.5 cm | L: 22 cm

Variant	Prod. no.
● black	**1008137**
● gold	**1008136**


E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no. 1005289

Product	Prod. no.
Fitu | Single ceiling rosette	
● black	**132600**
○ white	**132601**
● gold	**1002163**
◑ chrome	**132605**
1-phase light adapter	
● black	**143120**
○ white	**143121**
● grey	**143124**
3-phase light adapter	
● black	**145990**
● grey	**145994**
○ white	**1001542**

SUN 40
PD, E27





IP20 400 cm

220-240 V ~50/60 Hz

SOCKET INSIDE 40 W

Base: 1xE27 | max. Ø: 4.5 cm | L: 22 cm


Variant	Prod. no.
● black	**1008534**
● gold	**1008533**

E27 | 14 W | 240°
1520 lm | 3000 K | EEC = E

Prod. no. 1005307

OLYPSO 40
PD, E27





IP20 400 cm

220-240 V ~50/60 Hz
Material: steel/glass

SOCKET INSIDE 40 W

Base: 1xE27 | max. Ø: 8 cm | L: 12 cm


Variant	Prod. no.
● black	**1010413**
● gold	**1010414**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no.: 1005289

OLYPSO 50
PD, E27





IP20 400 cm

220-240 V ~50/60 Hz
Material: steel/glass

SOCKET INSIDE 40 W

Base: 1xE27 | max. Ø: 12 cm | L: 16 cm


Variant	Prod. no.
● black	**1010415**
● gold	**1010416**

E27 | 14 W | 240°
1520 lm | 3000 K | EEC = E

Prod. no.: 1005307


1009136 185

MAGICO 20
PD, E27



IP20 IK02 180 cm

220-240 V ~50/60 Hz
Material: aluminium

• open cable end

SOCKET INSIDE 10 W

Base: 1xE27

Variant	Prod. no.
black/gold	**1008502**
black	**1008500**
white	**1008501**
aluminium	**1009135**

E27 | 8 W | 320°
700 lm | 2500 K | EEC = F


C,L

Prod. no. 1005265

Product	Prod. no.
Fitu | Single ceiling rosette	
black	**132600**
white	**132601**
1-phase light adapter	
black	**143120**
white	**143121**
grey	**143124**
3-phase light adapter	
black	**145990**
grey	**145994**
white	**1001542**
Recessed ceiling rosette	
black	**1004674**
white	**1004675**
Surface-mounted ceiling rosette	
black	**1004744**

MAGICO 38
PD, E27





IP20 IK02 180 cm

220-240 V ~50/60 Hz
Material: aluminium

• open cable end

SOCKET INSIDE 10 W

Base: 1xE27

Variant	Prod. no.
black/gold	**1008505**
black	**1008503**
white	**1008504**
aluminium	**1009136**

E27 | 8 W | 320°
700 lm | 2500 K | EEC = F


C,L

Prod. no. 1005265

Product	Prod. no.
Fitu | Single ceiling rosette	
black	**132600**
white	**132601**
1-phase light adapter	
black	**143120**
white	**143121**
grey	**143124**
3-phase light adapter	
black	**145990**
grey	**145994**
white	**1001542**
Recessed ceiling rosette	
black	**1004674**
white	**1004675**
Surface-mounted ceiling rosette	
black	**1004744**

MAGICO 55
PD, E27





IP20 IK02 180 cm

220-240 V ~50/60 Hz
Material: aluminium

• open cable end

SOCKET INSIDE 10 W

Base: 1xE27

Variant	Prod. no.
black/gold	**1008508**
black	**1008507**
white	**1008506**
aluminium	**1009137**

E27 | 8 W | 320°
700 lm | 2500 K | EEC = F


C,L

Prod. no. 1005265

Product	Prod. no.
Fitu | Single ceiling rosette	
black	**132600**
white	**132601**
1-phase light adapter	
black	**143120**
white	**143121**
grey	**143124**
3-phase light adapter	
black	**145990**
grey	**145994**
white	**1001542**
Recessed ceiling rosette	
black	**1004674**
white	**1004675**
Surface-mounted ceiling rosette	
black	**1004744**

NUMINOS® S
PD









220-240 V ~50/60 Hz | 200 mA
Total wattage: 8 W
Material: aluminium/PC

Variant
All S versions
All S versions DALI


Note:
Decorative ring also available in white, gold and copper



Product	Prod. no.
Front ring S	
○ white	**1006167**
● copper	**1008140**
● gold	**1008144**



● black




○ white

					Prod. no.	
C	2700 K	950 lm	24°	16	**1004146**	
			36°	16	**1004147**	
			60°	19	**1004148**	
	3000 K	1050 lm	24°	16	**1004154**	
			36°	16	**1004155**	
			60°	19	**1004156**	
	4000 K	1100 lm	24°	16	**1004162**	
			36°	16	**1004163**	
			60°	19	**1004164**	
Dali Touch	2700 K	950 lm	24°	16	**1004434**	
			36°	16	**1004435**	
			60°	19	**1004436**	
	3000 K	1050 lm	24°	16	**1004442**	
			36°	16	**1004443**	
			60°	19	**1004444**	
	4000 K	1100 lm	24°	16	**1004450**	
			36°	16	**1004451**	
			60°	19	**1004452**	
C	2700 K	950 lm	24°	16	**1004150**	
			36°	16	**1004151**	
			60°	19	**1004152**	
	3000 K	1050 lm	24°	16	**1004158**	
			36°	16	**1004159**	
			60°	19	**1004160**	
	4000 K	1100 lm	24°	16	**1004166**	
			36°	16	**1004167**	
			60°	19	**1004168**	
Dali Touch	2700 K	950 lm	24°	16	**1004438**	
			36°	16	**1004439**	
			60°	19	**1004440**	
	3000 K	1050 lm	24°	16	**1004446**	
			36°	16	**1004447**	
			60°	19	**1004448**	
	4000 K	1100 lm	24°	16	**1004454**	
			36°	16	**1004455**	
			60°	19	**1004456**	

NUMINOS® M
PD










220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium/PC

Variant
All M versions
All M versions DALI



● black



○ white

Note:
Decorative ring also available in white, gold and copper




Product	Prod. no.
Front ring M	
○ white	**1006168**
● copper	**1008141**
● gold	**1008145**

					Prod. no.	
C	2700 K	1750 lm	24°	16	**1004242**	
			36°	16	**1004243**	
			60°	22	**1004244**	
	3000 K	1800 lm	24°	16	**1004250**	
			36°	16	**1004251**	
			60°	22	**1004252**	
	4000 K	1950 lm	24°	16	**1004258**	
			36°	16	**1004259**	
			60°	22	**1004260**	
Dali Touch	2700 K	1750 lm	24°	16	**1004530**	
			36°	16	**1004531**	
			60°	22	**1004532**	
	3000 K	1800 lm	24°	16	**1004538**	
			36°	16	**1004539**	
			60°	22	**1004540**	
	4000 K	1950 lm	24°	16	**1004546**	
			36°	16	**1004547**	
			60°	22	**1004548**	
C	2700 K	1750 lm	24°	16	**1004246**	
			36°	16	**1004247**	
			60°	22	**1004248**	
	3000 K	1800 lm	24°	16	**1004254**	
			36°	16	**1004255**	
			60°	22	**1004256**	
	4000 K	1950 lm	24°	16	**1004262**	
			36°	16	**1004263**	
			60°	22	**1004264**	
Dali Touch	2700 K	1750 lm	24°	16	**1004534**	
			36°	16	**1004535**	
			60°	22	**1004536**	
	3000 K	1800 lm	24°	16	**1004542**	
			36°	16	**1004543**	
			60°	22	**1004544**	
	4000 K	1950 lm	24°	16	**1004550**	
			36°	16	**1004551**	
			60°	22	**1004552**	

NUMINOS® L
PD









220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: aluminium/PC

Variant
All L versions
All L versions DALI


Note:
Decorative ring also available in white, gold and copper



Product	Prod. no.
Front ring L	
○ white	**1006169**
● copper	**1008142**
● gold	**1008146**



● black




○ white

					Prod. no.	
C	2700 K	2300 lm	24°	16	**1004338**	
			36°	16	**1004339**	
			60°	19	**1004340**	
	3000 K	2400 lm	24°	16	**1004346**	
			36°	16	**1004347**	
			60°	19	**1004348**	
	4000 K	2600 lm	24°	16	**1004354**	
			36°	16	**1004355**	
			60°	19	**1004356**	
Dali Touch	2700 K	2300 lm	24°	16	**1004626**	
			36°	16	**1004627**	
			60°	19	**1004628**	
	3000 K	2400 lm	24°	16	**1004634**	
			36°	16	**1004635**	
			60°	19	**1004636**	
	4000 K	2600 lm	24°	16	**1004642**	
			36°	16	**1004643**	
			60°	19	**1004644**	
C	2700 K	2300 lm	24°	16	**1004342**	
			36°	16	**1004343**	
			60°	19	**1004344**	
	3000 K	2400 lm	24°	16	**1004350**	
			36°	16	**1004351**	
			60°	19	**1004352**	
	4000 K	2600 lm	24°	16	**1004358**	
			36°	16	**1004359**	
			60°	19	**1004360**	
Dali Touch	2700 K	2300 lm	24°	16	**1004630**	
			36°	16	**1004631**	
			60°	19	**1004632**	
	3000 K	2400 lm	24°	16	**1004638**	
			36°	16	**1004639**	
			60°	19	**1004640**	
	4000 K	2600 lm	24°	16	**1004646**	
			36°	16	**1004647**	
			60°	19	**1004648**	

NUMINOS® XL
PD





IP20 | 50 000 h L90B10 | 250 cm | 58

LED INSIDE | CRI 90

220-240 V ~50/60 Hz | 700 mA
Total wattage: 27 W
Material: aluminium/PC

Variant
All XL versions
All XL versions DALI


Note:
Decorative ring also available in white, gold and copper



Product	Prod. no.
Front ring XL	
○ white	**1006170**
● copper	**1008143**
● gold	**1008147**




● black



○ white


					Prod. no.	
C	2700 K	3550 lm	24°	16	**1005705**	
			36°	16	**1005706**	
		3150 lm	60°	22	**1005707**	
	3000 K	3550 lm	24°	16	**1005711**	
			36°	16	**1005712**	
		3150 lm	60°	22	**1005713**	
	4000 K	3900 lm	24°	16	**1005717**	
			36°	16	**1005718**	
		3500 lm	60°	22	**1005719**	
Dali Touch	2700 K	3550 lm	24°	16	**1005777**	
			36°	16	**1005778**	
		3150 lm	60°	22	**1005779**	
	3000 K	3550 lm	24°	16	**1005783**	
			36°	16	**1005784**	
		3150 lm	60°	22	**1005785**	
	4000 K	3900 lm	24°	16	**1005789**	
			36°	16	**1005790**	
		3500 lm	60°	22	**1005791**	
C	2700 K	3550 lm	24°	16	**1005708**	
			36°	16	**1005709**	
		3150 lm	60°	22	**1005710**	
	3000 K	3550 lm	24°	16	**1005714**	
			36°	16	**1005715**	
		3150 lm	60°	22	**1005716**	
	4000 K	3900 lm	24°	16	**1005720**	
			36°	16	**1005721**	
		3500 lm	60°	22	**1005722**	
Dali Touch	2700 K	3550 lm	24°	16	**1005780**	
			36°	16	**1005781**	
		3150 lm	60°	22	**1005782**	
	3000 K	3550 lm	24°	16	**1005786**	
			36°	16	**1005787**	
		3150 lm	60°	22	**1005788**	
	4000 K	3900 lm	24°	16	**1005792**	
			36°	16	**1005793**	
		3500 lm	60°	22	**1005794**	

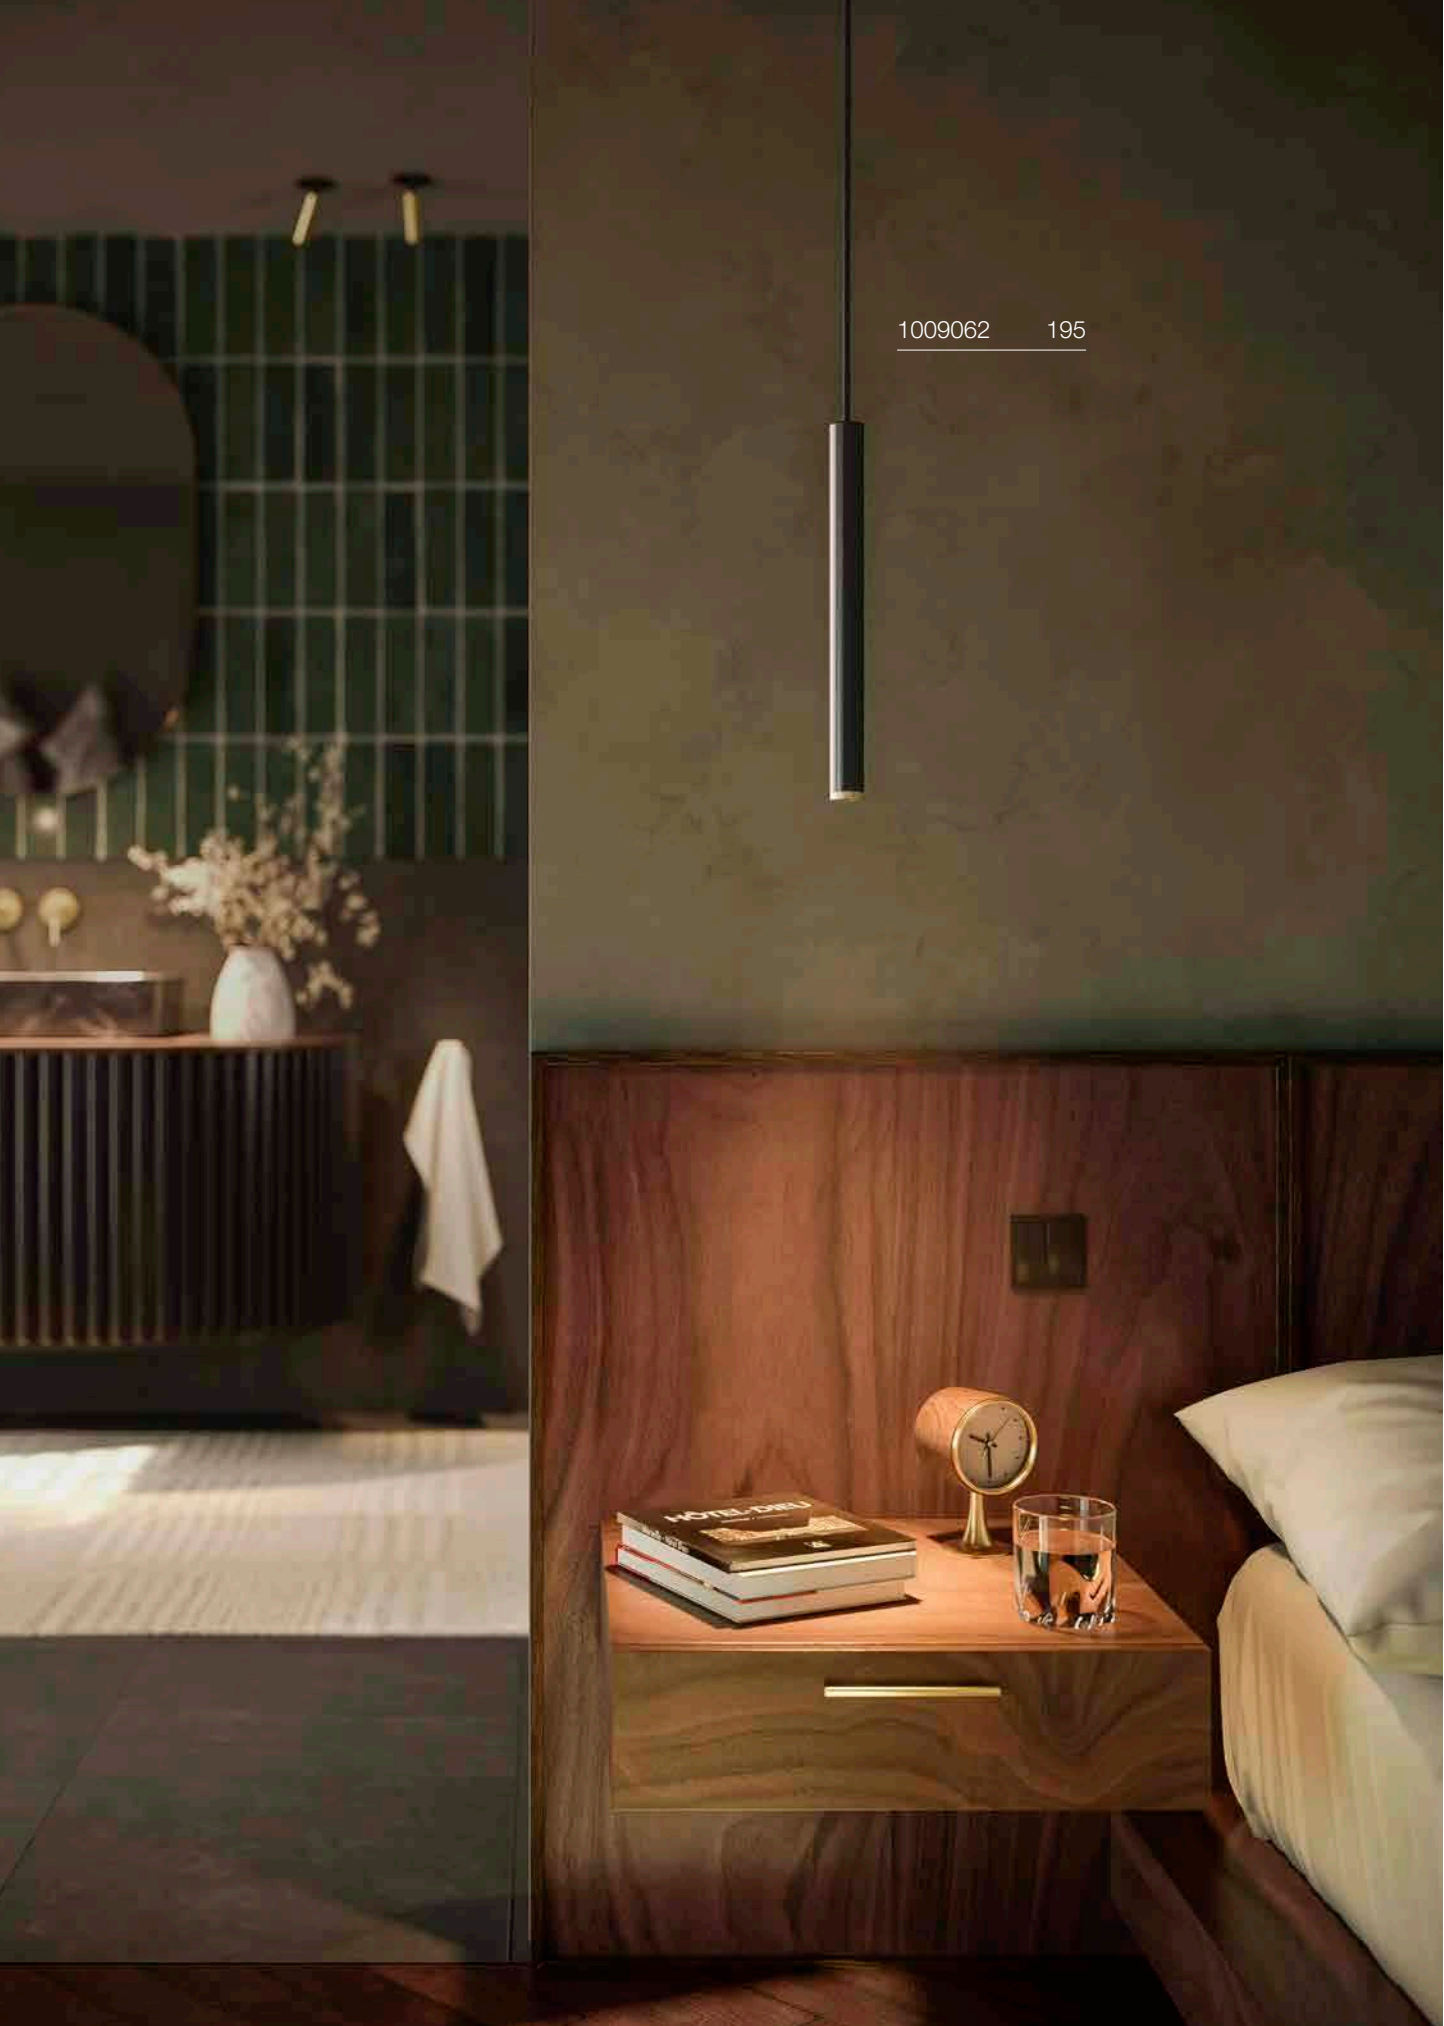
1009062 195
HÔTEL-DIEU

GRIP! S
PD, PHASE, Ø 3,0 CM

GERMAN DESIGN AWARD WINNER 2025





C,L | IP20 | IK02 | 29° | 50 000 h L80B10 | 200 cm | UGR 25

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: steel

- Honeycomb accessories included
- Including external LED driver

LED INSIDE | CRI 90

1009060 **1009062** **1009064** **1009066**	2700 K 590 lm
1009061 **1009063** **1009065** **1009067**	3000 K 620 lm

Variant	Prod. no.
black/gold 590 lm | 2700 K	**1009062**
black/gold 620 lm | 3000 K	**1009063**
white/black 590 lm | 2700 K	**1009060**
white/black 620 lm | 3000 K	**1009061**
gold/black 590 lm | 2700 K	**1009066**
gold/black 620 lm | 3000 K	**1009067**
bronze/black 590 lm | 2700 K	**1009064**
bronze/black 620 lm | 3000 K	**1009065**

⊕

Product	Prod. no.
Decorative ring, white	
black	**1011829**
white	**1011830**
gold	**1011831**
nickel	**1011832**
HONEYCOMB + Spacer	
black	**1011837**



MOTUNA
PD, PHASE



C · IP20 · 130° · 50000 h L80B20 · 250 cm

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium

LED INSIDE · CRI 90

	2700 K
1010216	750 lm
1010366	1000 lm

Variant	Prod. no.
black/gold 750 lm	**1010216**
white/gold 1000 lm	**1010366**

OVANA 44
PD, LED, PHASE, CCT



C,L · IP20 · IK02 · 115° · 50000 h L80B10 · 200 cm · UGR 22 · 50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: steel/polycarbonate (PE)

LED INSIDE · CCT · CRI 90

	2700 K	3000 K	4000 K
1011991 Down	1620 lm	1650 lm	1680 lm
1011992 Down	1860 lm	1870 lm	1900 lm

Variant	Prod. no.
black 1620 lm	**1011991**
white 1860 lm	**1011992**

SLVconnect® OVANA 44
PD, LED, ZIGBEE, TW



IP20 · IK02 · 115° · 50000 h L80B10 · 200 cm · UGR 22 · 50 · zigbee

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: steel/polycarbonate (PE)

LED INSIDE · TW · CRI 90


	2200 K - 6500 K
1011997 Down	1490 lm - 1650 lm
1011998 Down	1710 lm - 1900 lm

Variant	Prod. no.
black 1490 lm	**1011997**
white 1710 lm	**1011998**



MEDO® 2.0 SLIM 30
CL, PHASE

NEW





220-240 V ~50/60 Hz | 200 mA
Total wattage: 8 W
Material: aluminium/steel



Down	3000 K	4000 K
	1000 lm	1000 lm


Variant	Prod. no.
● black	**1011693**
○ white	**1011694**

⊕

Product	Prod. no.
Pendant suspension 1.5 m central	
● black	**1011779**
○ white	**1011780**
Pendant suspension 5 m central	
● black	**1011781**
○ white	**1011782**
Pendant suspension 3 m parallel	
● black	**1011783**
○ white	**1011784**

MEDO® 2.0 SLIM 40
CL, PHASE

NEW



220-240 V ~50/60 Hz | 400 mA
Total wattage: 15.5 W
Material: aluminium/steel

Down	3000 K	4000 K
	1900 lm	1900 lm

Variant	Prod. no.
● black	**1011695**
○ white	**1011696**

Product	Prod. no.
Pendant suspension 1.5 m central	
● black	**1011779**
○ white	**1011780**
Pendant suspension 5 m central	
● black	**1011781**
○ white	**1011782**
Pendant suspension 3 m parallel	
● black	**1011783**
○ white	**1011784**

MEDO® 2.0 SLIM 60
CL, PHASE

NEW



220-240 V ~50/60 Hz | 900 mA
Total wattage: 35 W
Material: aluminium/steel


Down	3000 K	4000 K
	4200 lm	4200 lm

Variant	Prod. no.
● black	**1011697**
○ white	**1011698**

Product	Prod. no.
Pendant suspension 1.5 m central	
● black	**1011779**
○ white	**1011780**
Pendant suspension 5 m central	
● black	**1011781**
○ white	**1011782**
Pendant suspension 3 m parallel	
● black	**1011783**
○ white	**1011784**

MEDO® 2.0 SLIM 80
CL, PHASE

NEW

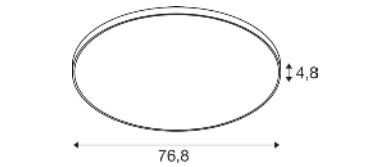

220-240 V ~50/60 Hz | 1200 mA
Total wattage: 45 W
Material: aluminium/steel

Down	3000 K	4000 K
	5900 lm	5900 lm

Variant	Prod. no.
● black	**1011699**
○ white	**1011700**


Product	Prod. no.
Pendant suspension 1.5 m central	
● black	**1011779**
○ white	**1011780**
Pendant suspension 5 m central	
● black	**1011781**
○ white	**1011782**
Pendant suspension 3 m parallel	
● black	**1011783**
○ white	**1011784**



MEDO® 2.0 SLIM 30
CL, DALI

NEW





Dali Touch IP20 IK03 85° 100 000 h L80B10 UGR 19

220-240 V ~0/50/60 Hz | 200 mA
Total wattage: 8.6 W
Material: aluminium/steel

LED INSIDE CCT CRI 90

	3000 K	4000 K
Down	1000 lm	1000 lm

Variant	Prod. no.
● black	**1011701**
○ white	**1011702**

⊕

Product	Prod. no.
Pendant suspension 1.5 m central	
● black	**1011779**
○ white	**1011780**
Pendant suspension 5 m central	
● black	**1011781**
○ white	**1011782**
Pendant suspension 3 m parallel	
● black	**1011783**
○ white	**1011784**

MEDO® 2.0 SLIM 40
CL, DALI



Dali Touch IP20 IK03 85° 100.000 h L80B10 UGR 19

220-240 V ~0/50/60 Hz | 400 mA
Total wattage: 15.5 W
Material: aluminium/steel

LED INSIDE CCT CRI 90

Down	3000 K	4000 K
	1900 lm	1900 lm

Variant	Prod. no.
● black	**1011703**
○ white	**1011704**

⊕

Product	Prod. no.
Pendant suspension 1.5 m central	
● black	**1011779**
○ white	**1011780**
Pendant suspension 5 m central	
● black	**1011781**
○ white	**1011782**
Pendant suspension 3 m parallel	
● black	**1011783**
○ white	**1011784**

MEDO® 2.0 SLIM 60
CL, DALI



Dali Touch IP20 IK03 85° 100.000 h L80B10 UGR 19

220-240 V ~0/50/60 Hz | 900 mA
Total wattage: 34 W
Material: aluminium/steel

LED INSIDE CCT CRI 90

Down	3000 K	4000 K
	4200 lm	4200 lm

Variant	Prod. no.
● black	**1011705**
○ white	**1011706**

⊕

Product	Prod. no.
Pendant suspension 1.5 m central	
● black	**1011779**
○ white	**1011780**
Pendant suspension 5 m central	
● black	**1011781**
○ white	**1011782**
Pendant suspension 3 m parallel	
● black	**1011783**
○ white	**1011784**

MEDO® 2.0 SLIM 80
CL, DALI



Dali Touch IP20 IK03 85° 100.000 h L80B10 UGR 19

200-240 V ~0/50/60 Hz | 1200 mA
Total wattage: 45 W
Material: aluminium/steel

LED INSIDE CCT CRI 90

Down	3000 K	4000 K
	5900 lm	5900 lm

Variant	Prod. no.
● black	**1011707**
○ white	**1011708**


⊕

Product	Prod. no.
Pendant suspension 1.5 m central	
● black	**1011779**
○ white	**1011780**
Pendant suspension 5 m central	
● black	**1011781**
○ white	**1011782**
Pendant suspension 3 m parallel	
● black	**1011783**
○ white	**1011784**

MEDO® 2.0 HYVE 40
CL, PHASE

NEW





C · IP20 · 80° · 60 000 h L80B10 · UGR 16

220-240 V ~50/60 Hz | 400 mA
Total wattage: 16 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90

	3000 K	4000 K
Down	2100 lm	2100 lm


Variant	Prod. no.
● black	**1011851**
○ white	**1011850**

Product	Prod. no.
Pendant suspension 1.5 m central	
● black	**1011779**
○ white	**1011780**
Pendant suspension 5 m central	
● black	**1011781**
○ white	**1011782**
Pendant suspension 3 m parallel	
● black	**1011783**
○ white	**1011784**

MEDO® 2.0 HYVE 40
CL, DALI

NEW





Dali · Touch · IP20 · 80° · 60 000 h L80B10 · UGR 16

200-240 V ~0/50/60 Hz | 400 mA
Total wattage: 17 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90

	3000 K	4000 K
Down	2100 lm	2100 lm


Variant	Prod. no.
● black	**1011853**
○ white	**1011852**

Product	Prod. no.
Pendant suspension 1.5 m central	
● black	**1011779**
○ white	**1011780**
Pendant suspension 5 m central	
● black	**1011781**
○ white	**1011782**
Pendant suspension 3 m parallel	
● black	**1011783**
○ white	**1011784**

MEDO® 2.0 HYVE 60
CL, PHASE

NEW





C · IP20 · 80° · 60 000 h L80B10 · UGR 13

220-240 V ~50/60 Hz | 900 mA
Total wattage: 35 W
Material: aluminium/steel


LED INSIDE · CCT · CRI 90

	3000 K	4000 K
Down	4800 lm	4800 lm

Variant	Prod. no.
● black	**1011855**
○ white	**1011854**

Product	Prod. no.
Pendant suspension 1.5 m central	
● black	**1011779**
○ white	**1011780**
Pendant suspension 5 m central	
● black	**1011781**
○ white	**1011782**
Pendant suspension 3 m parallel	
● black	**1011783**
○ white	**1011784**

MEDO® 2.0 HYVE 60
CL, DALI

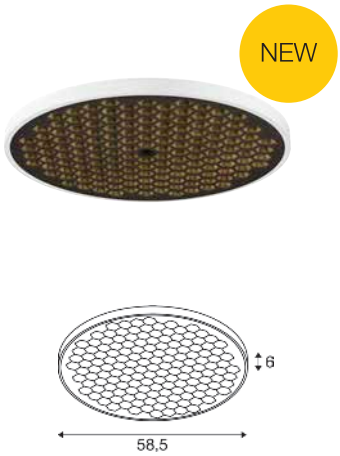

200-240 V ~0/50/60 Hz | 900 mA
Total wattage: 33 W
Material: aluminium/steel

Down	3000 K	4000 K
	4800 lm	4800 lm

Variant	Prod. no.
● black	**1011857**
○ white	**1011856**

Product	Prod. no.
Pendant suspension 1.5 m central	
● black	**1011779**
○ white	**1011780**
Pendant suspension 5 m central	
● black	**1011781**
○ white	**1011782**
Pendant suspension 3 m parallel	
● black	**1011783**
○ white	**1011784**

MEDO® 2.0 HYVE 80
CL, PHASE



220-240 V ~50/60 Hz | 1800 mA
Total wattage: 70 W
Material: aluminium/steel

Down	3000 K	4000 K
	9700 lm	9700 lm

Variant	Prod. no.
● black	**1011859**
○ white	**1011858**

Product	Prod. no.
Pendant suspension 1.5 m central	
● black	**1011779**
○ white	**1011780**
Pendant suspension 5 m central	
● black	**1011781**
○ white	**1011782**
Pendant suspension 3 m parallel	
● black	**1011783**
○ white	**1011784**

MEDO® 2.0 HYVE 80
CL, DALI



200-240 V ~0/50/60 Hz | 1800 mA
Total wattage: 67 W
Material: aluminium/steel

Down	3000 K	4000 K
	9700 lm	9700 lm

Variant	Prod. no.
● black	**1011861**
○ white	**1011860**

Product	Prod. no.
Pendant suspension 1.5 m central	
● black	**1011779**
○ white	**1011780**
Pendant suspension 5 m central	
● black	**1011781**
○ white	**1011782**
Pendant suspension 3 m parallel	
● black	**1011783**
○ white	**1011784**


1011699 199

MEDO® 2.0 SUSPENSION KIT
PENDANT SUSPENSION, 1.5 M CENTRAL

NEW



IP20 150 cm

Ø: 13 cm
H: 3 cm
Material: steel

Variant	Prod. no.
● black	**1011779**
○ white	**1011780**

MEDO® 2.0 SUSPENSION KIT
PENDANT SUSPENSION, 5 M CENTRAL

NEW



IP20 500 cm

Ø: 13 cm
H: 3 cm
Material: steel

Variant	Prod. no.
● black	**1011781**
○ white	**1011782**

MEDO® 2.0 SUSPENSION KIT
PENDANT SUSPENSION, 3 M PARALLEL

NEW



IP20 300 cm

Ø: 8 cm
H: 3 cm
Material: steel

Variant	Prod. no.
● black	**1011783**
○ white	**1011784**



MEDO® RING 60
PD, DALI







220-240 V ~50/60 Hz | 700 mA
Total wattage: 26 W
Material: aluminium/steel




	3000 K	4000 K
Down	3750 lm	4000 lm

Variant	Prod. no.
● black	**1008589**
○ white	**1008590**

MEDO® RING 60
PD, PHASE







220-240 V ~50/60 Hz | 700 mA
Total wattage: 27 W
Material: aluminium/steel




Down	3000 K	4000 K
	3750 lm	4000 lm

Variant	Prod. no.
● black	**1008591**
○ white	**1008592**

MEDO® RING 90
PD, DALI







220-240 V ~50/60 Hz | 1200 mA
Total wattage: 42 W
Material: aluminium/steel




Down	3000 K	4000 K
	5000 lm	5300 lm

Variant	Prod. no.
● black	**1008593**
○ white	**1008594**


MEDO® RING 90
PD, PHASE







220-240 V ~50/60 Hz | 1200 mA
Total wattage: 43 W
Material: aluminium/steel



Down	3000 K	4000 K
	5000 lm	5300 lm

Variant	Prod. no.
● black	**1008595**
○ white	**1008596**

MEDO® PRO 30
CW, DALI, UGR<19



Dali · Touch · IP50 · IK02 · 70° · 50 000 h L80B10 · UGR 19 · 20

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90

	3000 K	4000 K
Direct	1150 lm	1150 lm
Indirect	100 lm	100 lm

Variant	Prod. no.
● black	**1007284**
○ white	**1007285**

⊕

Product	Prod. no.
Suspension kit 1.5 m	
● black	**135250**
○ white	**135251**
Suspension kit 5 m	
○ white	**1001950**
● black	**1001952**

MEDO® PRO 30
CW, PHASE, UGR<19



C · IP50 · IK02 · 70° · 50 000 h L80B10 · UGR 19 · 20

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90

	3000 K	4000 K
Direct	1150 lm	1150 lm
Indirect	100 lm	100 lm

Variant	Prod. no.
● black	**1007288**
○ white	**1007289**

⊕

Product	Prod. no.
Suspension kit 1.5 m	
● black	**135250**
○ white	**135251**
Suspension kit 5 m	
○ white	**1001950**
● black	**1001952**

MEDO® PRO 40
CW, DALI, UGR<19



Dali · Touch · IP50 · IK02 · 80° · 50 000 h L80B10 · UGR 19 · 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90

	3000 K	4000 K
Direct	2200 lm	2300 lm
Indirect	200 lm	200 lm

Variant	Prod. no.
● black	**1007292**
○ white	**1007293**

⊕

Product	Prod. no.
Suspension kit 1.5 m	
● black	**135250**
○ white	**135251**
Suspension kit 5 m	
○ white	**1001950**
● black	**1001952**

MEDO® PRO 40
CW, PHASE, UGR<19



220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium/steel

	3000 K	4000 K
Direct	2200 lm	2300 lm
Indirect	200 lm	200 lm

Variant	Prod. no.
● black	**1007296**
○ white	**1007297**

Product	Prod. no.
Suspension kit 1.5 m	
● black	**135250**
○ white	**135251**
Suspension kit 5 m	
○ white	**1001950**
● black	**1001952**

MEDO® PRO 60
CW, DALI, UGR<19



220-240 V ~0/50/60 Hz | 1000 mA
Total wattage: 39 W
Material: aluminium/steel

	3000 K	4000 K
Direct	4600 lm	4700 lm
Indirect	400 lm	400 lm

Variant	Prod. no.
● black	**1007300**
○ white	**1007301**

Product	Prod. no.
Suspension kit 1.5 m	
● black	**135250**
○ white	**135251**
Suspension kit 5 m	
○ white	**1001950**
● black	**1001952**

MEDO® PRO 60
CW, PHASE, UGR<19



220-240 V ~50/60 Hz | 1000 mA
Total wattage: 37 W
Material: aluminium/steel

	3000 K	4000 K
Direct	4600 lm	4700 lm
Indirect	400 lm	400 lm

Variant	Prod. no.
● black	**1007304**
○ white	**1007305**

Product	Prod. no.
Suspension kit 1.5 m	
● black	**135250**
○ white	**135251**
Suspension kit 5 m	
○ white	**1001950**
● black	**1001952**

MEDO® PRO 90
CL, DALI, UGR<19



Dali Touch IP50 IK02 80° 50 000 h L80B10 UGR 19 20

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 75 W
Material: aluminium/steel

LED INSIDE CCT CRI 90

	3000 K	4000 K
Direct	8800 lm	9100 lm
Indirect	600 lm	600 lm

Variant	Prod. no.
● black	**1007308**
○ white	**1007309**

Product	Prod. no.
Suspension kit 1.5 m	
● black	**135250**
○ white	**135251**
Suspension kit 5 m	
○ white	**1001950**
● black	**1001952**

MEDO® PRO 90
CL, PHASE, UGR<19



C IP50 IK02 80° 50 000 h L80B10 UGR 19 20

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 74 W
Material: aluminium/steel

LED INSIDE CCT CRI 90

	3000 K	4000 K
Direct	8800 lm	9100 lm
Indirect	600 lm	600 lm

Variant	Prod. no.
● black	**1007312**
○ white	**1007313**

Product	Prod. no.
Suspension kit 1.5 m	
● black	**135250**
○ white	**135251**
Suspension kit 5 m	
○ white	**1001950**
● black	**1001952**

MEDO® PRO 30
CW, DALI



Dali Touch IP50 IK02 110° 50 000 h L80B10 UGR 25 20

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium/steel

LED INSIDE CCT CRI 90

	3000 K	4000 K
Direct	1300 lm	1300 lm
Indirect	50 lm	50 lm

Variant	Prod. no.
● black	**1007286**
○ white	**1007287**

Product	Prod. no.
Suspension kit 1.5 m	
● black	**135250**
○ white	**135251**
Suspension kit 5 m	
○ white	**1001950**
● black	**1001952**

MEDO® PRO 30
CW, PHASE



220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium/steel

Direct	3000 K	4000 K
	1300 lm	1300 lm
Indirect	3000 K	4000 K
	50 lm	50 lm

Variant	Prod. no.
● black	**1007290**
○ white	**1007291**

Product	Prod. no.
Suspension kit 1.5 m	
● black	**135250**
○ white	**135251**
Suspension kit 5 m	
○ white	**1001950**
● black	**1001952**

MEDO® PRO 40
CW, DALI



220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium/steel

Direct	3000 K	4000 K
	2550 lm	2550 lm
Indirect	3000 K	4000 K
	100 lm	100 lm

Variant	Prod. no.
● black	**1007294**
○ white	**1007295**

Product	Prod. no.
Suspension kit 1.5 m	
● black	**135250**
○ white	**135251**
Suspension kit 5 m	
○ white	**1001950**
● black	**1001952**

MEDO® PRO 40
CW, PHASE




220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium/steel

Direct	3000 K	4000 K
	2550 lm	2550 lm
Indirect	3000 K	4000 K
	100 lm	100 lm


Variant	Prod. no.
● black	**1007298**
○ white	**1007299**

Product	Prod. no.
Suspension kit 1.5 m	
● black	**135250**
○ white	**135251**
Suspension kit 5 m	
○ white	**1001950**
● black	**1001952**

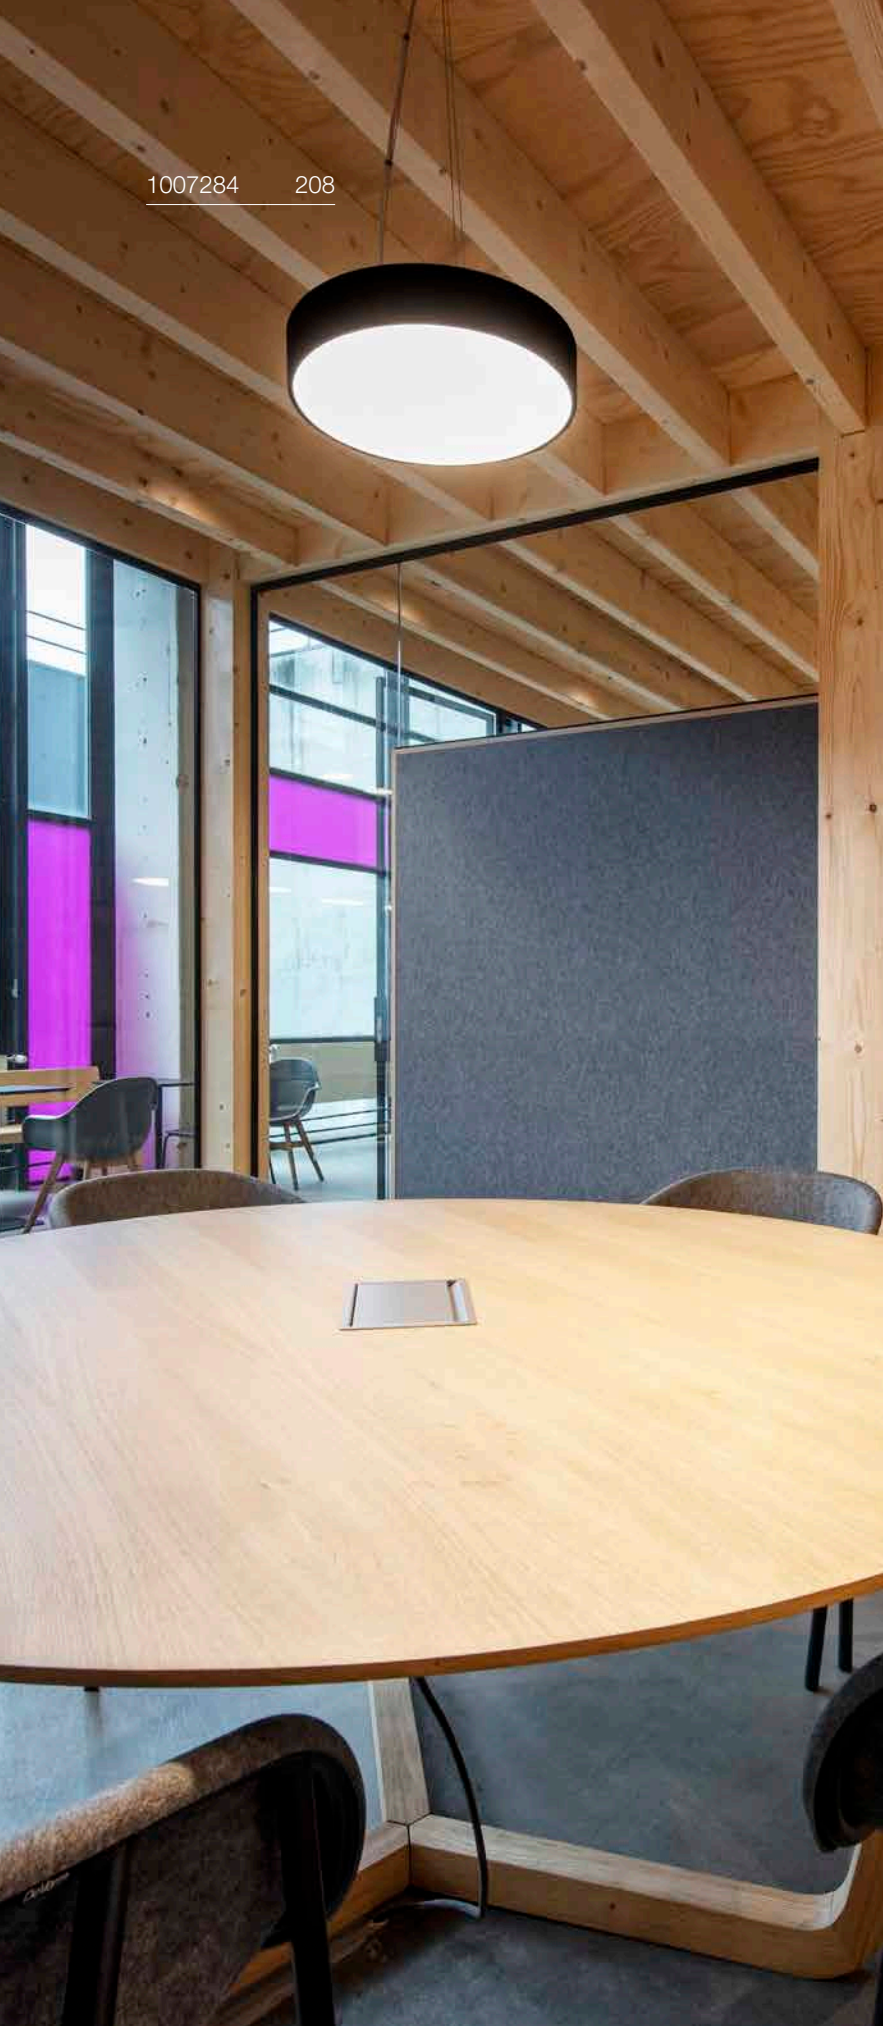

MEDO® PRO 60
CW, DALI







220-240 V ~0/50/60 Hz | 1000 mA
Total wattage: 39 W
Material: aluminium/steel



	3000 K	4000 K
Direct	5250 lm	5300 lm
Indirect	200 lm	200 lm

Variant	Prod. no.
● black	**1007302**
○ white	**1007303**

Product	Prod. no.
Suspension kit 1.5 m	
● black	**135250**
○ white	**135251**
Suspension kit 5 m	
○ white	**1001950**
● black	**1001952**

MEDO® PRO 60
CW, PHASE



C IP50 IK02 110° 50 000 h L80B10 UGR 25 20

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 37 W
Material: aluminium/steel

LED INSIDE CCT CRI 90

	3000 K	4000 K
Direct	5250 lm	5300 lm
Indirect	200 lm	200 lm

Variant	Prod. no.
● black	**1007306**
○ white	**1007307**

⊕

Product	Prod. no.
Suspension kit 1.5 m	
● black	**135250**
○ white	**135251**
Suspension kit 5 m	
○ white	**1001950**
● black	**1001952**

MEDO® PRO 90
CL, DALI



Dali Touch IP50 IK02 110° 50 000 h L80B10 UGR 25 20

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 75 W
Material: aluminium/steel

LED INSIDE CCT CRI 90

	3000 K	4000 K
Direct	10550 lm	10750 lm
Indirect	450 lm	450 lm

Variant	Prod. no.
● black	**1007310**
○ white	**1007311**

⊕

Product	Prod. no.
Suspension kit 1.5 m	
● black	**135250**
○ white	**135251**
Suspension kit 5 m	
○ white	**1001950**
● black	**1001952**

MEDO® PRO 90
CL, PHASE



C IP50 IK02 110° 50 000 h L80B10 UGR 25 20

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 74 W
Material: aluminium/steel

LED INSIDE CCT CRI 90

	3000 K	4000 K
Direct	10550 lm	10750 lm
Indirect	450 lm	450 lm


Variant	Prod. no.
● black	**1007314**
○ white	**1007315**


⊕

Product	Prod. no.
Suspension kit 1.5 m	
● black	**135250**
○ white	**135251**
Suspension kit 5 m	
○ white	**1001950**
● black	**1001952**


MEDO®
OVERVIEW

NEW







NEW



	MEDO® SLIM 2.0 CW	**MEDO® PRO** CW	**MEDO® HYVE** CW
Sizes	**30 | 40 | 60 | 80**	**30 | 40 | 60 | 90**	**40 | 60 | 80**
UGR	19	19 | 25	13 | 16
Control	Phase **|** DALI 2	Phase **|** DALI 2	Phase **|** DALI 2
CCT Switch	3000K **|** 4000K	3000K **|** 4000K	3000K **|** 4000K
EasyBase	✓	✓	✓
Suspension kit	1.5 | 5 m (not included) 3 m parallel	1.5 | 5 m (not included)	1.5 | 5 m (not included) 3 m parallel

LED drivers are not included
and must be ordered separately






MEDO® MOUNTING FRAME	**MEDO® RING** PD
30 | 40 | 60 | 90	**60 | 90**
19	25
*	Phase **|** DALI 2
3000K **|** 4000K	3000K **|** 4000K
-	-
-	3 m (included)


*Requires driver

Easy and fast
to install thanks
to EasyBase


CEILING LIGHTS



Screw EasyBase
to the ceiling



Wire
EasyBase

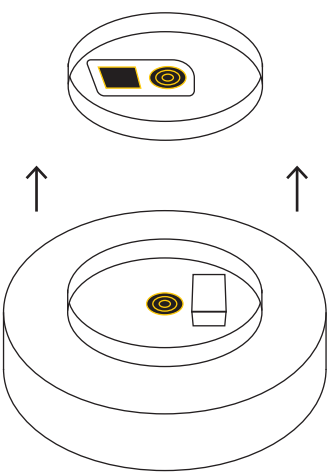


Select the colour temperature using
the CCT switch on the light, look for
the green markings

MEDO® 60 and MEDO® 90 are also
attached using the safety chain provided



LALU® SET
PD, E27 BASE





IP20 200 cm

220-240 V ~50/60 Hz
Material: aluminium/steel

- E27 lamp included

SOCKET INSIDE 4 W

Base: 1xE27

Variant	Prod. no.
● black	**1010785**

E27 | 4 W | 280°
830 lm | 2700 K | EEC = A

Prod. no. **1008641**

LALU® SET
PD, E27 BASE





IP20 200 cm

220-240 V ~50/60 Hz
Material: aluminium/steel

- E27 lamp included

SOCKET INSIDE 7.5 W

Base: 1xE27

Variant	Prod. no.
● black	**1010786**


E27 | 8 W | 320°
700 lm | 2500 K | EEC = F

C,L

Prod. no. **1005265**

LALU® SET
PD, E27 BASE





IP20 200 cm

220-240 V ~50/60 Hz
Material: aluminium/steel

- E27 lamp included

SOCKET INSIDE 7.5 W

Base: 1xE27

Variant	Prod. no.
● black	**1010787**


E27 | 8 W | 320°
700 lm | 2500 K | EEC = F

C,L

Prod. no. **1005265**

LALU® SET
PD, E27 BASE





IP20 200 cm

220-240 V ~50/60 Hz
Material: aluminium/steel

- E27 lamp included

SOCKET INSIDE 7.5 W

Base: 1xE27


Variant	Prod. no.
● black	**1010788**

E27 | 8 W | 320°
700 lm | 2500 K | EEC = F

C,L


Prod. no. **1005265**

Discover more LALU colours and shapes® at slv.com

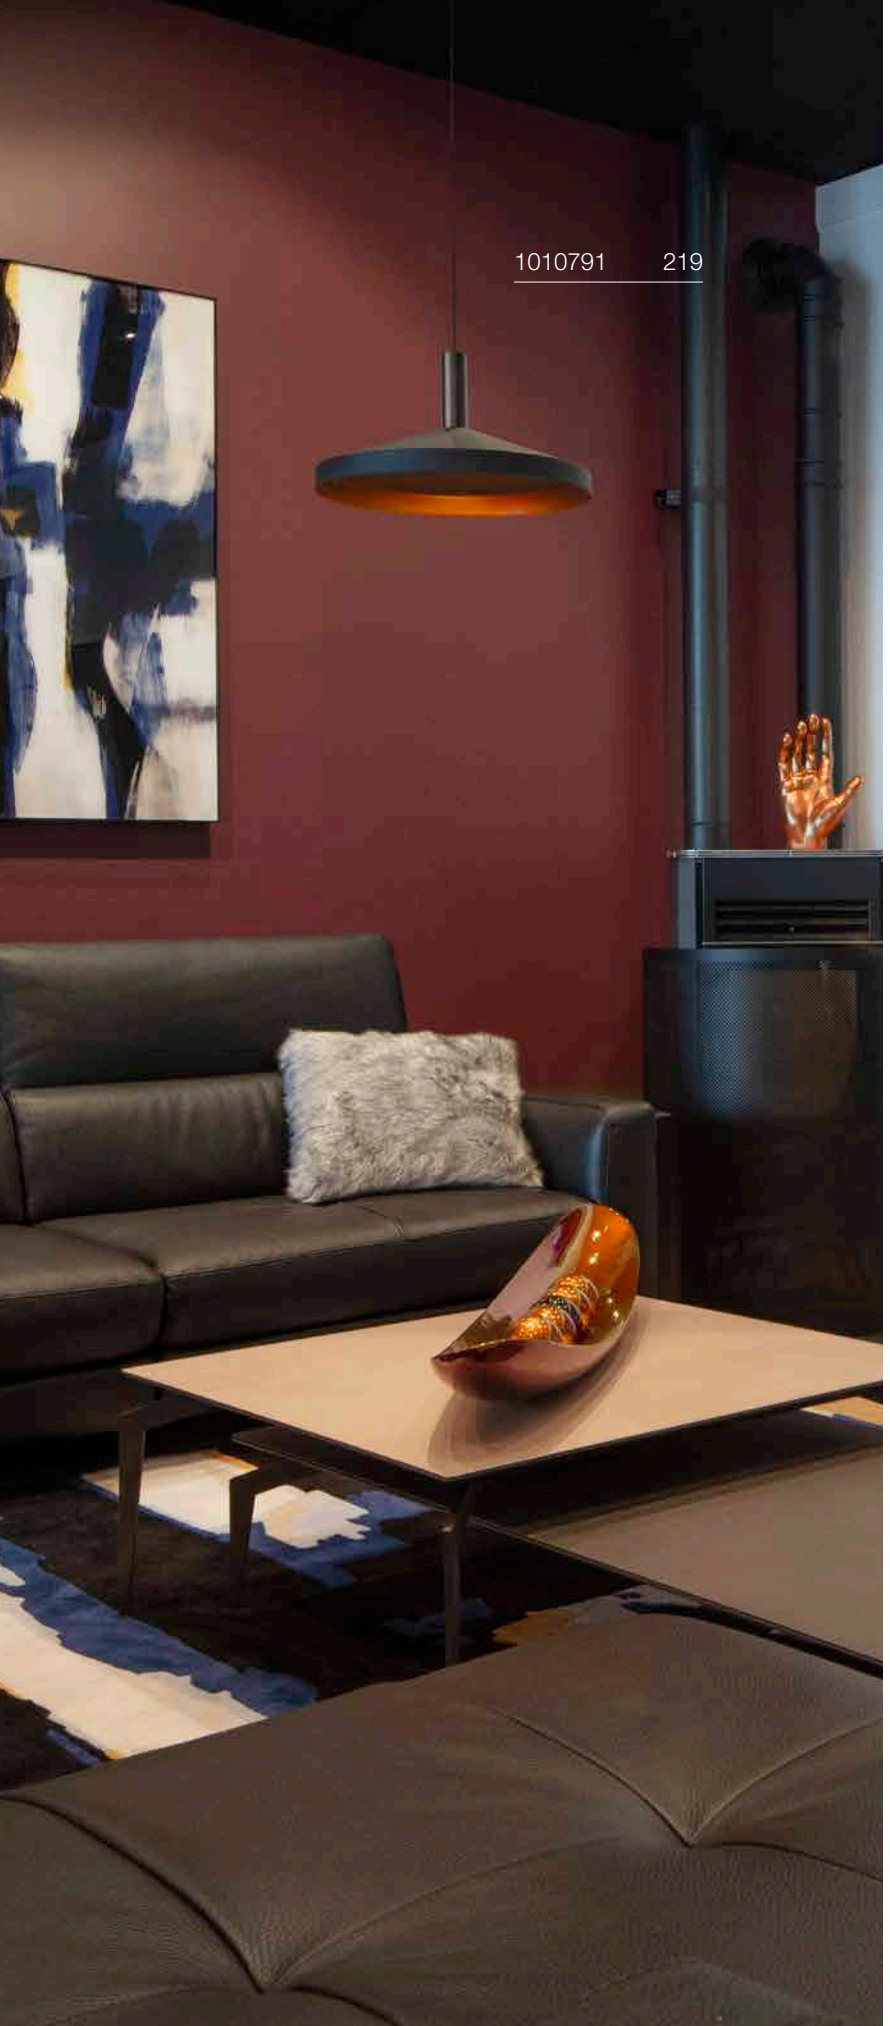

LALU® SET
PD, LED BASE, PHASE







220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: aluminium/steel

- Including colour temperature switch 2700 K/3000 K



	2700 K	3000 K
Down	550 lm	600 lm

Variant	Prod. no.
● black	**1010789**

LALU® SET
PD, LED BASE, PHASE





IP20 IK03 40° 50000 h L80B20 200 cm

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: aluminium/steel

- Including colour temperature switch 2700 K/3000 K


LED INSIDE CCT CRI 90

	2700 K	3000 K
Down	650 lm	700 lm

Variant	Prod. no.
● black	**1010790**

LALU® SET
PD, LED BASE, PHASE





IP20 IK03 40° 50000 h L80B20 200 cm

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: aluminium/steel

- Including colour temperature switch 2700 K/3000 K


LED INSIDE CCT CRI 90

	2700 K	3000 K
Down	700 lm	800 lm

Variant	Prod. no.
● black	**1010791**

LALU® SET
PD, LED BASE, PHASE





IP20 IK03 40° 50000 h L80B20 200 cm

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: aluminium/steel

- Including colour temperature switch 2700 K/3000 K

LED INSIDE CCT CRI 90


	2700 K	3000 K
Down	700 lm	700 lm

Variant	Prod. no.
● black	**1010792**

Discover more LALU colours and shapes® at slv.com

LALU® SET
PD, LED BASE, PHASE, RECESSED







220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: aluminium/steel

- Including colour temperature switch 2700 K/3000 K




	2700 K	3000 K
Down	550 lm	600 lm

Variant	Prod. no.
● black	**1010793**

LALU® SET
PD, LED BASE, PHASE, RECESSED







220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: aluminium/steel

- Including colour temperature switch 2700 K/3000 K




	2700 K	3000 K
Down	650 lm	700 lm

Variant	Prod. no.
● black	**1010794**

LALU® SET
PD, LED BASE, PHASE, RECESSED







220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: aluminium/steel

- Including colour temperature switch 2700 K/3000 K




	2700 K	3000 K
Down	700 lm	800 lm

Variant	Prod. no.
● black	**1010795**

LALU® SET
PD, LED BASE, PHASE, RECESSED





IP20 IK03 40° 50000 h L80B20 200 cm

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: aluminium/steel

- Including colour temperature switch 2700 K/3000 K


LED INSIDE CCT CRI 90


	2700 K	3000 K
Down	700 lm	700 lm

Variant	Prod. no.
● black	**1010796**

DYSKO
PD, PHASE

GERMAN DESIGN AWARD WINNER 2026





IP20 IK02 36° 50000 h L80B10 200 cm

220-240 V ~50/60 Hz | 100 mA
Total wattage: 4.4 W
Material: aluminium

- Including external LED driver

LED INSIDE CRI 90

	2700 K
	500 lm


Variant	Prod. no.
black/white	**1010360** ●
gold/black/white	**1010359**
gold/black/gold	**1010361** ●



1007703 223

ONE FLAT
PD, DALI, TRIPLE







220-240 V ~50/60 Hz | 1700 mA
Total wattage: 58 W
Material: aluminium/steel




2700 K	3000 K
3500 lm	3700 lm

Variant	Prod. no.
● black	**1007701**
○ white	**1007702**
● brass	**1007703**

ONE FLAT
PD, PHASE, SINGLE








220-240 V ~50/60 Hz | 600 mA
Total wattage: 23 W
Material: aluminium/steel



	2700 K	3000 K
1007856	1900 lm	2050 lm
1007855	1300 lm	1350 lm
1007857	1700 lm	1750 lm


Variant	Prod. no.
● black	**1007855**
○ white	**1007856**
● brass	**1007857**

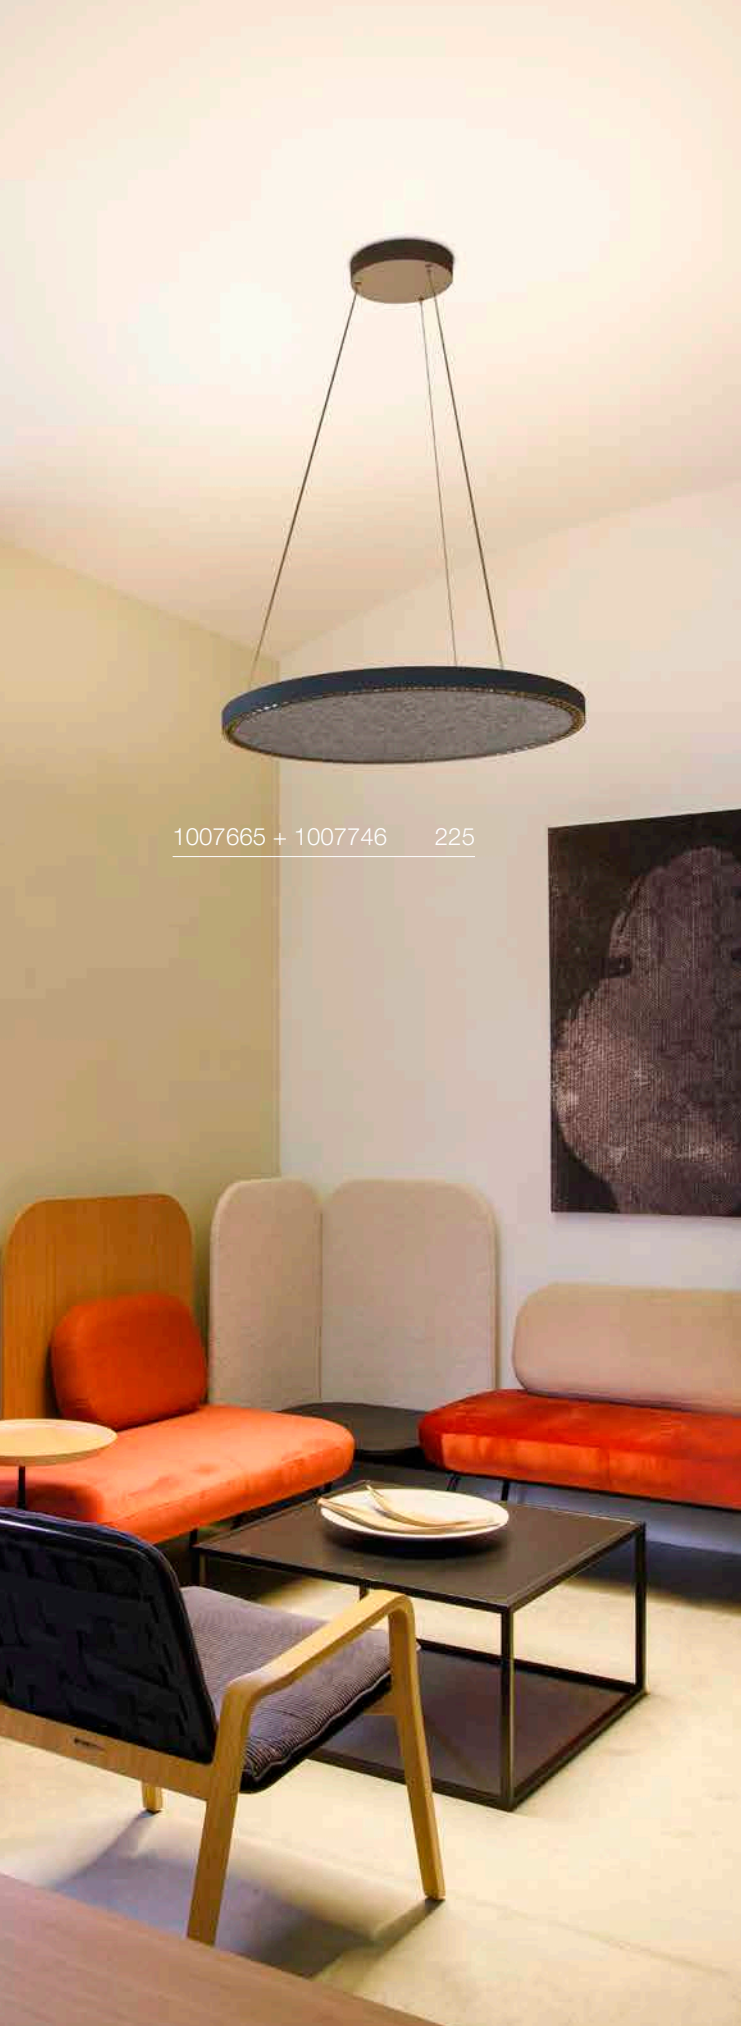

1007665 + 1007746 225

ONE VERTICAL
PD, PHASE







220-240 V ~50/60 Hz | 1050 mA
Total wattage: 40 W
Material: aluminium/steel




2700 K	3000 K
2400 lm	2550 lm

Variant	Prod. no.
● black	**1008002**
○ white	**1008003**
● brass	**1008004**

ONE CUBE
PD, DALI





Dali · Touch · IP20 · 44° · 50000 h L80B10 · 300 cm · UGR 19


220-240 V ~50/60 Hz | 1400 mA
Total wattage: 54 W
Material: aluminium/steel


LED INSIDE · CRI 90

1007661 **1007662**	3000 K 4000 lm
1007663 **1007664**	4000 K 4300 lm

Variant	Prod. no.
● black 3000 K	**1007661**
● black 4000 K	**1007663**
○ white 3000 K	**1007662**
○ white 4000 K	**1007664**

ONE CUBE UP/DOWN
PD, DALI, UP/DOWN





Dali · Touch · IP20 · 130° · 44° · 50000 h L80B10 · 300 cm · UGR 19

220-240 V ~50/60 Hz | 2100 mA
Total wattage: 80 W
Material: aluminium/steel

LED INSIDE

1007665 **1007666**	Down	3000 K 4000 lm
	Up	3000 K 2000 lm
1007671 **1007672**	Down	4000 K 4300 lm
	Up	4000 K 2200 lm

Variant	Prod. no.
● black 3000 K	**1007665**
● black 4000 K	**1007671**
○ white 3000 K	**1007666**
○ white 4000 K	**1007672**

ONE
FELT PLATE, ACOUSTIC FELT, FOR ONE 80/ONE CUBE



Ø: 75.5 cm
H: 3.8 cm


- Fits all One light rings with Ø 80 cm


Variant	Prod. no.
grey	**1007746**
beige	**1007891**


1005177 227

ONE 60
PD, DALI







220-240 V ~50/60 Hz | 600 mA
Total wattage: 24 W
Material: aluminium/steel




	3000 K	4000 K
	1480 lm	1550 lm

Variant	Prod. no.
● black	**1002909**
○ white	**1002910**

ONE 60
PD, DALI, UP/DOWN







220-240 V ~50/60 Hz | 600 mA
Total wattage: 25 W
Material: aluminium/steel




		3000 K	4000 K
Up		400 lm	410 lm
Down		400 lm	410 lm

Variant	Prod. no.
● black	**1004761**
○ white	**1004762**

ONE 60
PD, PHASE, UP/DOWN







220-240 V ~50/60 Hz | 600 mA
Total wattage: 24 W
Material: aluminium/steel




		2700 K	3000 K
1005177	Up	750 lm	800 lm
	Down	750 lm	800 lm
1004760	Up	800 lm	850 lm
	Down	800 lm	850 lm
1004759	Up	575 lm	600 lm
	Down	575 lm	600 lm

Variant	Prod. no.
● black	**1004759**
○ white	**1004760**
● brass	**1005177**


1004763 229

ONE 80
PD, DALI







220-240 V ~50/60 Hz | 800 mA
Total wattage: 32 W
Material: aluminium/steel




3000 K	4000 K
1930 lm	2140 lm

Variant	Prod. no.
● black	**1002911**
○ white	**1002912**

ONE 80
PD, DALI, UP/DOWN







220-240 V ~50/60 Hz | 800 mA
Total wattage: 34 W
Material: aluminium/steel

	3000 K	4000 K
Up	615 lm	635 lm
Down	615 lm	635 lm

Variant	Prod. no.
● black	**1004763**
○ white	**1004764**

ONE
FELT PLATE, ACOUSTIC FELT, FOR ONE 80/ONE CUBE



Ø: 75.5 cm
H: 3.8 cm

- Fits all One light rings with Ø 80 cm


Variant	Prod. no.
● grey	**1007746**
● beige	**1007891**


1005178 231

ONE DOUBLE
PD, DALI, UP/DOWN

GERMAN DESIGN AWARD SPECIAL 2022





Dali | 130° | 50000 h L80B10 | 300 cm

220-240 V ~50/60 Hz | 1400 mA
Total wattage: 55 W
Material: aluminium/steel

INSIDE | CCT | CRI 90


	3000 K	4000 K
Up	1050 lm	1060 lm
Down	3000 K	4000 K
	1050 lm	1060 lm

Variant	Prod. no.
● black	**1004767**
○ white	**1004768**

ONE DOUBLE
PD, PHASE, UP/DOWN

GERMAN DESIGN AWARD SPECIAL 2022





C | 130° | 180 cm

220-240 V ~50/60 Hz | 900 mA
Total wattage: 35 W
Material: aluminium/steel


INSIDE | CCT | CRI 90

	2700 K	3000 K
Up	615 lm	635 lm
Down	2700 K	3000 K
	615 lm	635 lm

Variant	Prod. no.
● black	**1004765**
○ white	**1004766**
● brass	**1005178**

ONE TRIPLE
PD, DALI





Dali | IP20 | 30000 h L70B50 | 300 cm

220-240 V ~50/60 Hz | 1700 mA
Total wattage: 64 W
Material: aluminium/steel

INSIDE | CCT | CRI 90

	3000 K	4000 K
	4040 lm	4200 lm

Variant	Prod. no.
● black	**1002913**
○ white	**1002914**



1006188 233



ONE LINEAR 100
PD, PHASE, UP/DOWN

GERMAN DESIGN AWARD SPECIAL 2022





180 cm 20

220-240 V ~50/60 Hz | 600 mA
Total wattage: 24 W
Material: aluminium/steel

LED INSIDE CCT CRI 90


	2700 K	3000 K
Up	550 lm	580 lm
Down	700 lm	670 lm

Variant	Prod. no.
● black	**1006185**

ONE LINEAR 140
PD, PHASE, UP/DOWN

GERMAN DESIGN AWARD SPECIAL 2022






180 cm 20

220-240 V ~50/60 Hz | 900 mA
Total wattage: 35 W
Material: aluminium/steel

LED INSIDE CCT CRI 90


	2700 K	3000 K
Up	830 lm	860 lm
Down	980 lm	1015 lm


Variant	Prod. no.
● black	**1006188**
○ white	**1006189**
● brass	**1006190**

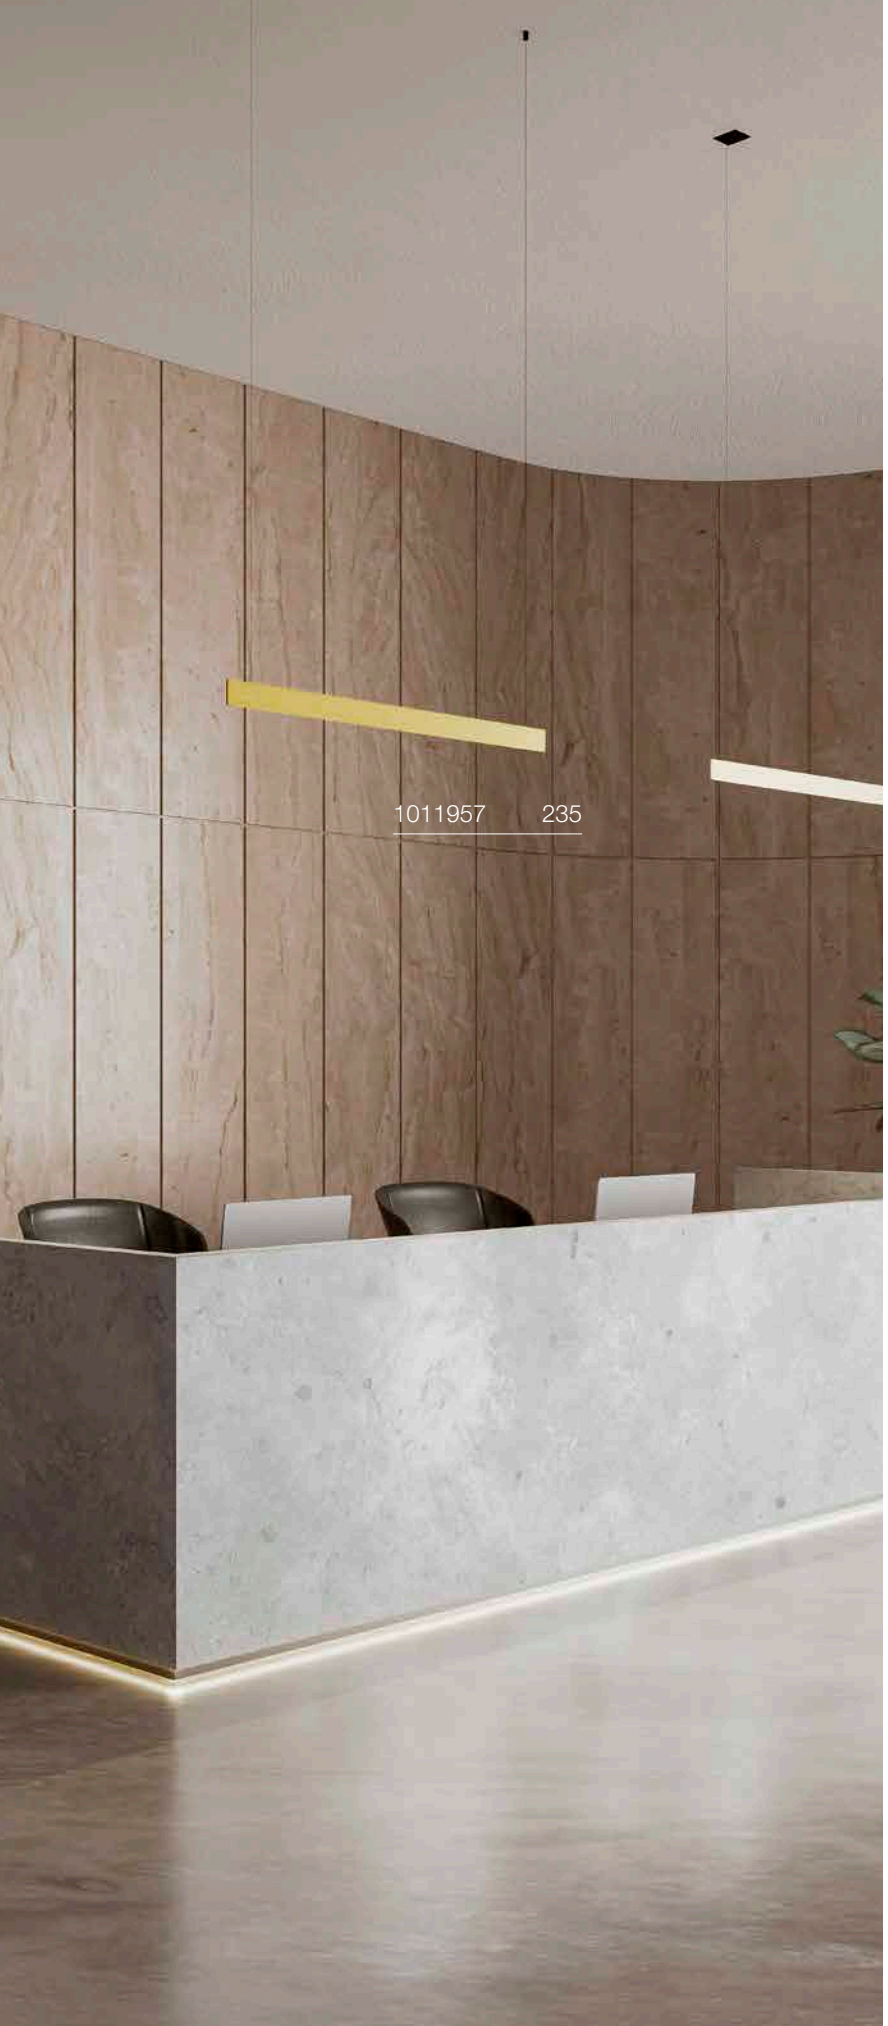

LINIUS 120
PD, PHASE, CANOPY

NEW








220-240 V ~50/60 Hz | 900 mA
Total wattage: 34 W
Material: aluminium/steel

LED INSIDE CRI 90

1011934 **1011935**	Up	2700 K / 1350 lm
	Down	2700 K / 1650 lm
1011936 **1011937**	Up	3000 K / 1400 lm
	Down	3000 K / 1700 lm

Variant	Prod. no.
black 2700 K	**1011934**
black 3000 K	**1011936**
brass 2700 K	**1011935**
brass 3000 K	**1011937**

LINIUS 120
PD, PHASE, RECESSED

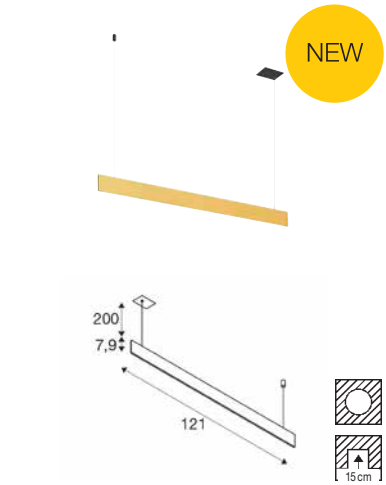

C · IP20 · IK02 · 90° · 50000 h L80B20 · 200 cm · 64


220-240 V ~50/60 Hz | 900 mA
Total wattage: 34 W
Material: aluminium/steel

LED INSIDE · CRI 90

1011938	Up	2700 K / 1350 lm
1011939	Down	2700 K / 1650 lm
1011940	Up	3000 K / 1400 lm
1011941	Down	3000 K / 1700 lm

Variant	Prod. no.
black 2700 K	**1011938**
black 3000 K	**1011940**
brass 2700 K	**1011939**
brass 3000 K	**1011941**

LINIUS 120
PD, DALI, CANOPY

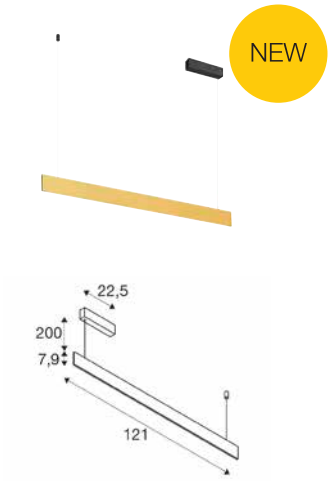

Dali · IP20 · IK02 · 90° · 50000 h L80B20 · 200 cm · 15


220-240 V ~0/50/60 Hz | 900 mA
Total wattage: 34 W
Material: aluminium/steel

LED INSIDE · CRI 90

1011950	Up	2700 K / 1350 lm
1011951	Down	2700 K / 1650 lm
1011952	Up	3000 K / 1400 lm
1011953	Down	3000 K / 1700 lm

Variant	Prod. no.
black 2700 K	**1011950**
black 3000 K	**1011952**
brass 2700 K	**1011951**
brass 3000 K	**1011953**

LINIUS 120
PD, DALI, RECESSED

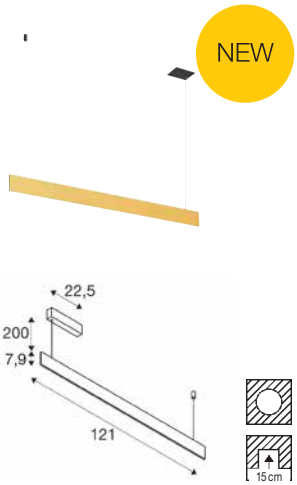


Dali · IP20 · IK02 · 90° · 50000 h L80B20 · 200 cm · 15

220-240 V ~0/50/60 Hz | 900 mA
Total wattage: 34 W
Material: aluminium/steel

LED INSIDE · CRI 90


1011954	Up	2700 K / 1350 lm
1011955	Down	2700 K / 1650 lm
1011956	Up	3000 K / 1400 lm
1011957	Down	3000 K / 1700 lm


Variant	Prod. no.
black 2700 K	**1011954**
black 3000 K	**1011956**
brass 2700 K	**1011955**
brass 3000 K	**1011957**

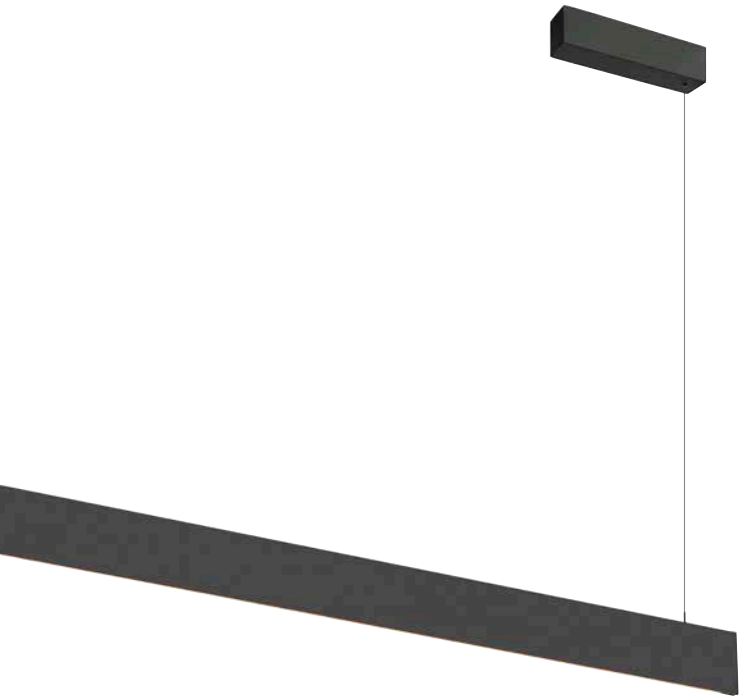

LINIUS 150
PD, PHASE, CANOPY

NEW








220-240 V ~50/60 Hz | 1050 mA
Total wattage: 40 W
Material: aluminium/steel

LED INSIDE CRI 90


1011938 **1011939**	Up	2700 K 1550 lm
	Down	2700 K 1800 lm
1011940 **1011941**	Up	3000 K 1600 lm
	Down	3000 K 1850 lm

Variant	Prod. no.
black 2700 K	**1011942**
black 3000 K	**1011944**
brass 2700 K	**1011943**
brass 3000 K	**1011945**

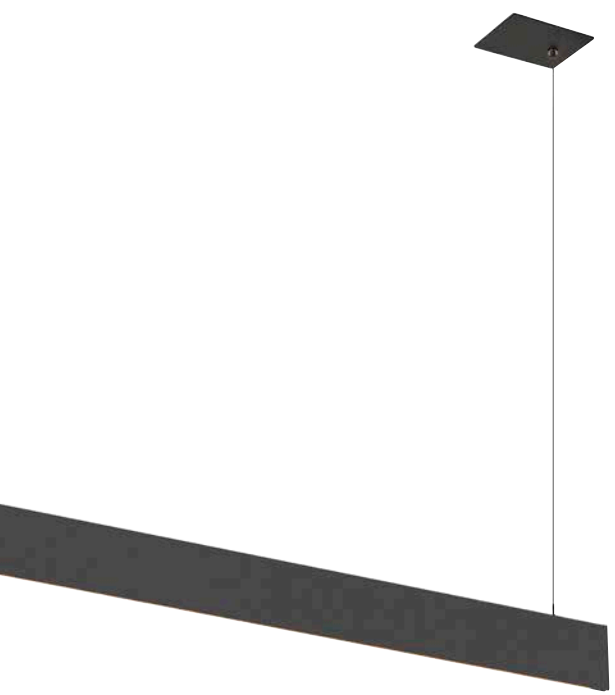

LINIUS 150
PD, PHASE, RECESSED

NEW

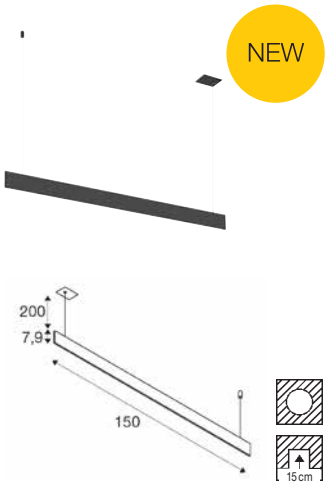

C · IP20 · IK02 · 90° · 50000 h L80B20 · 200 cm · 64

220-240 V ~50/60 Hz | 1050 mA
Total wattage: 40 W
Material: aluminium/steel


LED INSIDE · CRI 90

1011946 **1011947**	Up	2700 K / 1550 lm
	Down	2700 K / 1800 lm
1011948 **1011949**	Up	3000 K / 1600 lm
	Down	3000 K / 1850 lm

Variant	Prod. no.
● black 2700 K	**1011946**
● black 3000 K	**1011948**
● brass 2700 K	**1011947**
● brass 3000 K	**1011949**

LINIUS 150
PD, DALI, CANOPY

NEW

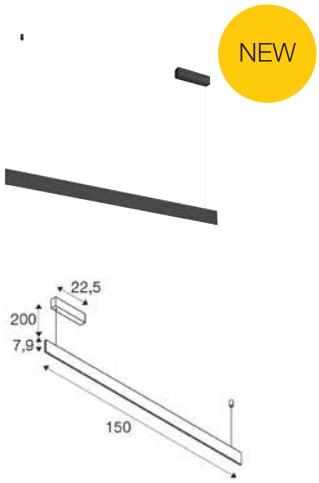

Dali · IP20 · IK02 · 90° · 50000 h L80B20 · 200 cm · 15

220-240 V ~0/50/60 Hz | 1050 mA
Total wattage: 40 W
Material: aluminium/steel


LED INSIDE · CRI 90

1011958 **1011959**	Up	2700 K / 1550 lm
	Down	2700 K / 1800 lm
1011960 **1011961**	Up	3000 K / 1600 lm
	Down	3000 K / 1850 lm

Variant	Prod. no.
● black 2700 K	**1011958**
● black 3000 K	**1011960**
● brass 2700 K	**1011959**
● brass 3000 K	**1011961**

LINIUS 150
PD, DALI, RECESSED

NEW

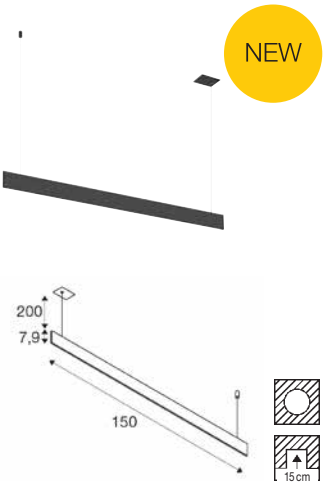

Dali · IP20 · IK02 · 90° · 50000 h L80B20 · 200 cm · 15

220-240 V ~0/50/60 Hz | 1050 mA
Total wattage: 40 W
Material: aluminium/steel

LED INSIDE · CRI 90


1011962 **1011963**	Up	2700 K / 1550 lm
	Down	2700 K / 1800 lm
1011964 **1011965**	Up	3000 K / 1600 lm
	Down	3000 K / 1850 lm

Variant	Prod. no.
● black 2700 K	**1011962**
● black 3000 K	**1011964**
● brass 2700 K	**1011963**
● brass 3000 K	**1011965**


1007588 239

PANTILO ROPE 19
PD, E27





IP20 250 cm 250 cm

220-240 V ~50/60 Hz
Material: glass

- open cable end
- Matching accessories can be found on page 259

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 10 cm | L: 11 cm

Variant	Prod. no.
gold	**1007597**
silver	**1007596**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no. **1005303**


SMART

E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no. **1012471**

PANTILO ROPE 20
PD, E27





IP20 250 cm

220-240 V ~50/60 Hz
Material: glass

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 10 cm | L: 18 cm

Variant	Prod. no.
gold	**1007589**
silver	**1007588**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no. **1005303**

SMART

E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no. **1012471**

PANTILO ROPE 27
PD, E27





IP20 250 cm

220-240 V ~50/60 Hz
Material: glass

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 15 cm | L: 11 cm

Variant	Prod. no.
gold	**1007599**
silver	**1007598**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no. **1005303**

SMART

E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no. **1012471**

PANTILO OVAL
PD, E27



IP20 250

220-240 V ~50/60 Hz
Material: glass

- open cable end
- Matching accessories can be found on page 259

SOCKET INSIDE 15 W

Base: 1xE27

Variant	Prod. no.
white	**1006402**
gold	**1006403**
chrome	**1006398**
copper	**1006400**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no. 1005303

SMART

E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no. 1012471

PANTILO 20
PD, E27



IP20 250

220-240 V ~50/60 Hz
Material: glass

- open cable end
- Matching accessories can be found on page 259

SOCKET INSIDE 15 W

Base: 1xE27

Variant	Prod. no.
white	**1006396**
gold	**1006395**
chrome	**1003004**
copper	**1003005**

E27 | 8 W | 320°
700 lm | 2500 K | EEC = F

Prod. no. 1005265

SMART

E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no. 1012471

PANTILO 28
PD, E27



IP20 250

220-240 V ~50/60 Hz
Material: glass

- open cable end
- Matching accessories can be found on page 259

SOCKET INSIDE 15 W

Base: 1xE27

Variant	Prod. no.
white	**1006399**
gold	**1006397**
chrome	**1003006**
copper	**1003007**

E27 | 8 W | 320°
700 lm | 2500 K | EEC = F

Prod. no. 1005265


SMART

E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no. 1012471

PANTILO CONVEX 29
PD, E27





IP20 250

220-240 V ~50/60 Hz
Material: glass

- open cable end
- Matching accessories can be found on page 259

SOCKET INSIDE 40 W

Base: E27 | max. Ø: 10 cm | L: 20 cm


Variant	Prod. no.
white	**1007881**
gold	**1007880**
chrome	**1003443**
copper	**1007879**

E27 | 6 W | 330°
570 lm | 2200 K | EEC = F

Prod. no. **1008152**

PANTILO CONVEX 40
PD, E27





IP20 150 cm

220-240 V ~50/60 Hz
Material: glass

SOCKET INSIDE 40 W

Base: E27 | max. Ø: 15 cm | L: 30 cm

Variant	Prod. no.
white	**1007878**
gold	**1007877**
chrome	**1003444**
copper	**1007876**

E27 | 6 W | 330°
570 lm | 2200 K | EEC = F


Prod. no. **1008152**



1008178 + 1008192 243

LIGHT EYE® 90
PD, QPAR51





IP20 150 cm

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.35 cm

Variant	Prod. no.
● black	**1008172**
○ white	**1008173**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

Prod. no. **1005079**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no. **1012469**

LIGHT EYE® 150
PD, QPAR111





IP20 150 cm

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 13 W

Base: 1xGU10 | max. Ø: 11.1 cm | L: 7 cm

Variant	Prod. no.
● black	**1008178**
○ white	**1008179**

GU10 | 12 W | 55°
680 lm | 3000 K | EEC = G

Prod. no. **1005298**

LIGHT EYE® 90
DECO RING Ø 5.7 CM



Ø: 5.9 cm
H: 1.4 cm
Material: steel

Variant	Prod. no.
● black	**1008186**
○ white	**1008187**
● gold	**1008188**
◑ chrome	**151049**

LIGHT EYE® 150
DECO RING Ø 13.6 CM



Ø: 13.6 cm
H: 2.3 cm
Material: steel


Variant	Prod. no.
● black	**1008189**
○ white	**1008190**
● gold	**1008192**
◑ chrome	**1008191**

ENOLA® 2.0 S
PD, SINGLE, GU10 MINI, PAR11

NEW







IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 5 W

Base: 1xGU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.
● black	**1011929**
○ white	**1011930**

GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F


C,L

Prod. no. **1011670**

Product	Prod. no.
Fitu | Single ceiling rosette	
○ white	**1004745**
ENOLA® 2.0 S, Deco Ring	
● black	**1011753**
○ white	**1011754**
gold	**1011755**
copper	**1011756**

ENOLA® 2.0 M
PD, SINGLE, GU10, QPAR51

NEW

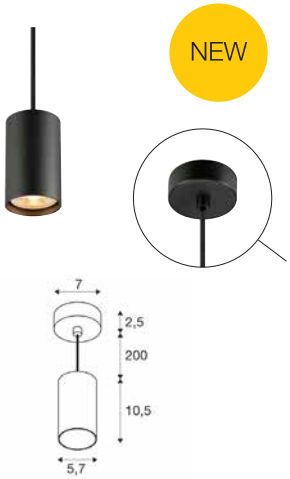

IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 10 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.
● black	**1011909**
○ white	**1011910**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no. **1005077**

SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no. **1012469**

Product	Prod. no.
Fitu | Single ceiling rosette	
○ white	**1004745**
ENOLA® 2.0/BIMA 2.0 M, Deco Ring	
● black	**1011749**
○ white	**1011750**
● gold	**1011751**
● copper	**1011752**

ENOLA® 2.0 M
PD, SIX. LONG, GU10, QPAR51

NEW

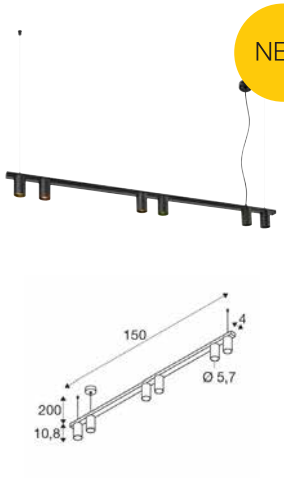

IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 10 W

Base: 6xGU10 max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.
● black	**1011907**
○ white	**1011908**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no. **1005077**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no. **1012469**

Product	Prod. no.
Fitu | Single ceiling rosette	
○ white	**1004745**
ENOLA® 2.0/BIMA 2.0 M, Deco Ring	
● black	**1011749**
○ white	**1011750**
● gold	**1011751**
● copper	**1011752**

ENOLA® 2.0 S
DECO RING

NEW



Ø: 3.9 cm
H: 1.1 cm
Material: plastic PC

Variant	Prod. no.
● black	**1011753**
○ white	**1011754**
● gold	**1011755**
● copper	**1011756**

ENOLA® 2.0/BIMA 2.0 M
DECO RING

NEW



Ø: 5.4 cm
H: 2 cm
Material: plastic PC

Variant	Prod. no.
● black	**1011749**
○ white	**1011750**
● gold	**1011751**
● copper	**1011752**



ASTO TUBE
PD, GU 10

IP20 250 cm

220-240 V ~50/60 Hz
Material: aluminium

• Decorative rings available as accessories

SOCKET INSIDE 10 W

Base: 1-4xGU10

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no. **1005077**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F


Prod. no. **1012469**

ASTO TUBE
PD, SINGLE, GU 10



Variant	Prod. no.
● black	**1006431**
○ white	**1006432**

ASTO TUBE
PD, DOUBLE, GU 10

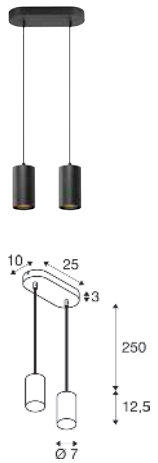

Variant	Prod. no.
● black	**1006433**
○ white	**1006434**


ASTO TUBE
DECORATIVE REFLECTOR



Ø: 6.8 cm
H: 4 cm
Material: polycarbonate (PC)

Variant	Prod. no.
◐ black/chrome	**1007190**
◐ gold	**1006450**
◐ chrome	**1006449**
◐ copper	**1006451**

ASTO TUBE
PD, TRIPLE, GU 10




Variant	Prod. no.
● black	**1006435**
○ white	**1006436**

ASTO TUBE
PD, QUADRUPLE, GU 10





Variant	Prod. no.
● black	**1006437**
○ white	**1006438**

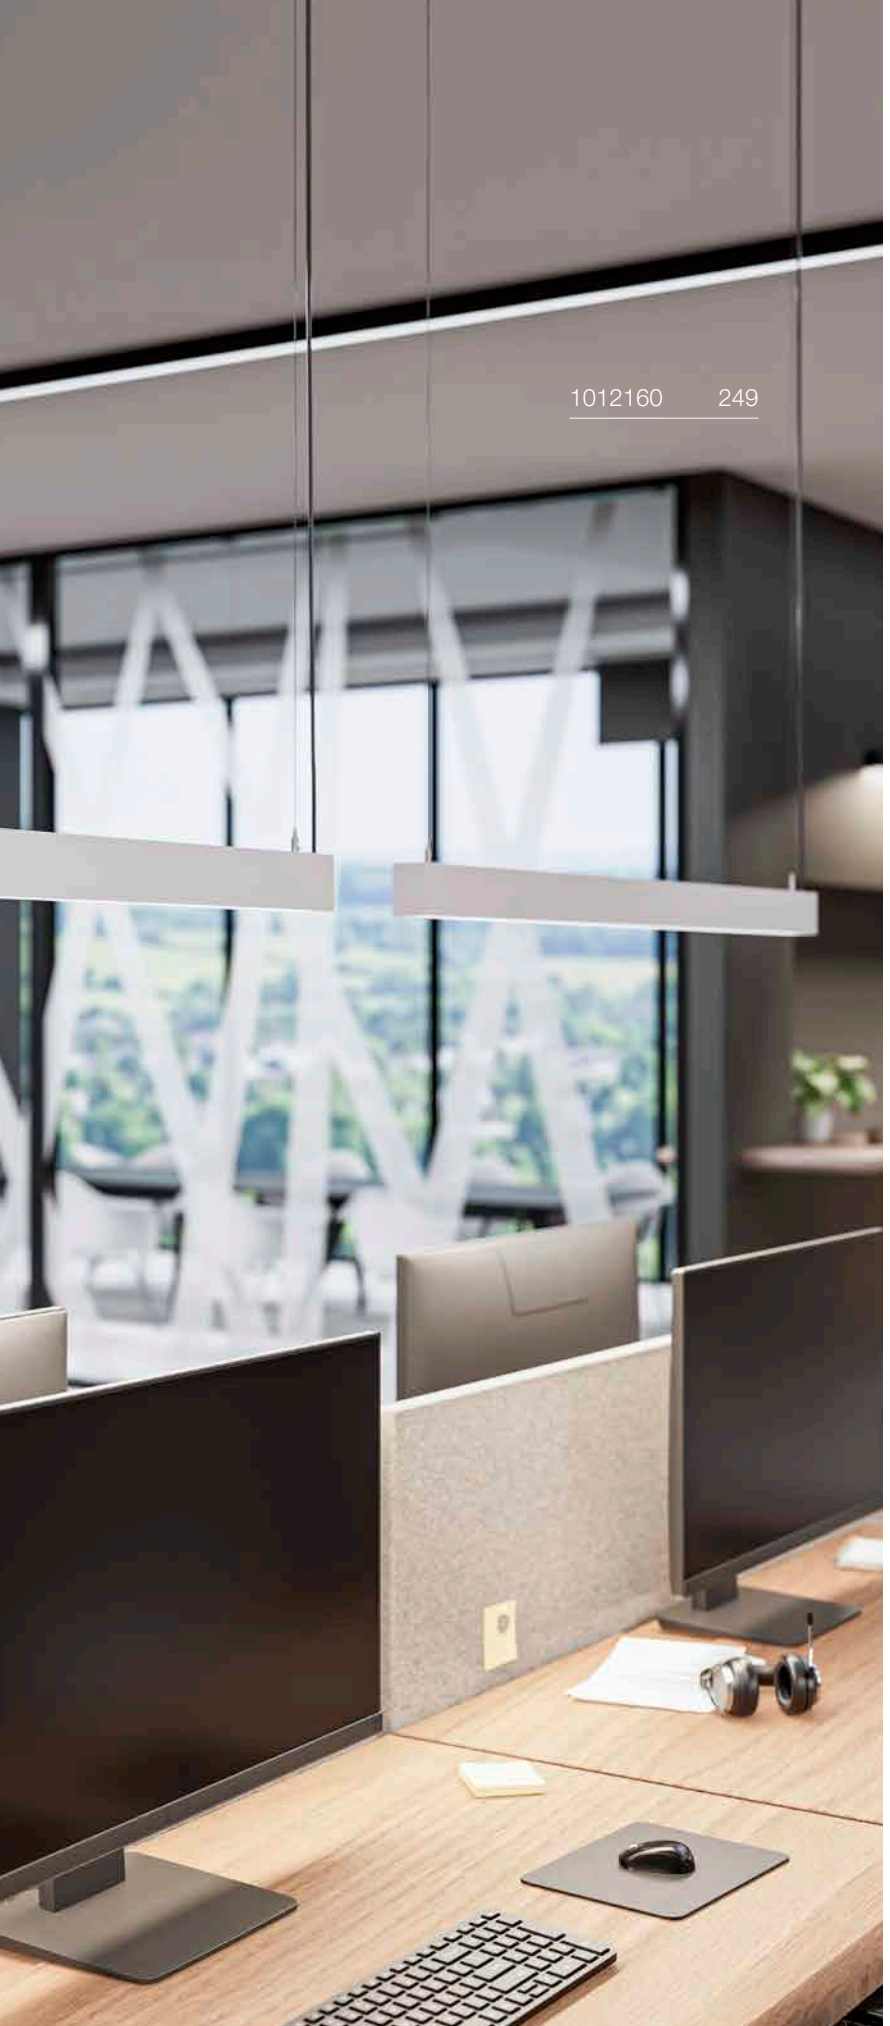

GLENOS® 2.0
PD, 1,2 M, DALI, UGR19

NEW







200-240 V ~0/50/60 Hz | 1050 mA
Total wattage: 38 W
Material: aluminium

LED INSIDE CRI 80

1012154	Down	3000 K / 2050 lm
	Up	3000 K / 3900 lm
1012155	Down	3000 K / 1800 lm
	Up	3000 K / 3850 lm
1012156	Down	4000 K / 2100 lm
	Up	4000 K / 4150 lm
1012157	Down	4000 K / 1850 lm
	Up	4000 K / 3950 lm

Variant	Prod. no.
● black 3000 K	**1012155**
● black 4000 K	**1012157**
○ white 3000 K	**1012154**
○ white 4000 K	**1012156**

GLENOS® 2.0
PD, 1,5 M, DALI, UGR19



200-240 V ~0/50/60 Hz | 1250 mA
Total wattage: 46 W
Material: aluminium

LED INSIDE CRI 80

1012158	Down	3000 K / 2700 lm
	Up	3000 K / 4800 lm
1012159	Down	3000 K / 2350 lm
	Up	3000 K / 4350 lm
1012160	Down	4000 K / 2800 lm
	Up	4000 K / 4850 lm
1012161	Down	4000 K / 2400 lm
	Up	4000 K / 4800 lm

Variant	Prod. no.
● black 3000 K	1012159
● black 4000 K	1012161
○ white 3000 K	1012158
○ white 4000 K	1012160

GLENOS® PRO
PD, 1,2 M, DALI, UGR16



220-240 V ~0/50/60 Hz | 1600 mA
Total wattage: 60 W
Material: Aluminium/Plastic PC

LED INSIDE CRI 90

1010509 1010510	Down	3000 K / 3200 lm
	Up	3000 K / 4300 lm
1010511 1010512	Down	4000 K / 3400 lm
	Up	4000 K / 4400 lm

Variant	Prod. no.
● black 3000 K	1010510
● black 4000 K	1010512
◑ white/black 3000 K	1010509
◑ white/black 4000 K	1010511

GLENOS® PRO
PD, 1,5M, DALI, UGR16



220-240 V ~0/50/60 Hz | 1850 mA
Total wattage: 70 W
Material: Aluminium/Plastic PC

LED INSIDE CRI 90


1010513 1010514	Down	3000 K / 3600 lm
	Up	3000 K / 4900 lm
1010515 1010516	Down	4000 K / 3850 lm
	Up	4000 K / 5550 lm

Variant	Prod. no.
● black 3000 K	1010514
● black 4000 K	1010516
◑ white/black 3000 K	1010513
◑ white/black 4000 K	1010515


1006345 251

WORKLIGHT PRO 120
PD, DALI





Dali · Touch · IP20 · IK03 · 115° · 80° · 50000 h L80B10 · 250 cm · UGR 19

220-240 V ~50/60 Hz | 1200 mA
Total wattage: 50 W
Material: aluminium/steel


INSIDE

Down	4000 K / 3300 lm
Up	4000 K / 2800 lm

Variant	Prod. no.
● black	**1007468**
○ white	**1007469**
● grey	**1007470**

WORKLIGHT PRO 150
PD, DALI





Dali · Touch · IP20 · IK03 · 115° · 80° · 50000 h L80B10 · 250 cm · UGR 19

220-240 V ~50/60 Hz | 1400 mA
Total wattage: 59 W
Material: aluminium/steel


INSIDE · CRI 80

Down	4000 K / 3900 lm
Up	4000 K / 3300 lm

Variant	Prod. no.
● black	**1007471**
○ white	**1007472**
● grey	**1007473**

WORKLIGHT
PD, DALI





Dali · IP20 · IK02 · 110° · 80° · 50000 h L80B10 · 250 cm · UGR 19

220-240 V ~50/60 Hz | 1550 mA
Total wattage: 57 W
Material: aluminium

- Safety plug


INSIDE · CRI 80


Down	4000 K / 3000 lm
Up	4000 K / 2000 lm

Variant	Prod. no.
● black	**1005395**
○ white	**1005396**
● grey	**1006345**


1010429 253

PANEL 60
PD, ROUND, PHASE

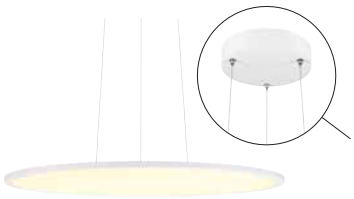



C,L · IP20 · IK02 · 90° · 50000 h L80B10 · 200 cm · UGR 19


220-240 V ~50/60 Hz | 750 mA
Total wattage: 29 W
Material: aluminium/steel


LED INSIDE · CCT · CRI 90

3000 K	4000 K
3050 lm	3300 lm

Variant	Prod. no.
○ white	**1010426**
● grey	**1010427**

PANEL 60
PD, ROUND, DALI

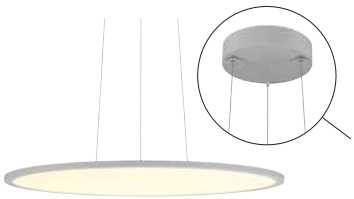



Dali · Touch · IP20 · IK02 · 90° · 50000 h L80B10 · 200 cm · UGR 19

220-240 V ~50/60 Hz | 750 mA
Total wattage: 29 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90


3000 K	4000 K
3050 lm	3300 lm

Variant	Prod. no.
○ white	**1010428**
● grey	**1010429**



GRIP! FLAT
PD, PHASE





C,L | IP20 | 50000 h L70B50 | 200 cm | UGR 15

220-240 V ~50/60 Hz | 500 mA
Total wattage: 16 W

- Including colour temperature switch 2700K/3000K
- Honeycomb included


LED INSIDE | CCT | CRI 90

	2700 K	3000 K
Down	400 lm	430 lm

Variant	Prod. no.
black/gold	**1009014**
white/black	**1009015**

Product	Prod. no.
GRIP! FLAT, decorative ring	
black	**1009102**
white	**1009103**
gold	**1009104**


GRIP! FLAT
FELT SHADE Ø 50 CM X 6.2 CM



Ø: 50 cm
H: 6.2 cm

Variant	Prod. no.
anthracite	**1010403**
grey	**1010404**
ochre	**1010405**

GRIP! FLAT
FELT SHADE Ø 50 CM X 0.6 CM




Ø: 50 cm
H: 0.6 cm

Variant	Prod. no.
anthracite	**1010406**
grey	**1010407**
ochre	**1010408**


1008617 257

OCULUS
PD, SINGLE, PHASE







220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: aluminium

- Additional frosted lens included
- Matching accessories can be found on page 259
- open cable end




Down	2000 K	- 3000 K
	36 lm	- 780 lm

Variant	Prod. no.
● black	**1004672**
○ white	**1004673**

OCULUS
PD, DTW, PVD







220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: aluminium




Down	2000 K	- 3000 K
	36 lm	- 780 lm

Variant	Prod. no.
● brass	**1008616**
● dark bronze	**1008615**
◐ dark copper	**1008617**

FITU
PD, E27





IP20 500

220-240 V ~50/60 Hz
Material: aluminium

- Textile cable
- Matching accessories can be found on page 259
- open cable end

SOCKET INSIDE 60 W

Base: 1xE27

Variant	Prod. no.
● black	**132690**
○ white	**132691**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no. **1005303**


SMART

E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no. **1012471**

FITU
PD, E27 STONE





IP20 500 cm 500 cm

220-240 V ~50/60 Hz
Material: stone

- open cable end

SOCKET INSIDE 15 W

Base: 1xE27


Variant	Prod. no.
● black	**1010417**
● grey	**1010419**
● beige	**1010418**

E27 | 6 W | 330°
260 lm | 1900 K |

Prod. no. **1008163**

FITU
PD, E27 RIBBED





IP20 500 cm 500 cm

220-240 V ~50/60 Hz
Material: aluminium

- open cable end

SOCKET INSIDE 15 W

Base: 1xE27

Variant	Prod. no.
● black	**1010420**
● gold	**1010421**

E27 | 4 W | 325°
250 lm | 1800 K | EEC = G

Prod. no. **1008645**

Better value as a set at slv.com

Fitu | Single ceiling rosette

16A max.
H: 3.9 cm
Material: steel
Strain relief included



Variant	Prod. no.
● black	**132600**
○ white	**132601**
● gold	**1002163**
◑ chrome	**132605**

Fitu | triple ceiling rose

16A max.
H: 5.4 cm
Material: steel
Strain relief included



Variant	Prod. no.
● black	**132610**
○ white	**132611**

FITU | Surface-mounted ceiling rosette

16A max.
H: 2.6 cm
Ø: 9 cm
Material: steel



Variant	Prod. no.
● black	**1004744**
○ white	**1004745**
● gold	**1006377**

FITU | Recessed ceiling rosette

16A max.
H: 3.3 cm
Material: steel/polyamide 66 (PA)



Variant	Prod. no.
● black	**1004674**
○ white	**1004675**
● gold	**1006378**

FITU | Ceiling hook

L: 4.6 cm
Material: aluminium



Variant	Prod. no.
● black	**132670**
○ white	**132671**

1-phase light adapter

6A max.
H: 3.2 cm
L: 8.5 cm
W: 3.5 cm
Material: polycarbonate (PC)



Variant	Prod. no.
● black	**143120**
○ white	**143121**
● grey	**143124**

3-phase light adapter

10A max.
H: 4.5 cm
L: 9.6 cm
W: 3.5 cm
Material: plastic




Variant	Prod. no.
● black	**145990**
○ white	**1001542**
● grey	**145994**

FITU | Cable clamp

L: 3.1 cm
Material: aluminium




Variant	Prod. no.
● black	**132680**
○ white	**132681**

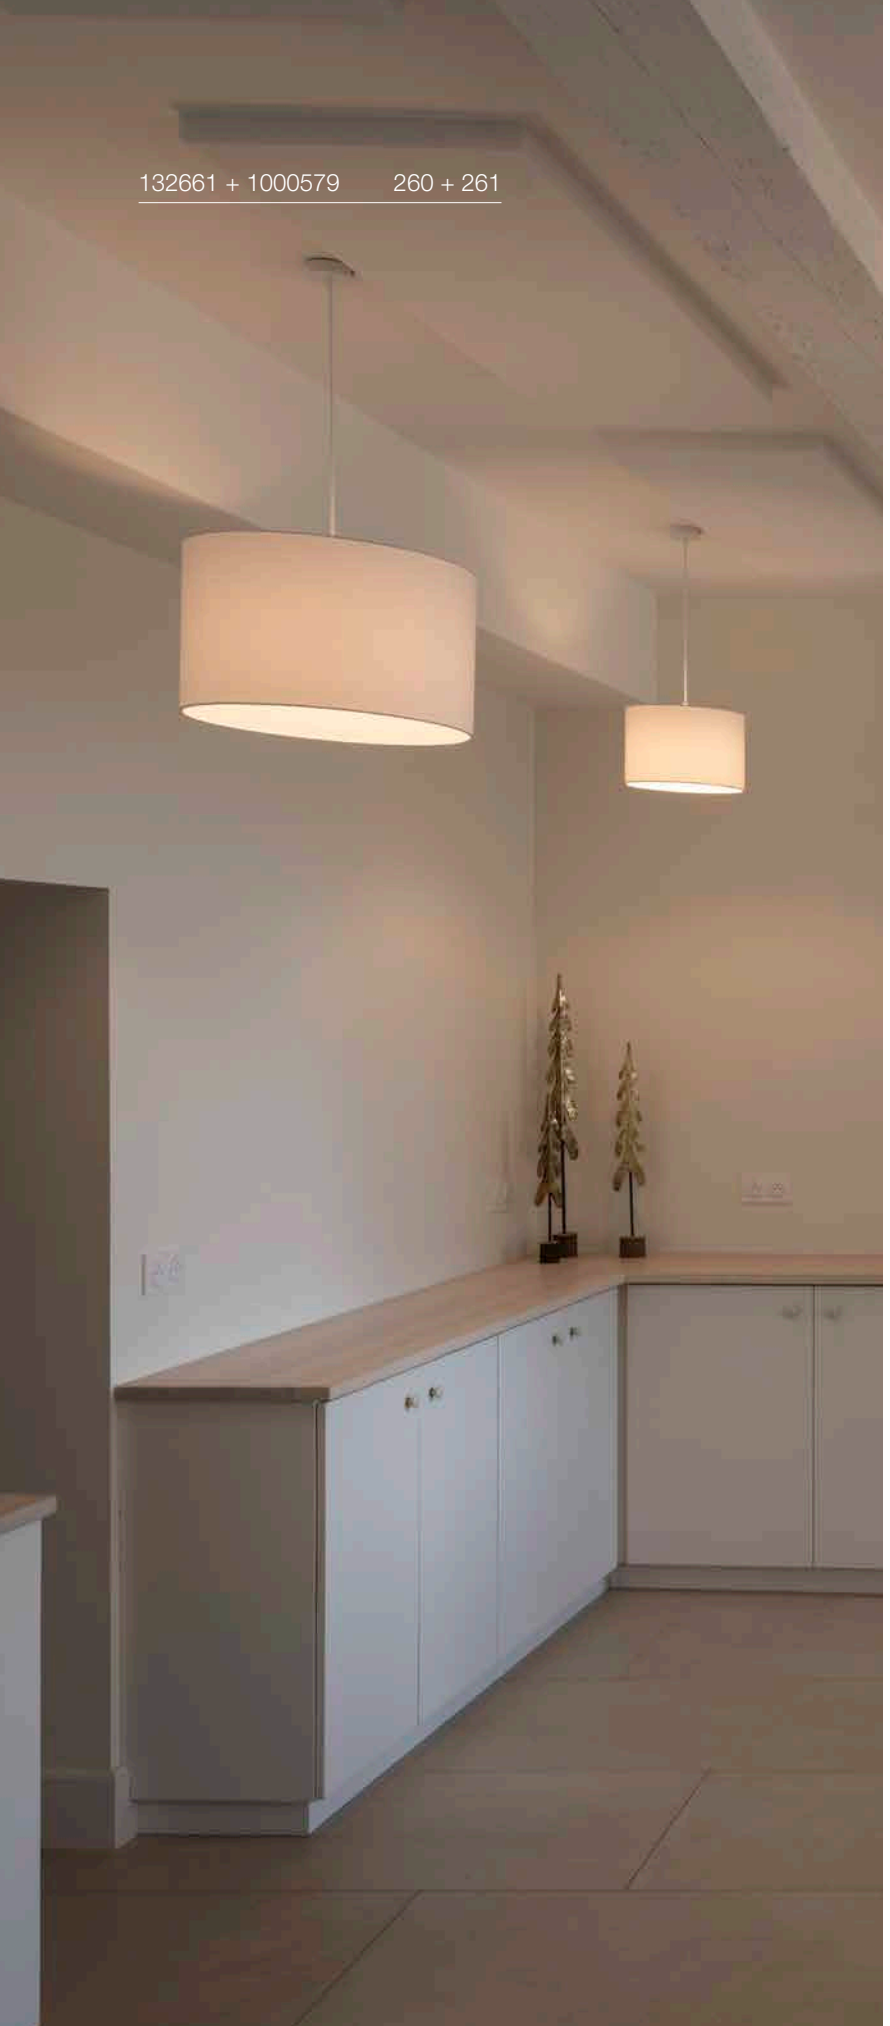

132661 + 1000579 260 + 261

FENDA
PD, E27





IP20 250

220-240 V ~50/60 Hz
Material: steel/plastic

- Matching accessories can be found on page 259
- open cable end

SOCKET INSIDE 60 W

Base: 1xE27

Variant	Prod. no.
● black	**132660**
○ white	**132661**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

C

Prod. no. **1005303**

FENDA
30 CM, ROUND



Ø: 30 cm
H: 20 cm
Material: textile/steel

Variant	Prod. no.
black/copper	**155592**
white	**155582**
grey	**1004774**
beige	**155583**

FENDA
Ø 45 CM, ROUND



Ø: 45.5 cm
H: 28 cm
Material: textile/steel

Variant	Prod. no.
black/copper	**156122**
white	**156111**
grey	**1004775**
beige	**156113**

⊕

Product	Prod. no.
Acrylic glass cover, for FENDA Ø 45.5 cm	
white	**156100**

FENDA
Ø 70 CM, ROUND



Ø: 70 cm
H: 36 cm
Material: textile/steel

• Not suitable for Fenda Bow

Variant	Prod. no.
black/copper	**1000580**
white	**1000579**

⊕

Product	Prod. no.
Acrylic glass cover, for FENDA Ø 70 cm	
white	**1000957**

FENDA
GLASS SHADE 12.5 CM, ROUND



Ø: 12.5 cm
H: 20 cm
Material: glass

Variant	Prod. no.
brown	**1000773**

MIX & MATCH FENDA & FITU


The modular components of the FENDA and FITU ranges can be combined flexibly to create a wide variety of configurations. A wide selection of shades and bases enables bespoke lighting solutions for a broad range of applications.


FENDA TL
- *155780*

FENDA FL
- *155790*

FENDA TL
- *155540*

FENDA FL
- *155490*

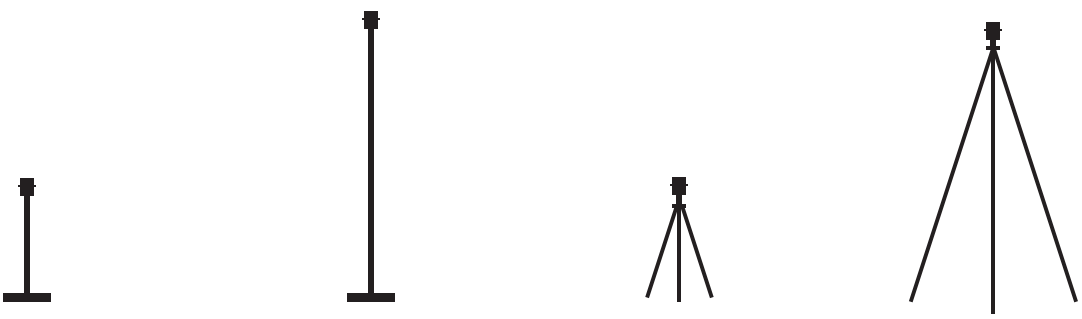

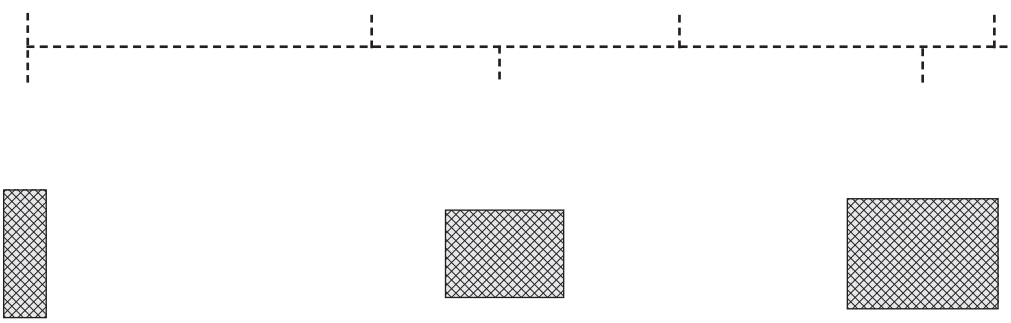

FENDA Ø15
- *156152*
- *156141*
- *156143*

FENDA Ø30
- *155592*
- *155582*
- *155583*
- *1004774*

FENDA Ø45
- *156122*
- *156111*
- *156113*
- *1004775*

All SLV Mix & Match products are identified by the corresponding symbol.

MIX match

FENDA PD

- ● *132660*
- ○ *132661*

FENDA CL

- ● *155550*
- ○ *155551*

FITU CRANE BASE

- ● *1004682*

FITU PD


- ● *132690*
- ○ *132691*


Stone

- ● *1010417*
- ● *1010418*
- ● *1010419*

Metal

- ● *1010420*
- ● *1010421*

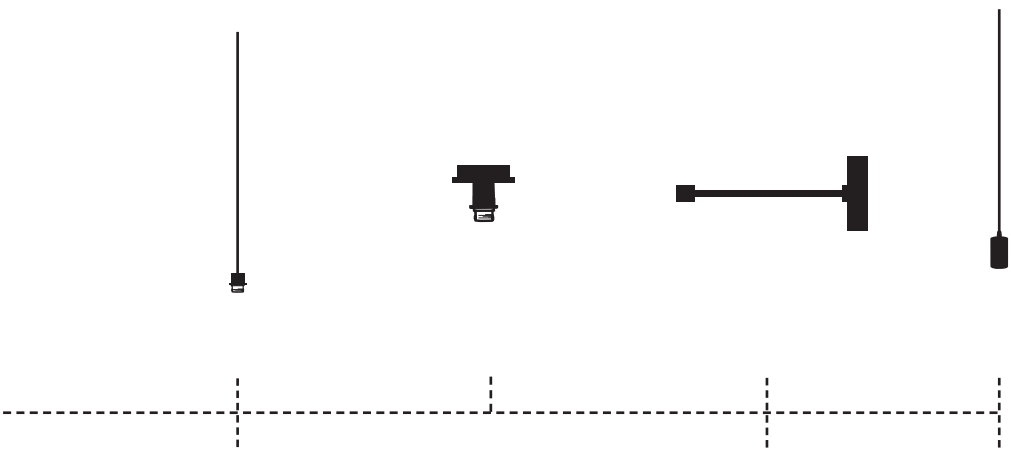



FENDA Ø70

- ● *1000580*
- ○ *1000579*




FENDA Ø12,5


Glass Shade

- ● *1000773*



HELIA 30
PD, PHASE








220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.2 W
Material: aluminium




3000 K
590 lm

Variant	Prod. no.
● black	**152360**

HELIA 40
PD, PHASE





IP20 | 30° | 30000 h L70B50 | 150 cm

220-240 V ~50/60 Hz | 500 mA
Total wattage: 10 W
Material: aluminium


LED INSIDE | CRI 90

3000 K
730 lm

Variant	Prod. no.
black	**152370**

PARA CONE 20
PD, E27





IP20 | 250 cm

220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE | 60 W

Base: 1xE27


Variant	Prod. no.
black/gold	**1008129**
copper/white	**1008130**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no. **1005303**

PARA CONE 30
PD, E27





IP20 | 250 cm

220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE | 60 W

Base: 1xE27


Variant	Prod. no.
black/gold	**1008131**
copper/white	**1008132**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no. **1005303**



PHELIA 10
PD, E27

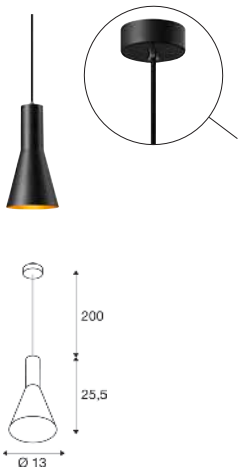

IP20 200 cm

220-240 V ~50/60 Hz
Material: aluminium

- Textile cable

SOCKET INSIDE 23 W

Base: 1xE27

Variant	Prod. no.
black/gold	**1002951**

E27 | 8 W | 180°
720 lm | 2700 K | EEC = F


Prod. no. **1005305**

SMART

E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no. **1012471**

PHELIA 25
PD, E27

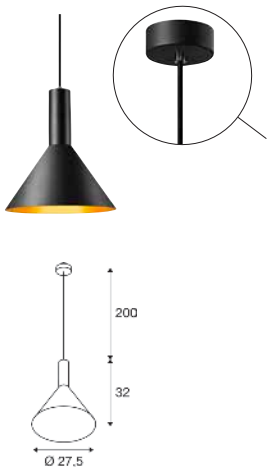

IP20 200 cm

220-240 V ~50/60 Hz
Material: aluminium

- Textile cable

SOCKET INSIDE 23 W

Base: 1xE27

Variant	Prod. no.
black/gold	**1002949**

E27 | 8 W | 180°
720 lm | 2700 K | EEC = F


Prod. no. **1005305**

SMART

E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no. **1012471**

PHELIA 30
PD, E27

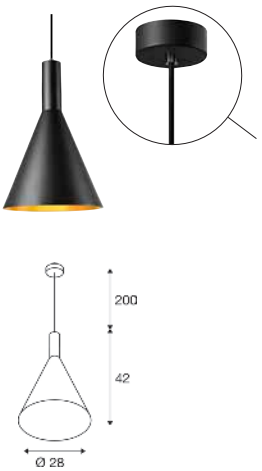

IP20 200 cm

220-240 V ~50/60 Hz
Material: aluminium

- Textile cable

SOCKET INSIDE 23 W

Base: 1xE27

Variant	Prod. no.
black/gold	**1002950**


E27 | 8 W | 320°
700 lm | 2500 K | EEC = F

Prod. no. **1005265**

SMART


E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no. **1012471**

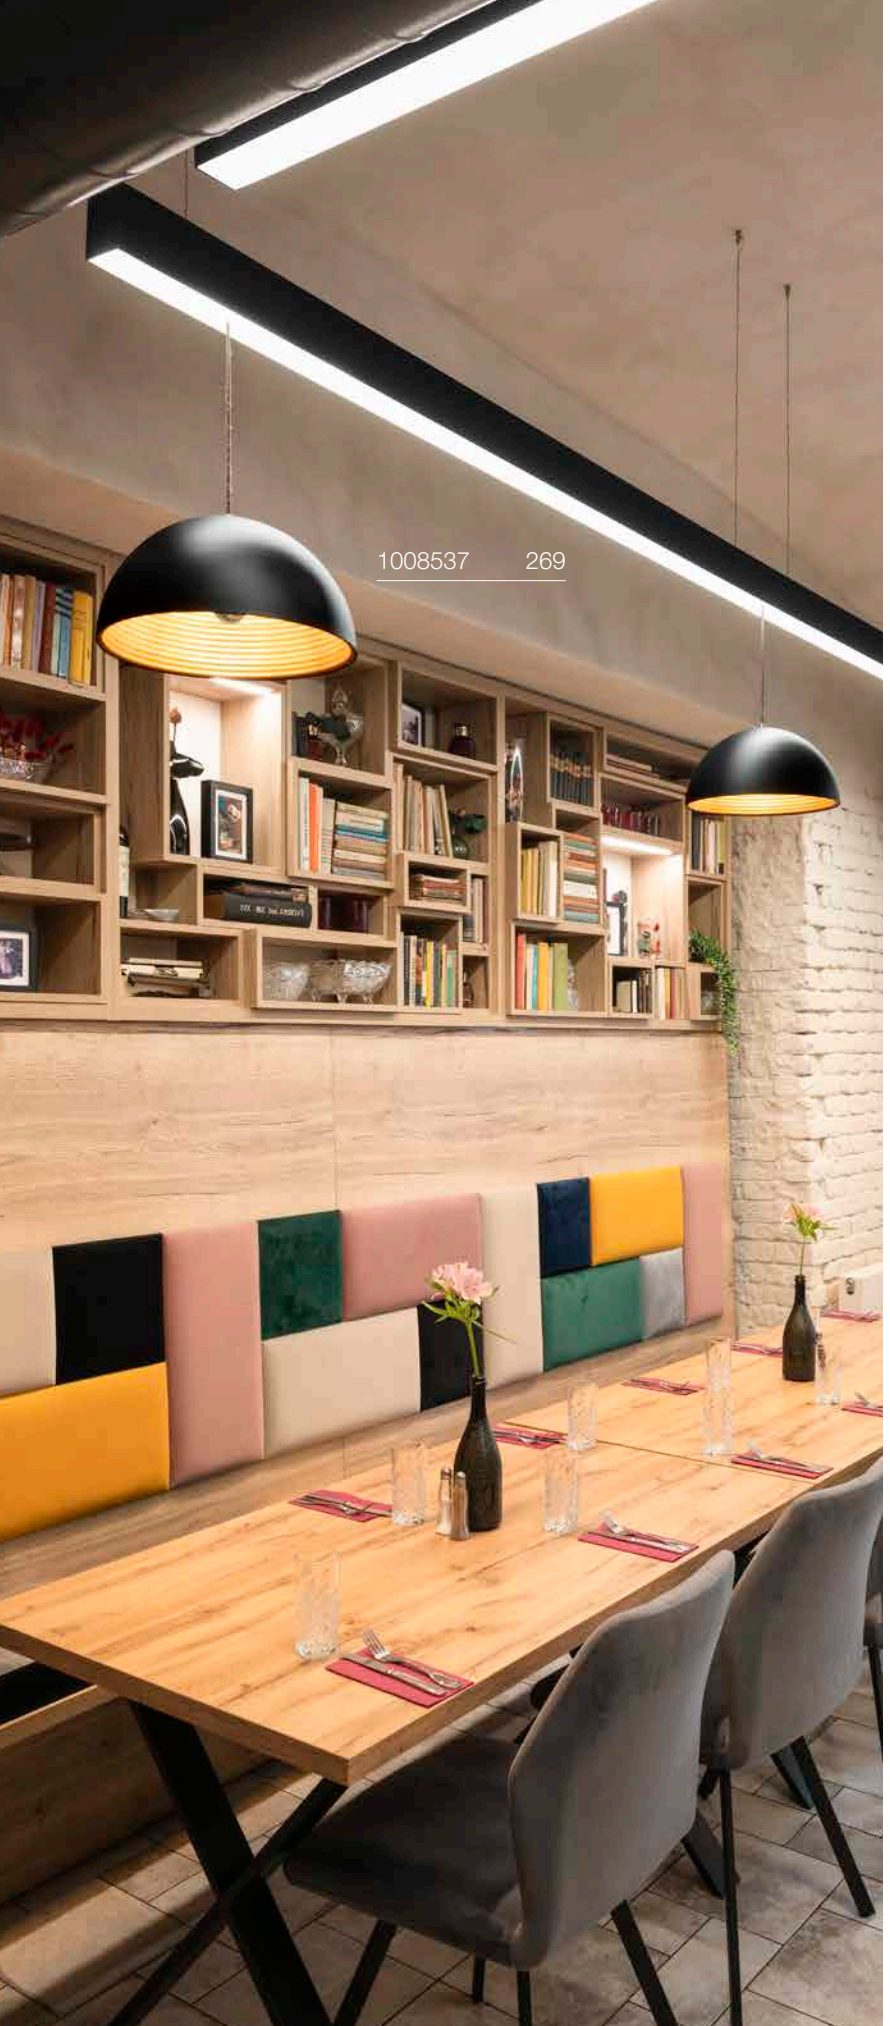

FORCHINI 50
PD, E27





IP20 150 cm

220-240 V ~50/60 Hz
Material: GRP

SOCKET INSIDE 40 W

Base: 1xE27	L: 20 cm


Variant	Prod. no.
black/gold	**1008535**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no. **1005303**

FORCHINI 70
PD, E27





IP20 150 cm

220-240 V ~50/60 Hz
Material: GRP

SOCKET INSIDE 40 W

Base: 1xE27 | L: 20 cm

Variant	Prod. no.
black/gold	**1008538**


E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

C,L

Prod. no. **1005268**

FORCHINI M 40
PD, E27





IP20 150 cm

220-240 V ~50/60 Hz
Material: Steel/Aluminium

SOCKET INSIDE 40 W

Base: 1xE27 | L: 15.2 cm

Variant	Prod. no.
black/gold	**1008536**


E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

C,L

Prod. no. **1005268**

FORCHINI M 50
PD, E27





IP20 150 cm

220-240 V ~50/60 Hz
Material: Steel/Aluminium

SOCKET INSIDE 40 W

Base: 1xE27 | L: 18 cm

Variant	Prod. no.
black/gold	**1008537**


E27 | 8 W | 330°
400 lm | 1900 K |

C

Prod. no. **1008159**


165400 271

ROTOBALL 25
PD, E27

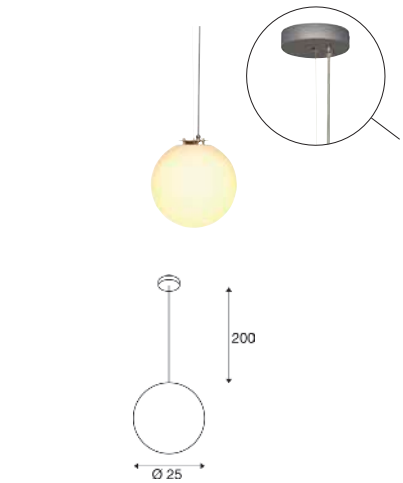

IP20 200 cm

220-240 V ~50/60 Hz
Material: Steel/Polyethylene (PE)

SOCKET INSIDE 24 W

Base: 1xE27 max. Ø: 7 cm

Variant	Prod. no.
○ white	**165390**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F


Prod. no. **1005303**

SMART

E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no. **1012471**

ROTOBALL 40
PD, E27

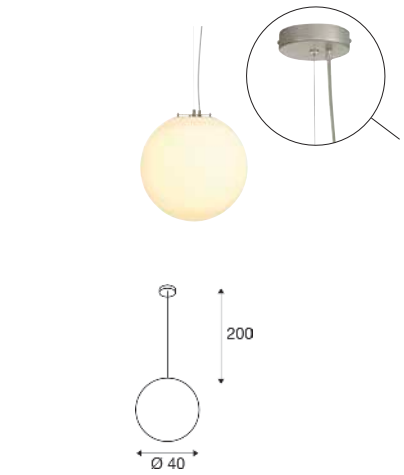

IP20 200 cm

220-240 V ~50/60 Hz
Material: Steel/Polyethylene (PE)

SOCKET INSIDE 24 W

Base: 1xE27 max. Ø: 9.5 cm

Variant	Prod. no.
○ white	**165410**

E27 | 13 W | 220°
1300 lm | 2700 K | EEC = F


Prod. no. **1005302**

SMART

E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no. **1012471**

ROTOBALL 50
PD, E27

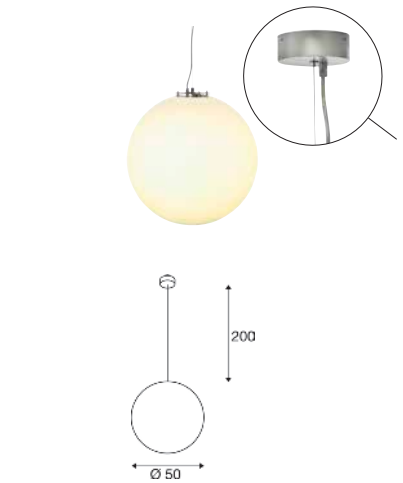

IP20 200 cm

220-240 V ~50/60 Hz
Material: Steel/Polyethylene (PE)

SOCKET INSIDE 24 W

Base: 1xE27 max. Ø: 9.5 cm

Variant	Prod. no.
○ white	**165400**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no. **1005303**

SMART


E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no. **1012471**


1005216 273

PARA DOME
PD, E27





IP20 250

220-240 V ~50/60 Hz
Material: aluminium

• open cable end

SOCKET INSIDE 150 W

Base: 1xE27 max. Ø: 7 cm

Variant	Prod. no.
black	**1005214**
grey	**1005215**

E27 | 11 W | 330°
1250 lm | 2700 K | EEC = E

Prod. no. 1008162

Product	Prod. no.
Fitu | Single ceiling rosette	
chrome	**132605**
1-phase light adapter	
grey	**143124**
3-phase light adapter	
grey	**145994**
Ceiling rosette	
grey	**210064**
Recessed ceiling rosette	
chrome	**1004676**
PARA DOME | Shade	
black	**1005216**
grey	**1005217**
transparent	**1005218**
PARA DOME, Shade	
black/gold	**1006410**

PARA DOME
SHADE



IP20

Ø: 30.8 cm
H: 20.6 cm
Material: aluminium

Variant	Prod. no.
black/gold	**1006410**
black	**1005216**
grey	**1005217**

PARA DOME
SHADE




IP20

Ø: 31.5 cm
H: 20 cm
Material: polycarbonate (PC)

Variant	Prod. no.
transparent	**1005218**

PARA 380
PD, E27





IP20 150 cm

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 20 W

Base: 1xE27

Variant	Prod. no.
black	**165359**

E27 | 13 W | 220°
1300 lm | 2700 K | EEC = F

Prod. no. 1005302



INDOOR | WALL AND CEILING LIGHTS



QUIMERA | 279



LYGANT | 279



SUN MIRROR | 281



MIX match

VARYT | 285



SUN | 286–287



DYSKO | 289



NUMINOS® | 290–297

NEW

MEDO® 2 SLIM | 298–301



NEW

MEDO® HYVE | 302–303



MEDO® PRO | 304–309



ONE | 310–311



ONE LINEAR | 312–313



ONE | 313



TRUKKO | 314–315



SEDO | 316–317



ARLINA | 317



WL | 318–319



MIBO UP/DOWN | 319



MAGANDA | 319



DORISA | 320

NEW

GLENOS® 2.0 | 320

Q-LINE® | 321

L-LINE 60 | 321



PANTILO ROPE | 322




ENOLA® 2.0 | 324–327



NEW

GRIP! | 328–329



NEW

GRIP! FLAT | 329




ASTO TUBE | 331



MANA | 333–335



OCULUS |



PLASTRA | 338–339



PLASTRA | 340



PLASTRA | 340



PLASTRA 101 | 341

PLASTRA | 341

PLASTRA 104 | 341



WUD | 343



LOGS IN | 344–345



QUAD FRAME | 346

WL 149 | 347



SHELL 30 | 347



ASSO 300 | 348–349



OSSA7 349



CARISO | 351

CHROMBO | 351

DIRETO 60 | 353



DENA 30 | 353

BASKET | 353



FITU | 354



THEO UP/DOWN | 354



SOLID CUBE | 354



FENDA | 355



KENKUA SPOT | 355



COUPA | 356



KARPO MAGN | 356



KARPO GOOSE | 356



KARPO 30 | 357



KARPO | 357



SOMNILA SPOT | 358



SOMNILA FLEX | 358–359



DIO FLEX PLATE | 359



PHELIA | 361



MERADO FLOOD | 361



DISPLAY ADL 50 | 361



PURI 2.0 TUBE | 362–363



SOCKET

PURI 2.0 CONE | 364–365



SOCKET

PURI 2.0 DOME | 366–367



LED

NOBLO® | 371–373



LED

KALU 2.0 | 374



SOCKET

PANTILO ROPE | 375



NEW

SOCKET

MOTUNA | 375



LED

CYFT | 376–379



SOCKET

ASTO TUBE | 381



SOCKET

KALU | 383



SOCKET

KALU | 383



SOCKET

ALTRA DICE | 385



SOCKET

SPOT 79 | 385



NEW

LED

SENSER 2.0 | 386–389



NEW

LED

LIPSY® 2.0 | 390–393

LED

SIMA | 394



SOCKET

MELAN | 395



LED


BATTEN | 395


1008036 279

QUIMERA
WL, PHASE

GERMAN DESIGN AWARD WINNER 2025





C | IP20 | IK03 | 350° | 50000 h L80B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 8.5 W
Material: aluminium


LED INSIDE | CCT | CRI 90

2700 K	3000 K
330 lm	350 lm

Variant	Prod. no.
brass	**1008036**
dark bronze	**1008035**
dark copper	**1008037**

LYGANT
WL, SINGLE





IP44 | 30000 h L70B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 8 W
Material: aluminium


LED INSIDE | CRI 90

3000 K
560 lm

Variant	Prod. no.
black	**1007614**
brass	**1007612**
chrome	**1007615**

LYGANT
WL, DOUBLE





IP44 | 30000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: aluminium

LED INSIDE | CRI 90


3000 K
800 lm

Variant	Prod. no.
black	**1007618**
brass	**1007616**
chrome	**1007619**


1010194 281

SUN MIRROR
WL, QUAD





IP44 IK02 50000h L70B50

220-240 V ~50/60 Hz | 600 mA
Total wattage: 18 W
Material: steel


LED INSIDE CCT CRI 90

2700 K	3000 K	4000 K
1200 lm	1300 lm	1400 lm

Variant	Prod. no.
● black	**1010193**

SUN MIRROR
WL, TRIPLE





IP44 IK02 50000h L70B50

220-240 V ~50/60 Hz | 450 mA
Total wattage: 13 W
Material: steel

LED INSIDE CCT CRI 90

2700 K	3000 K	4000 K
900 lm	950 lm	1000 lm

Variant	Prod. no.
● black	**1010194**

MIX & MATCH VARYT

The modular components of the VARYT range can be combined flexibly to create a wide variety of configurations.

A wide selection of lampshades and light bases enables bespoke lighting solutions for a broad range of applications.

VARYT PD

- ● *1008114*
- ○ *1008115*
- *1008117*
- *1008116*
- *1008118*

VARYT CL


- ● *1008099*
- ○ *1008100*
- *1008102*
- *1008101*
- *1008103*


VARYT WL

- ● *1008104*
- ○ *1008105*
- *1008107*
- *1008106*
- *1008108*

VARYT TL


- ● *1008109*
- ○ *1008110*
- *1008112*
- *1008111*
- *1008113*

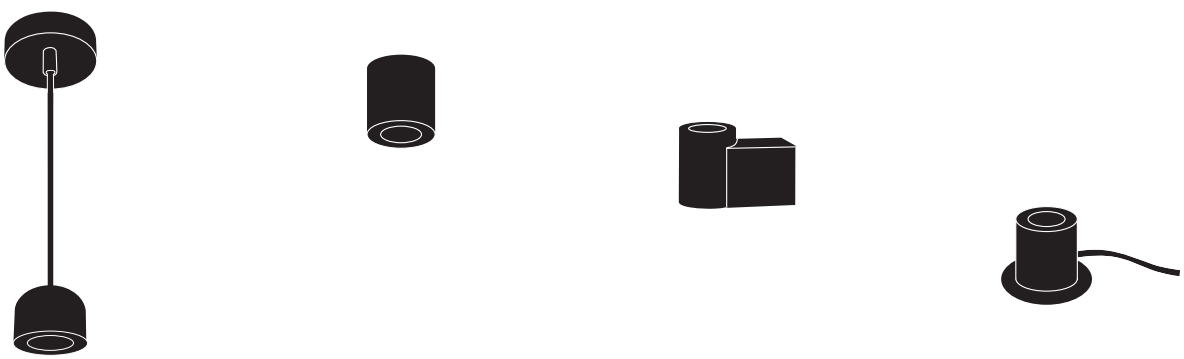




VARYT KUGEL Ø12

○ *1008119*




VARYT LINIE Ø12

○ *1007859*





VARYT PLISSEE Ø11.5

○ *1007860*




IP44

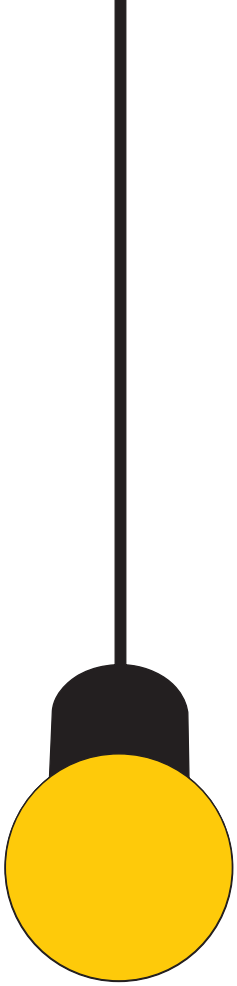

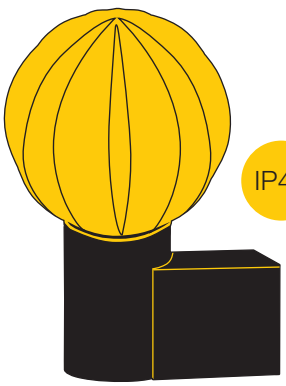

IP44

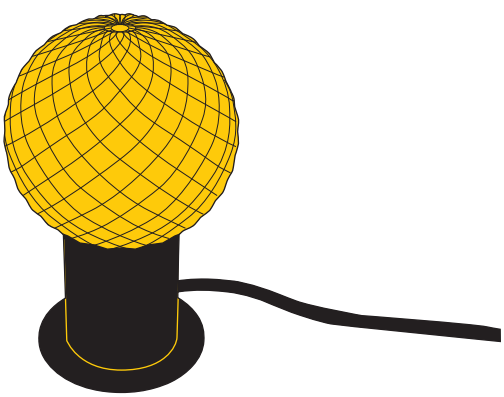



VARYT DIAMONT Ø11

- *1007858*
- *1008023*


All SLV Mix & Match products are identified by the corresponding symbol.

MIX match



VARYT
WL, E14





IP44 IK02

220-240 V ~50/60 Hz
Material: steel

• IP44 in combination with one of the shades

SOCKET INSIDE 6 W

Base: 1 × E14 | max. Ø: 11 cm | L: 3.8 cm

Variant	Prod. no.
● black	**1008104**
○ white	**1008105**
● brass	**1008107**
◑ chrome	**1008106**
● copper	**1008108**

E14 | 4 W | 320°
380 lm | 2700 K | EEC = F

C,L

Prod. no.: **1005284**

VARYT
KUGEL GLASS SHADE



IK02

Ø: 12 cm
H: 12.8 cm
Material: glass

Variant	Prod. no.
○ white	**1008119**

VARYT
DIAMANT GLASS SHADE



IK02

Ø: 12 cm
H: 12.7 cm
Material: glass

Variant	Prod. no.
● smoky grey	**1007858**
● amber	**1008023**

VARYT
LINIE GLASS SHADE



IK02

Ø: 12 cm
H: 13 cm
Material: glass

Variant	Prod. no.
○ white	**1007859**


VARYT
PLISSEE GLASS SHADE



IK02

Ø: 11.5 cm
H: 13.5 cm
Material: glass


Variant	Prod. no.
○ white	**1007860**

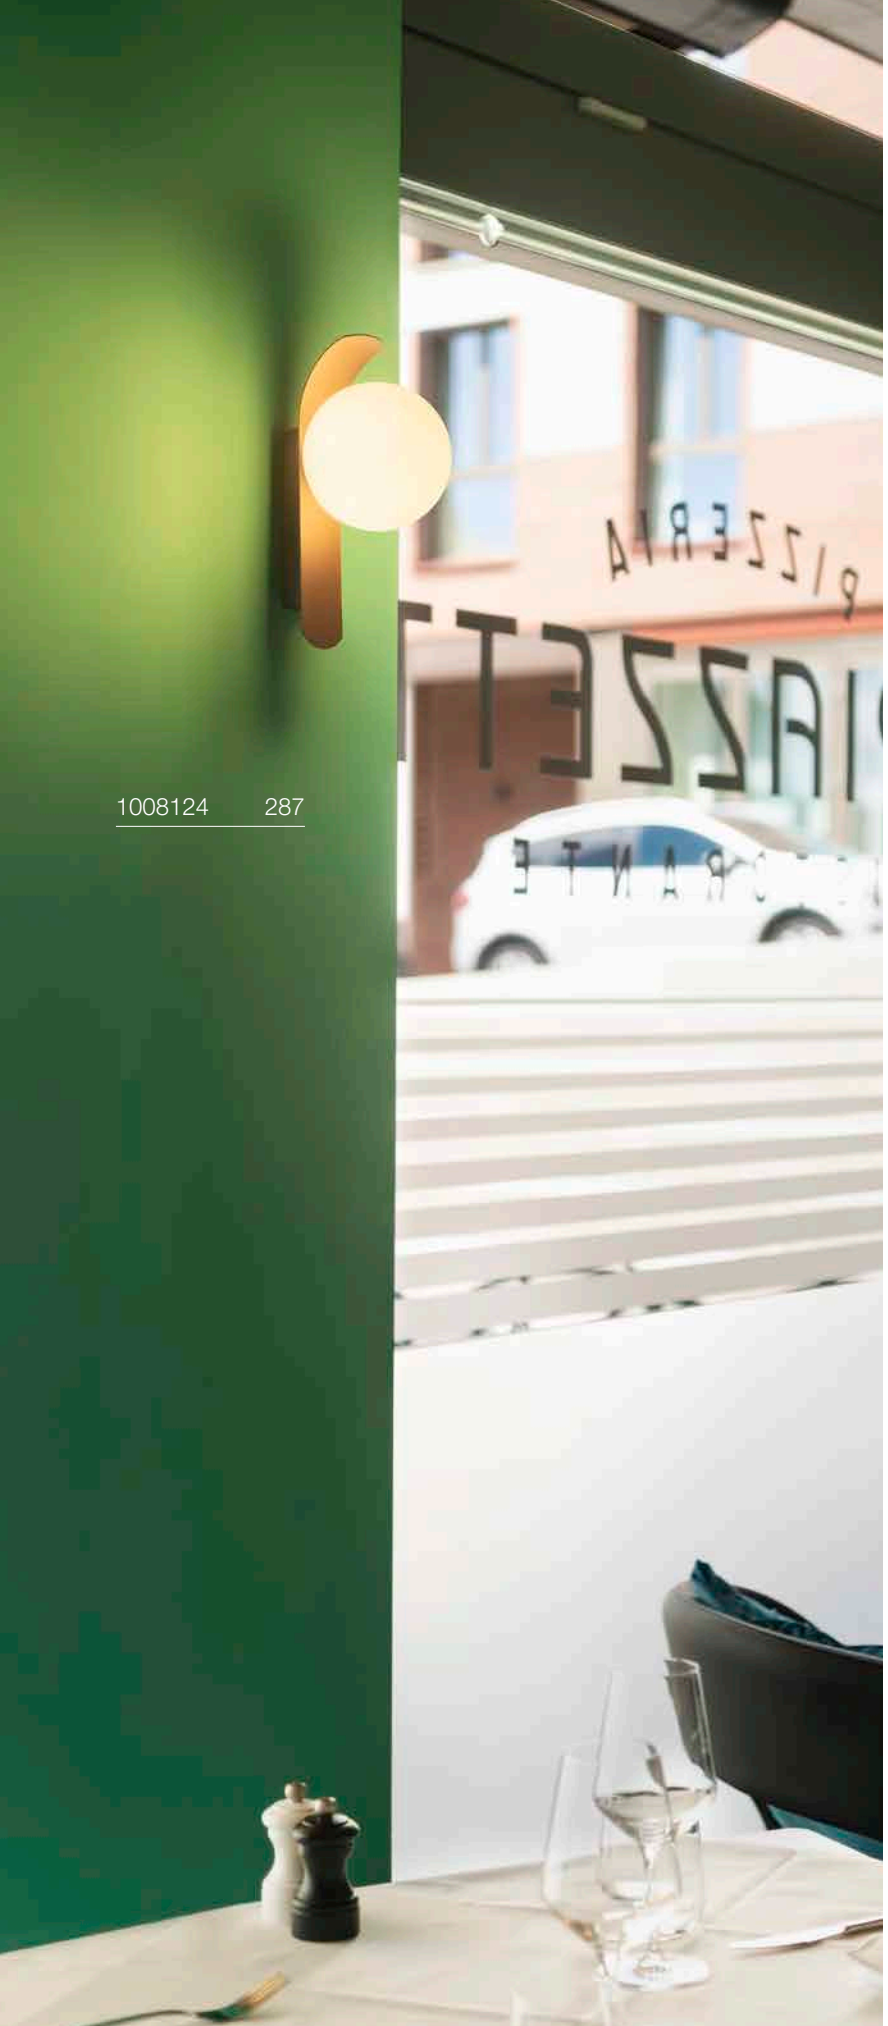

1008124 287

SUN
WL, G9, ANGULAR





IP20 IK02

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 40 W

Base: 1 × G69 max. Ø: 1.9 cm | L: 6 cm


Variant	Prod. no.
● black	**1008123**

G9 | 4 W | 300°
450 lm | 2700 K | EEC = E

Prod. no.: **1007455**

SUN
WL, G9, CURVED





IP20 IK02

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 40 W

Base: 1 × G69 | max. Ø: 1.9 cm | L: 6 cm


Variant	Prod. no.
● black	**1008124**

G9 | 4 W | 300°
450 lm | 2700 K | EEC = E

Prod. no.: **1007455**

SUN
WL, UP, G9, ANGULAR





IP20 IK02

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 5 W

Base: 1 × G69 | max. Ø: 1.9 cm | L: 6 cm


Variant	Prod. no.
● black	**1009144**

G9 | 4 W | 300°
400 lm | 3000 K | EEC = E

Prod. no.: **1005286**

SUN
WL, DOUBLE, G9, ANGULAR





IP20 IK02

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 5 W

Base: 1 × G69 | max. Ø: 1.9 cm | L: 6 cm

Variant	Prod. no.
● black	**1009145**

G9 | 4 W | 300°
400 lm | 3000 K | EEC = E


Prod. no.: **1005286**



1010306 289

DYSKO
CW, SINGLE, PHASE









220-240 V ~50/60 Hz | 150 mA
Total wattage: 6.7 W
Material: aluminium




	2700 K 750 lm

Variant	Prod. no.
black/gold	**1010300**
black/black	**1010302**
white/black	**1010301**

DYSKO
CW, DOUBLE, PHASE









220-240 V ~50/60 Hz | 150 mA
Total wattage: 13 W
Material: aluminium




Spot 1	2700 K 750 lm
Spot 2	2700 K 750 lm

Variant	Prod. no.
black/gold	**1010306**
black/black	**1010308**
white/black	**1010307**

DYSKO
CW, SWITCH, SINGLE, PHASE











220-240 V ~50/60 Hz | 150 mA
Total wattage: 6.7 W
Material: aluminium

- incl. on/off switch




	2700 K 750 lm

Variant	Prod. no.
black/gold	**1010312**
white/black	**1010313**

NUMINOS® S
CW










220-240 V ~50/60 Hz | 200 mA
Total wattage: 8 W
Material: aluminium/PC

Variant
All S versions
All DALI S versions




Please note: decorative ring also available in white, gold and copper

Product	Prod. no.
Front ring S	
○ white	**1006167**
● copper	**1008140**
● gold	**1008144**



● black





○ white

					Prod. no.	
C	2700 K	950 lm	24°	16	**1004098**	
			36°	16	**1004099**	
			60°	19	**1004100**	
	3000 K	1050 lm	24°	16	**1004106**	
			36°	16	**1004107**	
			60°	19	**1004108**	
	4000 K	1100 lm	24°	16	**1004114**	
			36°	16	**1004115**	
			60°	19	**1004116**	
Dali Touch	2700 K	950 lm	24°	16	**1004386**	
			36°	16	**1004387**	
			60°	19	**1004388**	
	3000 K	1050 lm	24°	16	**1004394**	
			36°	16	**1004395**	
			60°	19	**1004396**	
	4000 K	1100 lm	24°	16	**1004402**	
			36°	16	**1004403**	
			60°	19	**1004404**	
C	2700 K	950 lm	24°	16	**1004102**	
			36°	16	**1004103**	
			60°	19	**1004104**	
	3000 K	1050 lm	24°	16	**1004110**	
			36°	16	**1004111**	
			60°	19	**1004112**	
	4000 K	1100 lm	24°	16	**1004118**	
			36°	16	**1004119**	
			60°	19	**1004120**	
Dali Touch	2700 K	950 lm	24°	16	**1004390**	
			36°	16	**1004391**	
			60°	19	**1004392**	
	3000 K	1050 lm	24°	16	**1004398**	
			36°	16	**1004399**	
			60°	19	**1004400**	
	4000 K	1100 lm	24°	16	**1004406**	
			36°	16	**1004407**	
			60°	19	**1004408**	

NUMINOS® M
CL








● black

IP20 350° 90° 50000h L90B10 78

INSIDE CRI 90

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium/PC



○ white

Variant
All M versions
All DALI M versions

Please note: decorative ring also available in white, gold and copper





Product	Prod. no.
Front ring M	
○ white	**1006168**
● copper	**1008141**
● gold	**1008145**

					Prod. no.	
C	2700 K	1750 lm	24°	16	**1004194**	
			36°	16	**1004195**	
			60°	22	**1004196**	
	3000 K	1800 lm	24°	16	**1004202**	
			36°	16	**1004203**	
			60°	22	**1004204**	
	4000 K	1950 lm	24°	16	**1004210**	
			36°	16	**1004211**	
			60°	22	**1004212**	
Dali Touch	2700 K	1750 lm	24°	16	**1004482**	
			36°	16	**1004483**	
			60°	22	**1004484**	
	3000 K	1800 lm	24°	16	**1004490**	
			36°	16	**1004491**	
			60°	22	**1004492**	
	4000 K	1950 lm	24°	16	**1004498**	
			36°	16	**1004499**	
			60°	22	**1004500**	
C	2700 K	1750 lm	24°	16	**1004198**	
			36°	16	**1004199**	
			60°	22	**1004200**	
	3000 K	1800 lm	24°	16	**1004206**	
			36°	16	**1004207**	
			60°	22	**1004208**	
	4000 K	1950 lm	24°	16	**1004214**	
			36°	16	**1004215**	
			60°	22	**1004216**	
Dali Touch	2700 K	1750 lm	24°	16	**1004486**	
			36°	16	**1004487**	
			60°	22	**1004488**	
	3000 K	1800 lm	24°	16	**1004494**	
			36°	16	**1004495**	
			60°	22	**1004496**	
	4000 K	1950 lm	24°	16	**1004502**	
			36°	16	**1004503**	
			60°	22	**1004504**	


NUMINOS® L
CL







● black



○ white

IP20 350° 90° 50000h L90B10 78

INSIDE CRI 90

220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: aluminium/PC

Variant
All L versions
All DALI L versions

Please note: decorative ring also available in white, gold and copper





Product	Prod. no.
Front ring L	
○ white	**1006169**
● copper	**1008142**
● gold	**1008146**

				UGR	Prod. no.	
C	2700 K	2300 lm	24°	16	**1004290**	
			36°	16	**1004291**	
			60°	19	**1004292**	
	3000 K	2400 lm	24°	16	**1004298**	
			36°	16	**1004299**	
			60°	19	**1004300**	
	4000 K	2600 lm	24°	16	**1004306**	
			36°	16	**1004307**	
			60°	19	**1004308**	
Dali Touch	2700 K	2300 lm	24°	16	**1004578**	
			36°	16	**1004579**	
			60°	19	**1004580**	
	3000 K	2400 lm	24°	16	**1004586**	
			36°	16	**1004587**	
			60°	19	**1004588**	
	4000 K	2600 lm	24°	16	**1004594**	
			36°	16	**1004595**	
			60°	19	**1004596**	
C	2700 K	2300 lm	24°	16	**1004294**	
			36°	16	**1004295**	
			60°	19	**1004296**	
	3000 K	2400 lm	24°	16	**1004302**	
			36°	16	**1004303**	
			60°	19	**1004304**	
	4000 K	2600 lm	24°	16	**1004310**	
			36°	16	**1004311**	
			60°	19	**1004312**	
Dali Touch	2700 K	2300 lm	24°	16	**1004582**	
			36°	16	**1004583**	
			60°	19	**1004584**	
	3000 K	2400 lm	24°	16	**1004590**	
			36°	16	**1004591**	
			60°	19	**1004592**	
	4000 K	2600 lm	24°	16	**1004598**	
			36°	16	**1004599**	
			60°	19	**1004600**	

NUMINOS® XL
CL








● black

IP20 350° 90° 50000 h L90B10 58

INSIDE CRI 90

220-240 V ~50/60 Hz | 700 mA
Total wattage: 27 W
Material: aluminium/PC



○ white

Variant
All XL versions
All DALI XL versions

Please note: decorative ring also available in white, gold and copper




Product	Prod. no.
Front ring XL	
○ white	**1006170**
● copper	**1008143**
● gold	**1008147**

					Prod. no.	
Dali Touch	2700 K	3550 lm	24°	16	**1005741**	
			36°	16	**1005742**	
		3150 lm	60°	22	**1005743**	
	3000 K	3550 lm	24°	16	**1005747**	
			36°	16	**1005748**	
		3150 lm	60°	22	**1005749**	
	4000 K	3900 lm	24°	16	**1005753**	
			36°	16	**1005754**	
		3500 lm	60°	22	**1005755**	
C	2700 K	3550 lm	24°	16	**1006083**	
			36°	16	**1006084**	
		3150 lm	60°	22	**1006085**	
	3000 K	3550 lm	24°	16	**1006089**	
			36°	16	**1006090**	
		3150 lm	60°	22	**1006091**	
	4000 K	3900 lm	24°	16	**1006095**	
			36°	16	**1006096**	
		3500 lm	60°	22	**1006097**	
Dali Touch	2700 K	3550 lm	24°	16	**1005744**	
			36°	16	**1005745**	
		3150 lm	60°	22	**1005746**	
	3000 K	3550 lm	24°	16	**1005750**	
			36°	16	**1005751**	
		3150 lm	60°	22	**1005752**	
	4000 K	3900 lm	24°	16	**1005756**	
			36°	16	**1005757**	
		3500 lm	60°	22	**1005758**	
C	2700 K	3550 lm	24°	16	**1006086**	
			36°	16	**1006087**	
		3150 lm	60°	22	**1006088**	
	3000 K	3550 lm	24°	16	**1006092**	
			36°	16	**1006093**	
		3150 lm	60°	22	**1006094**	
	4000 K	3900 lm	24°	16	**1006098**	
			36°	16	**1006099**	
		3500 lm	60°	22	**1006100**	



MEDO® 2.0 SLIM 30
CL, PHASE

NEW





220-240 V ~50/60 Hz | 200 mA
Total wattage: 8 W
Material: aluminium/steel



	3000 K	4000 K
Down	1000 lm	1000 lm

Variant	Prod. no.
● black	**1011693**
○ white	**1011694**

⊕

Product	Prod. no.
1.5 m central suspension kit	
● black	**1011779**
○ white	**1011780**
5 m central suspension kit	
● black	**1011781**
○ white	**1011782**
3 m parallel suspension set	
● black	**1011783**
○ white	**1011784**

MEDO® 2.0 SLIM 40
CL, PHASE




220-240 V ~50/60 Hz | 400 mA
Total wattage: 15.5 W
Material: aluminium/steel

Down	3000 K	4000 K
	1900 lm	1900 lm

Variant	Prod. no.
● black	**1011695**
○ white	**1011696**

Product	Prod. no.
1.5 m central suspension kit	
● black	**1011779**
○ white	**1011780**
5 m central suspension kit	
● black	**1011781**
○ white	**1011782**
3 m parallel suspension set	
● black	**1011783**
○ white	**1011784**

MEDO® 2.0 SLIM 60
CL, PHASE

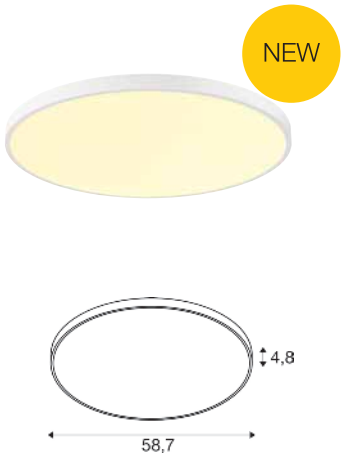

220-240 V ~50/60 Hz | 900 mA
Total wattage: 35 W
Material: aluminium/steel

Down	3000 K	4000 K
	4200 lm	4200 lm

Variant	Prod. no.
● black	**1011697**
○ white	**1011698**

Product	Prod. no.
1.5 m central suspension kit	
● black	**1011779**
○ white	**1011780**
5 m central suspension kit	
● black	**1011781**
○ white	**1011782**
3 m parallel suspension set	
● black	**1011783**
○ white	**1011784**

MEDO® 2.0 SLIM 80
CL, PHASE




220-240 V ~50/60 Hz | 1200 mA
Total wattage: 45 W
Material: aluminium/steel

Down	3000 K	4000 K
	5900 lm	5900 lm

Variant	Prod. no.
● black	**1011699**
○ white	**1011700**

Product	Prod. no.
1.5 m central suspension kit	
● black	**1011779**
○ white	**1011780**
5 m central suspension kit	
● black	**1011781**
○ white	**1011782**
3 m parallel suspension set	
● black	**1011783**
○ white	**1011784**

MEDO® 2.0 SLIM 30
CL, DALI

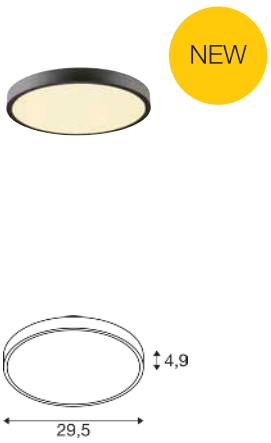

Dali Touch IP20 IK03 85° 100 000 h L80B10 UGR 19

220-240 V ~0/50/60 Hz | 200 mA
Total wattage: 8.6 W
Material: aluminium/steel

LED INSIDE CCT CRI 90

Down	3000 K	4000 K
	1000 lm	1000 lm

Variant	Prod. no.
● black	**1011701**
○ white	**1011702**

Product	Prod. no.
1.5 m central suspension kit	
● black	**1011779**
○ white	**1011780**
5 m central suspension kit	
● black	**1011781**
○ white	**1011782**
3 m parallel suspension set	
● black	**1011783**
○ white	**1011784**

MEDO® 2.0 SLIM 40
CL, DALI



Dali Touch IP20 IK03 85° 100 000 h L80B10 UGR 19

220-240 V ~0/50/60 Hz | 400 mA
Total wattage: 15.5 W
Material: aluminium/steel

LED INSIDE CCT CRI 90

Down	3000 K	4000 K
	1900 lm	1900 lm

Variant	Prod. no.
● black	**1011703**
○ white	**1011704**

Product	Prod. no.
1.5 m central suspension kit	
● black	**1011779**
○ white	**1011780**
5 m central suspension kit	
● black	**1011781**
○ white	**1011782**
3 m parallel suspension set	
● black	**1011783**
○ white	**1011784**

MEDO® 2.0 SLIM 60
CL, DALI



Dali Touch IP20 IK03 85° 100 000 h L80B10 UGR 19

220-240 V ~0/50/60 Hz | 900 mA
Total wattage: 34 W
Material: aluminium/steel

LED INSIDE CCT CRI 90


Down	3000 K	4000 K
	4200 lm	4200 lm

Variant	Prod. no.
● black	**1011705**
○ white	**1011706**

Product	Prod. no.
1.5 m central suspension kit	
● black	**1011779**
○ white	**1011780**
5 m central suspension kit	
● black	**1011781**
○ white	**1011782**
3 m parallel suspension set	
● black	**1011783**
○ white	**1011784**

MEDO® 2.0 SLIM 80
CL, DALI





Dali · Touch · IP20 · IK03 · 85° · 100 000 h L80B10 · UGR 19

200-240 V ~0/50/60 Hz | 1200 mA
Total wattage: 45 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90

Down	3000 K	4000 K
	5900 lm	5900 lm

Variant	Prod. no.
● black	**1011707**
○ white	**1011708**

Product	Prod. no.
1.5 m central suspension kit	
● black	**1011779**
○ white	**1011780**
5 m central suspension kit	
● black	**1011781**
○ white	**1011782**
3 m parallel suspension set	
● black	**1011783**
○ white	**1011784**

MEDO® 2.0 SUSPENSION KIT
3 M PARALLEL SUSPENSION SET



IP20 · 300 cm

Ø: 8 cm
H: 3 cm
Material: steel

Variant	Prod. no.
● black	**1011783**
○ white	**1011784**

MEDO® 2.0 SUSPENSION KIT
1.5 M CENTRAL SUSPENSION KIT



IP20 · 150 cm

Ø: 13 cm
H: 3 cm
Material: steel

Variant	Prod. no.
● black	**1011779**
○ white	**1011780**

MEDO® 2.0 SUSPENSION KIT
5 M CENTRAL SUSPENSION KIT



IP20 · 500 cm

Ø: 13 cm
H: 3 cm
Material: steel

Variant	Prod. no.
● black	**1011781**
○ white	**1011782**

MEDO® 2.0 HYVE 40
CL, PHASE



220-240 V ~50/60 Hz | 400 mA
Total wattage: 16 W
Material: aluminium/steel


INSIDE CCT CRI 90

	3000 K	4000 K
Down	2100 lm	2100 lm

Variant	Prod. no.
● black	**1011851**
○ white	**1011850**

Product	Prod. no.
1.5 m central suspension kit	
● black	**1011779**
○ white	**1011780**
5 m central suspension kit	
● black	**1011781**
○ white	**1011782**
3 m parallel suspension set	
● black	**1011783**
○ white	**1011784**

MEDO® 2.0 HYVE 40
CL, DALI

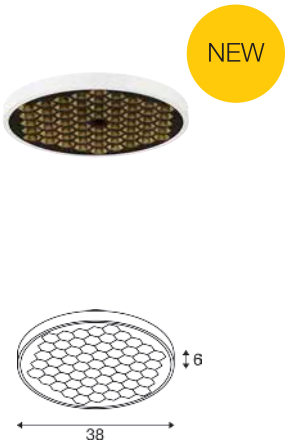

200-240 V ~0/50/60 Hz | 400 mA
Total wattage: 17 W
Material: aluminium/steel

INSIDE CCT CRI 90

	3000 K	4000 K
Down	2100 lm	2100 lm

Variant	Prod. no.
● black	**1011853**
○ white	**1011852**

Product	Prod. no.
1.5 m central suspension kit	
● black	**1011779**
○ white	**1011780**
5 m central suspension kit	
● black	**1011781**
○ white	**1011782**
3 m parallel suspension set	
● black	**1011783**
○ white	**1011784**

MEDO® 2.0 HYVE 60
CL, PHASE



220-240 V ~50/60 Hz | 900 mA
Total wattage: 35 W
Material: aluminium/steel

INSIDE CCT CRI 90

	3000 K	4000 K
Down	4800 lm	4800 lm

Variant	Prod. no.
● black	**1011855**
○ white	**1011854**

Product	Prod. no.
1.5 m central suspension kit	
● black	**1011779**
○ white	**1011780**
5 m central suspension kit	
● black	**1011781**
○ white	**1011782**
3 m parallel suspension set	
● black	**1011783**
○ white	**1011784**

MEDO® 2.0 HYVE 60
CL, DALI



200-240 V ~0/50/60 Hz | 900 mA
Total wattage: 33 W
Material: aluminium/steel

Down	3000 K	4000 K
	4800 lm	4800 lm

Variant	Prod. no.
● black	**1011857**
○ white	**1011856**

Product	Prod. no.
1.5 m central suspension kit	
● black	**1011779**
○ white	**1011780**
5 m central suspension kit	
● black	**1011781**
○ white	**1011782**
3 m parallel suspension set	
● black	**1011783**
○ white	**1011784**

MEDO® 2.0 HYVE 80
CL, PHASE



220-240 V ~50/60 Hz | 1800 mA
Total wattage: 70 W
Material: aluminium/steel

Down	3000 K	4000 K
	9700 lm	9700 lm

Variant	Prod. no.
● black	**1011859**
○ white	**1011858**

Product	Prod. no.
1.5 m central suspension kit	
● black	**1011779**
○ white	**1011780**
5 m central suspension kit	
● black	**1011781**
○ white	**1011782**
3 m parallel suspension set	
● black	**1011783**
○ white	**1011784**

MEDO® 2.0 HYVE 80
CL, DALI



200-240 V ~0/50/60 Hz | 1800 mA
Total wattage: 67 W
Material: aluminium/steel

Down	3000 K	4000 K
	9700 lm	9700 lm


Variant	Prod. no.
● black	**1011861**
○ white	**1011860**

Product	Prod. no.
1.5 m central suspension kit	
● black	**1011779**
○ white	**1011780**
5 m central suspension kit	
● black	**1011781**
○ white	**1011782**
3 m parallel suspension set	
● black	**1011783**
○ white	**1011784**



MEDO® PRO 30
CW, DALI, UGR<19







220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium/steel




Direct	3000 K	4000 K
	1150 lm	1150 lm
Indirect	3000 K	4000 K
	100 lm	100 lm

Variant	Prod. no.
● black	**1007284**
○ white	**1007285**

Product	Prod. no.
1.5 m suspension kit	
● black	**135250**
○ white	**135251**
5 m suspension kit	
○ white	**1001950**
● black	**1001952**

MEDO® PRO 30
CW, PHASE, UGR<19





C · IP50 · IK02 · 70° · 50000 h L80B10 · UGR 19 · 20

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium/steel

INSIDE · CCT · CRI 90


	3000 K	4000 K
Direct	1150 lm	1150 lm
Indirect	100 lm	100 lm

Variant	Prod. no.
● black	**1007288**
○ white	**1007289**

Product	Prod. no.
1.5 m suspension kit	
● black	**135250**
○ white	**135251**
5 m suspension kit	
○ white	**1001950**
● black	**1001952**

MEDO® PRO 40
CW, DALI, UGR<19





Dali · Touch · IP50 · IK02 · 80° · 50000 h L80B10 · UGR 19 · 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium/steel

INSIDE · CCT · CRI 90


	3000 K	4000 K
Direct	2200 lm	2300 lm
Indirect	200 lm	200 lm

Variant	Prod. no.
● black	**1007292**
○ white	**1007293**

Product	Prod. no.
1.5 m suspension kit	
● black	**135250**
○ white	**135251**
5 m suspension kit	
○ white	**1001950**
● black	**1001952**

MEDO® PRO 40
CW, PHASE, UGR<19





C · IP50 · IK02 · 80° · 50000 h L80B10 · UGR 19 · 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium/steel

INSIDE · CCT · CRI 90


	3000 K	4000 K
Direct	2200 lm	2300 lm
Indirect	200 lm	200 lm

Variant	Prod. no.
● black	**1007296**
○ white	**1007297**

Product	Prod. no.
1.5 m suspension kit	
● black	**135250**
○ white	**135251**
5 m suspension kit	
○ white	**1001950**
● black	**1001952**

MEDO® PRO 60
CW, DALI, UGR<19





Dali Touch IP50 IK02 80° 50000 h L80B10 UGR 19 20

220-240 V ~0/50/60 Hz | 1000 mA
Total wattage: 39 W
Material: aluminium/steel

INSIDE CCT CRI 90


	3000 K	4000 K
Direct	4600 lm	4700 lm
Indirect	400 lm	400 lm

Variant	Prod. no.
● black	**1007300**
○ white	**1007301**

Product	Prod. no.
1.5 m suspension kit	
● black	**135250**
○ white	**135251**
5 m suspension kit	
○ white	**1001950**
● black	**1001952**

MEDO® PRO 60
CW, PHASE, UGR<19





C IP50 IK02 80° 50000 h L80B10 UGR 19 20

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 37 W
Material: aluminium/steel


INSIDE CCT CRI 90

	3000 K	4000 K
Direct	4600 lm	4700 lm
Indirect	400 lm	400 lm

Variant	Prod. no.
● black	**1007304**
○ white	**1007305**

Product	Prod. no.
1.5 m suspension kit	
● black	**135250**
○ white	**135251**
5 m suspension kit	
○ white	**1001950**
● black	**1001952**

MEDO® PRO 90
CL, DALI, UGR<19



Dali Touch IP50 IK02 80° 50000 h L80B10 UGR 19 20

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 75 W
Material: aluminium/steel


INSIDE CCT CRI 90

	3000 K	4000 K
Direct	8800 lm	9100 lm
Indirect	600 lm	600 lm

Variant	Prod. no.
● black	**1007308**
○ white	**1007309**


Product	Prod. no.
1.5 m suspension kit	
● black	**135250**
○ white	**135251**
5 m suspension kit	
○ white	**1001950**
● black	**1001952**

MEDO® PRO 90
CL, PHASE, UGR<19





220-240 V ~50/60 Hz | 1000 mA
Total wattage: 74 W
Material: aluminium/steel




	3000 K	4000 K
Direct	8800 lm	9100 lm
Indirect	600 lm	600 lm

Variant	Prod. no.
● black	**1007312**
○ white	**1007313**


Product	Prod. no.
1.5 m suspension kit	
● black	**135250**
○ white	**135251**
5 m suspension kit	
○ white	**1001950**
● black	**1001952**

MEDO® PRO 30
CW, DALI





220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium/steel




	3000 K	4000 K
Direct	1300 lm	1300 lm
Indirect	50 lm	50 lm

Variant	Prod. no.
● black	**1007286**
○ white	**1007287**


Product	Prod. no.
1.5 m suspension kit	
● black	**135250**
○ white	**135251**
5 m suspension kit	
○ white	**1001950**
● black	**1001952**

MEDO® PRO 30
CW, PHASE





220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium/steel




	3000 K	4000 K
Direct	1300 lm	1300 lm
Indirect	50 lm	50 lm

Variant	Prod. no.
● black	**1007290**
○ white	**1007291**

Product	Prod. no.
1.5 m suspension kit	
● black	**135250**
○ white	**135251**
5 m suspension kit	
○ white	**1001950**
● black	**1001952**

MEDO® PRO 40
CW, DALI




220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium/steel

	3000 K	4000 K
Direct	2550 lm	2550 lm
Indirect	100 lm	100 lm

Variant	Prod. no.
● black	**1007294**
○ white	**1007295**

Product	Prod. no.
1.5 m suspension kit	
● black	**135250**
○ white	**135251**
5 m suspension kit	
○ white	**1001950**
● black	**1001952**

MEDO® PRO 40
CW, PHASE




220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium/steel

	3000 K	4000 K
Direct	2550 lm	2550 lm
Indirect	100 lm	100 lm

Variant	Prod. no.
● black	**1007298**
○ white	**1007299**

Product	Prod. no.
1.5 m suspension kit	
● black	**135250**
○ white	**135251**
5 m suspension kit	
○ white	**1001950**
● black	**1001952**

MEDO® PRO 60
CW, DALI




220-240 V ~0/50/60 Hz | 1000 mA
Total wattage: 39 W
Material: aluminium/steel

	3000 K	4000 K
Direct	5250 lm	5300 lm
Indirect	200 lm	200 lm

Variant	Prod. no.
● black	**1007302**
○ white	**1007303**

Product	Prod. no.
1.5 m suspension kit	
● black	**135250**
○ white	**135251**
5 m suspension kit	
○ white	**1001950**
● black	**1001952**

MEDO® PRO 60
CW, PHASE



C · IP50 · IK02 · 110° · 50000 h L80B10 · UGR 25 · 20

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 37 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90


	3000 K	4000 K
Direct	5250 lm	5300 lm
Indirect	200 lm	200 lm

Variant	Prod. no.
● black	**1007306**
○ white	**1007307**

⊕

Product	Prod. no.
1.5 m suspension kit	
● black	**135250**
○ white	**135251**
5 m suspension kit	
○ white	**1001950**
● black	**1001952**

MEDO® PRO 90
CL, DALI



Dali · Touch · IP50 · IK02 · 110° · 50000 h L80B10 · UGR 25 · 20

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 75 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90


	3000 K	4000 K
Direct	10550 lm	10750 lm
Indirect	450 lm	450 lm

Variant	Prod. no.
● black	**1007310**
○ white	**1007311**

⊕

Product	Prod. no.
1.5 m suspension kit	
● black	**135250**
○ white	**135251**
5 m suspension kit	
○ white	**1001950**
● black	**1001952**

MEDO® PRO 90
CL, PHASE



C · IP50 · IK02 · 110° · 50000 h L80B10 · UGR 25 · 20

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 74 W
Material: aluminium/steel


LED INSIDE · CCT · CRI 90

	3000 K	4000 K
Direct	10550 lm	10750 lm
Indirect	450 lm	450 lm

Variant	Prod. no.
● black	**1007314**
○ white	**1007315**

⊕


Product	Prod. no.
1.5 m suspension kit	
● black	**135250**
○ white	**135251**
5 m suspension kit	
○ white	**1001950**
● black	**1001952**

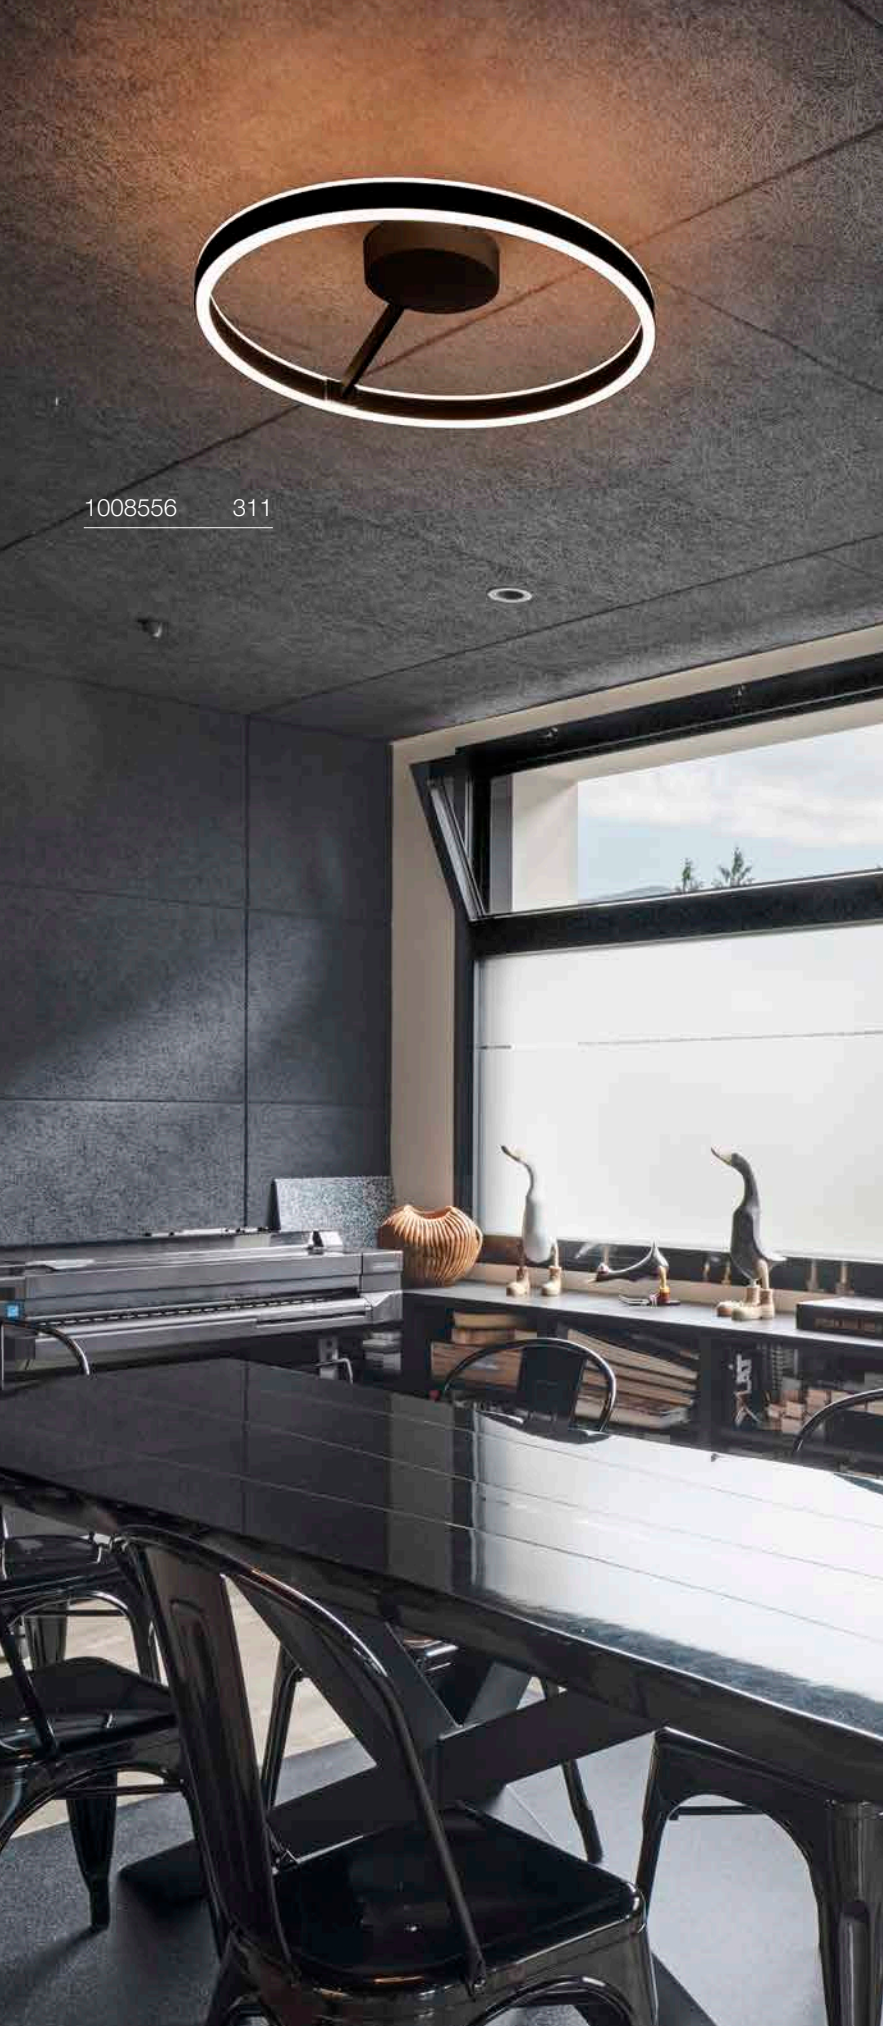

1008556 311

ONE 40
CW, PHASE, UP/DOWN







220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium/steel




Up	2700 K	3000 K
	450 lm	450 lm
Down	2700 K	3000 K
	450 lm	450 lm

Variant	Prod. no.
● black	**1008547**
○ white	**1008546**
● brass	**1008545**

ONE 60
CW, PHASE, UP/DOWN





C · IP20 · 130° · 50000 h L80B50

220-240 V ~50/60 Hz | 600 mA
Total wattage: 23 W
Material: aluminium/steel


LED INSIDE · CCT · CRI 90

		2700 K	3000 K
1008550	Up	550 lm	550 lm
	Down	750 lm	800 lm
1008549	Up	750 lm	800 lm
	Down	750 lm	800 lm
1008548	Up	750 lm	800 lm
	Down	750 lm	800 lm

Variant	Prod. no.
● black	**1008550**
○ white	**1008549**
● brass	**1008548**

ONE 40
CW, DALI, UP/DOWN





Dali · Touch · IP20 · 130° · 50000 h L80B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium/steel


LED INSIDE · CCT · CRI 90

		2700 K	3000 K
Up		450 lm	450 lm
Down		450 lm	450 lm

Variant	Prod. no.
● black	**1008553**
○ white	**1008552**
● brass	**1008551**

ONE 60
CW, DALI, UP/DOWN





Dali · Touch · IP20 · 130° · 50000 h L80B50

220-240 V ~50/60 Hz | 600 mA
Total wattage: 23 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90

		2700 K	3000 K
1008556	Up	550 lm	550 lm
	Down	750 lm	800 lm
1008555	Up	750 lm	850 lm
	Down	750 lm	800 lm
1008554	Up	750 lm	850 lm
	Down	750 lm	800 lm

Variant	Prod. no.
● black	**1008556**
○ white	**1008555**
● brass	**1008554**




1002915 313

ONE LINEAR 50
WL, PHASE, UP/DOWN

GERMAN DESIGN AWARD SPECIAL 2022







220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium/acrylic

LED INSIDE CCT CRI 90


		2700 K	3000 K
1008086	Up	450 lm	500 lm
	Down	450 lm	500 lm
1008085	Up	450 lm	500 lm
	Down	450 lm	500 lm
1008084	Up	365 lm	405 lm
	Down	365 lm	405 lm

Variant	Prod. no.
white/black	**1008084**
white	**1008085**
white/brass	**1008086**

ONE LINEAR 70
WL, PHASE, UP/DOWN

GERMAN DESIGN AWARD SPECIAL 2022





C,L · IP44 · 120° · 50000 h L80B10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: aluminium/acrylic


LED INSIDE · CCT · CRI 90

		2700 K	3000 K
1008083	Up	625 lm	675 lm
	Down	625 lm	675 lm
1008082	Up	625 lm	675 lm
	Down	625 lm	675 lm
1008081	Up	495 lm	550 lm
	Down	495 lm	550 lm

Variant	Prod. no.
white/black	**1008081**
white	**1008082**
white/brass	**1008083**

ONE 40
CW, DALI





Dali · IP20 · 130° · 30000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium/steel


LED INSIDE · CCT · CRI 90

3000 K	4000 K
700 lm	730 lm

Variant	Prod. no.
black	**1002915**
white	**1002917**

ONE 60
CW, DALI





Dali · IP20 · 130° · 30000 h L70B50

220-240 V ~50/60 Hz | 600 mA
Total wattage: 24 W
Material: aluminium/steel


LED INSIDE · CCT · CRI 90

3000 K	4000 K
1350 lm	1430 lm

Variant	Prod. no.
black	**1002918**



TRUKKO
WL,RECTANGULAR



Touch IP44 30000 h L70B50

220-240 V ~50/60 Hz | 24 V
Total wattage: 25 W
Material: glass/plastic

- mirror heating and memory function included
- Light colour can be adjusted via touch function

LED INSIDE CCT CRI 90

	3000 K	4000 K	6500 K
	1080 lm	1290 lm	1250 lm

Variant	Prod. no.
transparent/opaque	**1004730**

TRUKKO
WL, ROUND





Touch IP44 30000 h L70B50

220-240 V ~50/60 Hz | 24 V
Total wattage: 25 W
Material: glass/plastic

- mirror heating and memory function included
- Light colour can be adjusted via touch function


LED INSIDE CCT CRI 90

	3000 K	4000 K	6500 K
1007201	730 lm	710 lm	720 lm
1004731	1270 lm	1260 lm	1260 lm

Variant	Prod. no.
transparent/black	**1007201**
transparent/opaque	**1004731**

TRUKKO 80
WL, ROUND





Touch IP44 30000 h L70B50

220-240 V ~50/60 Hz | 24 V
Total wattage: 23 W
Material: glass/plastic

- mirror heating and memory function included
- Light colour can be adjusted via touch function


LED INSIDE CCT CRI 90

	3000 K	4000 K	6500 K
1007202	730 lm	740 lm	790 lm
	3000 K	4000 K	6500 K
1007200	1100 lm	1130 lm	1210 lm

Variant	Prod. no.
transparent/black	**1007202**
transparent/opaque	**1007200**

TRUKKO 60
WL





IP44 IK03 120° 50000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.2 W
Material: aluminium/plastic


LED INSIDE CRI 90

	3000 K
	750 lm

Variant	Prod. no.
transparent/opaque	**149762**

TRUKKO 90
WL





IP44 IK03 120° 50000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 12 W
Material: aluminium/plastic

LED INSIDE CRI 90


	3000 K
	1040 lm

Variant	Prod. no.
transparent/opaque	**149772**



SEDO 14
WL







220-240 V ~50/60 Hz | 500 mA
Total wattage: 18 W
Material: aluminium/glass




3000 K
1300 lm

Variant	Prod. no.
○ white	**151781**
● aluminium	**151786**

SEDO 21
WL





IP20 | 30000 h L70B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 30 W
Material: aluminium/glass


LED INSIDE | CRI 80

3000 K
2500 lm

Variant	Prod. no.
○ white	**151791**
● aluminium	**151796**

ARLINA 60
WL





IP20 | 30000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 23 W
Material: aluminium/glass


LED INSIDE | CRI 80

3000 K
1550 lm

Variant	Prod. no.
● aluminium	**1002239**

ARLINA 130
WL





IP20 | 30000 h L70B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 28 W
Material: aluminium/glass

LED INSIDE | CRI 80


3000 K
2400 lm

Variant	Prod. no.
● aluminium	**1002240**



WL 106
E14





IP44

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 40 W

Base: 1 × E14 | max. Ø: 3.6 cm | L: 11 cm


Variant	Prod. no.
chrome/white	**1002228**

E14 | 4 W | 320°
350 lm | 2700 K | EEC = G

Prod. no.: **1005285**

WL 106
E14





IP44

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 40 W

Base: 2 × E14 | max. Ø: 3.6 cm | L: 11 cm

Variant	Prod. no.
chrome/white	**1002229**


E14 | 4 W | 320°
380 lm | 2700 K | EEC = F

C,L

Prod. no.: **1005284**

MIBO UP/DOWN
WL, QT14





IP21

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 25 W

Base: 2 × G69


Variant	Prod. no.
chrome	**151282**

G9 | 4 W | 300°
400 lm | 3000 K | EEC = E

Prod. no.: **1005286**

MAGANDA
WL





IP44 IK02 90° 30 000 h L70B50

100-240 V ~50/60 Hz | 12 V
Total wattage: 4.8 W
Material: steel/glass

- Light colour can be adjusted via the housing switch.


LED INSIDE CCT CRI 90

2700 K	3000 K	4000 K
45 lm	48 lm	51 lm

Variant	Prod. no.
chrome	**1004971**

DORISA 30
WL





IP44 | 110° | 50 000 h L80B10

220-240 V ~50/60 Hz | 120 mA
Total wattage: 5.2 W
Material: aluminium/plastic


LED INSIDE | CRI 90

	4000 K
1011757	370 lm
1000777	420 lm

Variant	Prod. no.
● black 370 lm	**1011757**
◑ chrome 420 lm	**1000777**

DORISA 50
WL





IP44 | 110° | 50 000 h L80B10

220-240 V ~50/60 Hz | 145 mA
Total wattage: 6 W
Material: aluminium/plastic


LED INSIDE | CRI 90

	4000 K
1011758	430 lm
1000780	490 lm

Variant	Prod. no.
● black 430 lm	**1011758**
◑ chrome 490 lm	**1000780**

GLENOS® 2.0
WL, 1,5 M, DALI, UGR22

NEW



Dali | Touch | IP20 | 100 000 h L80B20 | UGR 22 | 41


200-240 V ~0/50/60 Hz | 550 mA
Total wattage: 20 W
Material: aluminium

LED INSIDE | CRI 80

	4000 K	3000 K
1012169 Down	2700 lm	
1012168 Down	2950 lm	
1012167 Down		2650 lm
1012166 Down		2900 lm

Variant	Prod. no.
● black 2650 lm | 3000 K	**1012167**
● black 2700 lm | 4000 K	**1012169**
○ white 2900 lm | 3000 K	**1012166**
○ white 2950 lm | 4000 K	**1012168**

Q-LINE®
WL



IP20 | 110° | 30000 h L70B50


220-240 V ~50/60 Hz | 700 mA
Total wattage: 45 W
Material: aluminium/acrylic

LED INSIDE | CRI 80

	3000 K
	3800 lm

Variant	Prod. no.
● black	**1000669**
○ white	**1000668**
● grey	**1000670**

L-LINE 60
WL



IP44 | 120° | 30000 h L70B50 | 20


220-240 V ~50/60 Hz | 350 mA
Total wattage: 10 W
Material: aluminium/polycarbonate (PC)

LED INSIDE | CRI 80

	3000 K
	820 lm

Variant	Prod. no.
○ white	**1001299**
◍ silver	**1001300**

L-LINE 120
WL



IP44 | 120° | 30000 h L80B10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 26 W
Power consumption: 14 W
Material: aluminium/polycarbonate (PC)

LED INSIDE | CRI 80

	3000 K
1001303	2250 lm
	3000 K
1001304	1650 lm


Variant	Prod. no.
○ white 2250 lm	**1001303**
◍ silver 1650 lm	**1001304**



PANTILO ROPE
WL, G9

GERMAN DESIGN AWARD WINNER 2024





IP20

220-240 V ~50/60 Hz
Material: glass

SOCKET INSIDE 15 W

Base: 1 × G69 max. Ø: 3 cm | L: 6 cm

Variant	Prod. no.
anthracite/silver	**1007594**
amber/gold	**1007595**


G9 | 4 W | 300°
400 lm | 3000 K | EEC = E

Prod. no.: **1005286**

ENOLA® 2.0 S
CW, SINGLE, GU10 MINI, PAR11, ROUND

NEW





IP20 IK02 340° 90°

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 5 W

Base: 1 × GU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.
● black	**1011915**
○ white	**1011916**

GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F


Prod. no.: **1011670**

Product	Prod. no.
ENOLA® 2.0 S, decorative ring	
● black	**1011753**
○ white	**1011754**
● gold	**1011755**
● copper	**1011756**

ENOLA® 2.0 S
CW, SINGLE, GU10 MINI, PAR11, SQUARE

NEW





IP20 IK02 340° 90° 50

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 5 W

Base: 1 × GU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.
● black	**1011917**
○ white	**1011918**

GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F


Prod. no.: **1011670**

Product	Prod. no.
ENOLA® 2.0 S, decorative ring	
● black	**1011753**
○ white	**1011754**
● gold	**1011755**
● copper	**1011756**

ENOLA® 2.0 S
WL, SINGLE, GU10 MINI, PAR11, BEDSIDE, USBC

NEW





IP20 IK02 340° 90° 50

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic

- USB type-C port: 5 V 2 A, max. 10 W

SOCKET INSIDE 5 W

Base: 1 × GU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.
● black	**1011923**
○ white	**1011924**

GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F

Prod. no.: **1011670**


Product	Prod. no.
ENOLA® 2.0 S, decorative ring	
● black	**1011753**
○ white	**1011754**
● gold	**1011755**
● copper	**1011756**


1011915 323
1011929 244

ENOLA® 2.0 S
WL, SINGLE, GU10 MINI, PAR11

NEW





IP20 IK02

220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE 5 W

Base: 1 × GU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.
● black	**1011925**
○ white	**1011926**

GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F


Prod. no.: **1011670**

Product	Prod. no.
ENOLA® 2.0 S, decorative ring	
● black	**1011753**
○ white	**1011754**
● gold	**1011755**
● copper	**1011756**

ENOLA® 2.0 S
WL, DOUBLE, GU10 MINI, PAR11

NEW





IP20 IK02

220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE 5 W

Base: 2 × GU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.
● black	**1011927**
○ white	**1011928**

GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F

Prod. no.: **1011670**

Product	Prod. no.
ENOLA® 2.0 S, decorative ring	
● black	**1011753**
○ white	**1011754**
● gold	**1011755**
● copper	**1011756**

ENOLA® 2.0 S
DECORATIVE RING

NEW




Ø: 3.9 cm
H: 1.1 cm
Material: plastic PC

Variant	Prod. no.
● black	**1011753**
○ white	**1011754**
● gold	**1011755**
● copper	**1011756**

ENOLA® 2.0 M
CW, SINGLE, GU10, QPAR51, ROUND

NEW





IP20 IK02 340° 90°

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 10 W

Base: 1 × GU10 | max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.
● black	**1011893**
○ white	**1011894**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L


Prod. no.: **1005076**

Product	Prod. no.
ENOLA® 2.0/BIMA 2.0 M, decorative ring	
● black	**1011749**
○ white	**1011750**
● gold	**1011751**
● copper	**1011752**

ENOLA® 2.0 M
CW, SINGLE, GU10, QPAR51, SQUARE

NEW





IP20 IK02 340° 90° 50

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 10 W

Base: 1 × GU10 | max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.
● black	**1011895**
○ white	**1011896**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L


Prod. no.: **1005076**

Product	Prod. no.
ENOLA® 2.0/BIMA 2.0 M, decorative ring	
● black	**1011749**
○ white	**1011750**
● gold	**1011751**
● copper	**1011752**

ENOLA® 2.0 M
WL, SINGLE, GU10, QPAR51

NEW





IP20 IK02

220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE 10 W

Base: 1 × GU10 | max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.
● black	**1011903**
○ white	**1011904**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L


Prod. no.: **1005076**

Product	Prod. no.
ENOLA® 2.0/BIMA 2.0 M, decorative ring	
● black	**1011749**
○ white	**1011750**
● gold	**1011751**
● copper	**1011752**

ENOLA® 2.0 M
WL, DOUBLE, GU10, QPAR51

NEW





IP20 IK02

220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE 10 W

Base: 2 × GU10 | max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.
● black	**1011905**
○ white	**1011906**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: **1005076**

Product	Prod. no.
ENOLA® 2.0/BIMA 2.0 M, decorative ring	
● black	**1011749**
○ white	**1011750**
● gold	**1011751**
● copper	**1011752**

ENOLA® 2.0/BIMA 2.0 M
DECORATIVE RING

NEW



Ø: 5.4 cm
H: 2 cm
Material: plastic PC

Variant	Prod. no.
● black	**1011749**
○ white	**1011750**
● gold	**1011751**
● copper	**1011752**




1009100 329

GRIP! S
WL, Ø 3,0 CM, ON/OFF SWITCH

NEW





IP20 IK02 29° 330° 90° 50000 h L80B10 UGR 25

220-240 V ~50/60 Hz | 100 mA
Total wattage: 4.6 W
Material: aluminium

- Honeycomb accessories included
- On/off switch included

LED INSIDE CRI 90

	2700 K
	260 lm


Variant	Prod. no.	
black/gold	**1012179**	●
white/black	**1012178**	●
bronze/black	**1012180**	●

Product	Prod. no.	
GRIP! S, decorative ring		
white	**1011829**	●
black	**1011830**	●
nickel	**1011831**	●
gold	**1011832**	●
HONEYCOMB + spacer		
black	**1011837**	

GRIP! S
WL, PHASE, UP/DOWN, Ø 3,0 CM

NEW





C IP20 IK02 29° 50000 h L80B10 UGR 25

220-240 V ~50/60 Hz | 300 mA
Total wattage: 12 W
Material: aluminium

- Honeycomb accessories included

LED INSIDE CRI 90

Up	2700 K
	370 lm
Down	2700 K
	370 lm


Variant	Prod. no.	
black/gold	**1012175**	●
white/black	**1012174**	●
bronze/black	**1012176**	●

Product	Prod. no.	
GRIP! S, decorative ring		
white	**1011829**	●
black	**1011830**	●
nickel	**1011831**	●
gold	**1011832**	●
HONEYCOMB + spacer		
black	**1011837**	

GRIP! L
WL, UP OR DOWN, 1X QPAR51, Ø 5,7 CM

NEW





IP20 IK02

220-240 V ~50/60 Hz
Material: aluminium

- Honeycomb accessories included

SOCKET INSIDE 6 W

Base: 1 × GU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
black/gold	**1011878**
white/black	**1011877**
gold/black	**1011880**
bronze/black	**1011879**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

C,L

Prod. no.: 1005080

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F


Prod. no.: 1012469

Product	Prod. no.
GRIP! L, decorative ring	
white	**1008496**
black	**1008497**
nickel	**1008498**
gold	**1008499**
HONEYCOMB + spacer	
black	**1011839**

GRIP! L
WL, UP/DOWN, 2X QPAR51, Ø 5,7 CM

NEW





IP20 IK02

220-240 V ~50/60 Hz
Material: aluminium

- Honeycomb accessories included

SOCKET INSIDE 6 W

Base: 2 × GU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
black/gold	**1011882**
white/black	**1011881**
gold/black	**1011884**
bronze/black	**1011883**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

C,L

Prod. no.: 1005080

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F


Prod. no.: 1012469

Product	Prod. no.
GRIP! L, decorative ring	
white	**1008496**
black	**1008497**
nickel	**1008498**
gold	**1008499**
HONEYCOMB + spacer	
black	**1011839**

GRIP! FLAT
CL, PHASE

GERMAN DESIGN AWARD WINNER 2026





C IP20 50000 h L70B50 UGR 15

220-240 V ~50/60 Hz | 500 mA
Total wattage: 15 W
Material: aluminium

- 2700 K/3000 K colour temperature switch included
- Contains honeycomb structure

LED INSIDE CCT CRI 90

Down	2700 K	3000 K
	400 lm	430 lm


Variant	Prod. no.
black	**1009100**
white/black	**1009101**

Product	Prod. no.
GRIP! FLAT, decorative ring	
black	**1009102**
white	**1009103**
gold	**1009104**


1006441 331

ASTO TUBE
WL, SINGLE, GU10





IP20

220-240 V ~50/60 Hz
Material: aluminium

• Decorative rings available as accessory

SOCKET INSIDE 10 W

Base: 1 × GU10

Variant	Prod. no.
● black	**1006441**
○ white	**1006442**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: **1005077**

SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

Product	Prod. no.
Decorative reflector	
chrome	**1006449**
gold	**1006450**
copper	**1006451**
black/chrome	**1007190**

ASTO TUBE
WL, UP/DOWN, GU10





IP20

220-240 V ~50/60 Hz
Material: aluminium

• Decorative rings available as accessory

SOCKET INSIDE 10 W

Base: 2 × GU10

Variant	Prod. no.
● black	**1006443**
○ white	**1006444**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: **1005077**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

Product	Prod. no.
Decorative reflector	
chrome	**1006449**
gold	**1006450**
copper	**1006451**
black/chrome	**1007190**


ASTO TUBE
DECORATIVE REFLECTOR



Ø: 6.8 cm
H: 4 cm
Material: polycarbonate (PC)

Variant	Prod. no.
black/chrome	**1007190**
gold	**1006450**
chrome	**1006449**
copper	**1006451**



1008204 335
1008201 335
1008205 335

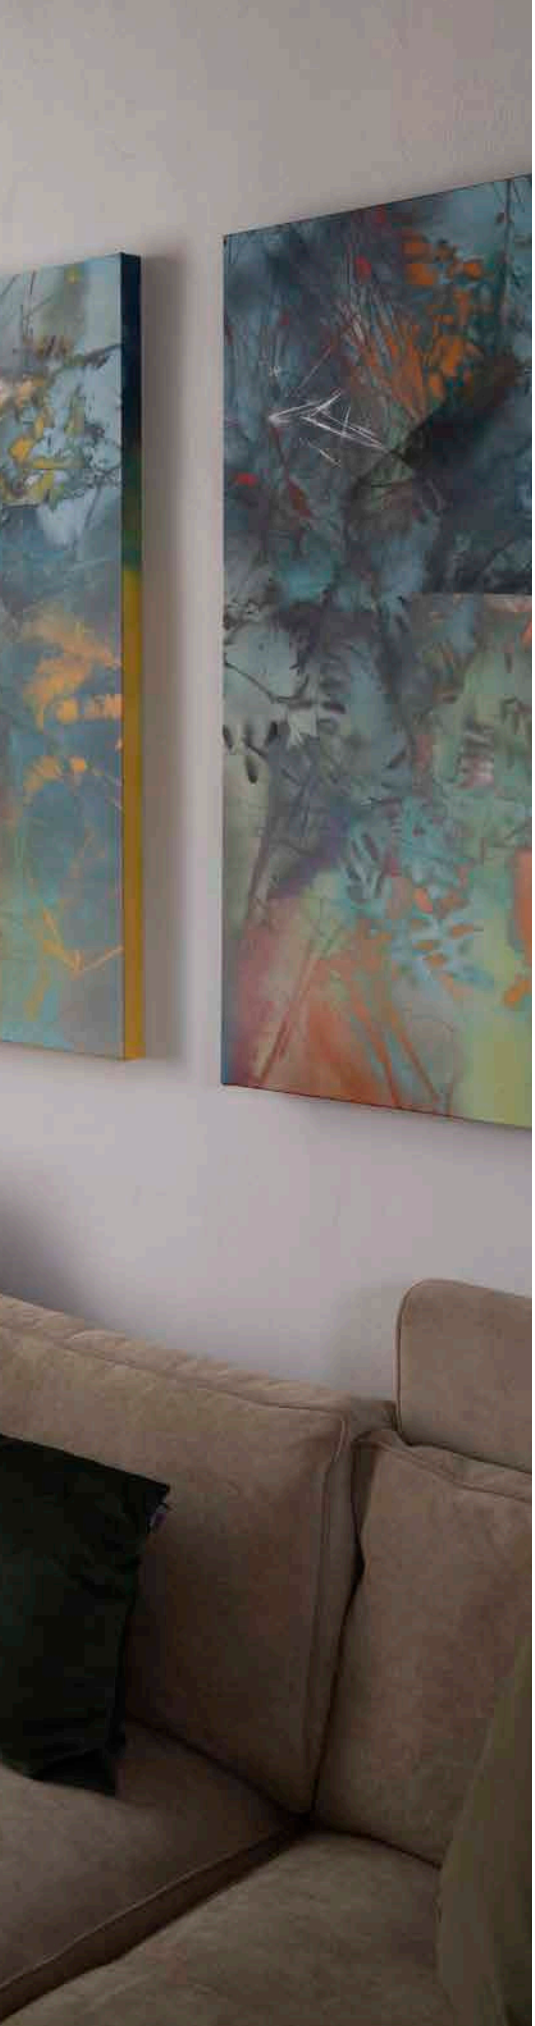

MANA BASE
WL, ROUND, PHASE

GERMAN DESIGN AWARD SPECIAL 2022






IP65 | 50000 h L80B50 | 68


220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: aluminium/polycarbonate (PC)

LED INSIDE | CCT | CRI 90

2700 K	3000 K
1070 lm	1100 lm


Variant	Prod. no.
● anthracite	**1006319**

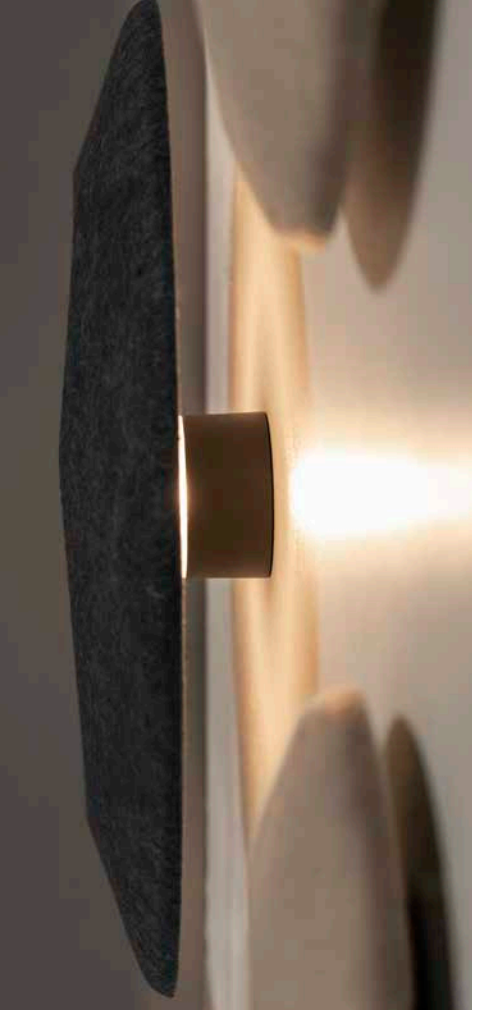

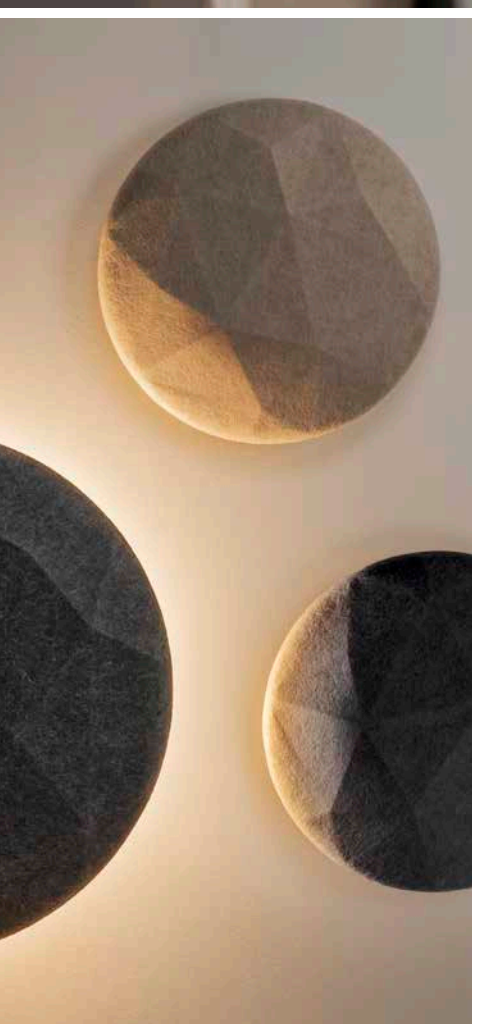

MANA BASE
ROUND





Material: aluminium/polycarbonate (PC)

- Non-illuminated base for round shades in the MANA series

Variant	Prod. no.
anthracite	**1004969**

MANA 40
SHADE, ROUND, ACOUSTIC FELT



IP20

Ø: 40 cm
H: 6 cm
Material: felt/aluminium

Variant	Prod. no.
grey	**1004661**
beige	**1004660**

MANA 60
SHADE, ROUND, ACOUSTIC FELT



IP20

Ø: 60 cm
H: 6 cm
Material: felt/aluminium

Variant	Prod. no.
grey	**1004663**
beige	**1004662**

MANA 40
SHADE, ROUND



IP20

Ø: 40 cm
H: 2.2 cm
Material: steel

Variant	Prod. no.
● black	**1008201**

MANA 40
SHADE, ROUND

IP20

Ø: 40 cm
H: 2.2 cm
Material: steel

Variant	Prod. no.
○ white	**1008203**

MANA 40
SHADE, ROUND,
MOON STRUCTURE



IP20

Ø: 40 cm
H: 2.2 cm
Material: steel

Variant	Prod. no.
● gold	**1008205**

MANA 60
SHADE, ROUND



IP20

Ø: 60 cm
H: 4.2 cm
Material: steel

Variant	Prod. no.
● black	**1008202**

MANA 60
SHADE, ROUND

IP20

Ø: 60 cm
H: 4.2 cm
Material: steel

Variant	Prod. no.
○ white	**1008204**

MANA 60
SHADE, ROUND,
MOON STRUCTURE



IP20


Ø: 60 cm
H: 4.2 cm
Material: steel

Variant	Prod. no.
● gold	**1008206**


1004670 337

OCULUS
WL, SINGLE, PHASE





IP20 | 100° | 25000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 8.5 W
Material: aluminium

- Additional frosted lens included


LED INSIDE | DIM TO WARM | CRI 90

2000 K	-	3000 K
57 lm	-	570 lm

Variant	Prod. no.
● black	**1006307**
○ white	**1006308**

OCULUS UP/DOWN
WL, PHASE





IP20 | IK02 | 100° | 50000 h L80B20

220-240 V ~50/60 Hz | 700 mA
Total wattage: 15 W
Material: aluminium

- Additional frosted lens included


LED INSIDE | DIM TO WARM | CRI 90

	2000 K	-	3000 K
Up	22 lm	-	555 lm
Down	22 lm	-	555 lm

Variant	Prod. no.
● black	**1004670**
○ white	**1004671**

OCULUS WL UP/DOWN
DTW, PVD





IP20 | IK02 | 100° | 30000 h L70B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 15 W
Material: aluminium

- Additional frosted lens included


LED INSIDE | DIM TO WARM | CRI 90

	2000 K	-	3000 K
Up	22 lm	-	555 lm
Down	22 lm	-	555 lm

Variant	Prod. no.
● brass	**1008613**
● dark bronze	**1008612**
◐ dark copper	**1008614**

PLASTRA
WL, CUBE, QT14





IP20

220-240 V ~50/60 Hz
Material: plaster/steel

SOCKET INSIDE 42 W

Base: 1 × G69


Variant	Prod. no.
○ white	**148018**

G9 | 4 W | 300°
400 lm | 3000 K | EEC = E

Prod. no.: **1005286**

PLASTRA
WL, RECTANGULAR, QT-DE12





IP20

220-240 V ~50/60 Hz
Material: plaster/steel

SOCKET INSIDE 20 W

Base: 1 × R7s 118 mm


Variant	Prod. no.
○ white	**1002238**

R7s 118 mm | 15 W | 330°
2000 lm | 3000 K | EEC = E

Prod. no.: **1005288**

PLASTRA
WL, E14





IP20

220-240 V ~50/60 Hz
Material: plaster/steel

SOCKET INSIDE 40 W

Base: 1 × E14


Variant	Prod. no.
○ white	**148010**

E14 | 4 W | 320°
350 lm | 2700 K | EEC = G

Prod. no.: **1005285**

PLASTRA
WL, SEMICIRCULAR





IP20

220-240 V ~50/60 Hz
Material: plaster/steel

SOCKET INSIDE 20 W


Base: 1 × R7s 118 mm | max. Ø: 2 cm | L: 11.8 cm

Variant	Prod. no.
○ white	**1004732**

R7s 118 mm | 15 W | 330°
2000 lm | 3000 K | EEC = E

Prod. no.: **1005288**

PLASTRA
WL, ROUND SHIELD



100-240 V ~50/60 Hz | 12 V
Total wattage: 6.5 W
Material: plaster/steel


LED INSIDE CRI 80

3000 K
375 lm

Variant	Prod. no.
○ white	**148091**

PLASTRA
WL, ANGULAR





100-240 V ~50/60 Hz | 12 V
Total wattage: 10.5 W
Material: plaster/steel


LED INSIDE CRI 80

3000 K
650 lm

Variant	Prod. no.
○ white	**148019**

PLASTRA
WL, QPAR51





220-240 V ~50/60 Hz
Material: plaster/steel

SOCKET INSIDE 35 W

Base: 2 × GU10


Variant	Prod. no.
○ white	**148060**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005076**

PLASTRA 101
WL, E14





IP20

220-240 V ~50/60 Hz
Material: plaster/steel

SOCKET INSIDE 40 W


Base: 1 × E14 max. Ø: 4.5 cm | L: 11 cm

Variant	Prod. no.
○ white	**148013**

E14 | 4 W | 320°
350 lm | 2700 K | EEC = G

Prod. no.: 1005285

PLASTRA
WL, CURVE, QT-DE12



IP20

220-240 V ~50/60 Hz
Material: plaster/steel

SOCKET INSIDE 100 W


Base: 1 × R7s 78 mm

Variant	Prod. no.
○ white	**148012**

R7s 78 mm | 9 W | 330°
1050 lm | 3000 K | EEC = E

Prod. no.: 1005287

PLASTRA 104
WL, QT14



IP20

220-240 V ~50/60 Hz
Material: plaster/steel


SOCKET INSIDE 42 W

Base: 1 × G69

Variant	Prod. no.
○ white	**148016**

G9 | 4 W | 300°
400 lm | 3000 K | EEC = E

Prod. no.: 1005286

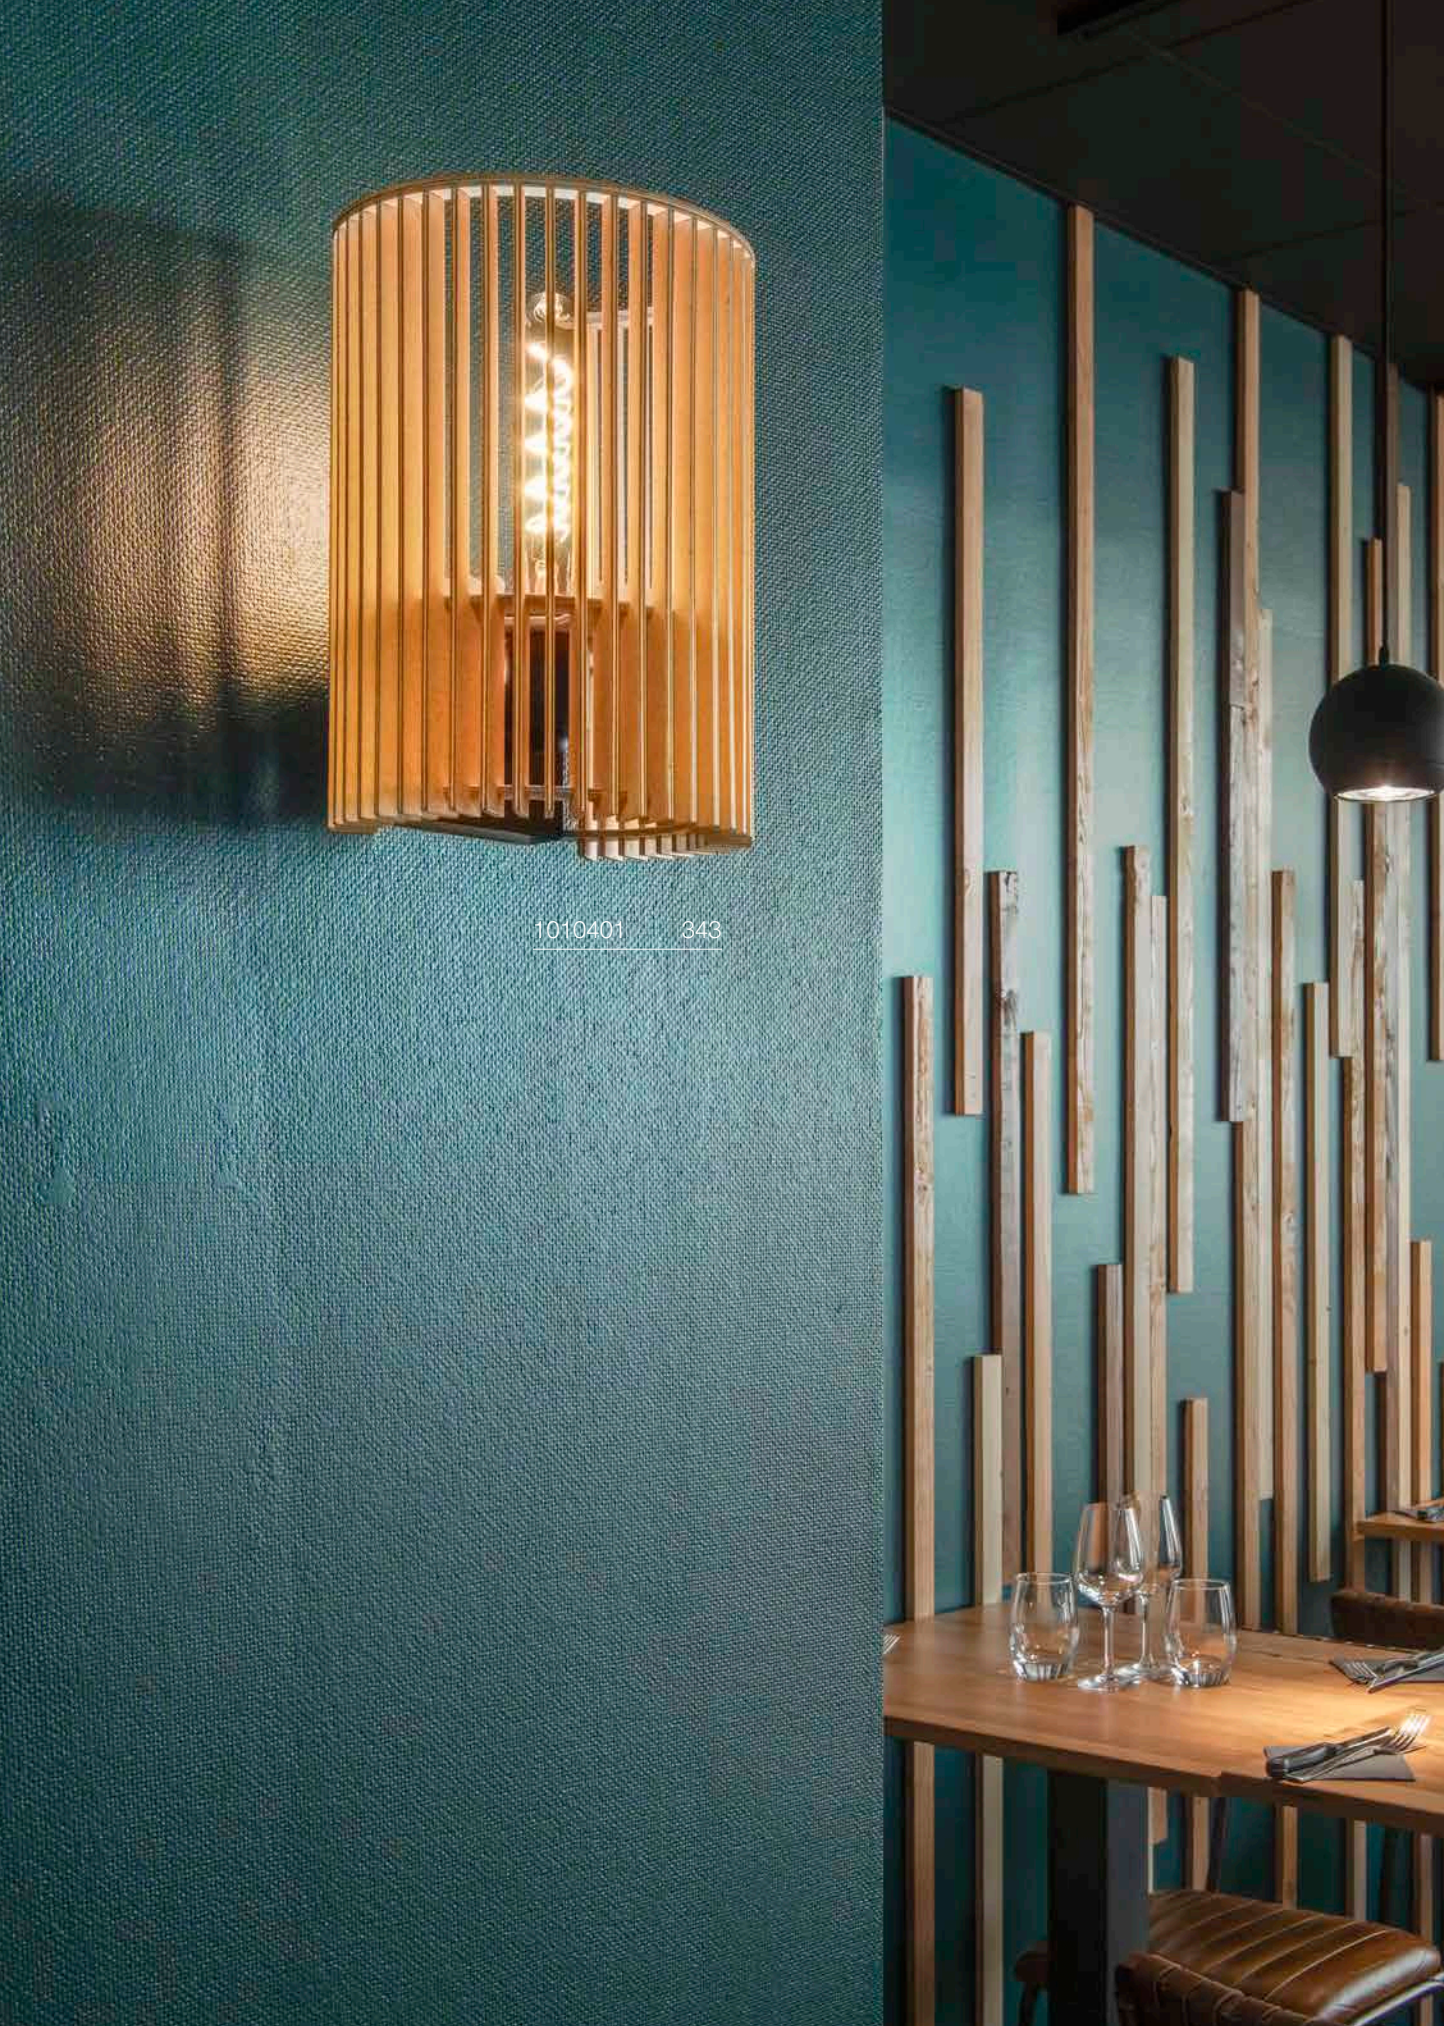


1010401 343



WUD
WL, E27, CYLINDRICAL





IP20 IK02

220-240 V ~50/60 Hz
Material: wood/steel

- Natural material


SOCKET INSIDE 40 W

Base: 1 × E27 | max. Ø: 12 cm | L: 18 cm

Variant	Prod. no.
brown	**1010401**

E27 | 6 W | 330°
570 lm | 2200 K | EEC = F


Prod. no.: **1008152**

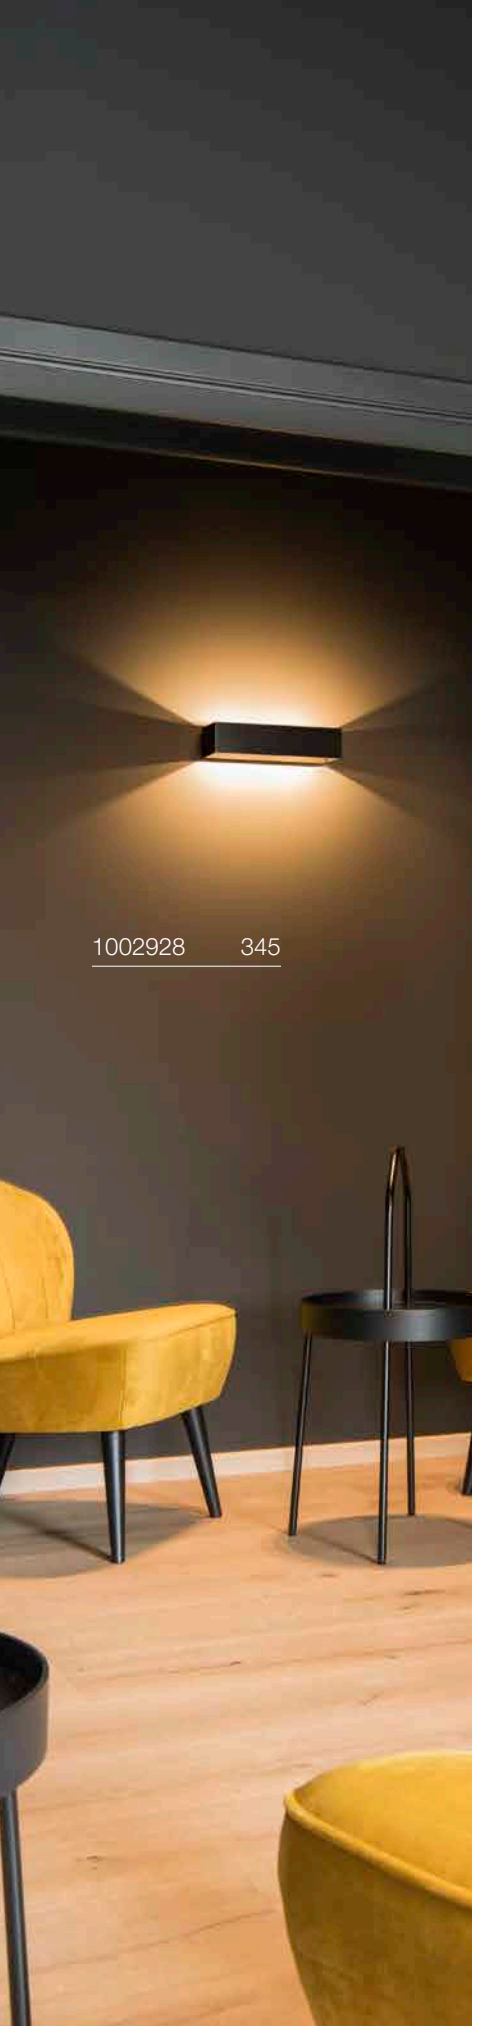

1002928 345

LOGS IN
WL





IP20 30 000 h L70B50


100-240 V ~50/60 Hz | 500 mA
Total wattage: 6 W
Material: aluminium


LED INSIDE CRI 90

	3000 K
151320	300 lm
151321	470 lm

Variant	Prod. no.
black/gold 300 lm	**151320**
white 470 lm	**151321**

LOGS IN
WL, PHASE





C IP20 30 000 h L70B50

220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: aluminium


LED INSIDE DIM TO WARM CRI 90

	2000 K - 3000 K
1000638	43 lm - 430 lm
1000639	69 lm - 690 lm

Variant	Prod. no.
black/gold 43 lm	**1000638**
white 69 lm	**1000639**

LOGS IN L
WL, PHASE





C,L · IP20 · 30000 h L70B50


220-240 V ~50/60 Hz | 500 mA
Total wattage: 18 W
Material: aluminium


LED INSIDE · CRI 90

	3000 K
1002842	1100 lm
1002844	1600 lm

Variant	Prod. no.
black/gold 1100 lm	**1002842**
white 1600 lm	**1002844**

LOGS IN L
WL, PHASE





C,L · IP20 · 30000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 21 W
Material: aluminium


LED INSIDE · DIM TO WARM · CRI 90


	2000 K - 3000 K
1002928	100 lm - 1000 lm
1002929	140 lm - 1390 lm

Variant	Prod. no.
black/gold 100 lm	**1002928**
white 140 lm	**1002929**

LOGS IN L
WL, DALI

NEW





Dali · Touch · IP20 · IK02 · 50000 h L80B20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: aluminium/steel


LED INSIDE · CRI 90

	3000 K
1011866	2000 lm
1011865	1400 lm

Variant	Prod. no.
black/gold 1400 lm	**1011865**
white 2000 lm	**1011866**

QUAD FRAME 14
WL





IP20 | 95° | 30000h L70B50 | 10

100-240 V ~50/60 Hz | 350 mA
Total wattage: 4.4 W
Material: aluminium


LED INSIDE | CCT | CRI 90

2700 K	3000 K
165 lm	175 lm

Variant	Prod. no.
○ white	**1003467**

QUAD FRAME 19
WL





IP20 | 100° | 30000h L70B50 | 10


220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: aluminium

LED INSIDE | CCT | CRI 90

2700 K	3000 K
580 lm	640 lm

Variant	Prod. no.
○ white	**1003468**

WL 149
WL, QT-DE12



IP20

220-240 V ~50/60 Hz
Material: steel/glass

SOCKET INSIDE 60 W


Base: R7s 78 mm

Variant	Prod. no.
● black/frosted	**1011748**
○ white/frosted	**149471**

R7s 78 mm | 9 W | 330°
1050 lm | 3000 K | EEC = E

Prod. no.: **1005287**

WL 149
WL, PHASE



C IP20 50000 h L70B50

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: steel/glass


LED INSIDE CRI 90

	3000 K
149511	1080 lm
1011747	600 lm

Variant	Prod. no.
● black 600 lm	**1011747**
○ white 1080 lm	**149511**

SHELL 30
WL, PHASE





C IP20 IK02 120° 50000 h L70B50

220-240 V ~50/60 Hz | 1300 mA
Total wattage: 50 W
Material: aluminium/acrylic

LED INSIDE

	3000 K
	5650 lm


Variant	Prod. no.
○ white	**1000423**



151410 349

ASSO 300
WL, PHASE







220-240 V ~50/60 Hz | 500 mA
Total wattage: 12 W
Material: aluminium/steel




3000 K
975 lm

Variant	Prod. no.
white	**151271**
aluminium/white	**151275**

ASSO 300
WL, PHASE





C,L · IP20 · 30000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 21 W
Material: aluminium/steel


LED INSIDE · DIM TO WARM · CRI 90

2000 K - 3000 K
135 lm - 1340 lm

Variant	Prod. no.
○ white	**1000634**

OSSA 180
WL, QT-DE12





IP20 · UGR 23

220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE · 100 W

Base: 1 × R7s 78 mm

Variant	Prod. no.
● black	**151450**
○ white	**151451**


R7s 78 mm | 9 W | 330°
1050 lm | 3000 K | EEC = E

C

Prod. no.: 1005287

OSSA 300
WL, QT-DE12





IP20 · UGR 23

220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE · 120 W

Base: 1 × R7s 118 mm

Variant	Prod. no.
● black	**151410**
○ white	**151411**

R7s 118 mm | 15 W | 330°
2000 lm | 3000 K | EEC = E


C

Prod. no.: 1005288


1008071 351

CARISO
WL, PHASE





C IP20 50000 h L70B50


220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.8 W
Material: aluminium/steel


LED INSIDE CRI 80

	2700 K	3000 K
	290 lm	630 lm

Variant	Prod. no.
black/gold 290 lm | 2700 K	**151710**
white 630 lm | 3000 K	**151711**

CARISO
WL, PHASE





C,L IP20 30000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 21 W
Material: aluminium/steel


LED INSIDE DIM TO WARM CRI 90

	1700 K	2700 K
151740	58 lm	580 lm
151741	100 lm	1030 lm

Variant	Prod. no.
black/gold 58 lm | 1700 K	**151740**
white 100 lm | 2000 K	**151741**

CHROMBO
WL, PHASE





C IP20 120° 50000 h L70B50

220-240 V ~50/60 Hz | 200 mA
Total wattage: 8 W
Material: steel/glass

LED INSIDE CRI 90

	3000 K
	790 lm


Variant	Prod. no.
black	**1008071**
white	**1003316**



1004740 353

DIRETO 60
WL, PHASE





220-240 V ~50/60 Hz | 500 mA
Total wattage: 14 W
Material: aluminium


Up	2700 K	3000 K
	590 lm	625 lm

Down	2700 K	3000 K
	590 lm	625 lm

Variant	Prod. no.
● black	**1004740**
○ white	**1004741**

DENA 30
WL, E14





220-240 V ~50/60 Hz
Material: aluminium

Base: 2 × E14 | max. Ø: 5.1 cm | L: 9.6 cm


Variant	Prod. no.
● aluminium	**147529**

E14 | 4 W | 320°
350 lm | 2700 K | EEC = G

Prod. no.: **1005285**

BASKET
WL, E27





220-240 V ~50/60 Hz
Material: glass


Base: 1 × E27 | max. Ø: 5.2 cm | L: 15.2 cm

Variant	Prod. no.
○ white	**151591**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no.: **1005289**

FITU
WALL BRACKET

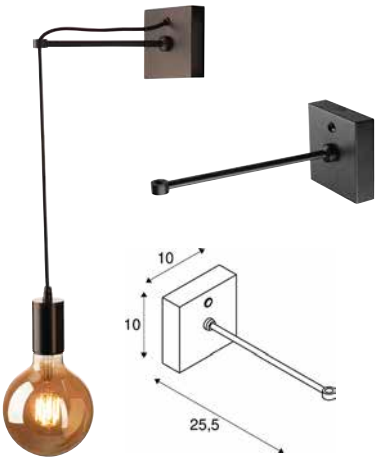


IP20

Material: steel

• See page 258 for matching pendant lights

Variant	Prod. no.
● black	**1004682**

THEO UP/DOWN
WL, QPAR51

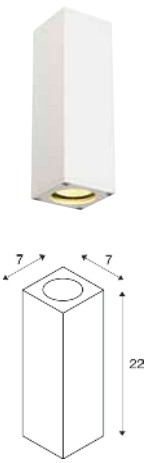

IP20

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 50 W

Base: 2xGU10

Variant	Prod. no.
● anthracite	**1000330**
○ white	**1000327**
● aluminium	**1000329**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F


Prod. no.: **1005077**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

SOLID CUBE
WL, QT14

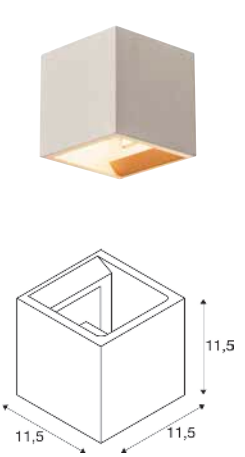

IP20

220-240 V ~50/60 Hz
Material: concrete

SOCKET INSIDE 25 W

Base: 1xG9


Variant	Prod. no.
● grey	**1000910**
● black sandstone	**1000911**

G9 | 4 W | 300°
400 lm | 3000 K | EEC = E

Prod. no.: **1005286**

FENDA
WL, BASE, E27





IP20

220-240 V ~50/60 Hz
Material: steel/plastic

SOCKET INSIDE 40 W

Base: 1 × E27 | max. Ø: 5.1 cm | L: 20 cm

Variant	Prod. no.
○ white	**1001272**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no.: 1005289

Product	Prod. no.
Lampshade	
● black	**1001273**
◐ black/copper	**1001274**
○ white	**1001275**
● beige	**1001276**

FENDA
WL, BASE, E27




W: 23 cm
H: 30 cm
Material: textile/steel

Variant	Prod. no.
◐ black/copper	**1001274**
● black	**1001273**
○ white	**1001275**
● beige	**1001276**

Product	Prod. no.
Base	
○ white	**1001272**

KENKUA SPOT
WL, E27





IP20 25° 180° 180° 30000 h L70B50

100-240 V ~50/60 Hz | 700 mA
Total wattage: 2 W
Material: steel/glass

- Light sources can be switched on/off separately at the light.

LED INSIDE SOCKET INSIDE CRI 80 40 W

Base: 1 × E27 | max. Ø: 6.5 cm | L: 12 cm

Spot	3000 K 200 lm


Variant	Prod. no.
◑ chrome	**1002855**

E27 | 4 W | 280°
830 lm | 2700 K | EEC = A

Prod. no.: 1008641

COUPA
WL





IP20 | 50 000 h L70B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 3.4 W
Material: steel/glass

- Light sources can be switched on/off separately at the light.

LED INSIDE | SOCKET INSIDE | CRI 80 | 42 W

Base: 1 × G69	L: 9 cm

Spot	3000 K 240 lm


Variant	Prod. no.
chrome/opaque	**149452**

G9 | 4 W | 300°
450 lm | 2700 K | EEC = E

Prod. no.: **1007455**

KARPO MAGN
CW, SINGLE, PHASE





C | IP20 | 38° | 25 000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 6.2 W
Material: steel/aluminium

- Light head position can be adjusted via the magnetic bracket


LED INSIDE | CRI 90

	3000 K 350 lm

Variant	Prod. no.
black	**1004706**

KARPO GOOSE
WL





Switch | IP20 | 40° | 50 000 h L70B50

220-240 V ~50/60 Hz | 12 V
Total wattage: 6 W
Material: aluminium/steel

- Light can be dimmed via switch on the light head


LED INSIDE | CRI 90

1006161	3000 K 420 lm
1006162	3000 K 380 lm

Variant	Prod. no.
black 380 lm	**1006162**
white 420 lm	**1006161**

KARPO 30
CW, SINGLE







220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.3 W
Material: aluminium/steel


LED INSIDE CRI 90

152330	3000 K 560 lm	
152331	3000 K 680 lm	

Variant	Prod. no.
● black 560 lm	**152330**
○ white 680 lm	**152331**

KARPO 30
WL, SINGLE







220-240 V ~50/60 Hz | 500 mA
Total wattage: 5.7 W
Material: aluminium/steel

- Switch on light housing


LED INSIDE CRI 90

152340	3000 K 450 lm	
152341	3000 K 470 lm	

Variant	Prod. no.
● black 450 lm	**152340**
○ white 470 lm	**152341**

KARPO
WL







220-240 V ~50/60 Hz | 500 mA
Total wattage: 6.8 W
Material: aluminium

- 2 USB connections max. 1.5 A
- 3 dimming levels via switch on base


LED INSIDE CRI 90

	3000 K 390 lm	

Variant	Prod. no.
○ white	**1002140**

SOMNILA SPOT
WL, LEFT





IP20 · 340° · 110° · 36000 h L70B50

100-240 V ~50/60 Hz | 12 V
Total wattage: 15 W
Material: aluminium/steel

- 1 USB type-C | 5 V 2.0 A
- Light sources can be switched on/off separately on the housing


LED INSIDE · CRI 90

1003455	Spot	3000 K / 120 lm
	Indirect	3000 K / 370 lm
1003457	Spot	3000 K / 120 lm
	Indirect	3000 K / 650 lm

Variant	Prod. no.
● black 120 lm	**1003455**
○ white 120 lm	**1003457**

SOMNILA SPOT
WL, RIGHT





IP20 · 340° · 110° · 36000 h L70B50

100-240 V ~50/60 Hz | 12 V
Total wattage: 15 W
Material: aluminium/steel

- 1 USB type-C | 5 V 2.0 A
- Light sources can be switched on/off separately on the housing


LED INSIDE · CRI 90

1003456	Spot	3000 K / 120 lm
	Indirect	3000 K / 370 lm
1003458	Spot	3000 K / 120 lm
	Indirect	3000 K / 650 lm

Variant	Prod. no.
● black 120 lm	**1003456**
○ white 120 lm	**1003458**

SOMNILA FLEX
WL, LEFT





IP20 · 110° · 36000 h L70B50

100-240 V ~50/60 Hz | 12 V
Material: aluminium

- Light sources can be switched on/off separately on the housing.


LED INSIDE · CRI 90

	Spot	3000 K / 120 lm

Variant	Prod. no.
○ white	**1003459**

SOMNILA FLEX
WL, RIGHT





IP20 | 110° | 36000 h L70B50

100-240 V ~50/60 Hz | 12 V
Material: aluminium

- Light sources can be switched on/off separately on the housing.


LED INSIDE | CRI 90

	3000 K
Spot	120 lm

Variant	Prod. no.
○ white	**1003460**

DIO FLEX PLATE
WL QPAR51





IP20

220-240 V ~50/60 Hz
Material: aluminium

- Switch on light housing

SOCKET INSIDE | 50 W

Base: 1 × GU10

Variant	Prod. no.
● black	**1002608**
○ white	**1002607**
◑ chrome	**146692**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F


C,L

Prod. no.: **1005076**

Product	Prod. no.
Lamp decorative ring Ø 5.7 cm	
◑ chrome	**151049**

DIO FLEX PLATE
WL





IP20 | 45° | 30000 h L70B50

100-240 V ~50/60 Hz | 350 mA
Total wattage: 1.9 W
Material: aluminium

- Switch on light housing

LED INSIDE | CRI 80

	3000 K
1002118	100 lm

	2700 K
1002430	100 lm

	3000 K
1002431	100 lm


	3000 K
146682	100 lm

Variant	Prod. no.
● black 2700 K	**1002430**
● black 3000 K	**1002431**
○ white 3000 K	**1002118**
◑ chrome 3000 K	**146682**


1002608 359
Gardenia

PHELIA
WL, QPAR51





IP20 | 350° | 90°

220-240 V ~50/60 Hz
Material: aluminium/steel

- Switch on lamp head

SOCKET INSIDE | 10 W

Base: 1 × GU10 max. Ø: 5.1 cm | L: 10.5 cm

Variant	Prod. no.
● black	**148540**


GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: **1005077**

MERADO FLOOD
WL, PHASE





C | IP20 | 360° | 90° | 40000 h L70B50 | 200

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 40 W
Material: aluminium


LED INSIDE | CRI 80

	4000 K
1001472	3200 lm
	3000 K
1001468	3000 lm

Variant	Prod. no.
○ white 3000 lm | 3000 K	**1001468**
○ white 3200 lm | 4000 K	**1001472**

DISPLAY ADL 50
QPAR51





IP20 | 200° | 90° | 30

220-240 V ~50/60 Hz
Material: aluminium/brass

- open cable end

SOCKET INSIDE | 50 W


Base: 1 × GU10

Variant	Prod. no.
○ white	**1002860**
◑ chrome	**146332**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

C,L

Prod. no.: **1005079**

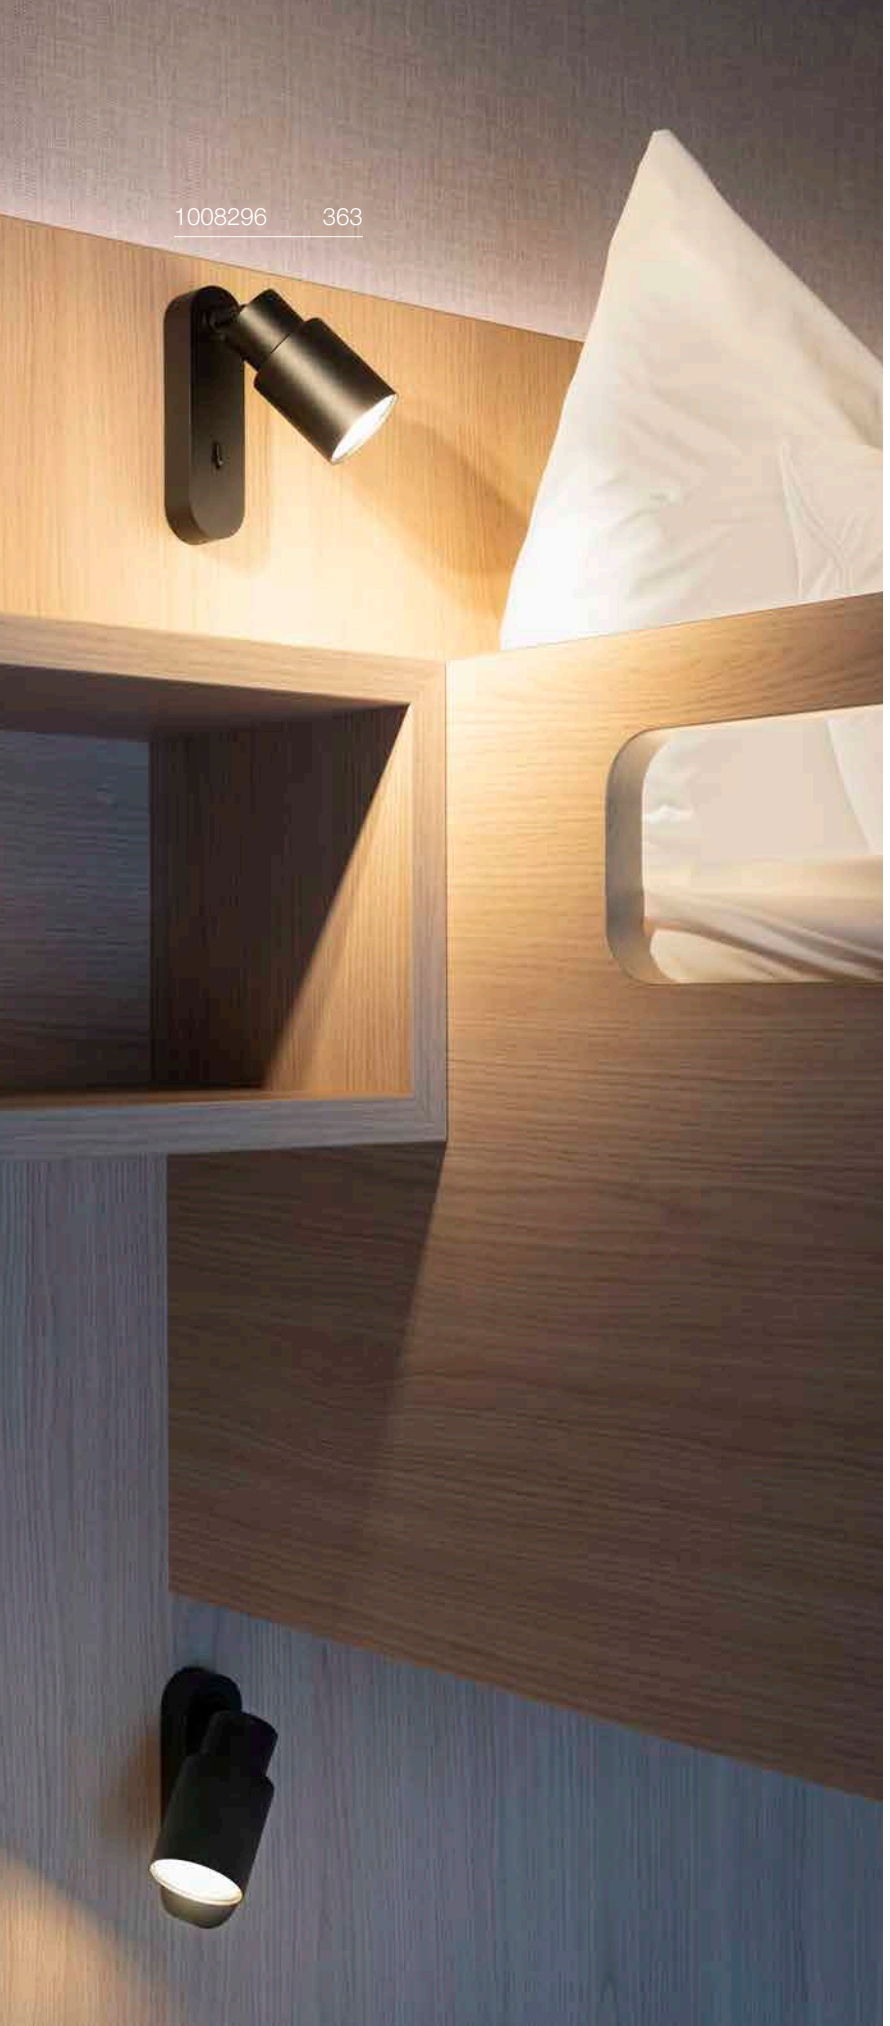

PURI 2.0 TUBE
CW, QPAR51

IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1-4 × GU10 max. Ø: 5.1 cm | L: 5.5 cm

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005076**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

PURI 2.0 TUBE
CW, DOUBLE LONG, QPAR51






Variant	Prod. no.
black	**1008361**
black/gold	**1008362**
white	**1008363**
grey	**1008364**

PURI 2.0 TUBE
CW, SINGLE, QPAR51






Variant	Prod. no.
black	1008284
black/gold	1008285
white	1008286
grey	1008287

PURI 2.0 TUBE
CW, SWITCH, SINGLE, QPAR51






Variant	Prod. no.
black	1008296
black/gold	1008297
white	1008298
grey	1008299

PURI 2.0 TUBE
CW, DOUBLE ASYM., QPAR51






Variant	Prod. no.
black	1008308
black/gold	1008309
white	1008310
grey	1008311

PURI 2.0 TUBE
CW, TRIPLE LONG, QPAR51






Variant	Prod. no.
black	1008320
black/gold	1008321
white	1008322
grey	1008323

PURI 2.0 TUBE
CW, TRIPLE ROUND, QPAR51






Variant	Prod. no.
black	1008332
black/gold	1008333
white	1008334
grey	1008335

PURI 2.0 TUBE
CW, QUADRUPLE LONG, QPAR51





Variant	Prod. no.
black	1008344
black/gold	1008345
white	1008346
grey	1008347



1008350 + 1008219 365 + 369

PURI 2.0 CONE
CW, QPAR51

IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1-4 × GU10 max. Ø: 5.1 cm | L: 5.5 cm

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: **1005076**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

PURI 2.0 CONE
CW, DOUBLE LONG, QPAR51






Variant	Prod. no.
● black	**1008365**
●● black/gold	**1008366**
○ white	**1008367**
● grey	**1008368**

PURI 2.0 CONE
CW, SINGLE, QPAR51






Variant	Prod. no.
● black	**1008288**
◐ black/gold	**1008289**
○ white	**1008290**
● grey	**1008291**

PURI 2.0 CONE
CW, SWITCH, SINGLE, QPAR51






Variant	Prod. no.
● black	**1008300**
◐ black/gold	**1008301**
○ white	**1008302**
● grey	**1008303**

PURI 2.0 CONE
CW, DOUBLE ASYM., QPAR51






Variant	Prod. no.
● black	**1008312**
◐ black/gold	**1008313**
○ white	**1008314**
● grey	**1008315**

PURI 2.0 CONE
CW, TRIPLE LONG, QPAR51






Variant	Prod. no.
● black	**1008324**
◐ black/gold	**1008325**
○ white	**1008326**
● grey	**1008327**

PURI 2.0 CONE
CW, TRIPLE ROUND, QPAR51






Variant	Prod. no.
● black	**1008336**
◐ black/gold	**1008337**
○ white	**1008338**
● grey	**1008339**

PURI 2.0 CONE
CW, QUADRUPLE LONG, QPAR51





Variant	Prod. no.
● black	**1008348**
◐ black/gold	**1008349**
○ white	**1008350**
● grey	**1008351**



PURI 2.0 DOME
CW, QPAR51

IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1-4 × GU10 max. Ø: 5.1 cm | L: 5.5 cm

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005076**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

PURI 2.0 DOME
CW, DOUBLE LONG, QPAR51






Variant	Prod. no.
black	**1008369**
black/gold	**1008370**
white	**1008371**
grey	**1008372**

PURI 2.0 DOME
CW, SINGLE, QPAR51






Variant	Prod. no.
black	1008292
black/gold	1008293
white	1008294
grey	1008295

PURI 2.0 DOME
CW, SWITCH, SINGLE, QPAR51






Variant	Prod. no.
black	1008304
black/gold	1008305
white	1008306
grey	1008307

PURI 2.0 DOME
CW, DOUBLE ASYM., QPAR51






Variant	Prod. no.
black	1008316
black/gold	1008317
white	1008318
grey	1008319

PURI 2.0 DOME
CW, TRIPLE LONG, QPAR51






Variant	Prod. no.
black	1008328
black/gold	1008329
white	1008330
grey	1008331

PURI 2.0 DOME
CW, TRIPLE ROUND, QPAR51






Variant	Prod. no.
black	1008340
black/gold	1008341
white	1008342
grey	1008343

PURI 2.0 DOME
CW, QUADRUPLE LONG, QPAR51





Variant	Prod. no.
black	1008352
black/gold	1008353
white	1008354
grey	1008355


1008318 + 1008221 367 + 369

PURI 2.0 TUBE
SHADE



Ø: 5.5 cm
H: 6.5 cm
Material: aluminium

Variant	Prod. no.
black	**1008214**
white	**1008213**
gold	**1008216**
grey	**1008215**
bronze	**1008217**
aluminium	**1008376**

PURI 2.0 CONE
SHADE



Ø: 5.5 cm
H: 6.5 cm
Material: aluminium

Variant	Prod. no.
black	**1008219**
white	**1008218**
gold	**1008221**
grey	**1008220**
bronze	**1008222**
aluminium	**1008377**

PURI 2.0 DOME
SHADE




Ø: 5.5 cm
H: 6.5 cm
Material: aluminium

Variant	Prod. no.
black	**1008224**
white	**1008223**
gold	**1008226**
grey	**1008225**
bronze	**1008227**
aluminium	**1008378**



NOBLO®
CW, SINGLE, PHASE, DTW





C · IP20 · 36° · 355° · 90° · 40000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 8 W
Material: aluminium/steel

LED INSIDE · DIM TO WARM · CRI 90

Down	2000 K - 3000 K
	10 lm - 450 lm


Variant	Prod. no.
● black	**1008706**
○ white	**1008703**

⊕

Product	Prod. no.
Decorative ring	
● black	**1008482**
○ white	**1008483**
● gold	**1008484**
● grey	**1008485**
● bronze	**1008486**
● copper	**1008487**

NOBLO®
CW, DOUBLE, PHASE, DTW





C,L · IP20 · 36° · 355° · 90° · 40000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: aluminium/steel

LED INSIDE · DIM TO WARM · CRI 90

Down	2000 K - 3000 K
	10 lm - 940 lm


Variant	Prod. no.
● black	**1008707**
○ white	**1008704**

⊕

Product	Prod. no.
Decorative ring	
● black	**1008482**
○ white	**1008483**
● gold	**1008484**
● grey	**1008485**
● bronze	**1008486**
● copper	**1008487**

NOBLO®
CW, TRIPLE, PHASE, DTW





C,L · IP20 · 36° · 355° · 90° · 40000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 22 W
Material: aluminium/steel

LED INSIDE · DIM TO WARM · CRI 90

Down	2000 K - 3000 K
	10 lm - 1360 lm

Variant	Prod. no.
● black	**1008708**
○ white	**1008705**


⊕

Product	Prod. no.
Decorative ring	
● black	**1008482**
○ white	**1008483**
● gold	**1008484**
● grey	**1008485**
● bronze	**1008486**
● copper	**1008487**


KoALA
DINOS

NOBLO®
CW, SINGLE, PHASE





C · IP20 · 32° · 355° · 90° · 50000 h L80B10

220-240 V ~50/60 Hz | 150 mA
Total wattage: 6 W
Material: aluminium/steel

LED INSIDE · CRI 90

1008709 **1008712**	Down	3000 K 750 lm
1008715 **1008718**	Down	2700 K 740 lm


Variant	Prod. no.
● black 750 lm | 3000 K	**1008712**
● black 740 lm | 2700 K	**1008718**
○ white 750 lm | 3000 K	**1008709**
○ white 740 lm | 2700 K	**1008715**

⊕

Product	Prod. no.
Decorative ring	
● black	**1008482**
○ white	**1008483**
● gold	**1008484**
● grey	**1008485**
● bronze	**1008486**
● copper	**1008487**

NOBLO®
CW, DOUBLE, PHASE





C,L · IP20 · 32° · 355° · 90° · 50000 h L80B10

220-240 V ~50/60 Hz | 300 mA
Total wattage: 12 W
Material: aluminium/steel

LED INSIDE · CRI 90

1008710 **1008713**	Down	3000 K 1460 lm
1008716 **1008719**	Down	2700 K 1450 lm


Variant	Prod. no.
● black 1460 lm | 3000 K	**1008713**
● black 1450 lm | 2700 K	**1008719**
○ white 1460 lm | 3000 K	**1008710**
○ white 1450 lm | 2700 K	**1008716**

⊕

Product	Prod. no.
Decorative ring	
● black	**1008482**
○ white	**1008483**
● gold	**1008484**
● grey	**1008485**
● bronze	**1008486**
● copper	**1008487**

NOBLO®
CW, TRIPLE, PHASE





C,L · IP20 · 32° · 355° · 90° · 50000 h L80B10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium/steel

LED INSIDE · CRI 90

1008711 **1008714**	Down	3000 K 2360 lm
1008717 **1008720**	Down	2700 K 2350 lm


Variant	Prod. no.
● black 2360 lm | 3000 K	**1008714**
● black 2350 lm | 2700 K	**1008720**
○ white 2360 lm | 3000 K	**1008711**
○ white 2350 lm | 2700 K	**1008717**

⊕

Product	Prod. no.
Decorative ring	
● black	**1008482**
○ white	**1008483**
● gold	**1008484**
● grey	**1008485**
● bronze	**1008486**
● copper	**1008487**

KALU 2.0
CW, SINGLE, PHASE





IP20 IK02 36° 270° 90°

50 000 h L90B10 UGR 19

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium

- Discover more lenses and decorative rings in the accessories section

LED INSIDE CRI 90


1010258 **1010260**	Down	2700 K 1400 lm
1010261 **1010263**	Down	3000 K 1450 lm

Variant	Prod. no.
● black 1400 lm | 2700 K	**1010258**
● black 1450 lm | 3000 K	**1010261**
○ white 1400 lm | 2700 K	**1010260**
○ white 1450 lm | 3000 K	**1010263**

Product	Prod. no.
Decorative ring	
○ white	**1010135**
● black	**1010136**
● gold	**1010138**
● copper	**1010139**
Lens	
○ transparent 15°	**1010140**
○ transparent 24°	**1010141**
○ transparent 36°	**1010142**
○ transparent 60°	**1010143**

KALU 2.0
CW, DOUBLE LONG, PHASE





IP20 IK02 36° 270° 90°

50 000 h L90B10 UGR 19

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium

- Discover more lenses and decorative rings in the accessories section

LED INSIDE CRI 90


1010264 **1010266**	Down	2700 K 1350 lm	2700 K 1350 lm
1010267 **1010269**	Down	3000 K 1400 lm	3000 K 1400 lm

Variant	Prod. no.
● black 2 × 1350 lm | 2700 K	**1010264**
● black 2 × 1400 lm | 3000 K	**1010267**
○ white 2 × 1350 lm | 2700 K	**1010266**
○ white 2 × 1400 lm | 3000 K	**1010269**

Product	Prod. no.
Decorative ring	
○ white	**1010135**
● black	**1010136**
● gold	**1010138**
● copper	**1010139**
Lens	
○ transparent 15°	**1010140**
○ transparent 24°	**1010141**
○ transparent 36°	**1010142**
○ transparent 60°	**1010143**

KALU 2.0
CW, TRIPLE LONG, PHASE





IP20 IK02 36° 270° 90°

50 000 h L90B10 UGR 19

220-240 V ~50/60 Hz | 750 mA
Total wattage: 28 W
Material: aluminium

- Discover more lenses and decorative rings in the accessories section

LED INSIDE CRI 90


1010270 **1010272**	Down	2700 K 1350 lm	2700 K 1350 lm	2700 K 1350 lm
1010273 **1010275**	Down	3000 K 1400 lm	3000 K 1400 lm	3000 K 1400 lm

Variant	Prod. no.
● black 3 × 1350 lm | 2700 K	**1010270**
● black 3 × 1400 lm | 3000 K	**1010273**
○ white 3 × 1350 lm | 2700 K	**1010272**
○ white 3 × 1400 lm | 3000 K	**1010275**

Product	Prod. no.
Decorative ring	
○ white	**1010135**
● black	**1010136**
● gold	**1010138**
● copper	**1010139**
Lens	
○ transparent 15°	**1010140**
○ transparent 24°	**1010141**
○ transparent 36°	**1010142**
○ transparent 60°	**1010143**

PANTILO ROPE 19
CW, E27





IP20

220-240 V ~50/60 Hz
Material: glass

SOCKET INSIDE 15 W

Base: 1 × E27	max. Ø: 10 cm	L: 11 cm


Variant	Prod. no.
gold	**1007592**
silver	**1007593**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no.: **1005303**

PANTILO ROPE 27
CW, E27





IP20

220-240 V ~50/60 Hz
Material: glass

SOCKET INSIDE 15 W

Base: 1 × E27	max. Ø: 15 cm	L: 11 cm

Variant	Prod. no.
gold	**1007591**
silver	**1007590**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no.: **1005303**

SMART


E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no.: **1012471**

MOTUNA
CW, PHASE

NEW





C IP20 130° 50000 h L80B20

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Power consumption: 8
Material: aluminium

LED INSIDE CRI 90

1010217	2700 K 750 lm
1010365	2700 K 1000 lm

Variant	Prod. no.
black/gold 750 lm	**1010217**
white/gold 1000 lm	**1010365**




1008024 376

1007608 377

CYFT WAVE
CW, PHASE







220-240 V ~50/60 Hz | 500 mA
Total wattage: 6.5 W
Material: aluminium/acrylic

- Suitable for outdoor use




1008024 Indirect	2700 K	3000 K	4000 K
	240 lm	260 lm	280 lm
1008941	2700 K	3000 K	4000 K
	230 lm	250 lm	250 lm

Variant	Prod. no.
● black/clear 240 lm	**1008024**
● black/amber 230 lm	**1008941**

CYFT
CW, PHASE







220-240 V ~50/60 Hz | 500 mA
Total wattage: 6.5 W
Material: aluminium/acrylic




	2700 K	3000 K	4000 K
Indirect	330 lm	350 lm	380 lm

Variant	Prod. no.
● black	**1007608**

CYFT DOME
CW, PHASE







220-240 V ~50/60 Hz | 500 mA
Total wattage: 6.5 W
Material: aluminium/glass

• Suitable for outdoor use



2700 K	3000 K	4000 K
290 lm	310 lm	310 lm

Variant	Prod. no.
● black/opaque	**1008944**

CYFT
DECORATIVE RING



Ø: 13.1 cm
H: 2.5 cm
Material: steel


• Grate ring suitable for outdoor use

Variant	Prod. no.
○ white	**1007611**
● brass	**1007610**
◑ chrome	**1007609**
● bronze	**1008025**
● rust	**1008943**
● nickel	**1008026**


1010210 379

CYFT XL
CW, PHASE







220-240 V ~50/60 Hz | 500 mA
Total wattage: 15 W
Material: aluminium/glass

- Suitable for outdoor use




2700 K	3000 K	4000 K
810 lm	920 lm	930 lm

Variant	Prod. no.
● black	**1010210**

CYFT WAVE XL
CW, PHASE







220-240 V ~50/60 Hz | 500 mA
Total wattage: 15 W
Material: aluminium/glass

- Suitable for outdoor use



2700 K	3000 K	4000 K
850 lm	950 lm	960 lm

Variant	Prod. no.
● black	**1010211**

CYFT XL
DECORATIVE RING



Ø: 20 cm
H: 2.3 cm
Material: aluminium

- Grate ring suitable for outdoor use

Variant	Prod. no.
○ white	**1010213**
● brass	**1010214**
◑ chrome	**1010215**
● rust	**1010212**



ASTO TUBE
CW, GU10

IP20 350° 90°

220-240 V ~50/60 Hz | 500 mA
Total wattage: 15 W
Material: aluminium/glass

- Decorative rings available as accessory

SOCKET INSIDE 10 W

Base: 1-4 × GU10

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

ASTO TUBE
CW, SINGLE, GU10






Variant	Prod. no.
● black	**1006423**
○ white	**1006424**

ASTO TUBE
CW, DOUBLE, GU10





Variant	Prod. no.
● black	**1006425**
○ white	**1006426**

ASTO TUBE
DECORATIVE REFLECTOR




Ø: 6.8 cm
H: 4 cm
Material: polycarbonate (PC)

Variant	Prod. no.
black/chrome	**1007190**
gold	**1006450**
chrome	**1006449**
copper	**1006451**

ASTO TUBE
CW, TRIPLE, GU10






Variant	Prod. no.
● black	**1006427**
○ white	**1006428**

ASTO TUBE
CW, QUADRUPLE, GU10





Variant	Prod. no.
● black	**1006429**
○ white	**1006430**


007

KALU
CW, QPAR111

IP20 350° 90°

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 75 W

Base: 1-4 × GU10


GU10 | 12 W | 55°
670 lm | 2700 K | EEC = G

C,L

Prod. no.: **1005297**

KALU
CW, SINGLE, QPAR111






Variant	Prod. no.
● black	**1000702**
○ white	**147301**
● aluminium	**147306**

KALU
CW, DOUBLE, QPAR111






Variant	Prod. no.
● black	**1000703**
○ white	**147311**
● aluminium	**147316**

KALU
CW, TRIPLE, QPAR111






Variant	Prod. no.
● black	**1000704**
○ white	**147321**
● aluminium	**147326**

KALU
CW, QUAD, QPAR111






Variant	Prod. no.
● black	**1002023**
○ white	**1002024**
● aluminium	**1002025**


132020 385

ALTRA DICE
CW, DOUBLE, QPAR51





IP20 350° 180°

220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE 50 W

Base: 2 × GU10


Variant	Prod. no.
○ white	**151531**

GU10 | 6 W | 36°
360 lm | 2200 K-2700 K | EEC = G

Prod. no.: 1005273

SPOT 79
CW, QPAR51





IP20 350° 180°

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 50 W

Base: 1 × GU10 max. Ø: 5.1 cm | L: 5.7 cm

Variant	Prod. no.
● black	**132020**
○ white	**132021**
● grey	**132024**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: 1005077

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F


Prod. no.: 1012469




SENSER 2.0 12
CW, ROUND/SQUARE, PHASE

NEW







IP20 IK02 90° 50000 h L80B10

220-240 V ~50/60 Hz | 350 mA
Total wattage: 7.2 W
Material: aluminium/plastic PC

LED INSIDE CCT CRI 90


	3000 K	4000 K
1012214 Down	500 lm	500 lm
1012213 Down	550 lm	600 lm


Variant	Prod. no.
○ white, round	**1012213** ●
○ white, square	**1012214** ●

SENSER 2.0 18
CW, ROUND/SQUARE, PHASE

NEW







C IP20 IK02 90° 50000 h L80B10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 14 W
Material: aluminium/plastic PC

LED INSIDE CCT CRI 90


	3000 K	4000 K
1012216 Down	1300 lm	1350 lm
1012215 Down	1250 lm	1350 lm


Variant	Prod. no.
○ white, round	**1012215**
○ white, square	**1012216**

SENSER 2.0 24
CW, ROUND/SQUARE, PHASE

NEW







C IP20 IK02 90° 50000 h L80B10 UGR 25

220-240 V | 700 mA
Total wattage: 23 W
Material: aluminium/plastic PC

LED INSIDE CCT CRI 90


	3000 K	4000 K
Down	2250 lm	2400 lm


Variant	Prod. no.
○ white, round	**1012217**
○ white, square	**1012218**

SENSER 2.0 30
CW, ROUND/SQUARE, PHASE

NEW







C IP20 IK02 90° 50000 h L80B10 UGR 22

220-240 V ~50/60 Hz | 700 mA
Total wattage: 28 W
Material: aluminium/plastic PC

LED INSIDE CCT CRI 90


	3000 K	4000 K
1012220 Down	2650 lm	2800 lm
1012219 Down	2700 lm	2900 lm


Variant	Prod. no.
○ white, round	**1012219**
○ white, square	**1012220**

SENSER 2.0 12
CW, ROUND/SQUARE, DALI

NEW









Dali IP20 IK02 90° 50000h L80B10

220-240 V ~50/60 Hz | 350 mA
Total wattage: 7 W
Material: aluminium/plastic PC

LED INSIDE CCT CRI 90


	3000 K	4000 K
1012222 Down	500 lm	500 lm
1012221 Down	550 lm	600 lm


Variant	Prod. no.
○ white, round	**1012221**
○ white, square	**1012222**

SENSER 2.0 18
CW, ROUND/SQUARE, DALI

NEW







Dali IP20 IK02 90° 50000 h L80B10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 13 W
Material: aluminium/plastic PC

LED INSIDE CCT CRI 90


	3000 K	4000 K
1012224 Down	1300 lm	1350 lm
1012223 Down	1250 lm	1350 lm


Variant	Prod. no.
○ white, round	**1012223**
○ white, square	**1012224**

SENSER 2.0 24
CW, ROUND/SQUARE, DALI

NEW







Dali IP20 IK02 90° 50000 h L80B10 UGR 25

220-240 V | 700 mA
Total wattage: 23 W
Material: aluminium/plastic PC

LED INSIDE CCT CRI 90


	3000 K	4000 K
Down	2250 lm	2400 lm


Variant	Prod. no.
○ white, round	**1012225**
○ white, square	**1012226**

SENSER 2.0 30
CW, ROUND/SQUARE, DALI

NEW







Dali IP20 IK02 90° 50000 h L80B10 UGR 22

220-240 V ~50/60 Hz | 700 mA
Total wattage: 27 W
Material: aluminium/plastic PC


LED INSIDE CCT CRI 90

	3000 K	4000 K
1012228 Down	2650 lm	2800 lm
1012227 Down	2700 lm	2900 lm

Variant	Prod. no.
○ white, round	**1012227**
○ white, square	**1012228**

LIPSY® 2.0 30
CW, DOME





IP44 IK02 120° 50000h L80B10 UGR 25

220-240 V ~50/60 Hz | 160 / 230 mA
Total wattage: 7.1 W / 11 W
Material: steel/PMMA


LED INSIDE CCT CRI 80

	3000 K	4000 K
7.1 W	900 lm	950 lm
11 W	1250 lm	1300 lm

Variant	Prod. no.
○ white/opaque	**1012182** ●

LIPSY® 2.0 30
CW, HF, DOME





IP44 IK02 120° 50000h L80B10 UGR 25 FR


220-240 V ~50/60 Hz | 200 mA
Total wattage: 13 W
Material: steel/PMMA


LED INSIDE CCT CRI 80

	3000 K	4000 K
Down	1400 lm	1500 lm

Variant	Prod. no.
○ white/opaque	**1012184** ●

LIPSY® 2.0 40
CW, DOME

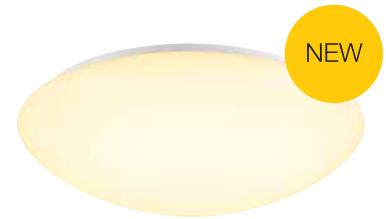



IP44 IK02 120° 50000 h L80B10 UGR 25


220-240 V ~50/60 Hz | 75 / 105 / 150 mA
Total wattage: 9 W / 18 W
Material: steel/PMMA


LED INSIDE CCT CRI 80

	3000 K	4000 K
9 W	1150 lm	1250 lm
18 W	2200 lm	2350 lm

Variant	Prod. no.
○ white/opaque	**1012186**

LIPSY® 2.0 40
CW, HF, DOME

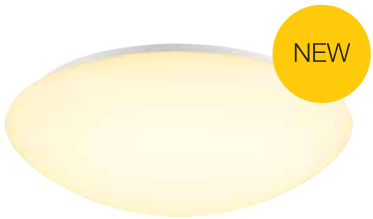



IP44 IK02 120° 50000 h L80B10 UGR 25 FR


220-240 V ~50/60 Hz | 450 mA
Total wattage: 18 W
Material: steel/PMMA


LED INSIDE CCT CRI 80

	3000 K	4000 K
Down	2000 lm	2150 lm

Variant	Prod. no.
○ white/opaque	**1012188**

LIPSY® 2.0 40
CW, 3H EM, DOME

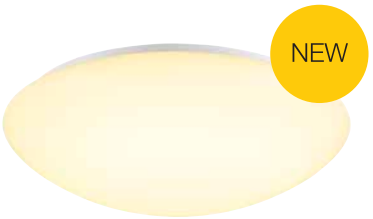



IP44 IK02 120° 50000 h L80B10 UGR 25

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19.5 W
Material: steel/PMMA


LED INSIDE CCT CRI 80

	3000 K	4000 K
Down	2000 lm	2150 lm

Variant	Prod. no.
○ white/opaque	**1012190**

LIPSY® 2.0 30
CW, DRUM





IP44 IK02 120° 50000h L80B10 UGR 25

220-240 V ~50/60 Hz | 160 / 230 mA
Total wattage: 7.1 W / 11 W
Material: steel/PMMA


LED INSIDE CCT CRI 80

	3000 K	4000 K
7.1 W	900 lm	950 lm
11 W	1250 lm	1300 lm

Variant	Prod. no.
○ white/opaque	**1012183** ●

LIPSY® 2.0 30
CW, HF, DRUM





IP44 IK02 120° 50000h L80B10 UGR 25 FR

220-240 V ~50/60 Hz | 200 mA
Total wattage: 13 W
Material: steel/PMMA


LED INSIDE CCT CRI 80

	3000 K	4000 K
Down	1400 lm	1500 lm

Variant	Prod. no.
○ white/opaque	**1012185** ●

LIPSY® 2.0 40
CW, DRUM





IP44 IK02 120° 50000 h L80B10 UGR 25

220-240 V ~50/60 Hz | 75 / 105 / 150 mA
Total wattage: 9 W / 18 W
Material: steel/PMMA


LED INSIDE CCT CRI 80

	3000 K	4000 K
9 W	1150 lm	1250 lm
18 W	2200 lm	2350 lm

Variant	Prod. no.
○ white/opaque	**1012187** ●

LIPSY® 2.0 40
CW, HF, DRUM





IP44 IK02 120° 50000 h L80B10 UGR 25 FR

220-240 V ~50/60 Hz | 450 mA
Total wattage: 18 W
Material: steel/PMMA


LED INSIDE CCT CRI 80

	3000 K	4000 K
Down	2000 lm	2150 lm

Variant	Prod. no.
○ white/opaque	**1012189** ●

LIPSY® 2.0 40
CW, 3H EM, DRUM






IP44 IK02 120° 50000 h L80B10 UGR 25

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19.5 W
Material: steel/PMMA

LED INSIDE CCT CRI 80


	3000 K	4000 K
Down	2000 lm	2150 lm

Variant	Prod. no.
○ white/opaque	**1012191** ●

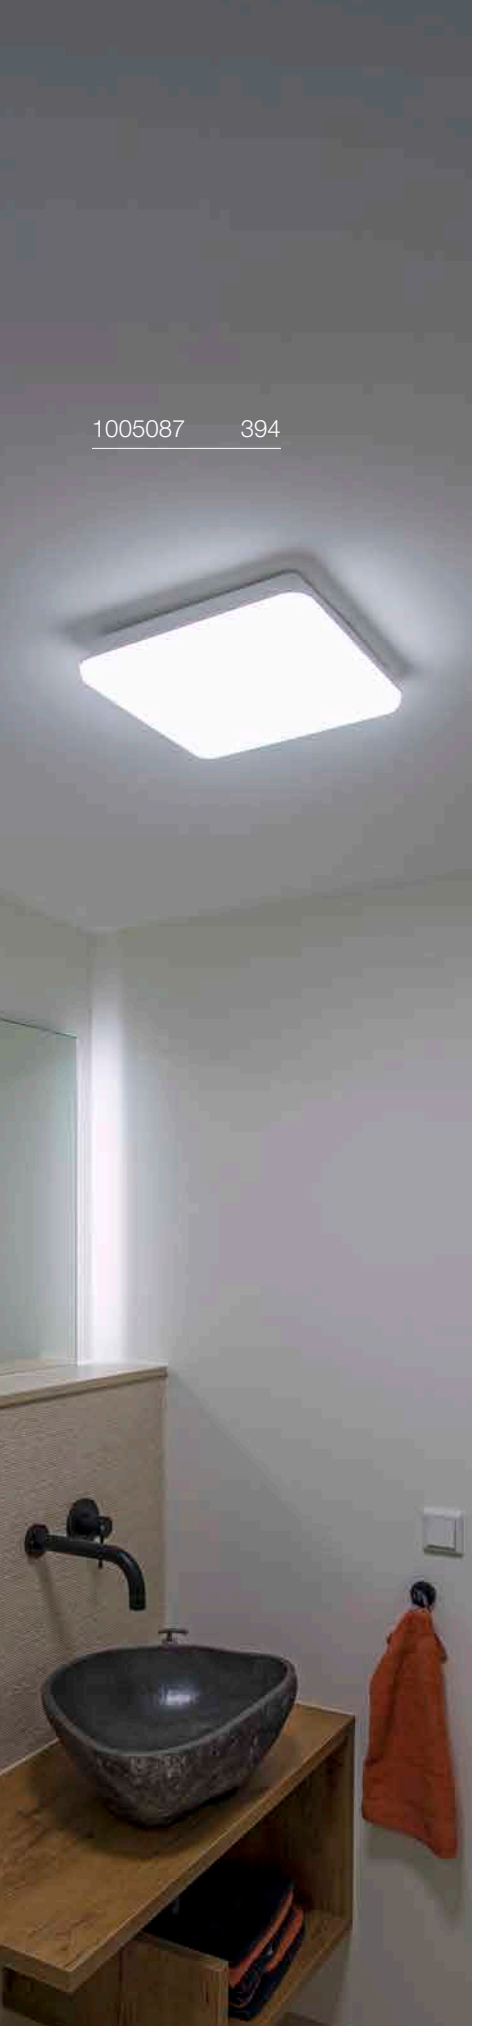

1005087 394

SIMA
CW, SQUARE, PHASE



IP44 IK02 120° 30000h L70B50 12


220-240 V ~50/60 Hz | 320 mA
Total wattage: 24 W
Material: polycarbonate (PC)

INSIDE CRI 90

3000 K
2200 lm

Variant	Prod. no.
○ white	**1005087**

SIMA
CW, SQUARE, SENSOR



IP44 IK02 120° 30000h L70B50 12 MR

220-240 V ~50/60 Hz | 320 mA
Total wattage: 24 W
Material: polycarbonate (PC)


INSIDE CRI 90

3000 K
2200 lm

Variant	Prod. no.
○ white	**1005088**

MELAN
CW, E27





IP20

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 60 W

Base: 1 × E27 | max. Ø: 7 cm | L: 16 cm

Variant	Prod. no.
aluminium	**155236**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no.: **1005303**


SMART

E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no.: **1012471**

BATTEN 60
CW





IP20 IK02 30000 h L70B50 10

220-240 V ~50/60 Hz | 110 mA
Total wattage: 9 W
Material: polycarbonate (PC)

- Switch on light housing
- Feed-in not included


LED INSIDE CCT CRI 90

	3000 K	4000 K
1006123	940 lm	980 lm

Variant	Prod. no.
white 940 lm	**1006123**

Product	Prod. no.
Feed-in	
white	**1006125**
Mounting brackets	
white	**1006126**
Connector	
white	**1006127**
Direct connector	
white	**1006128**

BATTEN 120
CW



IP20 IK02 30000 h L70B50 5

220-240 V ~50/60 Hz | 220 mA
Total wattage: 18 W
Material: polycarbonate (PC)

- Switch on light housing
- Feed-in not included

LED INSIDE CCT CRI 90

	3000 K	4000 K
1006124	1900 lm	1960 lm

Variant	Prod. no.
white 1900 lm	**1006124**

Product	Prod. no.
Feed-in	
white	**1006125**
Mounting brackets	
white	**1006126**
Connector	
white	**1006127**
Direct connector	
white	**1006128**



1010206 409

INDOOR | TABLE AND FLOOR LIGHTS



WUD TL | 399



VARYT | 401



QUIMERA | 403



ONE STRAIGHT | 405



ONE BOW | 405



SUN | 407



PANTILO SLIM | 408



PANTILO | 409



PANTILO ROPE | 409




FENDA | 411–413

NEW



MECANICA 2.0 | 414



KARPO | 415



PHELIA | 415



WORKLIGHT EASY | 417



NEW



WORKLIGHT | 417






WORKLIGHT PRO | 419


1010402 399

WUD
TL, E27, CYLINDRICAL





IP20 IK02

220-240 V ~50/60 Hz
Material: Wood

- Natural material
- Euro plug and switch

SOCKET INSIDE 40 W

Base: 1xE27	max. Ø: 12 cm	L: 18 cm

Variant	Prod. no.
beige	**1010402**

E27 | 6 W | 330°
570 lm | 2200 K | EEC = F


Prod. no.: **1008152**



1008113 + 1008023 401

VARYT
TL, E14





IP20 IK02 200

220-240 V ~50/60 Hz
Material: Aluminium

• Euro plug with switch in the supply cable

SOCKET INSIDE 6 W

Base: 1xE14	max. Ø: 3.8 cm	L: 11 cm

Variant	Prod. no.
● black	**1008109**
○ white	**1008110**
● brass	**1008112**
◑ chrome	**1008111**
● copper	**1008113**

E14 | 4 W | 320°
380 lm | 2700 K | EEC = F

C,L

Prod. no.: **1005284**

Product	Prod. no.
Glass shade for PD, WL, CL, TL	
● smoky grey	**1007858**
○ white	**1007859**
○ white	**1007860**
● amber	**1008023**
Glass shade for CL, WL, TL, PD	
○ white	**1008119**

VARYT
GLOBE GLASS SHADE



IK02

Ø: 12 cm
H: 12.8 cm
Material: Glass

Variant	Prod. no.
○ white	**1008119**

VARYT
DIAMOND GLASS SHADE



IK02

Ø: 12 cm
H: 12.7 cm
Material: Glass

Variant	Prod. no.
● smoky grey	**1007858**
● amber	**1008023**

VARYT
LINED GLASS SHADE



IK02

Ø: 12 cm
H: 13 cm
Material: Glass

Variant	Prod. no.
○ white	**1007859**

VARYT
PLEATED GLASS SHADE



IK02

Ø: 11.5 cm
H: 13.5 cm
Material: Glass

Variant	Prod. no.
○ white	**1007860**



1008033 177
1008038 403



QUIMERA
TL

GERMAN DESIGN AWARD WINNER 2025





IP20 IK04 360° 50000h L80B50 260

220-240 V ~50/60 Hz | 350 mA
Total wattage: 4 W
Material: Aluminium/Glass

- Power supply

LED INSIDE CCT CRI 90


	2700 K	3000 K
Indirect	150 lm	160 lm

Variant	Prod. no.
brass	**1008039**
dark bronze	**1008038**
dark copper	**1008040**


1006353 405

ONE STRAIGHT
FL







220-240 V ~50/60 Hz | 24 V
Total wattage: 22 W
Material: steel/polycarbonate (PC)

- Euro plug





	2700 K	3000 K
Up	600 lm	600 lm
Down	600 lm	600 lm

Variant	Prod. no.
● black	**1006355**
◐ black/brass	**1006353**
○ white	**1006354**

ONE BOW
FL







220-240 V ~50/60 Hz | 24 V
Total wattage: 22 W
Material: steel/polycarbonate (PC)

- Euro plug




	2700 K	3000 K
Up	600 lm	600 lm
Down	600 lm	600 lm

Variant	Prod. no.
● black	**1006352**
◐ black/brass	**1006350**
○ white	**1006351**


1009143 407

SUN
TL, G9





IP20 IK02 180

220-240 V ~50/60 Hz
Material: Steel

- Euro plug with switch in the supply cable

SOCKET INSIDE 5 W

Base: 1xG69 | max. Ø: 1.9 cm | L: 6 cm

Variant	Prod. no.
● black	**1009143**

G9 | 4 W | 300°
400 lm | 3000 K | EEC = E

Prod. no.: **1005286**

SUN
FL, G9





IP20 IK02 250

220-240 V ~50/60 Hz
Material: Steel

- Euro plug with switch in the supply cable


SOCKET INSIDE 5 W

Base: 1xG69 | max. Ø: 1.9 cm | L: 6 cm

Variant	Prod. no.
● black	**1009142**


G9 | 4 W | 300°
400 lm | 3000 K | EEC = E

Prod. no.: **1005286**

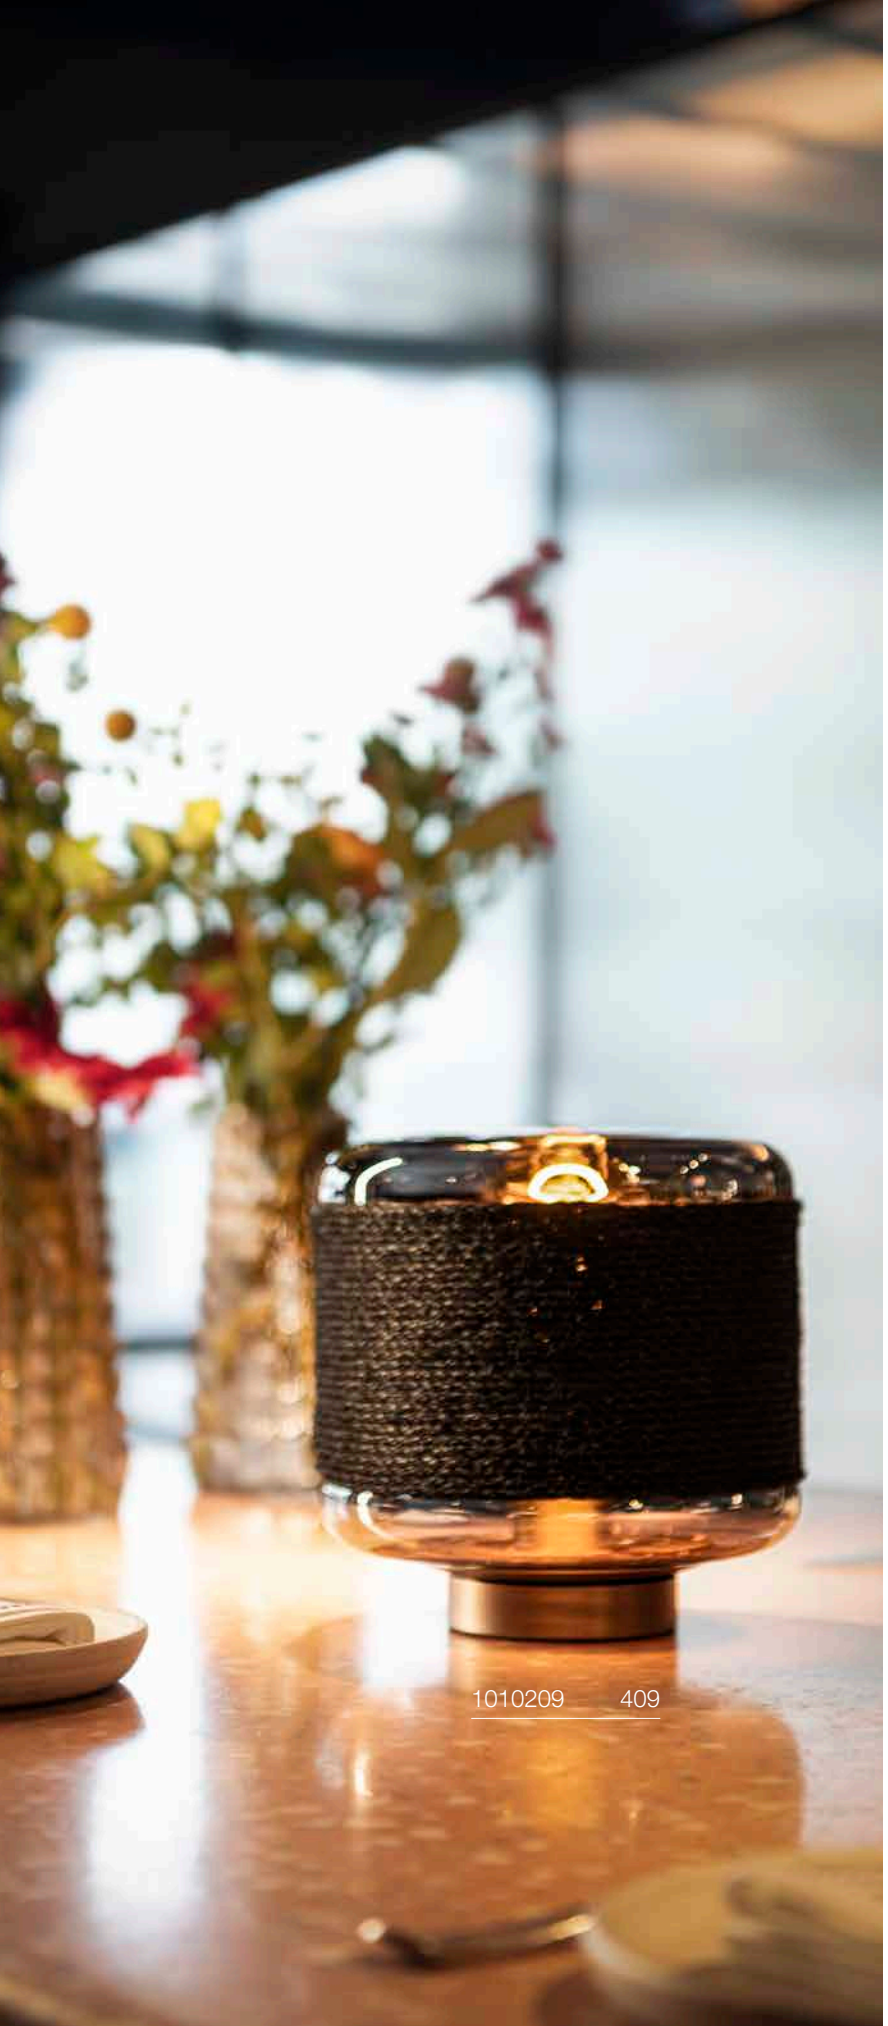

PANTILO SLIM
TL, E27







220-240 V ~50/60 Hz
Material: Steel

- Dimmable via the switch on the power cable
- Euro plug with switch in the supply cable



Base: 1xE27	max. Ø: 4.7 cm	L: 24 cm

Variant	Prod. no.
white	**1010348**
gold	**1010347**
chrome	**1010345**
copper	**1010346**




E27 | 6 W | 330°
570 lm | 2200 K | EEC = F



Prod. no.: **1008152**

PANTILO
TL, E27





IP20 IK02 186

220-240 V ~50/60 Hz
Material: Steel

- Euro plug with switch in the supply cable

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 6.8 cm | L: 14 cm

Variant	Prod. no.
white	**1010352**
gold	**1010351**
chrome	**1010349**
copper	**1010350**


E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no.: **1005303**

PANTILO ROPE 19
TL, E27

GERMAN DESIGN AWARD WINNER 2024





IP20 IK02 186

220-240 V ~50/60 Hz
Material: Steel

- Euro plug with switch in the supply cable

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 6.8 cm | L: 12 cm


Variant	Prod. no.
gold	**1010208**
silver	**1010209**

E27 | 4 W | 280°
830 lm | 2700 K | EEC = A

Prod. no.: **1008641**

PANTILO ROPE 27
FL, E27

GERMAN DESIGN AWARD WINNER 2024

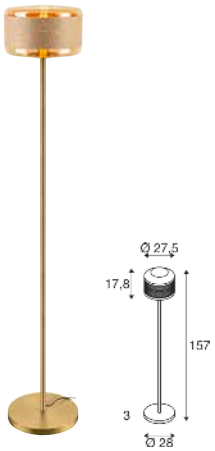

IP20 IK02 210

220-240 V ~50/60 Hz
Material: Steel

- Euro plug with switch in the supply cable

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 6.8 cm | L: 12 cm

Variant	Prod. no.
gold	**1010206**
silver	**1010207**

E27 | 4 W | 280°
830 lm | 2700 K | EEC = A

Prod. no.: **1008641**


155540 + 155592
411 + 413

FENDA
TL, E27



IP20 IK03 200

220-240 V ~50/60 Hz
Material: Steel/Plastic

• Euro plug and switch

SOCKET INSIDE 60 W


Base: 1xE27

Variant	Prod. no.
● black	**155780**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no.: **1005303**

FENDA
FL, E27

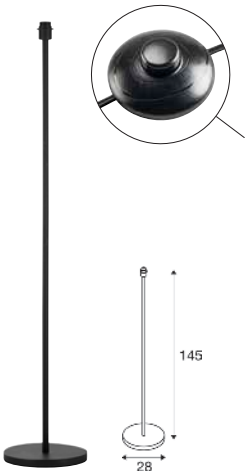

IP20 IK03 200

220-240 V ~50/60 Hz
Material: Steel/Plastic

• Euro plug and switch

SOCKET INSIDE 60 W


Base: 1xE27

Variant	Prod. no.
● black	**155790**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no.: **1005303**

FENDA
TL, E27

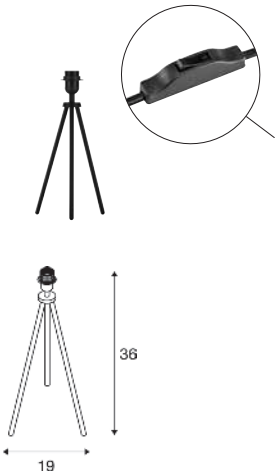

IP20 IK03 180

220-240 V ~50/60 Hz
Material: Aluminium/Plastic

• Euro plug and switch

SOCKET INSIDE 40 W

Base: 1xE27

Variant	Prod. no.
● black	**155540**

E27 | 8 W | 320°
700 lm | 2500 K | EEC = F


Prod. no.: **1005265**



155490 + 1004775 413

FENDA
FL, E27





IP20 IK03 330

220-240 V ~50/60 Hz
Material: Aluminium/Plastic

- Switch on light body
- Euro plug

SOCKET INSIDE 40 W

Base: 1xE27

Variant	Prod. no.
● black	**155490**

E27 | 13 W | 220°
1300 lm | 2700 K | EEC = F

C

Prod. no.: **1005302**

FENDA
30 CM, ROUND



Ø: 30 cm
H: 20 cm
Material: Textile/Steel

Variant	Prod. no.
black/copper	**155592**
○ white	**155582**
grey	**1004774**
beige	**155583**

FENDA
45 CM, ROUND



Ø: 45.5 cm
H: 28 cm
Material: Textile/Steel

Variant	Prod. no.
black/copper	**156122**
○ white	**156111**
grey	**1004775**
beige	**156113**

Product	Prod. no.
Acrylic glass cover, for FENDA Ø 45.5 cm	
○ white	**156100**

FENDA
70 CM, ROUND

IP20

Ø: 70 cm
H: 36 cm
Material: Textile/Steel

- Not suitable for Fenda Bow.

Variant	Prod. no.
black/copper	**1000580**
○ white	**1000579**


Product	Prod. no.
Acrylic glass cover for FENDA Ø 70 cm	
○ white	**1000957**

1012005 414

MECANICA 2.0
TL, LED, CCT

NEW





Touch IP20 IK02 85° 50000 h L80B10


220-240 V ~50/60 Hz | 190 mA
Total wattage: 9 W
Material: Aluminium/Plastic

LED INSIDE CCT CRI 90

2700 K	4000 K	6500 K
460 lm	520 lm	570 lm

Variant	Prod. no.
● black	**1012003**
○ white	**1012004**
● beige	**1012005**

KARPO
TL

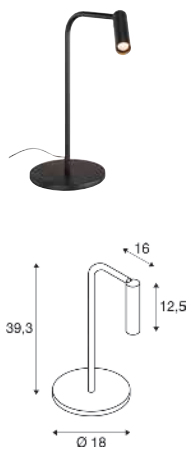

Switch · IP20 · 40° · 330° · 90° · 30000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 6.2 W
Material: Aluminium


- Switch on light body
- Power supply

LED INSIDE · CRI 90

3000 K
360 lm

Variant	Prod. no.
● black	**1001461**

KARPO
FL

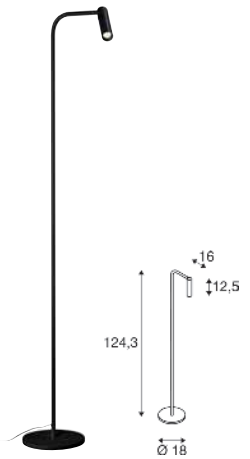

Switch · IP20 · 40° · 330° · 90° · 30000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 6.2 W
Material: Aluminium


- Switch on light body
- Power supply

LED INSIDE · CRI 90

3000 K
360 lm

Variant	Prod. no.
● black	**1001463**

PHELIA
FL, E27

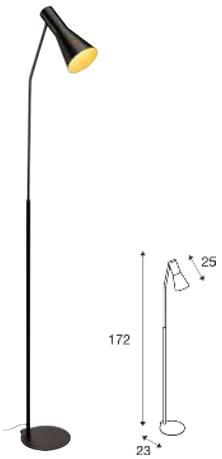

IP20 · IK03 · 350° · 90° · 200

220-240 V ~50/60 Hz
Material: Aluminium/Steel

- Switch on light body
- Safety plug and switch

SOCKET INSIDE · 23 W

Base: 1xE27 | max. Ø: 5.3 cm | L: 18 cm


Variant	Prod. no.
● black	**146010**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no.: **1005303**


1010393 417

WORKLIGHT EASY
FL 940

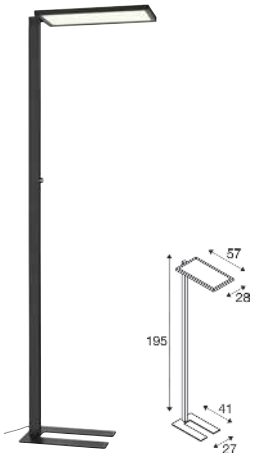

Switch · IP20 · IK03 · 115° · 80° · 50000 h L80B10 · 250 · UGR 19

220-240 V ~0/50/60 Hz | 1500 mA
Total wattage: 60 W
Material: Aluminium/Steel

- Safety plug


LED INSIDE · CRI 90

Up	4000 K 4230 lm
Down	4000 K 2920 lm

Variant	Prod. no.
● black	**1010393**
○ white	**1010394**

WORKLIGHT
TL

NEW

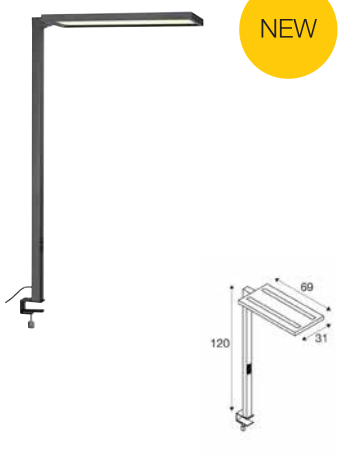

Touch · IP20 · IK03 · 140° · 80° · 50000 h L80B10 · 250 · UGR 13 · IR

200-240 V ~50/60 Hz | 48 V
Total wattage: 79 W
Material: Aluminium

- Safety plug


LED INSIDE · CRI 80

1012195	Down	4000 K 2250 lm
	Up	4000 K 9500 lm
1012196	Down	4000 K 2100 lm
	Up	4000 K 8850 lm
1012197	Down	4000 K 2200 lm
	Up	4000 K 9050 lm

Variant	Prod. no.
● black	**1012196**
○ white	**1012195**
● grey	**1012197**

WORKLIGHT
FL

NEW

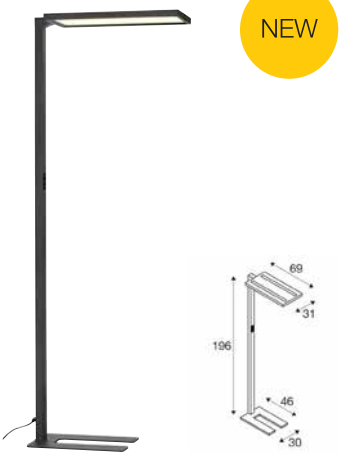

Touch · IP20 · IK03 · 140° · 80° · 50000 h L80B10 · 250 · UGR 13 · IR

200-240 V ~50/60 Hz | 48 V
Total wattage: 79 W
Material: Aluminium

- Safety plug


LED INSIDE · CRI 80

1012192	Down	4000 K 2250 lm
	Up	4000 K 9500 lm
1012193	Down	4000 K 2100 lm
	Up	4000 K 8850 lm
1012194	Down	4000 K 2200 lm
	Up	4000 K 9050 lm

Variant	Prod. no.
● black	**1012193**
○ white	**1012192**
● grey	**1012194**


1007462 419

WORKLIGHT PRO
FL, SINGLE

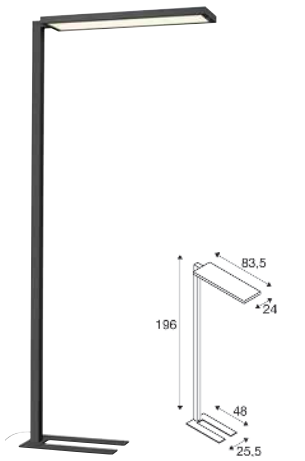

Touch · IP20 · IK03 · 115° · 75° · 50000 h L80B10 · 250 · UGR 16 · IR

200-240 V ~50/60 Hz | 48 V
Total wattage: 100 W
Material: Aluminium/Steel


- Safety plug

LED INSIDE · CRI 80

Direct	4000 K 2300 lm
Indirect	4000 K 10700 lm

Variant	Prod. no.
● black	**1007462**
○ white	**1007463**
● grey	**1007464**

WORKLIGHT PRO
FL, DOUBLE

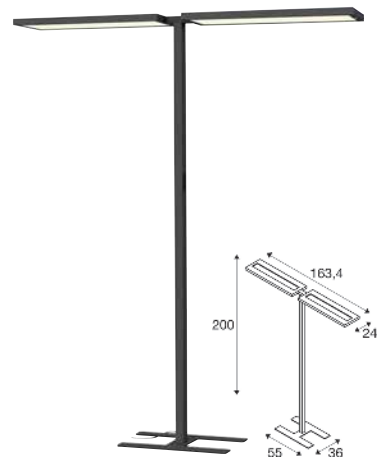

Touch · IP20 · IK03 · 115° · 75° · 50000 h L80B10 · 250 · UGR 16 · IR

200-240 V ~50/60 Hz | 48 V
Total wattage: 150 W
Material: Aluminium/Steel

- Safety plug

LED INSIDE · CRI 80

Direct	4000 K 4400 lm
Indirect	4000 K 15600 lm

Variant	Prod. no.
● black	**1007465**
○ white	**1007466**
● grey	**1007467**


1010336 441

INDOOR | 48 V SYSTEMS



KALU 2.0 | 439



LIGHT EYE® 2.0 | 439



DYSKO | 441



NUMINOS® | 442–449



IN-LINE | 450–453



FIX-IT! | 454–457



GRIP! FLAT | 459





GRIP! S | 460–461



GRIP! S | 463



GRIP! S MINI | 463



GRIP! M | 465




LALU® SET | 466–467

48V
TRACK SYSTEM

The 48V track system combines premium design with maximum flexibility. Different track geometries (straight, curved, L-, T- or X-shaped), together with surface-mounted, recessed and suspended installation options, offer extensive possibilities for a wide range of interior concepts..

The three-dimensional track layout enables seamless transitions from ceiling to wall. The integrated DALI control system enables individual control of each light and delivers flicker-free, precisely dimmable lighting.


The result is a future-proof track system for residential and commercial applications.

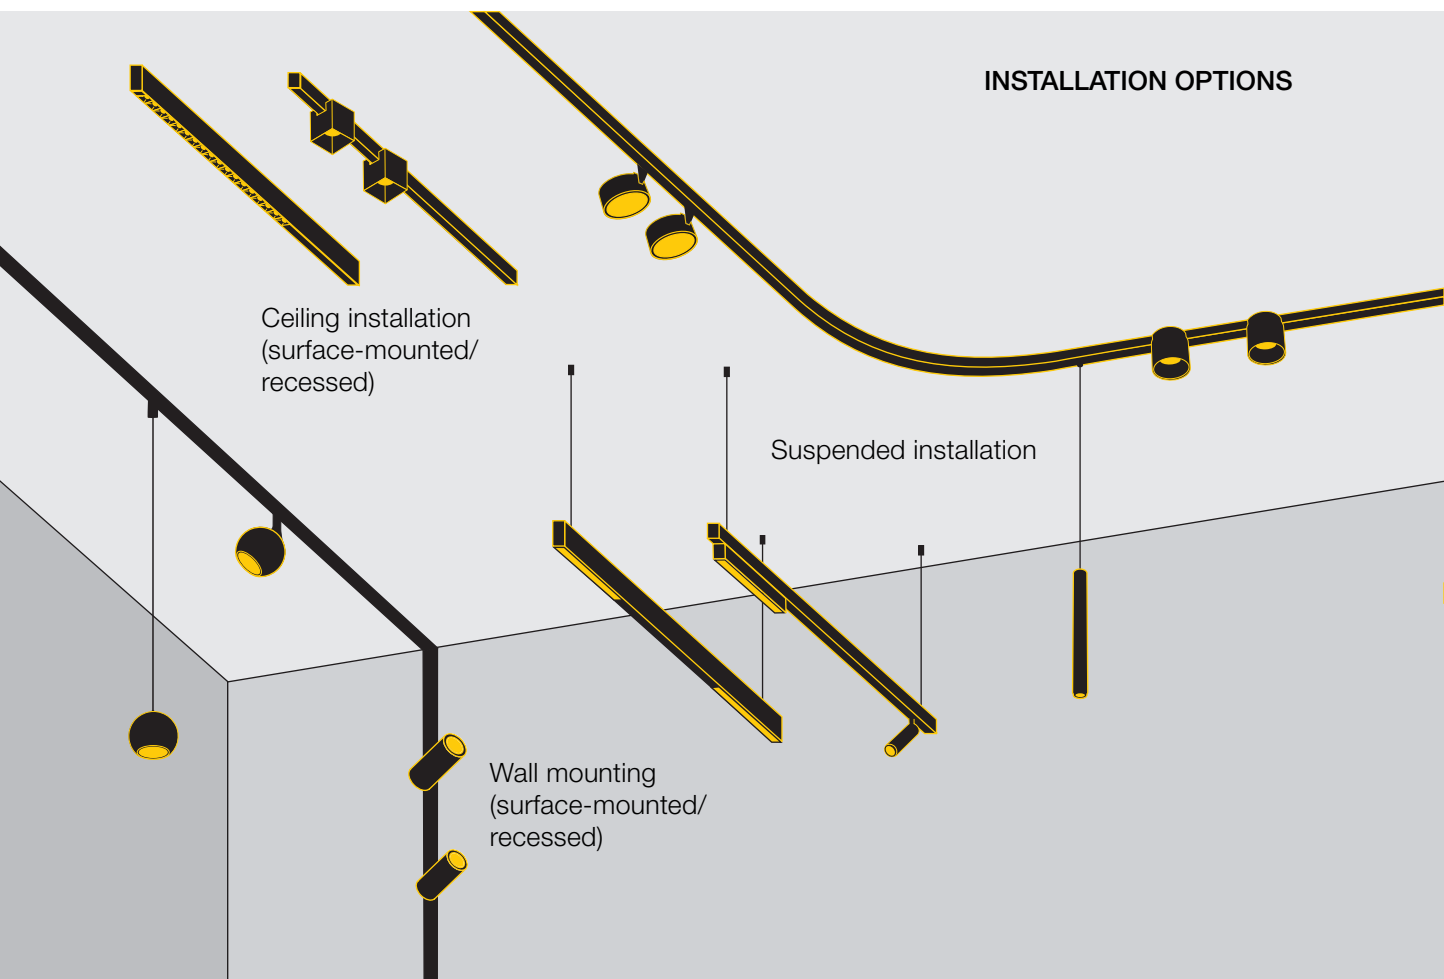


SYSTEM STRUCTURE

SELECT TRACK


Standard
surface-mounted track



Deep
surface-mounted track



Recessed track
for plasterboard ceilings

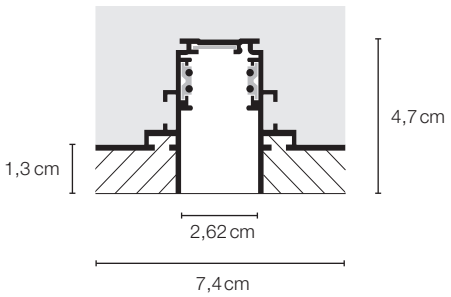


DEFINE THE GEOMETRY

and select the appropriate accessories and LED drivers

SELECT LIGHTS

Choose from a wide range of decorative and functional lights to tailor the lighting concept to your space.

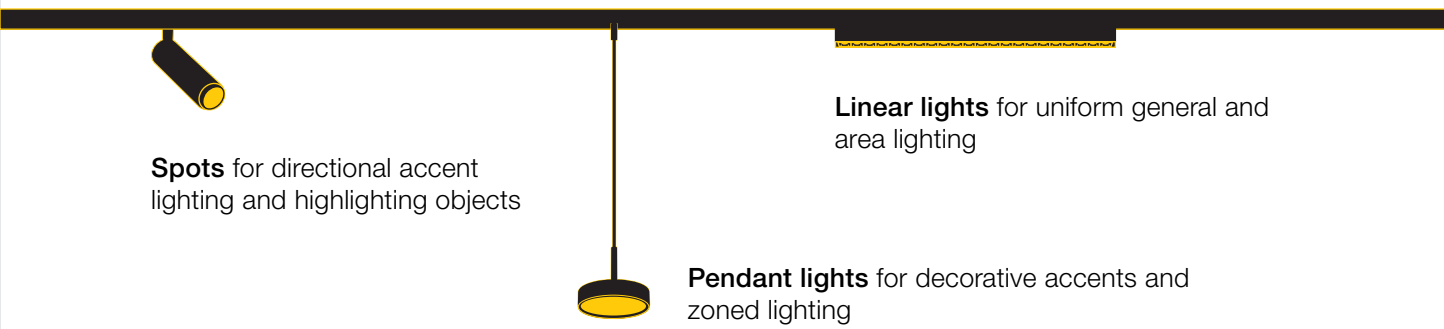

Spots for directional accent lighting and highlighting objects


Linear lights for uniform general and area lighting

Pendant lights for decorative accents and zoned lighting

48V SYSTEM TRACK
STANDARD SURFACE-MOUNTED TRACK, DALI







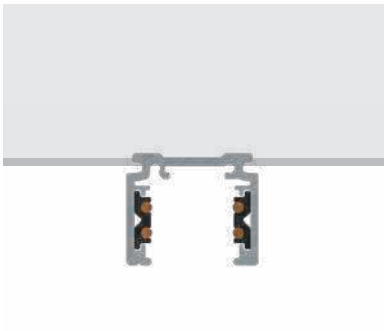

	100 cm	100 cm	200 cm	200 cm
Nominal voltage (V)	48 V	48 V	48 V	48 V
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	100 cm × 2.6 cm × 2.3 cm	100 cm × 2.6 cm × 2.3 cm	200 cm × 2.6 cm × 2.3 cm	200 cm × 2.6 cm × 2.3 cm
Prod. no.	**1006541**	**1006542**	**1006543**	**1006544**

	300 cm	300 cm	400 cm	400 cm
Nominal voltage (V)	48 V	48 V	48 V	48 V
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	300 cm × 2.6 cm × 2.3 cm	300 cm × 2.6 cm × 2.3 cm	400 cm × 2.6 cm × 2.3 cm	400 cm × 2.6 cm × 2.3 cm
Prod. no.	**1006545**	**1006546**	**1006547**	**1006548**

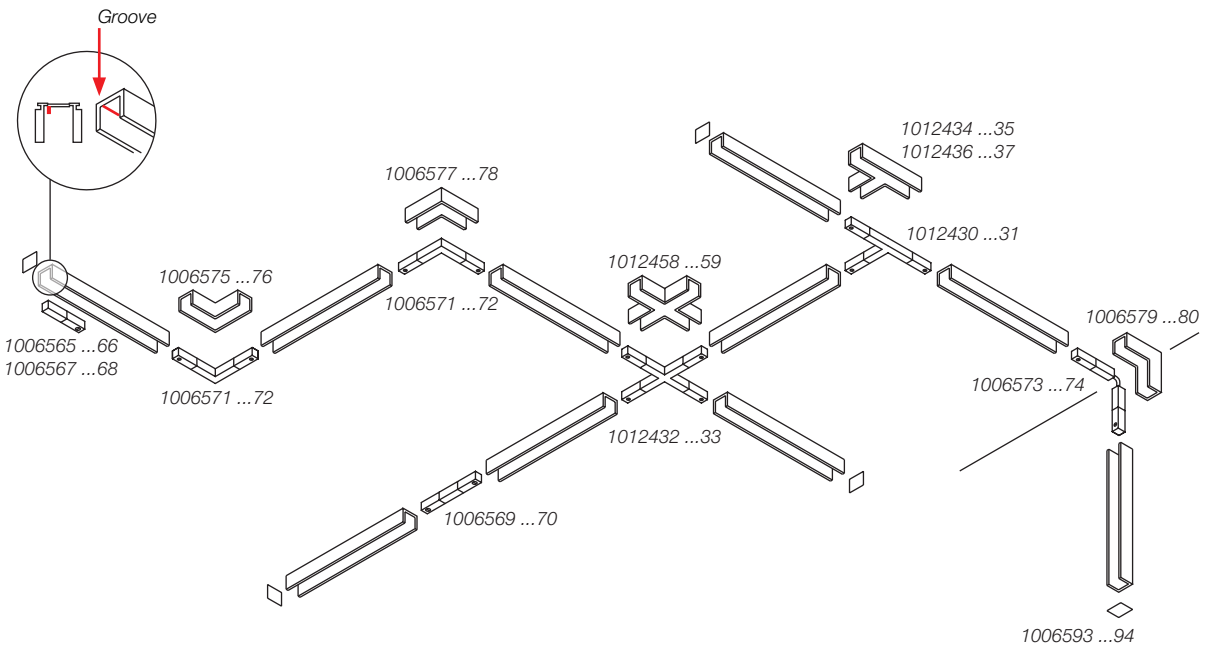
Groove
1012434 ...35
1012436 ...37
1006577 ...78
1012430 ...31
1012458 ...59
1006575 ...76
1006571 ...72
1006579 ...80
1006565 ...66
1006567 ...68
1006573 ...74
1006571 ...72
1012432 ...33
1006569 ...70
1006593 ...94

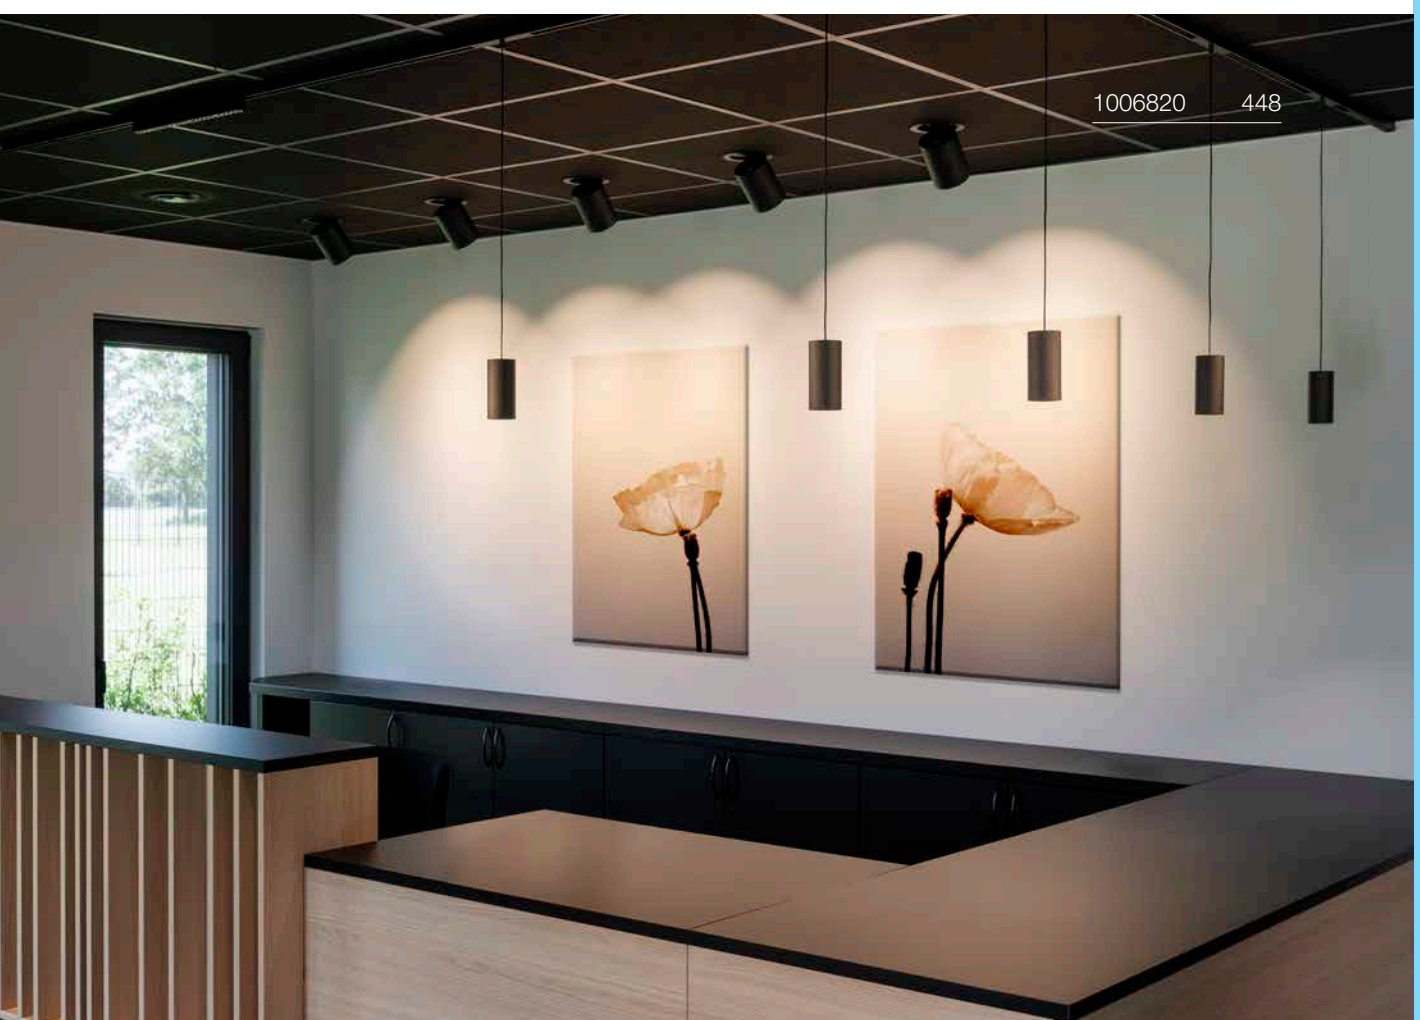

1006820 448

48V SYSTEM TRACK
STANDARD SURFACE-MOUNTED TRACK, CURVED, DALI

NEW






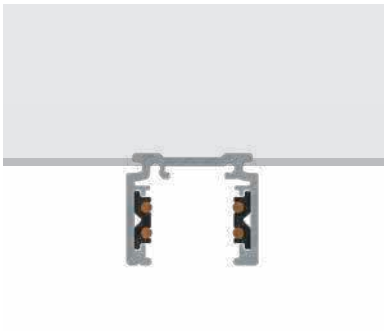


	79 cm	79 cm	79 cm	79 cm
Radius	50 cm	50 cm	50 cm	50 cm
Orientation	left	left	right	right
Nominal voltage (V)	48 V	48 V	48 V	48 V
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	79 cm × 2.6 cm × 2.3 cm	79 cm × 2.6 cm × 2.3 cm	79 cm × 2.6 cm × 2.3 cm	79 cm × 2.6 cm × 2.3 cm
Prod. no.	**1012415**	**1012416**	**1012417**	**1012418**

	126 cm	126 cm	126 cm	126 cm
Radius	80 cm	80 cm	80 cm	80 cm
Orientation	left	left	right	right
Nominal voltage (V)	48 V	48 V	48 V	48 V
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	126 cm × 2.6 cm × 2.3 cm	126 cm × 2.6 cm × 2.3 cm	126 cm × 2.6 cm × 2.3 cm	126 cm × 2.6 cm × 2.3 cm
Prod. no.	**1012586**	**1012419**	**1012420**	**1012421**

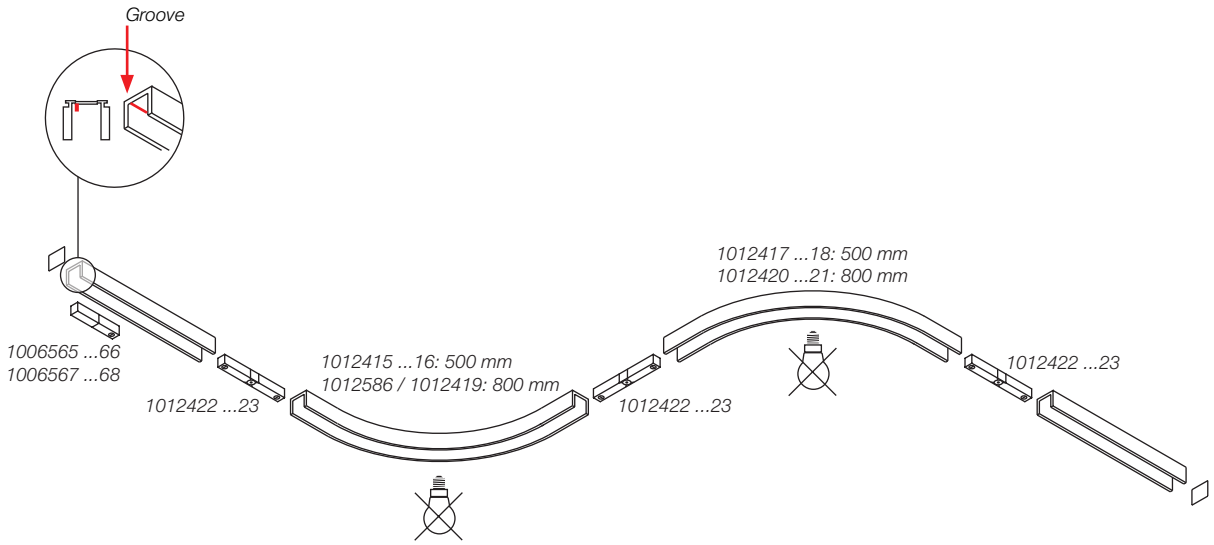

Curved tracks are currently not suitable for use with lights or power feed units.

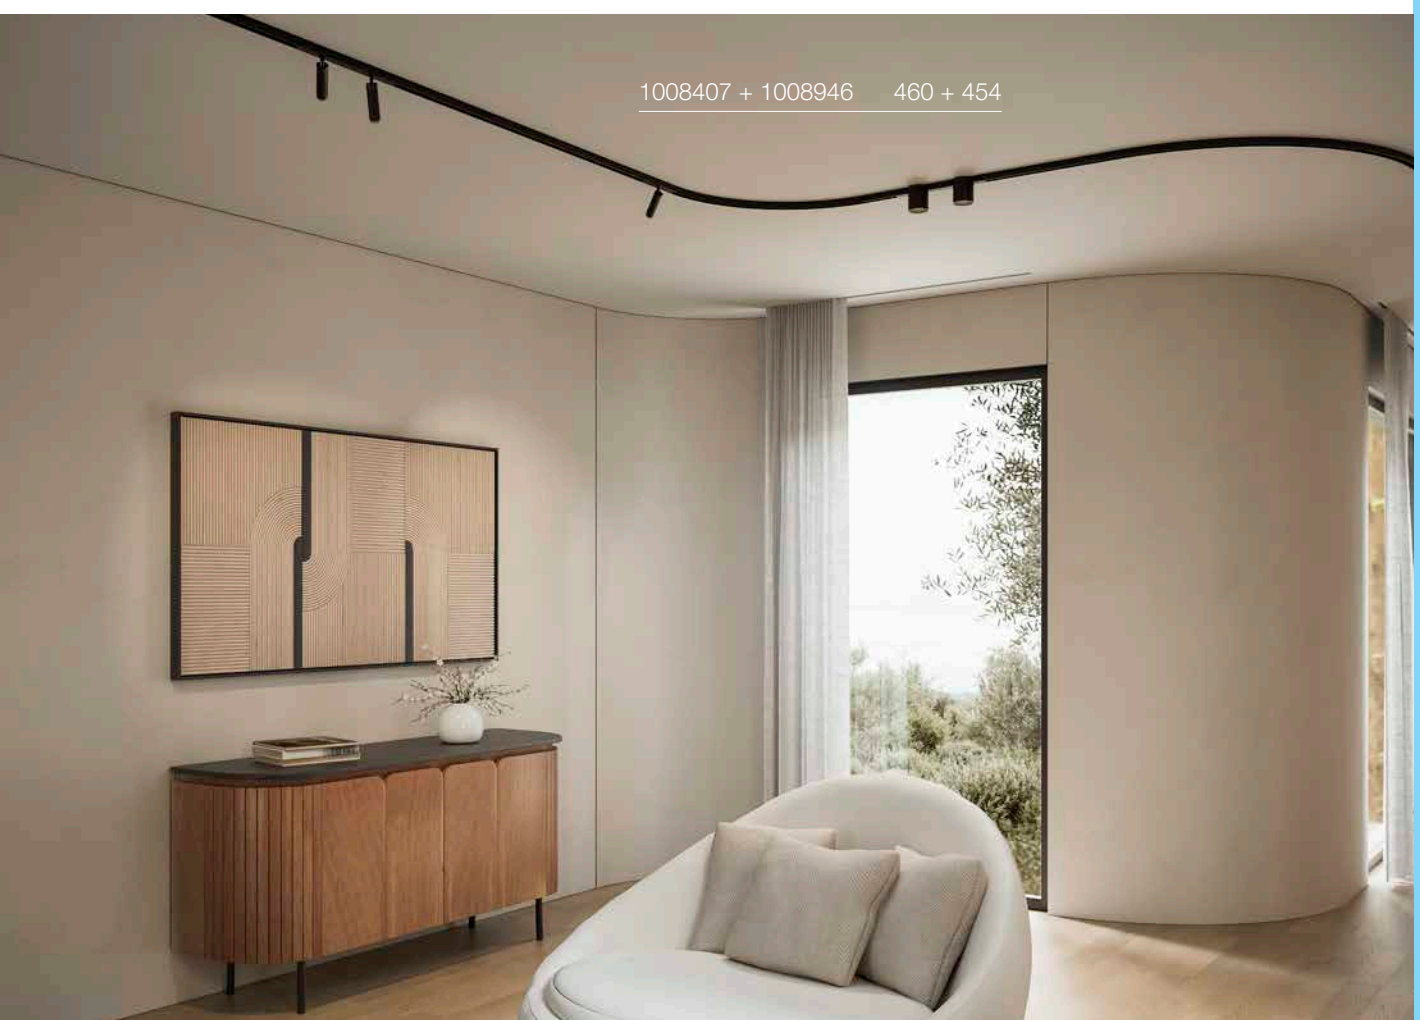



END FEED, LEFT

9.7 cm | Polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

● black Prod. no. **1006565**
○ white Prod. no. **1006566**



END FEED, RIGHT

9.7 cm | Polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

● black Prod. no. **1006567**
○ white Prod. no. **1006568**



MECHANICAL L-CONNECTOR FOR STANDARD SURFACE-MOUNTED TRACK, LEFT (FOR CEILING INSTALLATION)

7.1 cm | Aluminium
L: 7.1 cm, W: 7.1 cm, H: 2.2 cm

● black Prod. no. **1006575**
○ white Prod. no. **1006576**



MECHANICAL L-CONNECTOR FOR STANDARD SURFACE-MOUNTED TRACK, RIGHT (FOR CEILING INSTALLATION)

7.1 cm | Aluminium
L: 7.1 cm, W: 7.1 cm, H: 2.2 cm

● black Prod. no. **1006577**
○ white Prod. no. **1006578**



MECHANICAL L-CONNECTOR FOR STANDARD SURFACE-MOUNTED TRACK, STEREO, (WALL/CEILING)

8.4 cm | Aluminium
L: 8.4 cm, W: 2.6 cm, H: 8.4 cm


● black Prod. no. **1006579**
○ white Prod. no. **1006580**



ELECTRICAL L-CONNECTOR, DALI

11.4 cm | Polycarbonate (PC)
L: 11.4 cm, W: 11.4 cm, H: 1.9 cm


● black Prod. no. **1006571**
○ white Prod. no. **1006572**



T-CONNECTOR, MECHANICAL, FOR SURFACE-MOUNTED STANDARD TRACK, LEFT 1

Aluminium
W: 7.4 cm | H: 2.3 cm


● black Prod. no. **1012434**
○ white Prod. no. **1012435**



T-CONNECTOR, MECHANICAL, FOR SURFACE-MOUNTED STANDARD TRACK, LEFT 2

Aluminium
W: 7.4 cm | H: 2.3 cm


● black Prod. no. **1012436**
○ white Prod. no. **1012437**



T-CONNECTOR, MECHANICAL, FOR SURFACE-MOUNTED STANDARD TRACK, RIGHT 1

Aluminium
W: 7.4 cm | H: 2.3 cm

● black Prod. no. **1012438**
○ white Prod. no. **1012439**



T-CONNECTOR, MECHANICAL, FOR SURFACE-MOUNTED STANDARD TRACK, RIGHT 2

Aluminium
W: 7.4 cm | H: 2.3 cm

● black Prod. no. **1012440**
○ white Prod. no. **1012441**



ELECTRICAL T-CONNECTOR, DALI

13.3 cm
L: 13.3 cm | W: 7.5 cm | H: 1.8 cm

● black Prod. no. **1012430**
○ white Prod. no. **1012431**



X-CONNECTOR, MECHANICAL, FOR SURFACE-MOUNTED STANDARD TRACK

7.4 cm
L: 7.4 cm | W: 7.4 cm | H: 2.3 cm

● black Prod. no. **1012458**
○ white Prod. no. **1012459**



ELECTRICAL X-CONNECTOR, DALI

133 cm | Plastic PC
L: 133 cm | W: 13.3 cm | H: 1.8 cm

● black Prod. no. **1012432**
○ white Prod. no. **1012433**



Electrical longitudinal connector, DALI

14.4 cm | Polycarbonate (PC)
L: 14.4 cm | W: 1.6 cm | H: 1.9 cm

● black Prod. no. **1006569**
○ white Prod. no. **1006570**



SHORT & FLEXIBLE LONGITUDINAL ELECTRICAL CONNECTOR, INCLUDING REINFORCEMENT PLATE FOR CURVED TRACKS, DALI

10.7 cm | Plastic PC
L: 10.7 cm | W: 1.6 cm | H: 1.7 cm

● black Prod. no. **1012422**
○ white Prod. no. **1012423**



FLEXIBLE CONNECTOR, ELECTRICAL, DALI

23 cm | Polycarbonate (PC)
L: 23 cm | W: 1.6 cm | H: 1.9 cm

● black Prod. no. **1006573**
○ white Prod. no. **1006574**



EXTERNAL POWER ADAPTER 48 V | 60 W

18 cm | Polycarbonate (PC)
L: 18 cm | W: 4.5 cm | H: 2.7 cm

○ white Prod. no. **1006613**



EXTERNAL POWER ADAPTER 48 V | 150 W

19.1 cm | Metal/Polycarbonate (PC)
L: 19.1 cm | W: 8.8 cm | H: 3.6 cm

● black Prod. no. **1006614**



COVER, 20 MM FOR STANDARD TRACK ASSEMBLY, 2 M

200 mm, Aluminium/Polycarbonate (PC)
L: 200 cm | W: 2 cm | H: 0.6 cm

● black Prod. no. **1006611**
○ white Prod. no. **1006612**



END CAP FOR STANDARD SURFACE-MOUNTED TRACK

2.6 cm | Polycarbonate (PC)
L: 2.6 cm | W: 0.2 cm | H: 2.2 cm

● black Prod. no. **1006593**
○ white Prod. no. **1006594**



TRACK REINFORCEMENT PLATE FOR SURFACE-MOUNTED TRACK

5 cm | Steel
L: 5 cm | W: 1.3 cm | H: 0.3 cm

● grey Prod. no. **1006609**



TRACK REINFORCEMENT PLATE WITH MOUNTING SET, 3M WIRE ROPE

12 cm | Steel
L: 12 cm | W: 2.7 cm

● black Prod. no. **1006603**
○ white Prod. no. **1006604**



TRACK REINFORCEMENT PLATE WITH MOUNTING SET, 1M ROD

12 cm | Steel
L: 12 cm | W: 2.7 cm

● black Prod. no. **1006601**
○ white Prod. no. **1006602**



PENDANT SUSPENSION, 1M ROD

steel
W: 2.9 cm

● black Prod. no. **1006605**
○ white Prod. no. **1006606**



PENDANT SUSPENSION, 3M WIRE ROPE

steel
W: 2.9 cm

● black Prod. no. **1006607**
○ white Prod. no. **1006608**



MOUNTING BRACKET

3 cm | Aluminium
L: 3 cm | W: 2.7 cm | H: 1.1 cm

● black Prod. no. **1006599**
○ white Prod. no. **1006600**



INCLUDES CASAMBI TO DALI CONVERTER

28 cm | Plastic PC
L: 28 cm | W: 2.3 cm | H: 4.4 cm
The integrated Casambi-to-DALI module enables wireless control via the Casambi app and Casambi smart controllers.

● black Prod. no. **1008382**
○ white Prod. no. **1008383**



ON/OFF

28 cm | Plastic PC
L: 28 cm | W: 2.3 cm | H: 4.4 cm

● black Prod. no. **1007874**
○ white Prod. no. **1007875**



INCLUDES DALI THROUGH-WIRING

29.8 cm | Plastic PC
L: 29.8 cm | W: 1.6 cm | H: 1.9 cm

● black Prod. no. **1010446**
○ white Prod. no. **1010447**



INCLUDES DALI THROUGH-WIRING


26.8 cm | Polycarbonate (PC)
L: 26.8 cm | W: 2.2 cm | H: 4.4 cm

● black Prod. no. **1009012**
○ white Prod. no. **1009001**

48V SYSTEM TRACK
DALI DEEP SURFACE-MOUNTED TRACK






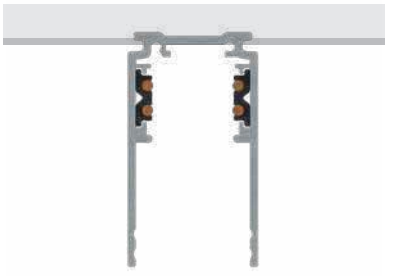

	100 cm	100 cm	200 cm	200 cm
Nominal voltage (V)	48 V	48 V	48 V	48 V
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	100 cm × 2.6 cm × 4.7 cm	100 cm × 2.6 cm × 4.7 cm	200 cm × 2.6 cm × 4.7 cm	200 cm × 2.6 cm × 4.7 cm
Prod. no.	**1006549**	**1006550**	**1006551**	**1006552**

	300 cm	300 cm	400 cm	400 cm
Nominal voltage (V)	48 V	48 V	48 V	48 V
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	300 cm × 2.6 cm × 4.7 cm	300 cm × 2.6 cm × 4.7 cm	400 cm × 2.6 cm × 4.7 cm	400 cm × 2.6 cm × 4.7 cm
Prod. no.	**1006553**	**1006554**	**1006555**	**1006556**

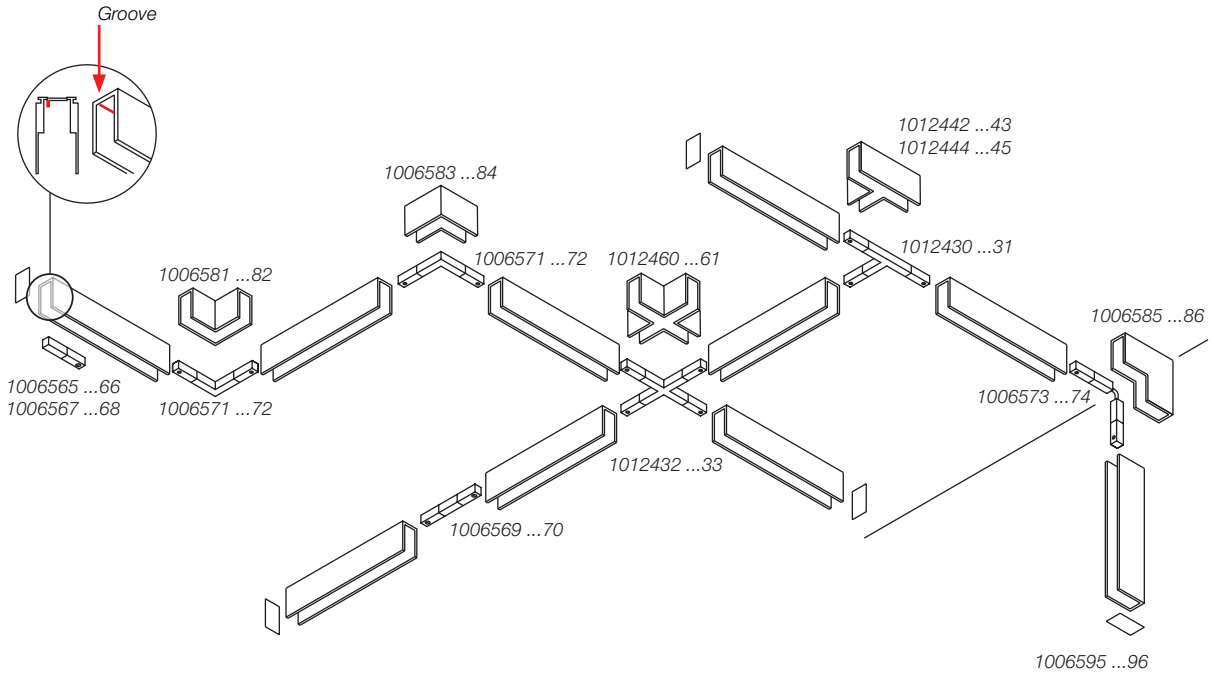

1006553 + 1006688 430 + 442



END FEED, LEFT

9.7 cm | Polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

● black Prod. no. **1006565**
○ white Prod. no. **1006566**



END FEED, RIGHT

9.7 cm | Polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

● black Prod. no. **1006567**
○ white Prod. no. **1006568**



MECHANICAL L-CONNECTOR FOR DEEP SURFACE-MOUNTED TRACK, LEFT (FOR CEILING INSTALLATION)

7.1 cm | Aluminium
L: 7.1 cm | W: 7.1 cm | H: 4.7 cm

● black Prod. no. **1006581**
○ white Prod. no. **1006582**



MECHANICAL L-CONNECTOR FOR DEEP SURFACE-MOUNTED TRACK, RIGHT (FOR CEILING INSTALLATION)

7.1 cm | Aluminium
L: 7.1 cm | W: 7.1 cm | H: 4.7 cm

● black Prod. no. **1006583**
○ white Prod. no. **1006584**



MECHANICAL L-CONNECTOR FOR SURFACE-MOUNTED TRACK, DEEP, STEREO (WALL/CEILING)

8.4 cm | Aluminium
L: 8.4 cm | W: 8.4 cm | H: 4.7 cm

● black Prod. no. **1006585**
○ white Prod. no. **1006586**



ELECTRICAL L-CONNECTOR, DALI

11.4 cm | Polycarbonate (PC)
L: 11.4 cm, W: 11.4 cm, H: 1.9 cm

● black Prod. no. **1006571**
○ white Prod. no. **1006572**



T-CONNECTOR, MECHANICAL, FOR SURFACE-MOUNTED DEEP TRACK, LEFT 1

7.4 cm | Aluminium
W: 7.4 cm | H: 4.7 cm

● black Prod. no. **1012442**
○ white Prod. no. **1012443**



T-CONNECTOR, MECHANICAL, FOR SURFACE-MOUNTED DEEP TRACK, LEFT 2

7.4 cm | Aluminium
W: 7.4 cm | H: 4.7 cm

● black Prod. no. **1012444**
○ white Prod. no. **1012445**



T-CONNECTOR, MECHANICAL, FOR SURFACE-MOUNTED DEEP TRACK, RIGHT 1

7.4 cm | Aluminium
W: 7.4 cm | H: 4.7 cm

● black Prod. no. **1012446**
○ white Prod. no. **1012447**



T-CONNECTOR, MECHANICAL, FOR SURFACE-MOUNTED DEEP TRACK, RIGHT 2

7.4 cm | Aluminium
W: 7.4 cm | H: 4.7 cm

● black Prod. no. **1012448**
○ white Prod. no. **1012449**



ELECTRICAL T-CONNECTOR, DALI

13.3 cm
L: 13.3 cm | W: 7.5 cm | H: 1.8 cm

● black Prod. no. **1012430**
○ white Prod. no. **1012431**



X-CONNECTOR, MECHANICAL, FOR SURFACE-MOUNTED DEEP TRACK

7.4 cm
L: 7.4 cm | W: 7.4 cm | H: 4.7 cm

● black Prod. no. **1012460**
○ white Prod. no. **1012461**



ELECTRICAL X-CONNECTOR, DALI

133 cm | Plastic PC
L: 133 cm | W: 13.3 cm | H: 1.8 cm

● black Prod. no. **1012432**
○ white Prod. no. **1012433**



Electrical longitudinal connector, DALI

14.4 cm | Polycarbonate (PC)
L: 14.4 cm | W: 1.6 cm | H: 1.9 cm

● black Prod. no. **1006569**
○ white Prod. no. **1006570**



FLEXIBLE CONNECTOR, ELECTRICAL, DALI

23 cm | Polycarbonate (PC)
L: 23 cm | W: 1.6 cm | H: 1.9 cm

● black Prod. no. **1006573**
○ white Prod. no. **1006574**



EXTERNAL POWER ADAPTER 48 V | 60 W

18 cm | Polycarbonate (PC)
L: 18 cm | W: 4.5 cm | H: 2.7 cm

○ white Prod. no. **1006613**



EXTERNAL POWER ADAPTER 48 V | 150 W

19.1 cm | Metal/Polycarbonate (PC)
L: 19.1 cm | W: 8.8 cm | H: 3.6 cm

● black Prod. no. **1006614**



TRACK COVER, 26 MM, FOR DEEP AND RECESSED SURFACE-MOUNTED TRACK, 2 M

200 cm | Polycarbonate (PC)
L: 200 cm | W: 26 cm | H: 6 cm

● black Prod. no. **1007188**
○ white Prod. no. **1007189**



END CAP FOR DEEP SURFACE-MOUNTED TRACK

2.6 cm | Polycarbonate (PC)
L: 2.6 cm | W: 0.2 cm | H: 4.7 cm

● black Prod. no. **1006595**
○ white Prod. no. **1006596**



TRACK REINFORCEMENT PLATE FOR SURFACE-MOUNTED TRACK

5 cm | Steel
L: 5 cm | W: 1.3 cm | H: 0.3 cm

● grey Prod. no. **1006609**



TRACK REINFORCEMENT PLATE WITH MOUNTING SET, 3M WIRE ROPE

12 cm | Steel
L: 12 cm | W: 2.7 cm

● black Prod. no. **1006603**
○ white Prod. no. **1006604**



TRACK REINFORCEMENT PLATE WITH MOUNTING SET, 1M ROD

12 cm | Steel
L: 12 cm | W: 2.7 cm

● black Prod. no. **1006601**
○ white Prod. no. **1006602**



PENDANT SUSPENSION, 1M ROD

steel
W: 2.9 cm

● black Prod. no. **1006605**
○ white Prod. no. **1006606**



PENDANT SUSPENSION, 3M WIRE ROPE

steel
W: 2.9 cm

● black Prod. no. **1006607**
○ white Prod. no. **1006608**



MOUNTING BRACKET

3 cm | Aluminium
L: 3 cm | W: 2.7 cm | H: 1.1 cm

● black Prod. no. **1006599**
○ white Prod. no. **1006600**



INCLUDES CASAMBI TO DALI CONVERTER

28 cm | Plastic PC
L: 28 cm | W: 2.3 cm | H: 4.4 cm
The integrated Casambi-to-DALI module enables wireless control via the Casambi app and Casambi smart controllers.

● black Prod. no. **1008382**
○ white Prod. no. **1008383**



ON/OFF

28 cm | Plastic PC
L: 28 cm | W: 2.3 cm | H: 4.4 cm

● black Prod. no. **1007874**
○ white Prod. no. **1007875**



INCLUDES DALI THROUGH-WIRING

29.8 cm | Plastic PC
L: 29.8 cm | W: 1.6 cm | H: 1.9 cm

● black Prod. no. **1010446**
○ white Prod. no. **1010447**



INCLUDES DALI THROUGH-WIRING


26.8 cm | Polycarbonate (PC)
L: 26.8 cm | W: 2.2 cm | H: 4.4 cm

● black Prod. no. **1009012**
○ white Prod. no. **1009001**

48V SYSTEM TRACK
RECESSED TRACK, DALI







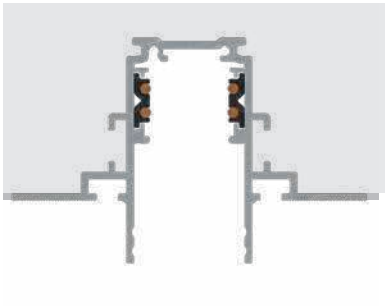

	100 cm	100 cm	200 cm	200 cm
Nominal voltage (V)	48 V	48 V	48 V	48 V
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	100 cm x 7.4 cm x 4.7 cm	100 cm x 7.4 cm x 4.7 cm	200 cm x 7.4 cm x 4.7 cm	200 cm x 7.4 cm x 4.7 cm
Prod. no.	**1006557**	**1006558**	**1006559**	**1006560**

	300 cm	300 cm	400 cm	400 cm
Nominal voltage (V)	48 V	48 V	48 V	48 V
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	300 cm x 7.4 cm x 4.7 cm	300 cm x 7.4 cm x 4.7 cm	400 cm x 7.4 cm x 4.7 cm	400 cm x 7.4 cm x 4.7 cm
Prod. no.	**1006561**	**1006562**	**1006563**	**1006564**

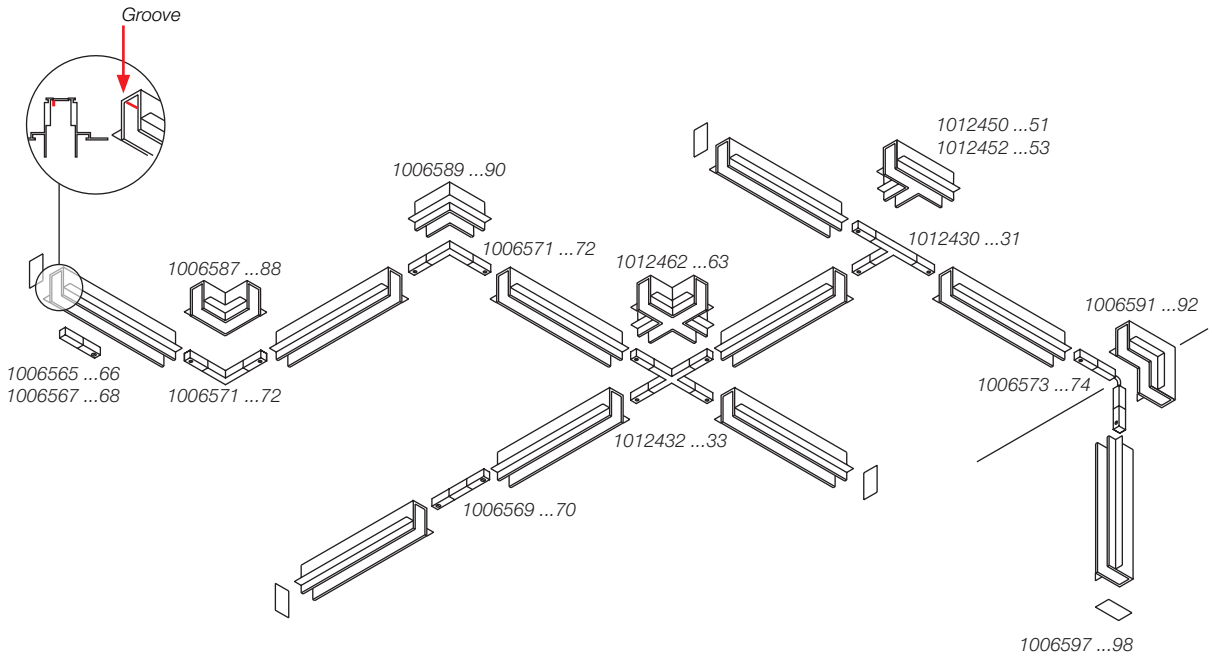
Groove
1012450 ...51
1012452 ...53
1006589 ...90
1012430 ...31
1006587 ...88
1006571 ...72
1012462 ...63
1006591 ...92
1006565 ...66
1006567 ...68
1006571 ...72
1006573 ...74
1012432 ...33
1006569 ...70
1006597 ...98

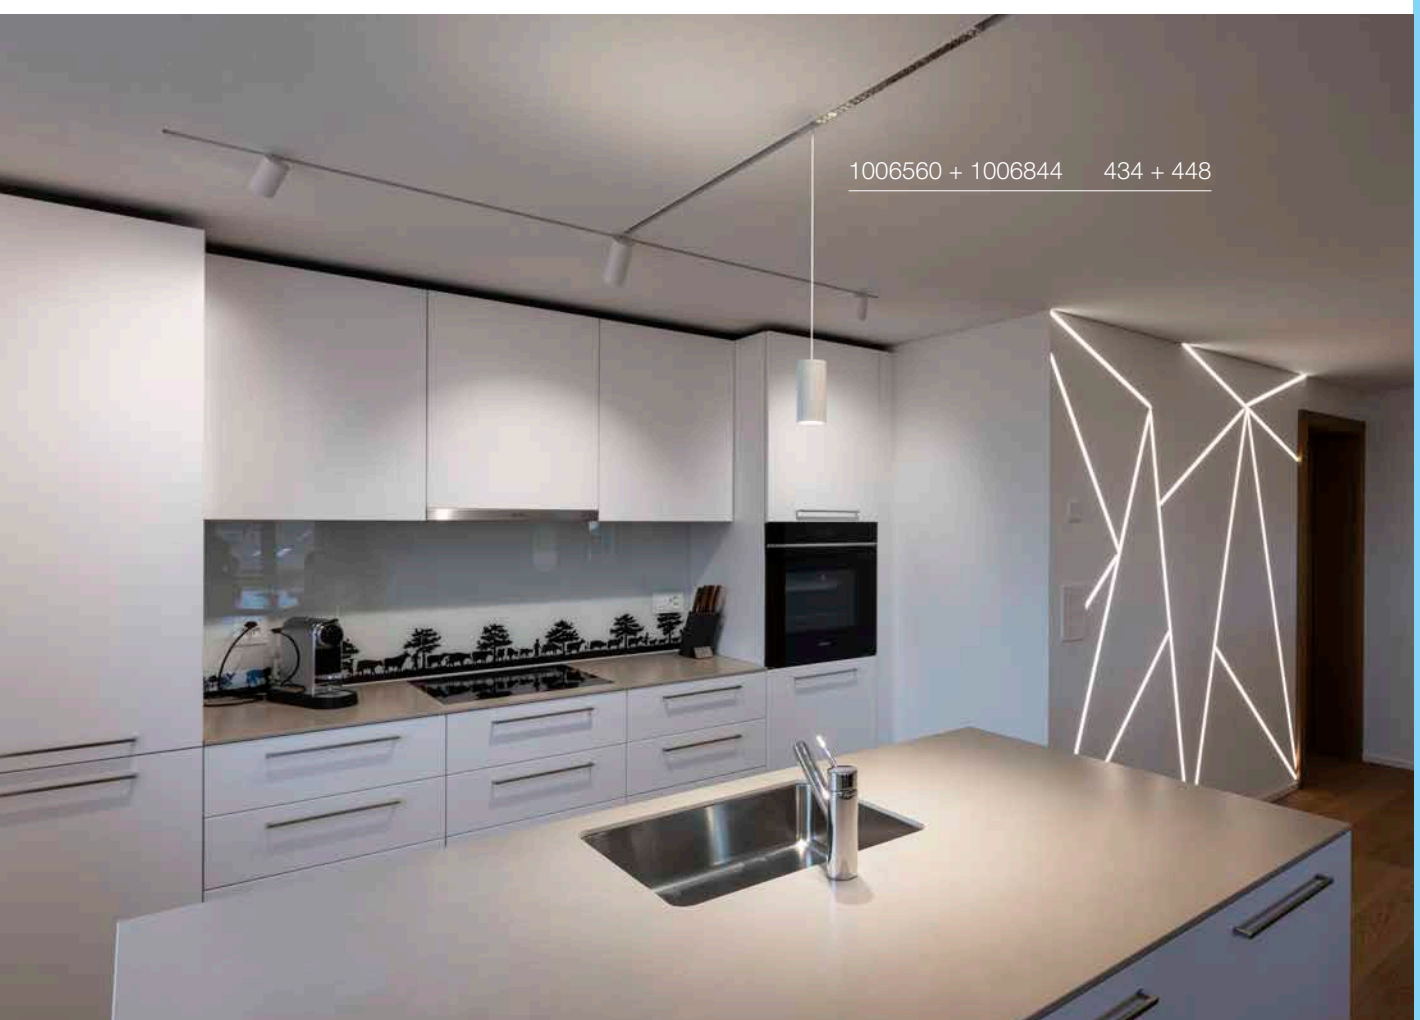
1006560 + 1006844 434 + 448



END FEED, LEFT

9.7 cm | Polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

● black Prod. no. **1006565**
○ white Prod. no. **1006566**



END FEED, RIGHT

9.7 cm | Polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

● black Prod. no. **1006567**
○ white Prod. no. **1006568**



MECHANICAL L-CONNECTOR FOR DEEP SURFACE-MOUNTED TRACK, LEFT (FOR CEILING INSTALLATION)

9.5 cm | Aluminium
L: 9.5 cm | W: 9.5 cm | H: 4.7 cm

● black Prod. no. **1006587**
○ white Prod. no. **1006588**



MECHANICAL L-CONNECTOR FOR DEEP SURFACE-MOUNTED TRACK, RIGHT (FOR CEILING INSTALLATION)

9.5 cm | Aluminium
L: 9.5 cm | W: 9.5 cm | H: 4.7 cm

● black Prod. no. **1006589**
○ white Prod. no. **1006590**



L-CONNECTOR MECHANICAL, FOR RECESSED TRACK, DEEP, STEREO, (WALL/CEILING)

8.1 cm | Aluminium
L: 8.1 cm | W: 7.4 cm | H: 8.1 cm


● black Prod. no. **1006591**
○ white Prod. no. **1006592**



ELECTRICAL L-CONNECTOR, DALI

11.4 cm | Polycarbonate (PC)
L: 11.4 cm, W: 11.4 cm, H: 1.9 cm


● black Prod. no. **1006571**
○ white Prod. no. **1006572**



T-CONNECTOR, MECHANICAL, FOR RECESSED DEEP TRACK, LEFT 1

7.4 cm | Aluminium
L: 7.4 cm | W: 7.4 cm | H: 4.6 cm


● black Prod. no. **1012450**
○ white Prod. no. **1012451**



T-CONNECTOR, MECHANICAL, FOR RECESSED DEEP TRACK, LEFT 2

7.4 cm | Aluminium
L: 7.4 cm | W: 7.4 cm | H: 4.7 cm


● black Prod. no. **1012452**
○ white Prod. no. **1012453**



T-CONNECTOR, MECHANICAL, FOR RECESSED DEEP TRACK, RIGHT 1

7.4 cm | Aluminium
L: 7.4 cm | W: 74 cm | H: 472 cm

● black Prod. no. **1012454**
○ white Prod. no. **1012455**



T-CONNECTOR, MECHANICAL, FOR RECESSED DEEP TRACK, RIGHT 2

7.4 cm | Aluminium
L: 7.4 cm | W: 74 cm | H: 472 cm

● black Prod. no. **1012456**
○ white Prod. no. **1012457**



ELECTRICAL T-CONNECTOR, DALI

13.3 cm
L: 13.3 cm | W: 7.5 cm | H: 1.8 cm

● black Prod. no. **1012430**
○ white Prod. no. **1012431**



X-CONNECTOR, MECHANICAL, FOR RECESSED DEEP TRACK

7.4 cm | Aluminium
L: 7.4 cm | W: 7.4 cm | H: 4.7 cm

● black Prod. no. **1012462**
○ white Prod. no. **1012463**



ELECTRICAL X-CONNECTOR, DALI

133 cm | Plastic PC
L: 133 cm | W: 13.3 cm | H: 1.8 cm

● black Prod. no. **1012432**
○ white Prod. no. **1012433**



ELECTRICAL LONGITUDINAL CONNECTOR, DALI

14.4 cm | Polycarbonate (PC)
L: 14.4 cm | W: 1.6 cm | H: 1.9 cm

● black Prod. no. **1006569**
○ white Prod. no. **1006570**



FLEXIBLE CONNECTOR, ELECTRICAL, DALI

23 cm | Polycarbonate (PC)
L: 23 cm | W: 1.6 cm | H: 1.9 cm

● black Prod. no. **1006573**
○ white Prod. no. **1006574**



EXTERNAL POWER ADAPTER 48 V | 60 W

18 cm | Polycarbonate (PC)
L: 18 cm | W: 4.5 cm | H: 2.7 cm

○ white Prod. no. **1006613**



EXTERNAL POWER ADAPTER 48 V | 150 W

19.1 cm | Metal/Polycarbonate (PC)
L: 19.1 cm | W: 8.8 cm | H: 3.6 cm

● black Prod. no. **1006614**



TRACK COVER, 26 MM, FOR DEEP AND RECESSED SURFACE-MOUNTED TRACK, 2 M

200 cm | Polycarbonate (PC)
L: 200 cm | W: 26 cm | H: 6 cm

● black Prod. no. **1007188**
○ white Prod. no. **1007189**



END CAP FOR RECESSED TRACK

3.4 cm | Polycarbonate (PC)
L: 3.4 cm | W: 0.2 cm | H: 4.7 cm

● black Prod. no. **1006597**
○ white Prod. no. **1006598**



TRACK REINFORCEMENT PLATES SET FOR RECESSED TRACK

6.3 cm | Steel
L: 6.3 cm | W: 0.8 cm | H: 0.3 cm


● grey Prod. no. **1006610**



INCLUDES CASAMBI TO DALI CONVERTER

28 cm | Plastic PC
L: 28 cm | W: 2.3 cm | H: 4.4 cm
The integrated Casambi-to-DALI module enables wireless control via the Casambi app and Casambi smart controllers.

● black Prod. no. **1008382**
○ white Prod. no. **1008383**



ON/OFF

28 cm | Plastic PC
L: 28 cm | W: 2.3 cm | H: 4.4 cm

● black Prod. no. **1007874**
○ white Prod. no. **1007875**



INCLUDES DALI THROUGH-WIRING

29.8 cm | Plastic PC
L: 29.8 cm | W: 1.6 cm | H: 1.9 cm

● black Prod. no. **1010446**
○ white Prod. no. **1010447**




INCLUDES DALI THROUGH-WIRING

26.8 cm | Polycarbonate (PC)
L: 26.8 cm | W: 2.2 cm | H: 4.4 cm

● black Prod. no. **1009012**
○ white Prod. no. **1009001**


MUSSO

KALU 2.0
48V, DALI, STANDARD SURFACE MOUNTED TRACK

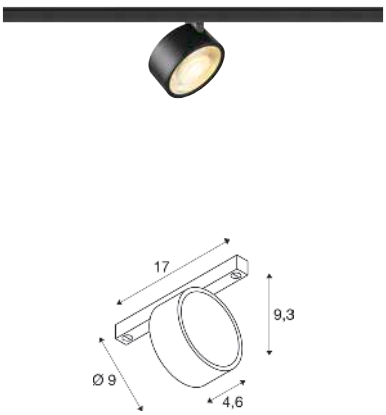

Dali IP20 IK02 36° 350° 90° 50000h L90B10 UGR 19

48 V | 250 mA
Total wattage: 9 W
Material: aluminium


- Compatible only with the standard 48 V surface-mounted track
- BEG-eligible
- Discover more lenses and decorative rings in the accessories section

LED INSIDE CRI 90

1010255 **1010257**	Down	3000 K 1450 lm
1010252 **1010254**	Down	2700 K 1400 lm

Variant	Prod. no.
● black 1400 lm|2700 K	**1010252**
● black 1450 lm|3000 K	**1010255**
○ white 1400 lm|2700 K	**1010254**
○ white 1450 lm|3000 K	**1010257**

LIGHT EYE® 2.0
48V, DALI, Ø 7,5 CM

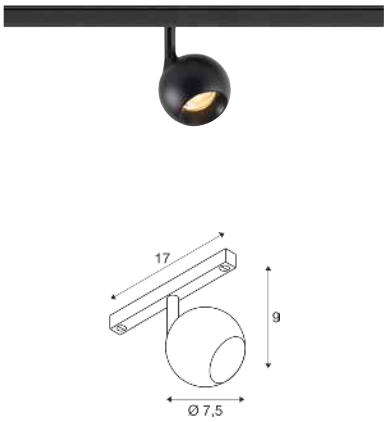

Dali IP20 30° 350° 90° 50000h L80B20


48 V | 250 mA
Total wattage: 10 W
Material: aluminium

LED INSIDE CRI 90

1010458 **1010459**	Down	3000 K 1200 lm
1010456 **1010457**	Down	2700 K 1150 lm

Variant	Prod. no.
● black 1150 lm|2700 K	**1010456**
● black 1200 lm|3000 K	**1010458**
◐ white/black 1150 lm|2700 K	**1010457**
◐ white/black 1200 lm|3000 K	**1010459**

LIGHT EYE® 2.0
48V, PD, DALI, Ø 7,5 CM

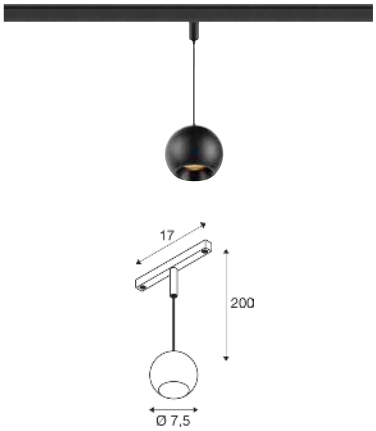

Dali IP20 30° 50000h L80B20 200 cm

48 V | 250 mA
Total wattage: 10 W
Material: aluminium

- With easily adjustable cable length thanks to the quick-connect coupling

LED INSIDE CRI 90


1010462 **1010463**	Down	3000 K 1200 lm
1010460 **1010461**	Down	2700 K 1150 lm

Variant	Prod. no.
● black 1150 lm|2700 K	**1010460**
● black 1200 lm|3000 K	**1010462**
◐ white/black 1150 lm|2700 K	**1010461**
◐ white/black 1200 lm|3000 K	**1010463**


1010336 441

DYSKO
48V, DALI, STANDARD SURFACE MOUNTED TRACK





Dali IP20 IK02 36° 360° 90° 50000h L80B10

48 V | 150 mA
Total wattage: 5.6 W
Material: Plastic PC/Aluminium

- Compatible only with the standard 48 V surface-mounted track


LED INSIDE CRI 90

2700 K
750 lm

Variant	Prod. no.
black	**1010332**
black/gold	**1010330**
white/black	**1010331**

DYSKO
48V, DALI, DEEP & RECESSED TRACK





Dali IP20 IK02 36° 360° 90° 50000h L80B10


48 V | 150 mA
Total wattage: 5.6 W
Material: Plastic PC/Aluminium


LED INSIDE CRI 90

2700 K
750 lm

Variant	Prod. no.
black	**1010377**
black/gold	**1010375**
white/black	**1010376**

DYSKO
48V, PD, DALI

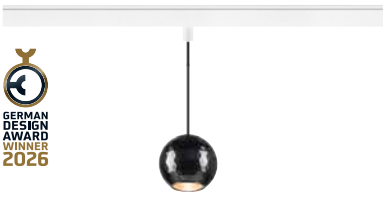



Dali IP20 IK02 36° 50000h L80B10 200 cm

48 V | 150 mA
Total wattage: 5.6 W
Material: Plastic PC/Aluminium


LED INSIDE CRI 90

2700 K
750 lm

Variant	Prod. no.
black	**1010338**
black/gold	**1010336**
white/black	**1010337**

NUMINOS® XS
48V, DALI






IP20 IK02 350° 90° 50000h L80B50 LED INSIDE

CRI 90

48 V | 200 mA
Total wattage: 8.7 W
Material: aluminium/polycarbonate (PC)



● black



● black




○ white



◑ chrome

Variant
All XS versions



○ white



● black



○ white




◑ chrome

Product	Prod. no.
Elliptical diffuser	
○ transparent	**1005612**
Prismatic diffuser	
○ transparent	**1005613**
Frosted diffuser	
○ frosted	**1005614**
Honeycomb diffuser	
● black	**1005615**

		640 lm	20°	16	**1006651**	
	2700 K	620 lm	40°	22	**1006654**	
		640 lm	55°	25	**1006657**	
		700 lm	20°	16	**1006669**	
Dali	3000 K	670 lm	40°	22	**1006672**	
		690 lm	55°	25	**1006675**	
		720 lm	20°	16	**1006687**	
	4000 K	700 lm	40°	22	**1006690**	
		710 lm	55°	25	**1006693**	
		670 lm	20°	16	**1006652**	
	2700 K	650 lm	40°	22	**1006655**	
		670 lm	55°	25	**1006658**	
		730 lm	20°	16	**1006670**	
Dali	3000 K	700 lm	40°	22	**1006673**	
		720 lm	55°	25	**1006676**	
		750 lm	20°	16	**1006688**	
	4000 K	730 lm	40°	22	**1006691**	
		740 lm	55°	25	**1006694**	
		670 lm	20°	16	**1006653**	
	2700 K	650 lm	40°	22	**1006656**	
		670 lm	55°	25	**1006659**	
		730 lm	20°	16	**1006671**	
Dali	3000 K	700 lm	40°	22	**1006674**	
		720 lm	55°	25	**1006677**	
		750 lm	20°	16	**1006689**	
	4000 K	730 lm	40°	22	**1006692**	
		740 lm	55°	25	**1006695**	
		640 lm	20°	16	**1006660**	
	2700 K	620 lm	40°	22	**1006663**	
		640 lm	55°	25	**1006666**	
		700 lm	20°	16	**1006678**	
Dali	3000 K	670 lm	40°	22	**1006681**	
		690 lm	55°	25	**1006684**	
		720 lm	20°	16	**1006696**	
	4000 K	700 lm	40°	22	**1006699**	
		710 lm	55°	25	**1006702**	
		670 lm	20°	16	**1006661**	
	2700 K	650 lm	40°	22	**1006664**	
		670 lm	55°	25	**1006667**	
		730 lm	20°	16	**1006679**	
Dali	3000 K	700 lm	40°	22	**1006682**	
		720 lm	55°	25	**1006685**	
		750 lm	20°	16	**1006697**	
	4000 K	730 lm	40°	22	**1006700**	
		740 lm	55°	25	**1006703**	
		670 lm	20°	16	**1006662**	
	2700 K	650 lm	40°	22	**1006665**	
		670 lm	55°	25	**1006668**	
		730 lm	20°	16	**1006680**	
Dali	3000 K	700 lm	40°	22	**1006683**	
		720 lm	55°	25	**1006686**	
		750 lm	20°	16	**1006698**	
	4000 K	730 lm	40°	22	**1006701**	
		740 lm	55°	25	**1006704**	

NUMINOS® S
48V, DALI






IP20 IK02 350° 90° 50000h L80B50 LED INSIDE

CRI 90

48 V | 350 mA
Total wattage: 16 W
Material: aluminium/polycarbonate (PC)



● black



● black




○ white



◑ chrome

Variant
All S versions



○ white



● black



○ white




◑ chrome

Product	Prod. no.
Elliptical diffuser	
○ transparent	**1004786**
Prismatic diffuser	
○ transparent	**1004787**
Frosted diffuser	
○ frosted	**1004788**
Honeycomb diffuser	
● black	**1004789**

					Prod. no.	
Dali	2700 K	1000 lm	20°	19	**1006705**	
		970 lm	40°	16	**1006708**	
		960 lm	55°	19	**1006711**	
	3000 K	1060 lm	20°	19	**1006723**	
		1030 lm	40°	19	**1006726**	
			55°	22	**1006729**	
	4000 K	1280 lm	20°	22	**1006741**	
		1150 lm	40°	19	**1006744**	
		1130 lm	55°	19	**1006747**	
Dali	2700 K	1020 lm	20°	19	**1006706**	
		1050 lm	40°	19	**1006709**	
		1030 lm	55°	22	**1006712**	
	3000 K	1120 lm	20°	19	**1006724**	
			40°	19	**1006727**	
			55°	22	**1006730**	
	4000 K	1350 lm	20°	22	**1006742**	
		1230 lm	40°	19	**1006745**	
		1220 lm	55°	22	**1006748**	
Dali	2700 K	960 lm	20°	19	**1006707**	
		1000 lm	40°	16	**1006710**	
		980 lm	55°	19	**1006713**	
	3000 K	1050 lm	20°	19	**1006725**	
			40°	19	**1006728**	
			55°	22	**1006731**	
	4000 K	1350 lm	20°	22	**1006743**	
		1200 lm	40°	19	**1006746**	
		1170 lm	55°	22	**1006749**	
Dali	2700 K	1000 lm	20°	19	**1006714**	
		970 lm	40°	16	**1006717**	
		960 lm	55°	19	**1006720**	
	3000 K	1060 lm	20°	19	**1006732**	
		1030 lm	40°	19	**1006735**	
			55°	22	**1006738**	
	4000 K	1280 lm	20°	22	**1006750**	
		1150 lm	40°	19	**1006753**	
		1130 lm	55°	19	**1006756**	
Dali	2700 K	1020 lm	20°	19	**1006715**	
		1050 lm	40°	19	**1006718**	
		1030 lm	55°	22	**1006721**	
	3000 K	1120 lm	20°	19	**1006733**	
			40°	19	**1006736**	
			55°	22	**1006739**	
	4000 K	1350 lm	20°	22	**1006751**	
		1230 lm	40°	19	**1006754**	
		1220 lm	55°	22	**1006757**	
Dali	2700 K	960 lm	20°	19	**1006716**	
		1000 lm	40°	16	**1006719**	
		980 lm	55°	19	**1006722**	
	3000 K	1050 lm	20°	19	**1006734**	
			40°	19	**1006737**	
			55°	22	**1006740**	
	4000 K	1350 lm	20°	22	**1006752**	
		1200 lm	40°	19	**1006755**	
		1170 lm	55°	22	**1006758**	

NUMINOS® XS
48V, DALI





IP20 IK02 50 000 h L80B50 150 cm LED INSIDE CRI 90

48 V | 200 mA
Total wattage: 8.7 W
Material: aluminium/polycarbonate (PC)



● black



● black




○ white



◑ chrome

Variant
All XS versions



○ white



● black



○ white




◑ chrome

Product	Prod. no.
Elliptical diffuser	
○ transparent	**1005612**
Prismatic diffuser	
○ transparent	**1005613**
Frosted diffuser	
○ frosted	**1005614**
Honeycomb diffuser	
● black	**1005615**

					Prod. no.	
Dali	2700 K	640 lm	20°	16	**1006759**	
		620 lm	40°	22	**1006762**	
		640 lm	55°	25	**1006765**	
	3000 K	700 lm	20°	16	**1006777**	
		670 lm	40°	22	**1006780**	
		690 lm	55°	25	**1006783**	
	4000 K	720 lm	20°	16	**1006795**	
		700 lm	40°	22	**1006798**	
		710 lm	55°	25	**1006801**	
Dali	2700 K	670 lm	20°	16	**1006760**	
		650 lm	40°	22	**1006763**	
		670 lm	55°	25	**1006766**	
	3000 K	730 lm	20°	16	**1006778**	
		700 lm	40°	22	**1006781**	
		720 lm	55°	25	**1006784**	
	4000 K	750 lm	20°	16	**1006796**	
		730 lm	40°	22	**1006799**	
		740 lm	55°	25	**1006802**	
Dali	2700 K	670 lm	20°	16	**1006761**	
		650 lm	40°	22	**1006764**	
		670 lm	55°	25	**1006767**	
	3000 K	730 lm	20°	16	**1006779**	
		700 lm	40°	22	**1006782**	
		720 lm	55°	25	**1006785**	
	4000 K	750 lm	20°	16	**1006797**	
		730 lm	40°	22	**1006800**	
		740 lm	55°	25	**1006803**	
Dali	2700 K	640 lm	20°	16	**1006768**	
		620 lm	40°	22	**1006771**	
		640 lm	55°	25	**1006774**	
	3000 K	700 lm	20°	16	**1006786**	
		670 lm	40°	22	**1006789**	
		690 lm	55°	25	**1006792**	
	4000 K	720 lm	20°	16	**1006804**	
		700 lm	40°	22	**1006807**	
		710 lm	55°	25	**1006810**	
Dali	2700 K	670 lm	20°	16	**1006769**	
		650 lm	40°	22	**1006772**	
		670 lm	55°	25	**1006775**	
	3000 K	730 lm	20°	16	**1006787**	
		700 lm	40°	22	**1006790**	
		720 lm	55°	25	**1006793**	
	4000 K	750 lm	20°	16	**1006805**	
		730 lm	40°	22	**1006808**	
		740 lm	55°	25	**1006811**	
Dali	2700 K	670 lm	20°	16	**1006770**	
		650 lm	40°	22	**1006773**	
		670 lm	55°	25	**1006776**	
	3000 K	730 lm	20°	16	**1006788**	
		700 lm	40°	22	**1006791**	
		720 lm	55°	25	**1006794**	
	4000 K	750 lm	20°	16	**1006806**	
		730 lm	40°	22	**1006809**	
		740 lm	55°	25	**1006812**	

NUMINOS® S
48V, DALI





Dali IP20 IK02 20° 50000 h L80B50 150 cm

UGR 19 LED INSIDE CRI 90

48 V | 350 mA
Total wattage: 16 W
Material: aluminium/polycarbonate (PC)



● black



● black




○ white



◑ chrome

Variant
All S versions



○ white



● black



○ white




◑ chrome

Product	Prod. no.
Elliptical diffuser	
○ transparent	**1004786**
Prismatic diffuser	
○ transparent	**1004787**
Frosted diffuser	
○ frosted	**1004788**
Honeycomb diffuser	
● black	**1004789**

	2700 K	1000 lm	20°	19	**1006813**	
		970 lm	40°	16	**1006816**	
		960 lm	55°	19	**1006819**	
Dali	3000 K	1060 lm	20°	19	**1006831**	
		1030 lm	40°	19	**1006834**	
			55°	22	**1006837**	
	4000 K	1280 lm	20°	22	**1006849**	
		1150 lm	40°	19	**1006852**	
		1130 lm	55°	19	**1006855**	
	2700 K	1020 lm	20°	19	**1006814**	
		1050 lm	40°	19	**1006817**	
		1030 lm	55°	22	**1006820**	
Dali	3000 K	1120 lm	20°	19	**1006832**	
			40°	19	**1006835**	
			55°	22	**1006838**	
	4000 K	1350 lm	20°	22	**1006850**	
		1230 lm	40°	19	**1006853**	
		1220 lm	55°	22	**1006856**	
	2700 K	960 lm	20°	19	**1006815**	
		1000 lm	40°	16	**1006818**	
		980 lm	55°	19	**1006821**	
Dali	3000 K	1050 lm	20°	19	**1006833**	
			40°	19	**1006836**	
			55°	22	**1006839**	
	4000 K	1350 lm	20°	22	**1006851**	
		1200 lm	40°	19	**1006854**	
		1170 lm	55°	22	**1006857**	
	2700 K	1000 lm	20°	19	**1006822**	
		970 lm	40°	16	**1006825**	
		960 lm	55°	19	**1006828**	
Dali	3000 K	1060 lm	20°	19	**1006840**	
		1030 lm	40°	19	**1006843**	
			55°	22	**1006846**	
	4000 K	1280 lm	20°	22	**1006858**	
		1150 lm	40°	19	**1006861**	
		1130 lm	55°	19	**1006864**	
	2700 K	1020 lm	20°	19	**1006823**	
		1050 lm	40°	19	**1006826**	
		1030 lm	55°	22	**1006829**	
Dali	3000 K	1120 lm	20°	19	**1006841**	
			40°	19	**1006844**	
			55°	22	**1006847**	
	4000 K	1350 lm	20°	22	**1006859**	
		1230 lm	40°	19	**1006862**	
		1220 lm	55°	22	**1006865**	
	2700 K	960 lm	20°	19	**1006824**	
		1000 lm	40°	16	**1006827**	
		980 lm	55°	19	**1006830**	
Dali	3000 K	1050 lm	20°	19	**1006842**	
			40°	19	**1006845**	
			55°	22	**1006848**	
	4000 K	1350 lm	20°	22	**1006860**	
		1200 lm	40°	19	**1006863**	
		1170 lm	55°	22	**1006866**	

IN-LINE 22
48V, OPAL, DALI

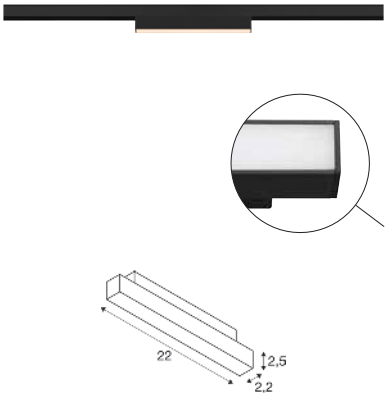


48 V | 350 mA
Total wattage: 7.3 W
Material: aluminium

INSIDE

1006619 **1006620**	Direct	4000 K 680 lm
1006617 **1006618**	Direct	3000 K 570 lm
1006615 **1006616**	Direct	2700 K 540 lm

Variant	Prod. no.
● black 540 lm | 2700 K	**1006615**
● black 570 lm | 3000 K	**1006617**
● black 680 lm | 4000 K	**1006619**
○ white 540 lm | 2700 K	**1006616**
○ white 570 lm | 3000 K	**1006618**
○ white 680 lm | 4000 K	**1006620**

IN-LINE 22
48V, DARKLIGHT REFLECTOR, DALI

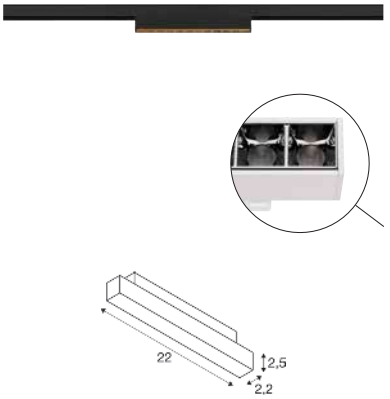


48 V | 350 mA
Total wattage: 7.3 W
Material: aluminium/polycarbonate (PC)

INSIDE

1006631 **1006632**	Direct	4000 K 650 lm
1006629 **1006630**	Direct	3000 K 610 lm
1006627 **1006628**	Direct	2700 K 580 lm

Variant	Prod. no.
● black 580 lm | 2700 K	**1006627**
● black 610 lm | 3000 K	**1006629**
● black 650 lm | 4000 K	**1006631**
○ white 580 lm | 2700 K	**1006628**
○ white 610 lm | 3000 K	**1006630**
○ white 650 lm | 4000 K	**1006632**

IN-LINE 44
48V, OPAL, DALI

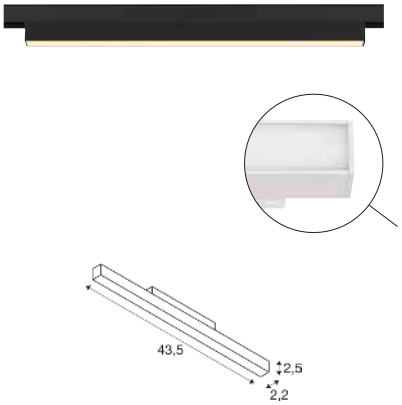


48 V | 350 mA
Total wattage: 14 W
Material: aluminium/polycarbonate (PC)

LED INSIDE CRI 90

1006625 **1006626**	Direct	4000 K 1450 lm
1006623 **1006624**	Direct	3000 K 1180 lm
1006621 **1006622**	Direct	2700 K 1140 lm

Variant	Prod. no.
● black 1140 lm | 2700 K	**1006621**
● black 1180 lm | 3000 K	**1006623**
● black 1450 lm | 4000 K	**1006625**
○ white 1140 lm | 2700 K	**1006622**
○ white 1180 lm | 3000 K	**1006624**
○ white 1450 lm | 4000 K	**1006626**

IN-LINE 44
48V, DARKLIGHT REFLECTOR, DALI

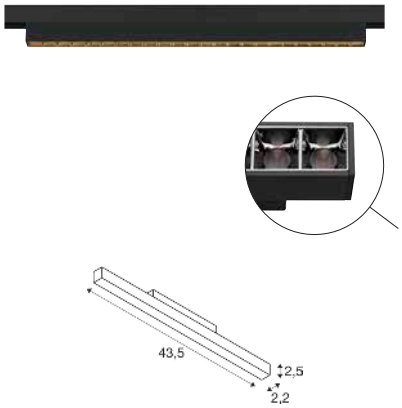

48 V | 350 mA
Total wattage: 14 W
Material: aluminium/polycarbonate (PC)


LED INSIDE

1006637 **1006638**	Direct	4000 K 1250 lm
1006635 **1006636**	Direct	3000 K 1230 lm
1006633 **1006634**	Direct	2700 K 1180 lm

Variant	Prod. no.
● black 1180 lm | 2700 K	**1006633**
● black 1230 lm | 3000 K	**1006635**
● black 1250 lm | 4000 K	**1006637**
○ white 1180 lm | 2700 K	**1006634**
○ white 1230 lm | 3000 K	**1006636**
○ white 1250 lm | 4000 K	**1006638**


1006648 453

IN-LINE 24
48V, MOVE, DARKLIGHT REFLECTOR, DALI

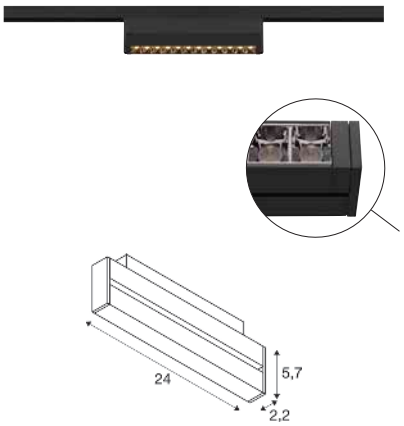

Dali IP20 IK02 35° 180° 50000h L80B50

UGR 16


48 V | 350 mA
Total wattage: 7.3 W
Material: aluminium/polycarbonate (PC)

LED INSIDE

1006643 **1006644**	Direct	4000 K 650 lm
1006641 **1006642**	Direct	3000 K 610 lm
1006639 **1006640**	Direct	2700 K 580 lm

Variant	Prod. no.
● black 580 lm | 2700 K	**1006639**
● black 610 lm | 3000 K	**1006641**
● black 650 lm | 4000 K	**1006643**
○ white 580 lm | 2700 K	**1006640**
○ white 610 lm | 3000 K	**1006642**
○ white 650 lm | 4000 K	**1006644**

IN-LINE 46
48V, MOVE, DARKLIGHT REFLECTOR, DALI

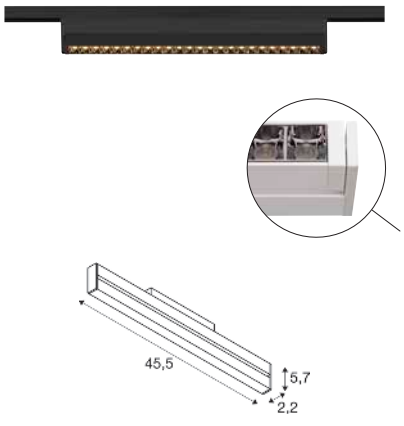

Dali IP20 IK02 35° 180° 50000h L80B50

UGR 16

48 V | 350 mA
Total wattage: 14 W
Material: aluminium/polycarbonate (PC)

LED INSIDE CRI 90


1006649 **1006650**	Direct	4000 K 1250 lm
1006647 **1006648**	Direct	3000 K 1230 lm
1006645 **1006646**	Direct	2700 K 1180 lm

Variant	Prod. no.
● black 1180 lm | 2700 K	**1006645**
● black 1230 lm | 3000 K	**1006647**
● black 1250 lm | 4000 K	**1006649**
○ white 1180 lm | 2700 K	**1006646**
○ white 1230 lm | 3000 K	**1006648**
○ white 1250 lm | 4000 K	**1006650**



FIX-IT!
48V, DALI, ROUND, STANDARD SURFACE MOUNTED TRACK





Dali IP20 36° 50 000 h L80B20 UGR 16

48 V | 175 mA
Total wattage: 6.6 W
Material: Aluminium/Plastic PC

- Compatible only with the standard 48 V surface-mounted track
- With black insert as standard

LED INSIDE CRI 90

1008949 **1008950** **1008951** **1008952**	Down	3000 K 850 lm
1008945 **1008946** **1008947** **1008948**	Down	2700 K 800 lm


Variant	Prod. no.
● black 800 lm | 2700 K	**1008946**
● black 850 lm | 3000 K	**1008950**
◑ white/black 800 lm | 2700 K	**1008945**
◑ white/black 850 lm | 3000 K	**1008949**
◑ gold/black 800 lm | 2700 K	**1008947**
◑ gold/black 850 lm | 3000 K	**1008951**
◑ bronze/black 800 lm | 2700 K	**1008948**
◑ bronze/black 850 lm | 3000 K	**1008952**

⊕

Product	Prod. no.
Round inlay	
● black	**1008994**
○ white	**1008993**
● gold	**1008995**
● bronze	**1008996**

FIX-IT!
48V, DALI, ROUND, STANDARD SURFACE MOUNTED TRACK





48 V | 350 mA
Total wattage: 7.4 W
Material: Aluminium/Plastic PC

- Compatible only with the standard 48 V surface-mounted track
- With black insert as standard

LED INSIDE | DIM TO WARM | CRI 90


Down	2000 K - 3000 K	
	3 lm - 480 lm	

Variant	Prod. no.
black	**1008954**
white/black	**1008953**
gold/black	**1008955**
bronze/black	**1008956**

Product	Prod. no.
Round inlay	
black	**1008994**
white	**1008993**
gold	**1008995**
bronze	**1008996**

FIX-IT!
48V, DALI, ROUND, DEEP SURFACE MOUNTED TRACK





48 V | 175 mA
Total wattage: 6.6 W
Material: Aluminium/Plastic PC

- Compatible only with the deep 48 V surface-mounted track
- With black insert as standard

LED INSIDE | CRI 90


1008961 **1008962** **1008963** **1008964**	Down	3000 K 850 lm
1008957 **1008958** **1008959** **1008960**	Down	2700 K 800 lm

Variant	Prod. no.
black 800 lm | 2700 K	**1008958**
black 850 lm | 3000 K	**1008962**
white/black 800 lm | 2700 K	**1008957**
white/black 850 lm | 3000 K	**1008961**
gold/black 800 lm | 2700 K	**1008959**
gold/black 850 lm | 3000 K	**1008963**
bronze/black 800 lm | 2700 K	**1008960**
bronze/black 850 lm | 3000 K	**1008964**

Product	Prod. no.
Round inlay	
black	**1008994**
white	**1008993**
gold	**1008995**
bronze	**1008996**

FIX-IT!
48V, DALI, ROUND, DEEP SURFACE MOUNTED TRACK





48 V | 350 mA
Total wattage: 7.4 W
Material: Aluminium/Plastic PC


- Compatible only with the deep 48 V surface-mounted track
- With black insert as standard

LED INSIDE | DIM TO WARM | CRI 90

Down	2000 K - 3000 K	
	3 lm - 480 lm	


Variant	Prod. no.
black	**1008966**
white/black	**1008965**
gold/black	**1008967**
bronze/black	**1008968**

Product	Prod. no.
Round inlay	
black	**1008994**
white	**1008993**
gold	**1008995**
bronze	**1008996**

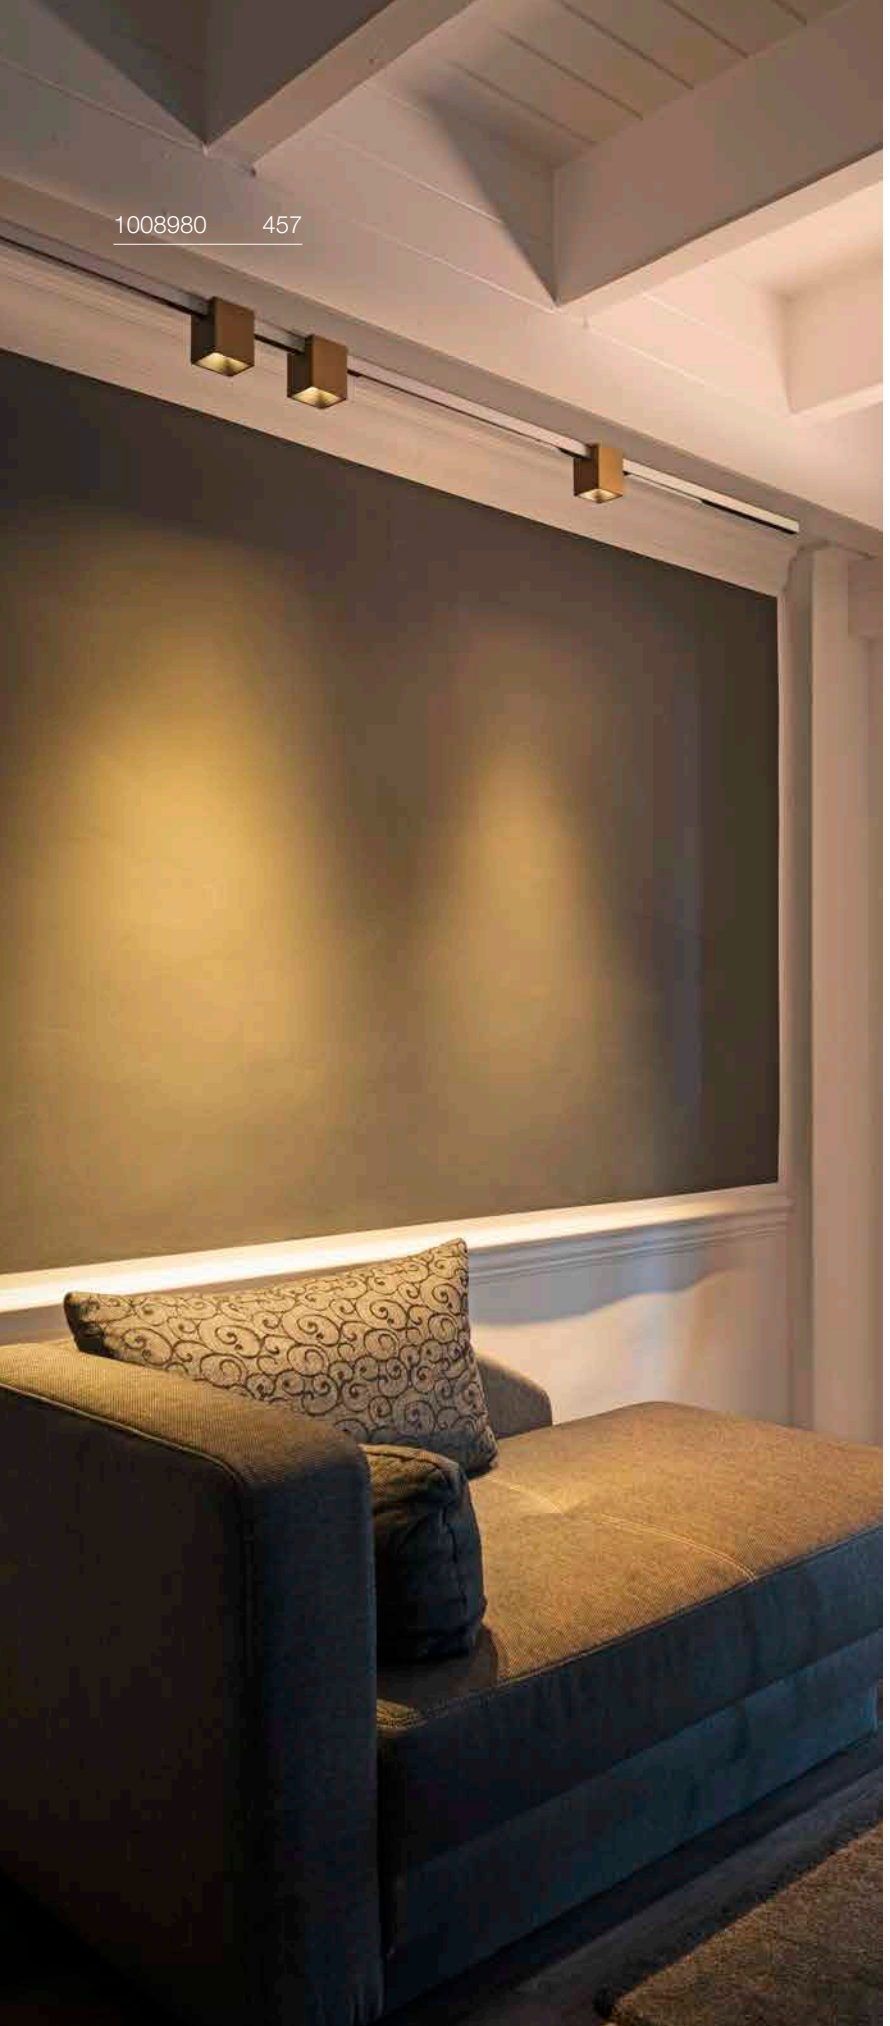

FIX-IT!
48V, DALI, SQUARE, STANDARD SURFACE MOUNTED TRACK







48 V | 175 mA
Total wattage: 6.6 W
Material: Aluminium/Plastic PC

- Compatible only with the standard 48 V surface-mounted track
- With black insert as standard



1008973 **1008974** **1008975** **1008976**	Down	3000 K 865 lm
1008969 **1008970** **1008971** **1008972**	Down	2700 K 800 lm


Variant	Prod. no.
● black 800 lm | 2700 K	**1008970**
● black 865 lm | 3000 K	**1008974**
◑ white/black 800 lm | 2700 K	**1008969**
◑ white/black 865 lm | 3000 K	**1008973**
◑ gold/black 800 lm | 2700 K	**1008971**
◑ gold/black 865 lm | 3000 K	**1008975**
◑ bronze/black 800 lm | 2700 K	**1008972**
◑ bronze/black 865 lm | 3000 K	**1008976**

⊕

Product	Prod. no.
Square inlay	
● black	**1008998**
○ white	**1008997**
● gold	**1008999**
● bronze	**1009000**

FIX-IT!
48V, DALI, SQUARE, STANDARD SURFACE MOUNTED TRACK





Dali | IP20 | 36° | 50 000 h L80B20 | UGR 19

48 V | 350 mA
Total wattage: 7.4 W
Material: Aluminium/Plastic PC

- Compatible only with the standard 48 V surface-mounted track
- With black insert as standard

LED INSIDE | DIM TO WARM | CRI 90

Down	2000 K - 3000 K	
	3 lm - 495 lm	


Variant	Prod. no.
black	**1008978**
white/black	**1008977**
gold/black	**1008979**
bronze/black	**1008980**

⊕

Product	Prod. no.
Square inlay	
black	**1008998**
white	**1008997**
gold	**1008999**
bronze	**1009000**

FIX-IT!
48V, DALI, SQUARE, DEEP SURFACE MOUNTED TRACK





Dali | IP20 | 36° | 50 000 h L80B20 | UGR 16

48 V | 175 mA
Total wattage: 6.6 W
Material: Aluminium/Plastic PC

- Compatible only with the deep 48 V surface-mounted track
- With black insert as standard

LED INSIDE | CRI 90

1008985 **1008986** **1008987** **1008988**	Down	3000 K
		865 lm
1008981 **1008982** **1008983** **1008984**	Down	2700 K
		800 lm


Variant	Prod. no.
black 800 lm | 2700 K	**1008982**
black 865 lm | 3000 K	**1008986**
white/black 800 lm | 2700 K	**1008981**
white/black 865 lm | 3000 K	**1008985**
gold/black 800 lm | 2700 K	**1008983**
gold/black 865 lm | 3000 K	**1008987**
bronze/black 800 lm | 2700 K	**1008984**
bronze/black 865 lm | 3000 K	**1008988**

⊕

Product	Prod. no.
Square inlay	
black	**1008998**
white	**1008997**
gold	**1008999**
bronze	**1009000**

FIX-IT!
48V, DALI, SQUARE, DEEP SURFACE MOUNTED TRACK





Dali | IP20 | 36° | 50 000 h L80B20 | UGR 19

48 V | 350 mA
Total wattage: 7.4 W
Material: Aluminium/Plastic PC

- Compatible only with the deep 48 V surface-mounted track
- With black insert as standard

LED INSIDE | DIM TO WARM | CRI 90

Down	2000 K - 3000 K	
	3 lm - 495 lm	

Variant	Prod. no.
black	**1008990**
white/black	**1008989**
gold/black	**1008991**
bronze/black	**1008992**

⊕

Product	Prod. no.
Square inlay	
black	**1008998**
white	**1008997**
gold	**1008999**
bronze	**1009000**


FRUIT OP JE WERK.NL

GRIP! FLAT
48V, DALI



Dali IP20 340° 90° 50000h L70B50 UGR 15

48 V | 500 mA
Total wattage: 14.5 W
Material: aluminium

- Including colour temperature switch 2700 K/3000 K
- Honeycomb insert included

LED INSIDE CCT CRI 90

	2700 K	3000 K
Down	400 lm	430 lm

Variant	Prod. no.
● black	**1009016**
◐ white/black	**1009017**

⊕

Product	Prod. no.
GRIP! FLAT, decorative ring	
● black	**1009102**
○ white	**1009103**
● gold	**1009104**

GRIP! FLAT
48V, PD, DALI



Dali IP20 50000h L70B50 200 cm UGR 15

48 V | 500 mA
Total wattage: 14.5 W
Material: aluminium

- Including colour temperature switch 2700 K/3000 K
- Honeycomb insert included

LED INSIDE CCT CRI 90


	2700 K	3000 K
Down	400 lm	430 lm

Variant	Prod. no.
● black	**1009018**
◐ white/black	**1009019**

⊕

Product	Prod. no.
GRIP! FLAT, decorative ring	
● black	**1009102**
○ white	**1009103**
● gold	**1009104**
GRIP! FLAT, Felt shade A, anthracite	
● anthracite	**1010403**
GRIP! FLAT, Felt shade A, grey	
● grey	**1010404**
GRIP! FLAT, Felt shade A, yellow	
● ochre	**1010405**
GRIP! FLAT, Felt shade B, anthracite	
● anthracite	**1010406**
GRIP! FLAT, Felt shade B, grey	
● grey	**1010407**
GRIP! FLAT, Felt shade B, yellow	
● ochre	**1010408**


GRIP! FLAT
FELT SHADE Ø 50 CM X 6.2 CM



Ø: 50 cm
H: 6.2 cm


Variant	Prod. no.
● anthracite	**1010403**
● grey	**1010404**
● ochre	**1010405**

GRIP! FLAT
FELT SHADE Ø 50 CM X 0.6 CM



Ø: 50 cm
H: 0.6 cm

Variant	Prod. no.
● anthracite	**1010406**
● grey	**1010407**
● ochre	**1010408**

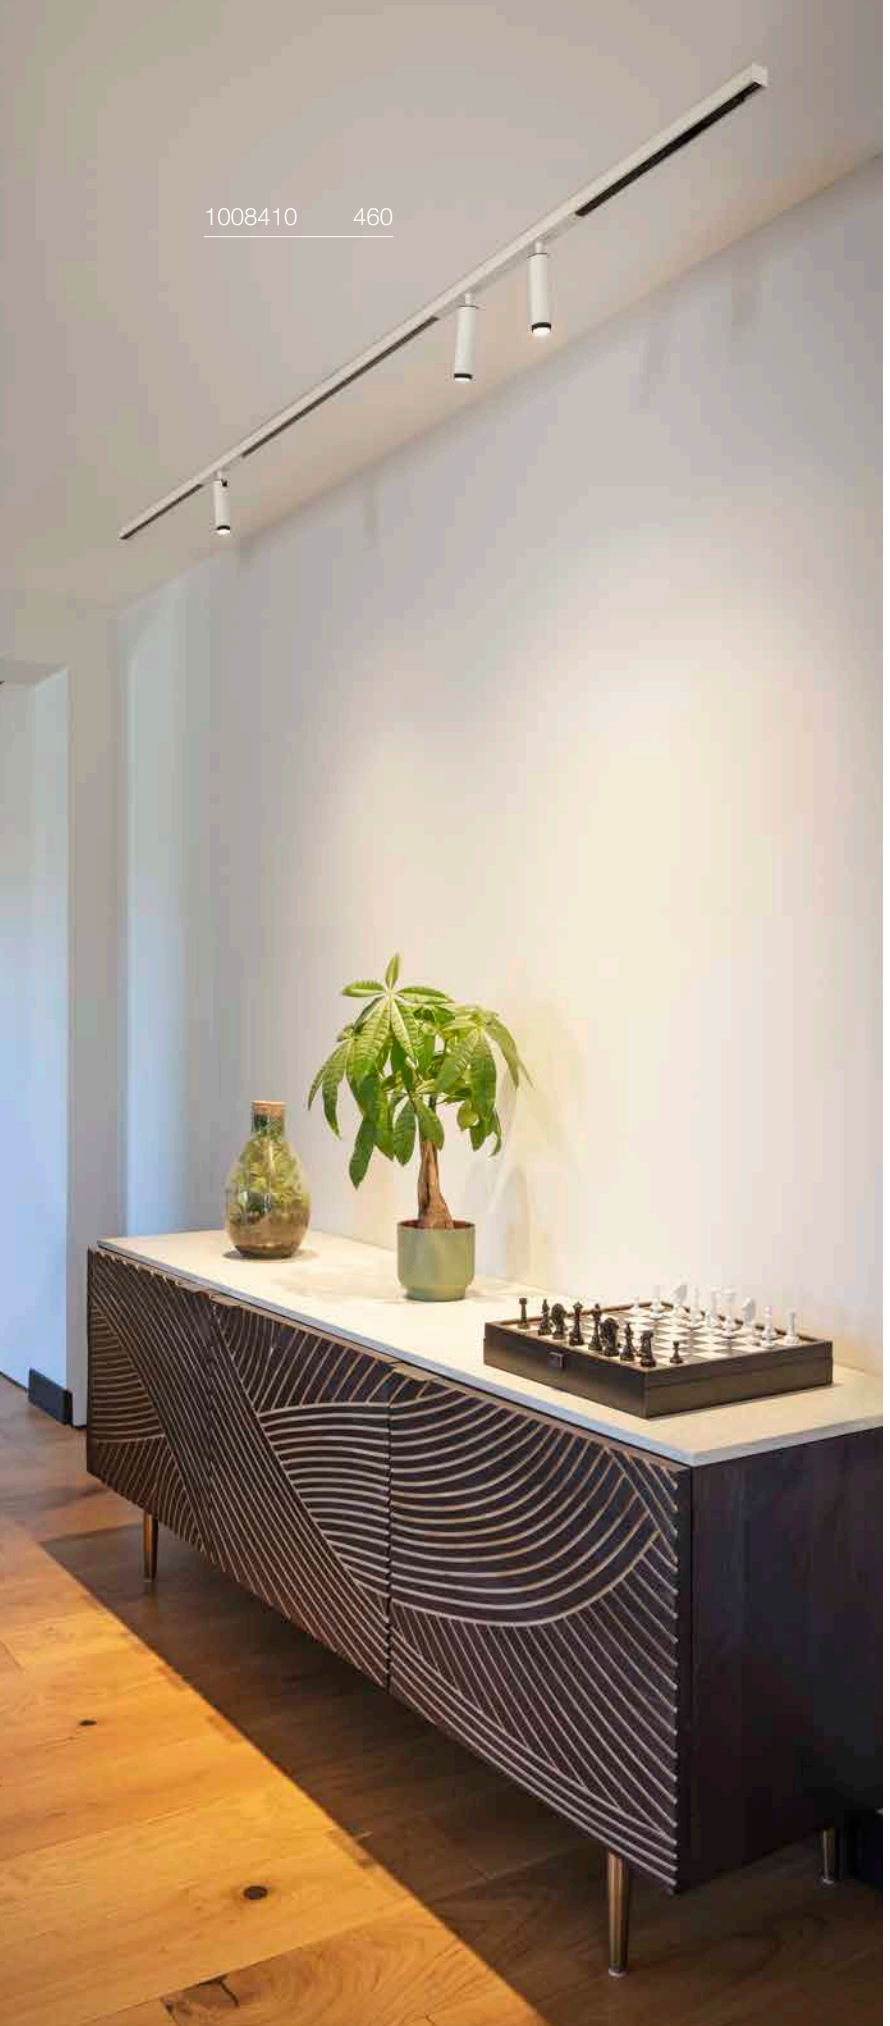


GRIP! S

48V, DALI, STANDARD TRACK, Ø 3.0 CM



GERMAN DESIGN AWARD WINNER 2025



Dali IP20 IK02 29° 340° 90° 50.000 h L80B10 UGR 25

48 V | 250 mA
Total wattage: 9.8 W
Material: aluminium

- Compatible only with the standard 48 V surface-mounted track
- Honeycomb accessories included

LED INSIDE CRI 90

1008410 **1008412** **1008413** **1008414**	Down	3000 K 620 lm
1008405 **1008407** **1008408** **1008409**	Down	2700 K 590 lm

Variant	Prod. no.
black/gold 590 lm | 2700 K	**1008407**
black/gold 620 lm | 3000 K	**1008412**
white/black 590 lm | 2700 K	**1008405**
white/black 620 lm | 3000 K	**1008410**
gold/black 590 lm | 2700 K	**1008409**
gold/black 620 lm | 3000 K	**1008414**
bronze/black 590 lm | 2700 K	**1008408**
bronze/black 620 lm | 3000 K	**1008413**

⊕

Product	Prod. no.
GRIP! S, decorative ring	
white	**1011829**
black	**1011830**
nickel	**1011831**
gold	**1011832**
HONEYCOMB + Spacer	
black	**1011837**

GRIP! S
48V, DALI, DEEP & RECESSED TRACK, Ø 3.0 CM



Dali IP20 IK02 29° 340° 90° 50 000 h L80B10 UGR 25

48 V | 250 mA
Total wattage: 9.8 W
Material: aluminium

- Honeycomb accessories included


INSIDE CRI 90

1009025 **1009027** **1009029** **1009031**	Down	3000 K 620 lm
1009024 **1009026** **1009028** **1009030**	Down	2700 K 590 lm

Variant	Prod. no.
black/gold 590 lm | 2700 K	**1009026**
black/gold 620 lm | 3000 K	**1009027**
white/black 590 lm | 2700 K	**1009024**
white/black 620 lm | 3000 K	**1009025**
gold/black 590 lm | 2700 K	**1009030**
gold/black 620 lm | 3000 K	**1009031**
bronze/black 590 lm | 2700 K	**1009028**
bronze/black 620 lm | 3000 K	**1009029**

Product	Prod. no.
GRIP! S, decorative ring	
white	**1011829**
black	**1011830**
nickel	**1011831**
gold	**1011832**
HONEYCOMB + Spacer	
black	**1011837**

GRIP! S
48V, DALI, STANDARD TRACK, Ø 3.0 CM

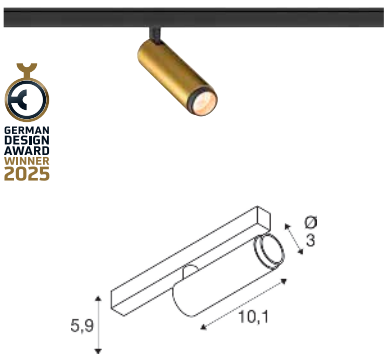

Dali IP20 IK02 29° 330° 90° 50 000 h L80B20 UGR 25

48 V | 250 mA
Total wattage: 9.8 W
Material: aluminium

- Compatible only with the standard 48 V surface-mounted track
- Honeycomb accessories included


INSIDE DIM TO WARM CRI 90

Down		2000 K - 3000 K 350 lm

Variant	Prod. no.
black/gold	**1008417**
white/black	**1008415**
gold/black	**1008419**
bronze/black	**1008418**

Product	Prod. no.
GRIP! S, decorative ring	
white	**1011829**
black	**1011830**
nickel	**1011831**
gold	**1011832**
HONEYCOMB + Spacer	
black	**1011837**

GRIP! S
48V, DALI, DEEP & RECESSED TRACK, Ø 3.0 CM

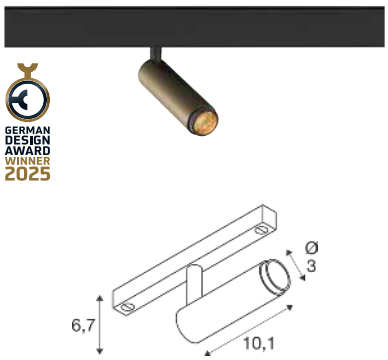

Dali IP20 IK02 29° 340° 90° 50 000 h L80B20 UGR 25

48 V | 250 mA
Total wattage: 9.8 W
Material: aluminium

- Honeycomb accessories included

INSIDE DIM TO WARM CRI 90

Down		2000 K - 3000 K 350 lm

Variant	Prod. no.
black/gold	**1009033**
white/black	**1009032**
gold/black	**1009035**
bronze/black	**1009034**


Product	Prod. no.
GRIP! S, decorative ring	
white	**1011829**
black	**1011830**
nickel	**1011831**
gold	**1011832**
HONEYCOMB + Spacer	
black	**1011837**


1008456 463

GRIP! S
48V, PD, DALI, Ø 3,0 CM

GERMAN DESIGN AWARD WINNER 2025





Dali · IP20 · IK02 · 29° · 50000 h L80B10 · 200 cm · UGR 25

48 V | 250 mA
Total wattage: 9.8 W
Material: aluminium

- Honeycomb accessories included

LED INSIDE · CRI 90

1008459 **1008461** **1008462** **1008463**	Down	3000 K 620 lm
1008454 **1008456** **1008457** **1008458**	Down	2700 K 590 lm

Variant	Prod. no.
black/gold 590 lm | 2700 K	**1008456**
black/gold 620 lm | 3000 K	**1008461**
white/black 590 lm | 2700 K	**1008454**
white/black 620 lm | 3000 K	**1008459**
gold/black 590 lm | 2700 K	**1008458**
gold/black 620 lm | 3000 K	**1008463**
bronze/black 590 lm | 2700 K	**1008457**
bronze/black 620 lm | 3000 K	**1008462**


⊕

Product	Prod. no.
GRIP! S, decorative ring	
white	**1011829**
black	**1011830**
nickel	**1011831**
gold	**1011832**
HONEYCOMB + Spacer	
black	**1011837**

GRIP! S
48V, PD, DALI, Ø 3,0 CM

GERMAN DESIGN AWARD WINNER 2025





Dali · IP20 · IK02 · 29° · 50000 h L80B20 · 200 cm · UGR 25

48 V | 250 mA
Total wattage: 9.8 W
Material: aluminium

- Honeycomb accessories included

LED INSIDE · DIM TO WARM · CRI 90

Down		2000 K - 3000 K 350 lm


Variant	Prod. no.
black/gold	**1008466**
white/black	**1008464**
gold/black	**1008468**
bronze/black	**1008467**

⊕

Product	Prod. no.
GRIP! S, decorative ring	
white	**1011829**
black	**1011830**
nickel	**1011831**
gold	**1011832**
HONEYCOMB + Spacer	
black	**1011837**

GRIP! S MINI
48V, DALI, SHORT, STANDARD TRACK, Ø 3.0 CM





Dali · IP20 · IK02 · 29° · 340° · 90° · 50000 h L80B10 · UGR 25

48 V | 100 mA
Total wattage: 4.2 W
Material: aluminium

- Honeycomb accessories included

LED INSIDE · CRI 90

1012170 **1012172**	Down	2700 K 260 lm
1012171 **1012173**	Down	3000 K 270 lm

Variant	Prod. no.
black/gold 260 lm | 2700 K	**1012172**
black/gold 270 lm | 3000 K	**1012173**
white/black 260 lm | 2700 K	**1012170**
white/black 270 lm | 3000 K	**1012171**

⊕


Product	Prod. no.
GRIP! S, decorative ring	
white	**1011829**
black	**1011830**
nickel	**1011831**
gold	**1011832**
HONEYCOMB + Spacer	
black	**1011837**


1012377 465

GRIP! M
48V, DALI, DEEP & RECESSED TRACK, Ø 4.3 CM



GERMAN DESIGN AWARD WINNER 2026





48 V | 350 mA
Total wattage: 13 W
Material: aluminium

- Honeycomb accessories included

LED INSIDE CRI 90

1012375 **1012377**	2700 K 1450 lm
1012376 **1012378**	3000 K 1540 lm

Variant	Prod. no.
black/gold 1450 lm | 2700 K	**1012377**
black/gold 1540 lm | 3000 K	**1012378**
white/black 1450 lm | 2700 K	**1012375**
white/black 1540 lm | 3000 K	**1012376**

Product	Prod. no.
GRIP! M, decorative ring	
white	**1011833**
black	**1011834**
nickel	**1011835**
gold	**1011836**
Honeycomb	
black	**1011838**



LALU® SET
48V, PD, LED BASE, DALI





48 V | 500 mA
Total wattage: 9 W
Material: Aluminium/Steel

- Including colour temperature switch 2700 K/3000 K
- With black adapter




	2700 K	3000 K
Down	500 lm	550 lm

Variant	Prod. no.
● black	**1010801**

LALU® SET
48V, PD, LED BASE, DALI





Dali IP20 IK03 40° 50000h L80B50 200 cm

48 V | 500 mA
Total wattage: 9 W
Material: Aluminium/Steel

- Including colour temperature switch 2700 K/3000 K
- With black adapter

LED INSIDE CCT CRI 90

	2700 K	3000 K
Down	600 lm	650 lm

Variant	Prod. no.
● black	**1010802**

LALU® SET
48V, PD, LED BASE, DALI





Dali IP20 IK03 40° 50000h L80B50 200 cm

48 V | 500 mA
Total wattage: 9 W
Material: Aluminium/Steel

- Including colour temperature switch 2700 K/3000 K
- With black adapter


LED INSIDE CCT CRI 90

	2700 K	3000 K
Down	650 lm	700 lm

Variant	Prod. no.
● black	**1010803**

LALU® SET
48V, PD, LED BASE, DALI





Dali IP20 IK03 40° 50000h L80B50 200 cm

48 V | 500 mA
Total wattage: 9 W
Material: Aluminium/Steel

- Including colour temperature switch 2700 K/3000 K
- With black adapter

LED INSIDE CCT CRI 90

	2700 K	3000 K
Down	600 lm	650 lm

Variant	Prod. no.
● black	**1010804**

Discover more LALU colours and shapes® at slv.com


139081 475

INDOOR | LOW-VOLTAGE SYSTEMS



SOCKET

ASMARA | 475



SOCKET

TELESKOP | 475



SOCKET

COSMIC | 477



LED

DURNO | 477



LED

NOBLO® SPOT | 477

TENSEO
Low-voltage cable 4 MMA²





	1,000 cm	1,000 cm	1,000 cm
Max. current (A)	25 A max.	25 A max.	25 A max.
Colour	● black	○ white	○ transparent
Material	Copper/Plastic	Copper/Plastic	Copper/Plastic
L x W x H (cm)	1,000 cm	1,000 cm	1,000 cm
Prod. no.	**1002602**	**1002603**	**1002604**

	2,000 cm	2,000 cm	2,000 cm
Max. current (A)	25 A max.	25 A max.	25 A max.
Colour	● black	○ white	○ transparent
Material	Copper/Plastic	Copper/Plastic	Copper/Plastic
L x W x H (cm)	2,000 cm	2,000 cm	2,000 cm
Prod. no.	**139030**	**139031**	**139024**

TENSEO
Low-voltage cable 6 MMA^2, 20M





	2,000 cm	2,000 cm	2,000 cm
Max. current (A)	25 A max.	25 A max.	25 A max.
Colour	● black	○ transparent	○ white
Material	Copper/Plastic	Copper/Plastic	Copper/Plastic
L x W x H (cm)	2,000 cm	2,000 cm	2,000 cm
Prod. no.	**139030**	**139024**	**139031**


1002695 477



12V AC | 50VA CONVENTIONAL

Steel/Brass
H: 11 cm

● black	Prod. no.	**1002691**
○ white	Prod. no.	**1002692**
◑ chrome	Prod. no.	**1002693**



12V AC | 105VA CONVENTIONAL

Brass/Glass
H: 11 cm

○ white	Prod. no.	**138981**
◑ chrome	Prod. no.	**138982**



12V AC | 210VA CONVENTIONAL

Steel/Brass
H: 11 cm

○ white	Prod. no.	**138991**
◑ chrome	Prod. no.	**138992**



CABLE TENSIONER

Brass
H: 11 cm

● black	Prod. no.	**181530**
○ white	Prod. no.	**181531**
◑ chrome	Prod. no.	**181532**



WALL BRACKET

3 cm | Steel/Brass
L: 3 cm

● black	Prod. no.	**186300**
○ white	Prod. no.	**186301**
◑ chrome	Prod. no.	**186302**



CABLE GUIDE 6 CM

Steel/Brass
H: 6 cm

● black	Prod. no.	**186330**
○ white	Prod. no.	**186331**
◑ chrome	Prod. no.	**186332**



CABLE GUIDE

Steel/Brass
H: 16 cm

● black	Prod. no.	**186340**
○ white	Prod. no.	**186341**
◑ chrome	Prod. no.	**186342**



WALL BRACKET 10 CM

Steel/Brass
H: 11.5 cm
With clamping device

● black	Prod. no.	**186310**
○ white	Prod. no.	**186311**
◑ chrome	Prod. no.	**186312**



CEILING CABLE GUIDE

Steel/Brass
H: 16 cm

● black	Prod. no.	**186640**
○ white	Prod. no.	**186641**
◑ chrome	Prod. no.	**186642**



POWER FEED

Brass
H: 1.8 cm
25A max.

● black	Prod. no.	**186350**
○ white	Prod. no.	**186351**
◑ chrome	Prod. no.	**186352**



INSULATING CONNECTOR

6.4 cm | Aluminium/Plastic
L: 6.4 cm

● black	Prod. no.	**186360**
○ white	Prod. no.	**186361**
◑ chrome	Prod. no.	**186362**



SPACER

Aluminium
W: 9 cm

● black	Prod. no.	**1002700**
○ white	Prod. no.	**1002701**
◑ chrome	Prod. no.	**1002702**



ELECTRICAL SPACER

Brass
W: 9 cm

● black	Prod. no.	**1002703**
○ white	Prod. no.	**1002704**
◑ chrome	Prod. no.	**1002705**



SUSPENSION KIT 2 M

Steel/Aluminium
W: 18.6 cm
Length of suspension: 200 cm

● black	Prod. no.	**1002697**
○ white	Prod. no.	**1002698**
◑ chrome	Prod. no.	**1002699**


139071 475

ASMARA
LV, QR-C51



IP20 90°

12V AC
Material: Stainless steel

SOCKET INSIDE 35 W


Base: 1xGX5.3

Variant	Prod. no.
● black	**139070**
○ white	**139071**
◑ chrome	**139072**

GU5.3 | 6 W | 36°
460 lm | 3000 K | EEC = F

Prod. no.: 1001575

TELESKOP
LV, QR-C51

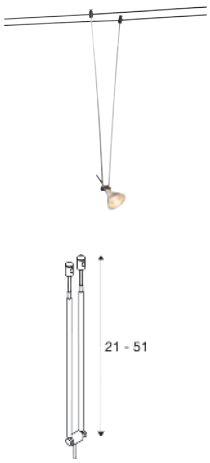

IP20 90°

12V AC
Material: Steel/Brass

- Telescopic adjustable from 21-51 cm

SOCKET INSIDE 20 W

Base: 1xGX5.3

Variant	Prod. no.
● black	**139080**
○ white	**139081**
◑ chrome	**139082**


GU5.3 | 6 W | 36°
450 lm | 2700 K | EEC = G

Prod. no.: 1001574


1002862 477

COSMIC
LV, QR-C51





IP20 90°

12V AC
Material: Steel/Brass

SOCKET INSIDE 35 W

Base: 1xGX5.3

Variant	Prod. no.
● black	**139090**
○ white	**139091**
◑ chrome	**139092**


GU5.3 | 6 W | 36°
450 lm | 2700 K | EEC = G



Prod. no.: **1001574**

DURNO
LV





120° 40° 25000 h L70B50

12V AC
Total wattage: 6 W
Material: Aluminium/Stainless steel


LED INSIDE CRI 80

	2700 K 360 lm

Variant	Prod. no.
● black	**1002861**
○ white	**1002862**
◑◑ chrome/Stainless steel	**1002863**

NOBLO® SPOT
LV, ROPE TRACK





IP20 36° 340° 90° 25000 h L70B50

12V AC
Total wattage: 8.5 W
Material: aluminium

LED INSIDE CRI 80

1002694	2700 K 420 lm
1002695	2700 K 450 lm
1002696	2700 K 450 lm

Variant	Prod. no.
● black 420 lm	**1002694**
○ white 450 lm	**1002695**
◑ chrome 450 lm	**1002696**


143580 527
1008060 525

INDOOR | 1-PHASE SYSTEMS



SOCKET

HAVEN 25 | 487



LED

QUIMERA | 489



SOCKET

FORCHINI M 40 TRACK | 489



LED

LALU® SET | 491–493



SOCKET

PURI 2.0 TUBE | 495–497



SOCKET

PURI 2.0 CONE | 495–497



SOCKET

PURI 2.0 DOME | 495–459



SOCKET

PURI 2.0 | 498



SOCKET

ENOLA® 2.0 | 500–501



SOCKET

BIMA 2.0 | 503



LED
SOCKET

GRIP! | 505–509



LED

GRIP! FLAT | 511



LED

DYSKO | 513



LED
SOCKET

LIGHT EYE® | 514–517



LED

KALU 2.0 | 519



SOCKET

KALU TRACK | 519



LED

NOBLO® SPOT | 521



SOCKET

ASTO TUBE | 523



SOCKET

PARA CONE GL | 525



SOCKET

PARA CONE 14 | 525



LED

HELIA 50 TRACK | 527



LED

PANEL TRACK | 527



LED

PANEL TRACK | 527



SOCKET

EURO SPOT TRACK | 529





SOCKET

ALTRA DICE TRACK | 529


1009131 511
WACHTEL

1~ SYSTEM MOUNTING TRACK
1-PHASE

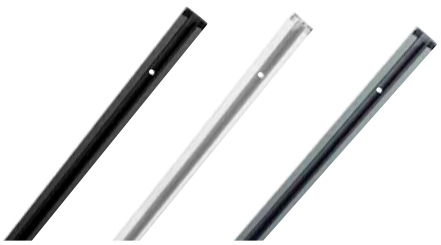

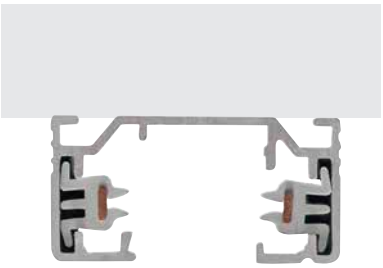

	100 cm	100 cm	100 cm
Nominal voltage (V)	220-240 V ~50/60 Hz	220-240 V ~50/60 Hz	220-240 V ~50/60 Hz
Max. current (A)	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● grey
Material	Aluminium	Aluminium	Aluminium
L x W x H (cm)	100 cm x 3.5 cm x 1.8 cm	100 cm x 3.5 cm x 1.8 cm	100 cm x 3.5 cm x 1.8 cm
Prod. no.	**143010**	**143011**	**143012**


	200 cm	200 cm	200 cm
Nominal voltage (V)	220-240 V ~50/60 Hz	220-240 V ~50/60 Hz	220-240 V ~50/60 Hz
Max. current (A)	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● grey
Material	Aluminium	Aluminium	Aluminium
L x W x H (cm)	200 cm x 3.5 cm x 1.8 cm	200 cm x 3.5 cm x 1.8 cm	200 cm x 3.5 cm x 1.8 cm
Prod. no.	**143020**	**143021**	**143022**


	300 cm	300 cm	300 cm
Nominal voltage (V)	220-240 V ~50/60 Hz	220-240 V ~50/60 Hz	220-240 V ~50/60 Hz
Max. current (A)	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● grey
Material	Aluminium	Aluminium	Aluminium
L x W x H (cm)	300 cm x 3.5 cm x 1.8 cm	300 cm x 3.5 cm x 1.8 cm	300 cm x 3.5 cm x 1.8 cm
Prod. no.	**1002151**	**1002152**	**1002153**


1~ SYSTEM MOUNTING TRACK
1-PHASE


Planning assistance and accessories at a glance

View of components from above
on the installation side

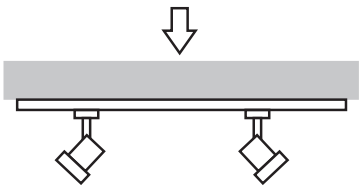

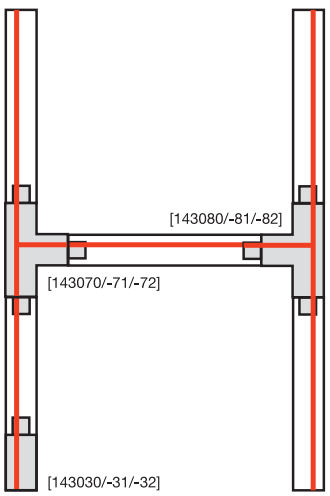

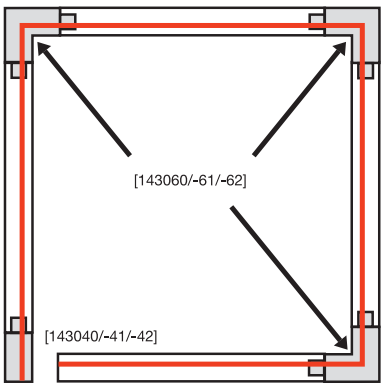

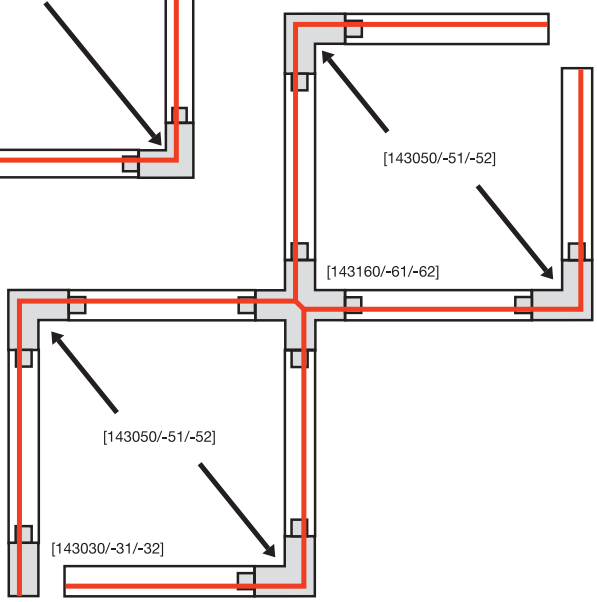



1-PHASE ADAPTOR

6 A max. | 8.5 cm | Polycarbonate (PC)
L: 8.5 cm | W: 3.5 cm | H: 3.2 cm

●	black	Prod. no. **143120**
○	white	Prod. no. **143121**
●	grey	Prod. no. **143124**



1-PHASE ADAPTOR WITH HOOK

6 A max. | 8.5 cm | Polycarbonate (PC)
L: 8.5 cm W: 3.5 cm H: 7.4 cm

For pendant lights that feature additional mechanical suspension.

●	black	Prod. no. **143170**
○	white	Prod. no. **143171**
●	grey	Prod. no. **143172**



1-PHASE, FEED-IN, EARTH LEFT

16 A max. | 6.5 cm | Polycarbonate (PC)
L: 6.5 cm | W: 3.5 cm | H: 1.8 cm

●	black	Prod. no. **143030**
○	white	Prod. no. **143031**
●	grey	Prod. no. **143032**



1-PHASE, FEED-IN, EARTH RIGHT

16 A max. | 6.5 cm | Polycarbonate (PC)
L: 6.5 cm | W: 3.5 cm | H: 1.8 cm

●	black	Prod. no. **143040**
○	white	Prod. no. **143041**
●	grey	Prod. no. **143042**



1-PHASE, LONGITUDINAL CONNECTOR WITH FEED CAPACITY

16 A max. | 17.2 cm | Polycarbonate (PC)
L: 17.2 cm | W: 3.5 cm | H: 1.8 cm

- ● black Prod. no. **143100**
- ○ white Prod. no. **143101**
- ● grey Prod. no. **143102**



1-PHASE, LONGITUDINAL CONNECTOR, ELECTRICAL

16 A max. | 6.4 cm | Polycarbonate (PC)
L: 6.4 cm | W: 3.5 cm | H: 1.8 cm

- ● black Prod. no. **143090**
- ○ white Prod. no. **143091**
- ● grey Prod. no. **143092**



1-PHASE, CORNER CONNECTOR, INTERNAL EARTH

16 A max. | 10.4 cm | Polycarbonate (PC)
L: 10.4 cm | W: 10.4 cm | H: 1.8 cm

- ● black Prod. no. **143060**
- ○ white Prod. no. **143061**
- ● grey Prod. no. **143062**



1-PHASE, CORNER CONNECTOR, EXTERNAL EARTH

16 A max. | 10.4 cm | Polycarbonate (PC)
L: 10.4 cm | W: 10.4 cm | H: 1.8 cm

- ● black Prod. no. **143050**
- ○ white Prod. no. **143051**
- ● grey Prod. no. **143052**



1-PHASE, T-CONNECTOR, EXTERNAL EARTH, LEFT

16 A max. | 17.2 cm | Polycarbonate (PC)
L: 17.2 cm | W: 10.4 cm | H: 1.8 cm

- ● black Prod. no. **143070**
- ○ white Prod. no. **143071**
- ● grey Prod. no. **143072**



1-PHASE, T-CONNECTOR, EXTERNAL EARTH, RIGHT

16 A max. | 17.2 cm | Polycarbonate (PC)
L: 17.2 cm | W: 10.4 cm | H: 1.8 cm

- ● black Prod. no. **143080**
- ○ white Prod. no. **143081**
- ● grey Prod. no. **143082**



1-PHASE, X-CONNECTOR

16 A max. | 9.5 cm | Polycarbonate (PC)
L: 9.5 cm | W: 17.2 cm | H: 1.8 cm

- ● black Prod. no. **143160**
- ○ white Prod. no. **143161**
- ● grey Prod. no. **143162**



1-PHASE, FLEX CONNECTOR

16 A max. | 16.4 cm | Polycarbonate (PC)
L: 16.4 cm | W: 3.5 cm | H: 1.8 cm

- ● black Prod. no. **143110**
- ○ white Prod. no. **143111**
- ● grey Prod. no. **143112**



1-PHASE, STABILISER, LONGITUDINAL CONNECTOR

19.7 cm | Steel
L: 19.7 cm | W: 3.2 cm | H: 1.3 cm
For reinforcement when mounting several tracks with ceiling suspension (1002845)

- ● nickel Prod. no. **143151**



1-PHASE, STABILISER, CORNER CONNECTOR LONG

11.5 cm | Steel
L: 11.,5 cm | W: 11.5 cm | H: 0.5 cm
For reinforcement when mounting several tracks with ceiling suspension (1002845)

- ● nickel Prod. no. **143152**



1-PHASE, STABILISING X-CONNECTOR

19.7 cm | Steel
L: 19.7 cm | B: 19.7 cm | H: 0.5 cm
For reinforcement when mounting several tracks with ceiling suspension (1002845)

- ● nickel Prod. no. **143169**



2M COVER FOR 1-PHASE TRACK

200 cm | Polycarbonate (PC)
L: 200 cm | B: 1.8 cm | H: 0.8 cm

- ● black Prod. no. **1004783**
- ○ white Prod. no. **1004785**
- ● grey Prod. no. **1004784**



1-PHASE, END CAPS (2 PIECES)

0.4 cm | Polycarbonate (PC)
L: 0.4 cm | W: 3.5 cm | H: 1.8 cm

- ● black Prod. no. **143130**
- ○ white Prod. no. **143131**
- ● grey Prod. no. **143132**



1-PHASE, CEILING ROSETTE 2.0

6 A max. | Polycarbonate (PC)
H: 2.5 cm

- ● black Prod. no. **1007926**
- ○ white Prod. no. **1007927**
- ● grey Prod. no. **1007928**



EUTRACK®, S-TRACK AND 1-PHASE TRACKS, 5 M, SET OF TWO

500 cm | Stainless steel/Brass
L: 500 cm

- ● nickel Prod. no. **1002845**



COVER PLATE, 1-PHASE


10 cm | Steel
L: 10 cm | W: 10 cm | H: 0 cm

- ● black Prod. no. **1008149**
- ○ white Prod. no. **1008148**
- ● grey Prod. no. **1008150**


143580 527

1~ SYSTEM RECESSED TRACK
1-PHASE, 2 M



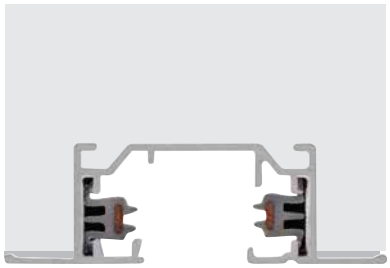

	200 cm
Nominal voltage (V)	220-240 V ~50/60 Hz
Max. current (A)	16 A max.
Colour	○ white
Material	Aluminium
L x W x H (cm)	200 cm x 5.5 cm x 1.8 cm
Prod. no.	**143221**



1-PHASE, FEED-IN, EARTH LEFT

16 A max. | 10.8 cm | Plastic
L: 10.8 cm | W: 5.5 cm | H: 2 cm

○ white Prod. no. **143231**



1-PHASE, FEED-IN, EARTH RIGHT

16 A max. | 10.8 cm | Plastic
L: 10.8 cm | W: 5.5 cm | H: 2 cm

○ white Prod. no. **143241**



1-PHASE, LONGITUDINAL CONNECTOR INCLUDING LONGITUDINAL BRACE

6.5 cm | Plastic/Steel
L: 6.5 cm | W: 1.8 cm | H: 1.7 cm
Longitudinal connector including longitudinal brace

○ white Prod. no. **143271**



1-PHASE, CORNER CONNECTOR, INTERNAL EARTH

16 A max. | 11.2 cm | Plastic
L: 11.2 cm | W: 11.2 cm | H: 2 cm

○ white Prod. no. **143261**



1-PHASE, CORNER CONNECTOR, EXTERNAL EARTH

16 A max. | 11.2 cm | Plastic
L: 11.2 cm | W: 11.2 cm | H: 2 cm

○ white Prod. no. **143251**



1-PHASE, END CAP

2.7 cm | Plastic
L: 2.7 cm | W: 5.5 cm | H: 1.8 cm

○ white Prod. no. **143281**



1-PHASE, RETAINER

7.5 cm | Steel
L: 7.5 cm | W: 1.5 cm | H: 4 cm

● nickel Prod. no. **143230**



1-PHASE ADAPTOR WITH HOOK

6 A max. | 8.5 cm | Polycarbonate (PC)
L: 8.5 cm W: 3.5 cm H: 7.4 cm
For pendant lights that feature additional mechanical suspension.

● black Prod. no. **143170**
○ white Prod. no. **143171**
● grey Prod. no. **143172**



1-PHASE ADAPTOR


6 A max. | 8.5 cm | Polycarbonate (PC)
L: 8.5 cm | W: 3.5 cm | H: 3.2 cm

● black Prod. no. **143120**
○ white Prod. no. **143121**
● grey Prod. no. **143124**


1011692 487

HAVEN 25
1-PHASE, E27





IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE 40 W

Base: 1xE27

Variant	Prod. no.
● black	**1011690**
○ white	**1011691**
● gold	**1011692**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F


Prod. no.: **1005303**


1008042 489

QUIMERA
1-PHASE, PD

GERMAN DESIGN AWARD WINNER 2025





C | IP20 | IK03 | 360° | 50000 h L80B50 | 150 cm

220-240 V ~50/60 Hz | 350 mA
Total wattage: 7.6 W
Material: Aluminium

- Narrow lines on the glass create fascinating light reflections
- Black track adapter


LED INSIDE | CRI 90

Indirect	2700 K
	365 lm

Variant	Prod. no.
black	**1008041**
brass	**1008042**
copper	**1008043**

FORCHINI M 40 TRACK
1-PHASE, E27





IP20 | 150 cm

220-240 V ~50/60 Hz
Material: Steel/Aluminium

- 1008540 with black 1-phase track adapter

SOCKET INSIDE | 40 W

Base: 1xE27 | max. Ø: 6.8 cm | L: 15.2 cm

Variant	Prod. no.
black/gold	**1008539**
black/gold	**1008540**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

C

Prod. no.: **1005303**


1010798 491

LALU® SET
1-PHASE, PD, LED BASE, PHASE





C | IP20 | IK03 | 40° | 50000 h L80B20 | 200 cm

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: Aluminium/Steel

- Including colour temperature switch 2700K/3000K
- With black adapter

LED INSIDE | CCT | CRI 90

	2700 K	3000 K
Down	700 lm	750 lm

Variant	Prod. no.
● black	**1010798**

LALU® SET
1-PHASE, PD, LED BASE, PHASE





C | IP20 | IK03 | 40° | 50000 h L80B20 | 200 cm

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: Aluminium/Steel

- Including colour temperature switch 2700K/3000K
- With black adapter

LED INSIDE | CCT | CRI 90

	2700 K	3000 K
Down	700 lm	800 lm


Variant	Prod. no.
● black	**1010799**

Discover more LALU® colours and shapes at slv.com


1010797 493

LALU® SET
1-PHASE, PD, LED BASE, PHASE





IP20 IK03 40° 50000h L80B20 200 cm

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: Aluminium/Steel

- Including colour temperature switch 2700K/3000K
- With black adapter


LED INSIDE CCT CRI 90

	2700 K	3000 K
Down	550 lm	600 lm

Variant	Prod. no.
● black	**1010797**

LALU® SET
1-PHASE, PD, LED BASE, PHASE





IP20 IK03 40° 50000h L80B20 200 cm

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: Aluminium/Steel

- Including colour temperature switch 2700K/3000K
- With black adapter

LED INSIDE CCT CRI 90

	2700 K	3000 K
Down	700 lm	700 lm


Variant	Prod. no.
● black	**1010800**

Discover more LALU® colours and shapes at slv.com


1008250 495

PURI 2.0 TUBE
1-PHASE, QPAR51





IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
black	**1008242**
black/gold	**1008243**
white	**1008244**
grey	**1008245**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

PURI 2.0 CONE
1-PHASE, QPAR51





IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
black	**1008246**
black/gold	**1008247**
white	**1008248**
grey	**1008249**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

PURI 2.0 DOME
1-PHASE, QPAR51





IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
black	**1008250**
black/gold	**1008251**
white	**1008252**
grey	**1008253**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**


1008263 497

PURI 2.0 TUBE
1-PHASE, PD, QPAR51

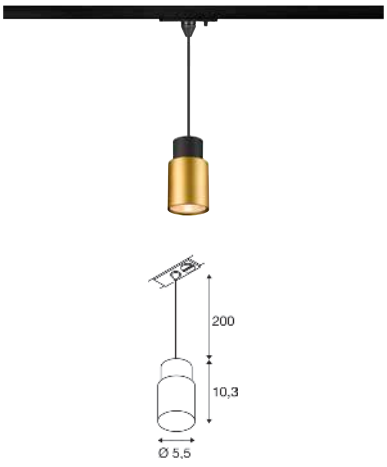

IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
black	**1008254**
black/gold	**1008255**
white	**1008256**
grey	**1008257**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F


Prod. no.: **1005077**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

PURI 2.0 CONE
1-PHASE, PD, QPAR51

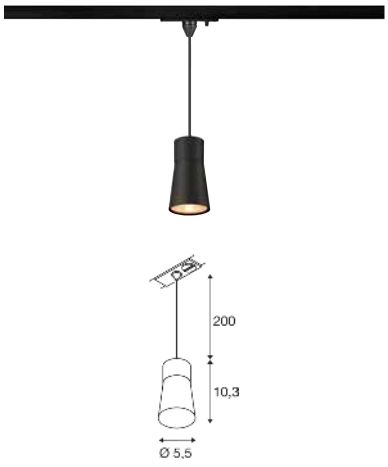

IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
black	**1008258**
black/gold	**1008259**
white	**1008260**
grey	**1008261**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F


Prod. no.: **1005077**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

PURI 2.0 DOME
1-PHASE, QPAR51

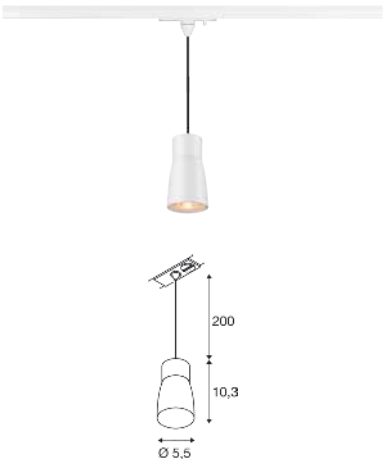

IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
black	**1008262**
black/gold	**1008263**
white	**1008264**
grey	**1008265**


GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077**

SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F


Prod. no.: **1012469**

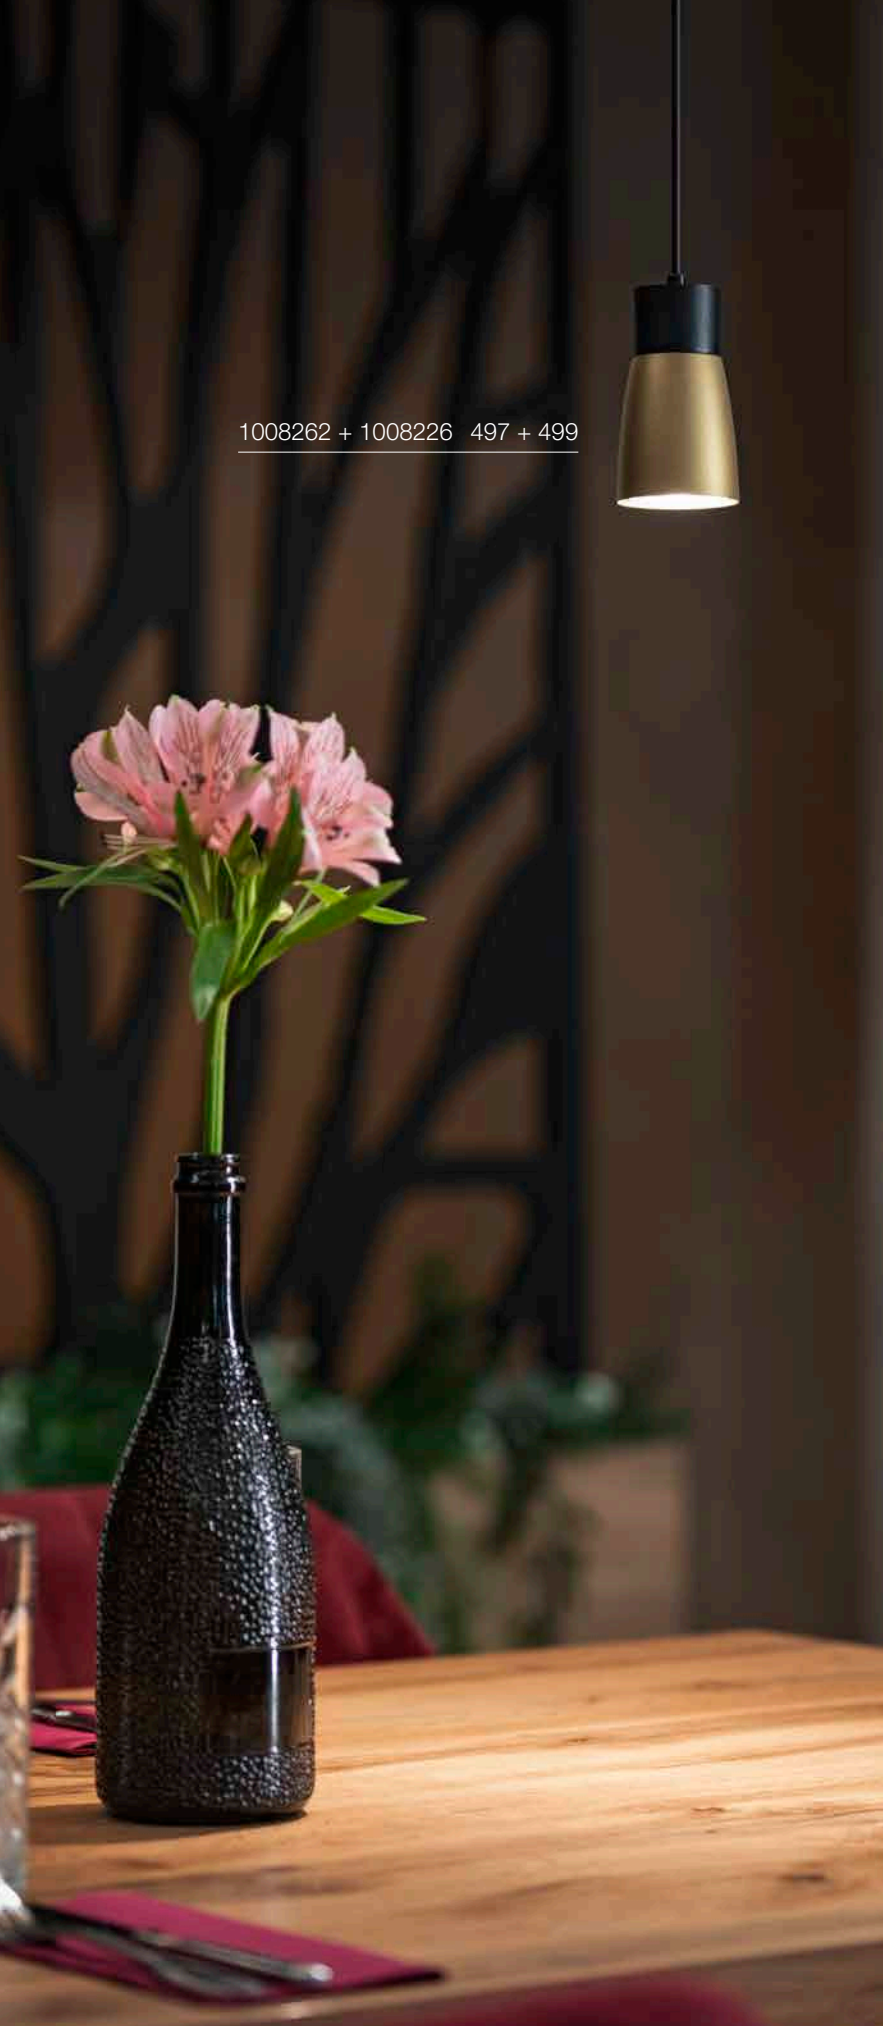

1008262 + 1008226 497 + 499

PURI 2.0
1-PHASE, TRIPLE TRACK SET, QPAR51







220-240 V ~50/60 Hz
Material: Aluminium

- Consists of:
  2 x 1 m track,
  1 x longitudinal connector with feed-in,
  1 x 2 end caps,
  3 x PURI 2.0 light heads,
  3 x GU10 2700K lamps



Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
● black	**1008903**
◐ black/gold	**1008904**
○ white	**1008902**

PURI 2.0 CONE
SHADE



Ø: 5.5 cm
H: 6.5 cm
Material: Aluminium

Variant	Prod. no.
black	**1008219**
white	**1008218**
gold	**1008221**
grey	**1008220**
Bronze	**1008222**
aluminium	**1008377**

PURI 2.0 DOME
SHADE



Ø: 5.5 cm
H: 6.5 cm
Material: Aluminium

Variant	Prod. no.
black	**1008224**
white	**1008223**
gold	**1008226**
grey	**1008225**
Bronze	**1008227**
aluminium	**1008378**

PURI 2.0 TUBE
SHADE




Ø: 5.5 cm
H: 6.5 cm
Material: Aluminium

Variant	Prod. no.
black	**1008214**
white	**1008213**
gold	**1008216**
grey	**1008215**
Bronze	**1008217**
aluminium	**1008376**

ENOLA® 2.0 S
1-PHASE, SINGLE,
GU10 MINI, PAR11





IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: Aluminium/Plastic PC

SOCKET INSIDE 5 W

Base: 1xGU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.
● black	**1011723**
○ white	**1011724**


GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F

Prod. no.: **1011670**

Product	Prod. no.
ENOLA® 2.0 S, Decorative Ring	
● black	**1011753**
○ white	**1011754**
● gold	**1011755**
● copper	**1011756**

ENOLA® 2.0 S
1-PHASE, PD, SINGLE,
GU10 MINI, PAR11





IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium/Plastic PC

SOCKET INSIDE 5 W

Base: 1xGU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.
● black	**1011727**
○ white	**1011728**

GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F

Prod. no.: **1011670**

Product	Prod. no.
ENOLA® 2.0 S, Decorative Ring	
● black	**1011753**
○ white	**1011754**
● gold	**1011755**
● copper	**1011756**

ENOLA® 2.0 S
DECORATIVE RING




Ø: 3.9 cm
H: 1.1 cm
Material: Plastic PC

Variant	Prod. no.
● black	**1011753**
○ white	**1011754**
● gold	**1011755**
● copper	**1011756**

ENOLA® 2.0 M
1-PHASE, SINGLE, GU10, QPAR51





IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: Aluminium/Plastic PC

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.
● black	**1011713**
○ white	**1011714**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005076**

SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

Product	Prod. no.
ENOLA® 2.0/BIMA 2.0 M, Decorative Ring	
● black	**1011749**
○ white	**1011750**
gold	**1011751**
copper	**1011752**

ENOLA® 2.0 M
1-PHASE, PD, SINGLE, GU10, QPAR51





IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium/Plastic PC

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.
● black	**1011717**
○ white	**1011718**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005076**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

Product	Prod. no.
ENOLA® 2.0/BIMA 2.0 M, Decorative Ring	
● black	**1011749**
○ white	**1011750**
gold	**1011751**
copper	**1011752**

ENOLA® 2.0/BIMA 2.0 M
DECORATIVE RING




Ø: 5.4 cm
H: 2 cm
Material: Plastic PC

Variant	Prod. no.
● black	**1011749**
○ white	**1011750**
gold	**1011751**
copper	**1011752**



BIMA 2.0
1-PHASE, SINGLE, QPAR51





IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: Aluminium/Plastic

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.4 cm

Variant	Prod. no.
● black	**1011759**
○ white	**1011760**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

C,L

Prod. no.: **1005079**

SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

Product	Prod. no.
ENOLA® 2.0/BIMA 2.0 M, Decorative Ring	
● black	**1011749**
○ white	**1011750**
gold	**1011751**
copper	**1011752**

BIMA 2.0
1-PHASE, DOUBLE, QPAR51





IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: Aluminium/Plastic

SOCKET INSIDE 10 W

Base: 2xGU10 | max. Ø: 5.1 cm | L: 5.4 cm

Variant	Prod. no.
● black	**1011761**
○ white	**1011762**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

C,L

Prod. no.: **1005079**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F


Prod. no.: **1012469**

Product	Prod. no.
ENOLA® 2.0/BIMA 2.0 M, Decorative Ring	
● black	**1011749**
○ white	**1011750**
gold	**1011751**
copper	**1011752**


1008399 505

GRIP! S
1-PHASE, PHASE, Ø 3,0 CM





C,L · IP20 · IK02 · 29° · 330° · 90° · 50 000 h L80B10 · UGR 25

220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: Aluminium

- Honeycomb accessories included


LED INSIDE · CRI 90

1008390 **1008392** **1008393** **1008394**	Down	2700 K 530 lm
1008395 **1008397** **1008398** **1008399**	Down	3000 K 610 lm

Variant	Prod. no.
black/gold 530 lm | 2700 K	**1008392**
black/gold 610 lm | 3000 K	**1008397**
white/black 530 lm | 2700 K	**1008390**
white/black 610 lm | 3000 K	**1008395**
gold/black 530 lm | 2700 K	**1008394**
gold/black 610 lm | 3000 K	**1008399**
Bronze/black 530 lm | 2700 K	**1008393**
Bronze/black 610 lm | 3000 K	**1008398**

GRIP! S
1-PHASE, PHASE, Ø 3,0 CM





C,L · IP20 · IK02 · 29° · 330° · 90° · 50 000 h L80B20 · UGR 25

220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: Aluminium

- Honeycomb accessories included


LED INSIDE · DIM TO WARM · CRI 90

Down	2000 K - 3000 K 350 lm - 350 lm

Variant	Prod. no.
black/gold	**1008402**
white/black	**1008400**
gold/black	**1008404**
Bronze/black	**1008403**

GRIP! M
1-PHASE, PHASE, Ø 4,3 CM









220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: Aluminium

- Honeycomb accessories included




1008420 **1008422** **1008423** **1008424**	Down	2700 K 1810 lm
1008425 **1008427** **1008428** **1008429**	Down	3000 K 1900 lm

Variant	Prod. no.
black/gold 1810 lm | 2700 K	**1008422**
black/gold 1900 lm | 3000 K	**1008427**
white/black 1810 lm | 2700 K	**1008420**
white/black 1900 lm | 3000 K	**1008425**
gold/black 1810 lm | 2700 K	**1008424**
gold/black 1900 lm | 3000 K	**1008429**
Bronze/black 1810 lm | 2700 K	**1008423**
Bronze/black 1900 lm | 3000 K	**1008428**

GRIP! M
1-PHASE, PHASE, Ø 4,3 CM









220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- Honeycomb accessories included




Down	2000 K	-	3000 K
	1000 lm	-	1000 lm

Variant	Prod. no.
black/gold	**1008432**
white/black	**1008430**
gold/black	**1008434**
Bronze/black	**1008433**

GRIP! L
1-PHASE, QPAR51, Ø 5,7 CM





IP20 IK02 360° 90°

220-240 V ~50/60 Hz
Material: Aluminium

- Honeycomb accessories included

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
black/gold	**1008449**
white/black	**1008447**
gold/black	**1008451**
Bronze/black	**1008450**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

Prod. no.: **1005080**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

GRIP! L
1-PHASE, PD, QPAR51, Ø 5,7 CM





IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium

- Honeycomb accessories included

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
black/gold	**1008471**
white/black	**1008469**
gold/black	**1008473**
Bronze/black	**1008472**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

Prod. no.: **1005080**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**


1008473 507

GRIP! S
DECORATIVE RING + SPACER



NEW

Ø: 2.7 cm
H: 1.1 cm
Material: Aluminium

Variant	Prod. no.
black	1011830
white	1011829
gold	1011832
Nickel	1011831

GRIP! M
DECORATIVE RING + SPACER



NEW

Ø: 4 cm
H: 1.4 cm
Material: Aluminium

Variant	Prod. no.
black	1011834
white	1011833
gold	1011836
Nickel	1011835

GRIP! L
DECORATIVE RING



Ø: 5.4 cm
H: 2.1 cm
Material: Aluminium


Variant	Prod. no.
black	1008497
white	1008496
gold	1008499
Nickel	1008498



1009133 + 1010406 511

GRIP! FLAT
1-PHASE, PHASE





C,L · IP20 · 330° · 84° · 50000h L70B50 · UGR 15

220-240 V ~50/60 Hz | 500 mA
Total wattage: 16 W
Material: Aluminium

- Including colour temperature switch 2700K/3000K
- Honeycomb included
- More colour options with optional decorative rings

LED INSIDE · CCT · CRI 90

Down	2700 K	3000 K
	400 lm	430 lm


Variant	Prod. no.
● black	**1009131**
○ white	**1009132**

⊕

Product	Prod. no.
GRIP! FLAT, decorative ring	
● black	**1009102**
○ white	**1009103**
● gold	**1009104**

GRIP! FLAT
1-PHASE, PD, PHASE





C,L · IP20 · 50000h L70B50 · 200 cm · UGR 15

220-240 V ~50/60 Hz | 500 mA
Total wattage: 16 W

- Including colour temperature switch 2700K/3000K
- Honeycomb included

LED INSIDE · CCT · CRI 90


Down	2700 K	3000 K
	400 lm	430 lm

Variant	Prod. no.
● black	**1009133**
○ white	**1009134**

⊕

Product	Prod. no.
GRIP! FLAT, decorative ring	
● black	**1009102**
○ white	**1009103**
● gold	**1009104**


GRIP! FLAT
FELT SHADE Ø 50 CM X 6.2 CM



Ø: 50 cm
H: 6.2 cm

Variant	Prod. no.
● anthracite	**1010403**
● grey	**1010404**
● ochre	**1010405**

GRIP! FLAT
FELT SHADE Ø 50 CM X 0.6 CM




Ø: 50 cm
H: 0.6 cm

Variant	Prod. no.
● anthracite	**1010406**
● grey	**1010407**
● ochre	**1010408**


1010324 513

DYSKO
1PH., PHASE







220-240 V ~50/60 Hz | 150 mA
Total wattage: 6.7 W
Material: Plastic PC/Aluminium

- Intrack LED driver adapter




2700 K
750 lm

Variant	Prod. no.
black	**1010320**
black/gold	**1010318**
white/black	**1010319**

DYSKO
1PH., PD, PHASE







220-240 V ~50/60 Hz | 150 mA
Total wattage: 6.7 W
Material: Plastic PC/Aluminium

- Intrack LED driver adapter




2700 K
750 lm

Variant	Prod. no.
black	**1010326**
black/gold	**1010324**
white/black	**1010325**

LIGHT EYE® 90
1-PHASE, QPAR51





IP20 330° 90°

220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.4 cm

Variant	Prod. no.
● black	**1008180**
○ white	**1008181**


GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

C,L

Prod. no.: **1005080**

LIGHT EYE® 150
1-PHASE, QPAR111





IP20 330° 90°

220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE 13 W

Base: 1xGU10 | max. Ø: 11.1 cm | L: 7 cm

Variant	Prod. no.
● black	**1008182**
○ white	**1008183**


GU10 | 12 W | 55°
680 lm | 3000 K | EEC = G

C,L

Prod. no.: **1005298**

LIGHT EYE® 90
1-PHASE, PD, QPAR51





IP20 150 cm

220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.35 cm

Variant	Prod. no.
● black	**1008168**
○ white	**1008169**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

Prod. no.: **1005080**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

LIGHT EYE® 150
1-PHASE, PD, QPAR111





IP20 150 cm

220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE 13 W

Base: 1xGU10 | max. Ø: 11.1 cm | L: 7 cm

Variant	Prod. no.
● black	**1008174**
○ white	**1008175**

GU10 | 12 W | 55°
680 lm | 3000 K | EEC = G

Prod. no.: **1005298**

LIGHT EYE® 90
DECORATIVE RING Ø 5.7 CM



Ø: 5.9 cm
H: 1.4 cm
Material: Steel

Variant	Prod. no.
● black	**1008186**
○ white	**1008187**
● gold	**1008188**
◑ chrome	**151049**

LIGHT EYE® 150
DECORATIVE RING Ø 13.6 CM




Ø: 13.6 cm
H: 2.3 cm
Material: Steel

Variant	Prod. no.
● black	**1008189**
○ white	**1008190**
● gold	**1008192**
◑ chrome	**1008191**


1010450 517

LIGHT EYE® 2.0
1-PHASE, PHASE, Ø 7,5 CM







220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: Aluminium


LED INSIDE CRI 90

1010448 **1010449**	Down	2700 K 1150 lm
1010450 **1010451**	Down	3000 K 1200 lm

Variant	Prod. no.
● black 1150 lm | 2700 K	**1010448**
● black 1200 lm | 3000 K	**1010450**
◑ white/black 1150 lm | 2700 K	**1010449**
◑ white/black 1200 lm | 3000 K	**1010451**

LIGHT EYE® 2.0
1-PHASE, PD, Ø 7,5 CM







220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: Aluminium

LED INSIDE CRI 90


1010452 **1010453**	Down	2700 K 1150 lm
1010454 **1010455**	Down	3000 K 1200 lm

Variant	Prod. no.
● black 1150 lm | 2700 K	**1010452**
● black 1200 lm | 3000 K	**1010454**
◑ white/black 1150 lm | 2700 K	**1010453**
◑ white/black 1200 lm | 3000 K	**1010455**


Coffee MENU
KNOW YOUR COFFEE

KALU 2.0
1-PHASE, PHASE





IP20 IK02 36° 340° 90° 50000 h L90B10 UGR 22

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: Aluminium

LED INSIDE CRI 90


1010222 **1010224**	Down	2700 K 1400 lm
1010226 **1010228**	Down	3000 K 1450 lm
1010230 **1010232**	Down	4000 K 1500 lm

Variant	Prod. no.
● black 1400 lm | 2700 K	**1010222**
● black 1450 lm | 3000 K	**1010226**
● black 1500 lm | 4000 K	**1010230**
○ white 1400 lm | 2700 K	**1010224**
○ white 1450 lm | 3000 K	**1010228**
○ white 1500 lm | 4000 K	**1010232**

Product	Prod. no.
KALU 2.0, decorative ring	
○ white	**1010135**
● black	**1010136**
● gold	**1010138**
● copper	**1010139**
KALU 2.0, lens	
○ transparent | 15°	**1010140**
○ transparent | 24°	**1010141**
○ transparent | 36°	**1010142**
○ transparent | 60°	**1010143**

KALU TRACK
1-PHASE, QPAR111





IP20 350° 90°

220-240 V ~50/60 Hz
Material: Aluminium/Plastic

SOCKET INSIDE 75 W

Base: 1xGU10

Variant	Prod. no.
● black	**143540**
○ white	**143541**
● grey	**143544**

GU10 | 12 W | 55°
670 lm | 2700 K | EEC = G


C,L

Prod. no.: **1005297**


1007673 521

NOBLO® SPOT
1-PHASE, TRIPLE TRACK SET







220-240 V ~50/60 Hz | 150 mA
Total wattage: 19 W
Material: Aluminium

- Consists of
  2 x 1 m track,
  1 x longitudinal connector with feed-in option,
  1 x 2 end caps,
  3 x NOBLO® lamp head




	2700 K
	2250 lm

Variant	Prod. no.
● black	**1007673**
○ white	**1007674**

NOBLO® SPOT
1-PHASE, PHASE







220-240 V ~50/60 Hz | 150 mA
Total wattage: 6 W
Material: Aluminium/Polycarbonate (PC)



1007638 **1007639** **1007640**	2700 K 740 lm
1007641 **1007642** **1007643**	3000 K 750 lm


Variant	Prod. no.
● black 740 lm | 2700 K	**1007638**
● black 750 lm | 3000 K	**1007641**
○ white 740 lm | 2700 K	**1007639**
○ white 750 lm | 3000 K	**1007642**
● grey 740 lm | 2700 K	**1007640**
● grey 750 lm | 3000 K	**1007643**

⊕

Product	Prod. no.
Decorative ring	
● black	**1008482**
○ white	**1008483**
● gold	**1008484**
● grey	**1008485**
● Bronze	**1008486**
● copper	**1008487**

NOBLO® SPOT
1-PHASE, PHASE







220-240 V ~50/60 Hz | 350 mA
Total wattage: 8.4 W
Material: Aluminium/Polycarbonate (PC)



	2000 K - 3000 K
	30 lm - 450 lm

Variant	Prod. no.
● black	**1007352**
○ white	**1007353**
● grey	**1007354**


⊕

Product	Prod. no.
Decorative ring	
● black	**1008482**
○ white	**1008483**
● gold	**1008484**
● grey	**1008485**
● Bronze	**1008486**
● copper	**1008487**


1006445 523

ASTO TUBE
1-PHASE, GU10





IP20 350° 90°

220-240 V ~50/60 Hz
Material: Aluminium

• Decorative rings available as accessories

SOCKET INSIDE 10 W

Base: 1xGU10


Variant	Prod. no.
● black	**1006445**
○ white	**1006446**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077**

ASTO TUBE
1-PHASE, PD, GU10





IP20 250 cm

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 10 W

Base: 1xGU10 max. Ø: 5 cm | L: 6 cm

Variant	Prod. no.
● black	**1010099**
○ white	**1010100**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005076**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

ASTO TUBE
DECORATIVE REFLECTOR




Ø: 6.8 cm
H: 4 cm
Material: polycarbonate (PC)

Variant	Prod. no.
black/chrome	**1007190**
gold	**1006450**
chrome	**1006449**
copper	**1006451**


1009140 525

PARA CONE GL
1-PHASE, GU10





IP20 300° 90°

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 25 W

Base: 1xGU10

Variant	Prod. no.
● black	**1006155**
○ white	**1006156**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

PARA CONE 14
1-PHASE, GU10





IP20 300° 80°

220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE 25 W

Base: 1xGU10

Variant	Prod. no.
black/gold	**1008052**
white/gold	**1008053**
copper/white	**1008054**
aluminium	**1009138**

GU10 | 3 W | 360°
270 lm | 2700 K | EEC = G

Prod. no.: **1006321**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

PARA CONE 14
1-PHASE, PD, GU10





IP20 150 cm

220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE 35 W

Base: 1xGU10

Variant	Prod. no.
black/gold	**1008058**
white/gold	**1008059**
copper/white	**1008060**
aluminium	**1009140**

GU10 | 3 W | 360°
270 lm | 2700 K | EEC = G

Prod. no.: **1006321**

SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**


1004935 527

HELIA 50 TRACK
1-PHASE







220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: Aluminium


INSIDE CRI 90


	3000 K
143580	920 lm
143581	970 lm

Variant	Prod. no.
● black 920 lm	**143580**
○ white 970 lm	**143581**

PANEL TRACK
1-PHASE, SQUARE







220-240 V ~50/60 Hz | 450 mA
Total wattage: 18 W
Material: Polycarbonate (PC)/Steel


INSIDE CRI 90


	3000 K
	1800 lm

Variant	Prod. no.
● black	**1004933**
○ white	**1004934**

PANEL TRACK
1-PHASE, ROUND







220-240 V ~50/60 Hz | 450 mA
Total wattage: 18 W
Material: Polycarbonate (PC)/Steel

INSIDE CRI 90


	3000 K
	1800 lm

Variant	Prod. no.
● black	**1004935**
○ white	**1004936**


1001861 529

EURO SPOT TRACK
1-PHASE, QPAR51





IP20 350° 100°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 25 W

Base: 1xGU10

Variant	Prod. no.
● black	**1001861**
○ white	**143811**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: **1005077**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

ALTRA DICE TRACK
1-PHASE, QPAR51





IP20 350° 180°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 50 W

Base: 1xGU10

Variant	Prod. no.
● black	**143350**
○ white	**143351**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: **1005077**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**


1004470 575

INDOOR | 3-PHASE SYSTEM



HAVEN 25 | 555



PURI 2.0 TUBE | 557–561



PURI 2.0 CONE | 557–561



PURI 2.0 DOME | 557–561



BIMA 2.0 | 563



ENOLA® 2.0 S | 564–565



GRIP! | 566–569



NUMINOS® | 572–579



NUMINOS® ZOOM | 580–581



UNIVERSAL TRACKSPOT | 583



NOBLO® SPOT | 585



EURO CUBE 2 | 586–587



KALU 2.0 | 589



KALU TRACK | 589



SIGHT EVO | 590–591



SIGHT PANEL | 592

SIGHT EASY | 593

SIGHT TRACK | 594



SIGHT MOVE | 595



PARA CONE 14 | 596–597



PARA CONE GL | 597



FORCHINI M 40 TRACK | 599



LIGHT EYE® | 600–601



EURO SPOT TRACK | 603



HELIA 50 TRACK | 605

3-PHASE TRACK SYSTEMS

3-phase track systems enable flexible and future-proof lighting design. Multiple circuits within a single track allow different lights to be switched on and off and controlled independently. This is particularly advantageous in sophisticated lighting concepts.

Depending on requirements, variants are available for traditional switching solutions (on/off) as well as for DALI-based lighting control systems.

Thanks to modular track elements and a wide range of lights, it is possible to create bespoke lighting solutions – from accent lighting to uniform basic lighting.

TYPICAL APPLICATIONS:

- Shops & retail spaces
- Gastronomy & hotels
- Exhibitions & museums
- Offices & public spaces

INSTALLATION OPTIONS




Configure power track systems online – from geometric planning to the bill of materials.

Scan the QR code and get started straight away.


SYSTEM STRUCTURE

SELECT A SYSTEM


S-TRACK
3-phase system: On/Off or DALI




EUTRAC
3-phase system



SELECT INSTALLATION TYPE

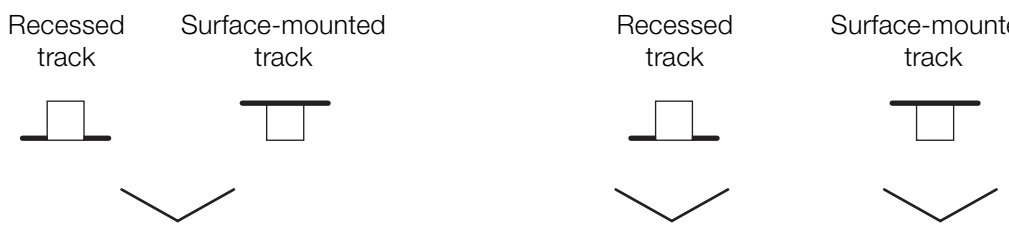


SPECIFY THE VERSION

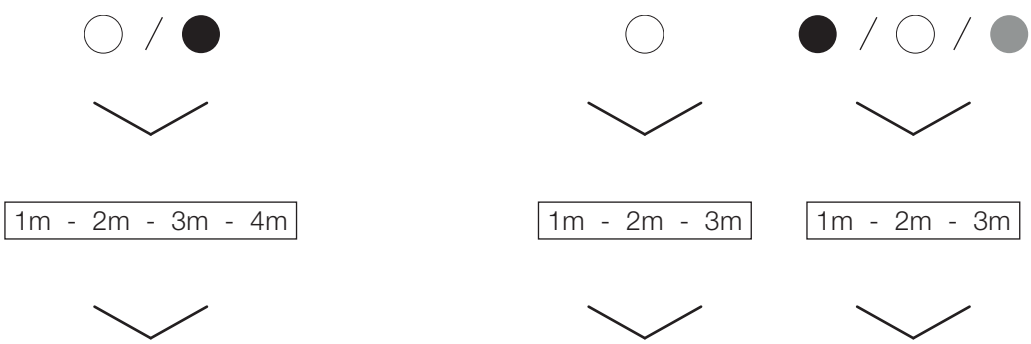

SELECT LIGHTS

Choose from a wide range of decorative and functional lights to tailor the lighting concept to your space.

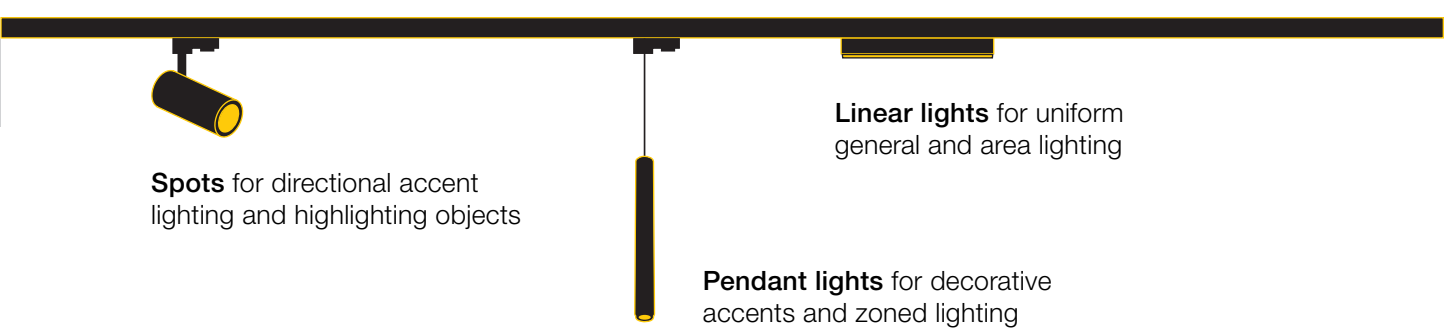



Spots for directional accent lighting and highlighting objects

Linear lights for uniform general and area lighting




Pendant lights for decorative accents and zoned lighting

COMPATIBILITY





TRACK COMPATIBILITY with adaptors from:




	SLV	EUTRAC®	Global/Nordic
SLV S-TRACK tracks and track components 			
3-phase	✓	✓	✓
3-Phase DALI	✓	✗	✓

LIGHT COMPATIBILITY with rails from:

	SLV S-TRACK	EUTRAC®	Global/Nordic
SLV lights with 3-phase adaptors 			
3-phase	✓	✓	✓
3-Phase DALI	✓	✗	✓

SLV's 3-phase track systems and components are compatible with lights and adaptors from EUTRAC®, Global/Nordic, Zumtobel, Erco, LTS ONETrack and unipro®.

Zumtobel	Erco	LTS ONETrack	unipro®
			
✓	✓	✓	✓
✗	✗	✓	✓

Zumtobel	Erco	LTS ONETrack	unipro®
			
✓	✓	✓	✓
✗	✗	✓	✓


Details not guaranteed. Technical data and dimensions are subject to change without notice. During the planning phase of the project, check the project using samples to ensure functionality. Compatibility refers only to tracks/lights. Tracks and track components from different manufacturers should not be combined. Subject to prior testing using light and track samples.



S-TRACK
3-PHASE SURFACE-MOUNTED TRACK, ON/OFF





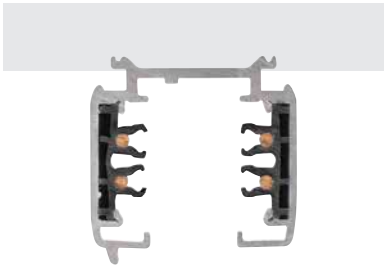


	100 cm	100 cm	200 cm	200 cm
Nominal voltage (V)	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● black	○ white
Material	Aluminium/plastic	Aluminium/plastic	Aluminium/plastic	Aluminium/plastic
L x W x H (cm)	100 cm x 3.6 cm x 3.6 cm	100 cm x 3.6 cm x 3.6 cm	200 cm x 3.6 cm x 3.6 cm	200 cm x 3.6 cm x 3.6 cm
Prod. no.	**175010**	**1001375**	**175020**	**1001376**

	300 cm	300 cm
Nominal voltage (V)	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz
Max. current (A)	16 A max.	16 A max.
Colour	● black	○ white
Material	Aluminium/plastic	Aluminium/plastic
L x W x H (cm)	300 cm x 3.6 cm x 3.6 cm	300 cm x 3.6 cm x 3.6 cm
Prod. no.	**175030**	**1001377**

S-TRACK
3-PHASE SURFACE-MOUNTED TRACK, ON/OFF

Planning assistance and accessories at a glance

View of components from above
on the installation side

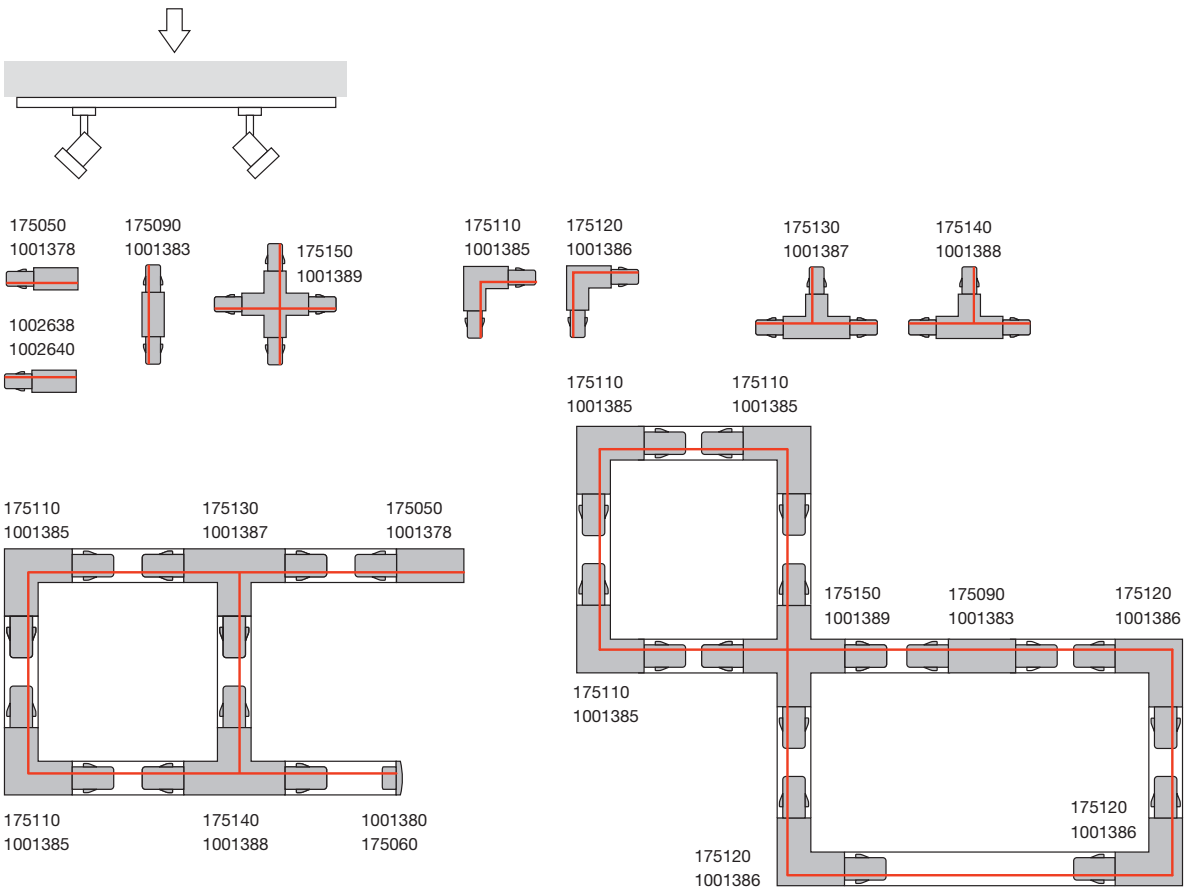

FEED-IN, EARTH RIGHT



16 A max. | 6.5 cm | Aluminium/Plastic
L: 6.5 cm | W: 3.5 cm | H: 3.3 cm

● black Prod. no. **175040**
○ white Prod. no. **1001379**


FEED-IN, EARTH LEFT



16 A max. | 6.5 cm | Aluminium/Plastic
L: 6.5 cm | W: 3.5 cm | H: 3.3 cm

● black Prod. no. **175050**
○ white Prod. no. **1001381**

L-CONNECTOR, EARTH INTERNAL



16 A max. | 6.7 cm | Aluminium/Plastic
L: 6.7 cm | W: 6.7 cm | H: 3.3 cm
Earth internal, with feed-in option.

● black Prod. no. **175110**
○ white Prod. no. **1001385**

L-CONNECTOR, EARTH EXTERNAL



16 A max. | 6.7 cm | Aluminium/Plastic
L: 6.7 cm | W: 6.7 cm | H: 3.3 cm
Earth external, with feed-in option.

● black Prod. no. **175120**
○ white Prod. no. **1001386**



T-CONNECTOR, EARTH LEFT

16 A max. | 10 cm | Aluminium/Plastic
L: 10 cm | W: 6.7 cm | H: 3.3 cm
Earth left, with feed-in capacity

● black Prod. no. **175130**
○ white Prod. no. **1001387**



T-CONNECTOR, EARTH RIGHT

16 A max. | 10 cm | Aluminium/Plastic
L: 10 cm | W: 6.7 cm | H: 3.3 cm
Earth right, with feed capacity

● black Prod. no. **175140**
○ white Prod. no. **1001388**



X-CONNECTOR

16 A max. | 10 cm | Aluminium/Plastic
L: 10 cm | W: 10 cm | H: 3.3 cm
2 circuits

● black Prod. no. **175150**
○ white Prod. no. **1001389**



LONGITUDINAL CONNECTOR WITH FEED-IN CAPACITY

16 A max. | 9.9 cm | Aluminium/Plastic
L: 9.9 cm | W: 3.5 cm | H: 3.3 cm
With feed-in capacity

● black Prod. no. **175090**
○ white Prod. no. **1001383**



FLEX CONNECTOR

16 A max. | 16,2 cm | Aluminium/Plastic
L: 16.2 cm | WB: 3.5 cm | H: 3.3 cm

● black Prod. no. **175100**
○ white Prod. no. **1001384**



MINI-CONNECTOR

16 A max. | 6.8 cm | Aluminium/Plastic
L: 6.8 cm | B: 2.5 cm | H: 2.6 cm

● black Prod. no. **175070**
○ white Prod. no. **1001378**



3-PHASE ADAPTER, ON/OFF

16 A max. | Polycarbonate (PC)
L: 8.4 cm | W: 5.5 cm | H: 3.3 cm

● black Prod. no. **175200**
○ white Prod. no. **1001394**



MINI INSULATING CONNECTOR

16 A max. | 6.8 cm | Plastic
L: 6.8 cm | W: 3.1 cm | H: 2.6 cm

● black Prod. no. **175080**
○ white Prod. no. **1001382**



PENDANT CLIP

4 cm | Steel
L: 4 cm | W: 3.4 cm | H: 1.3 cm

● black Prod. no. **1002657**
○ white Prod. no. **1002658**



COVER, 2M

200 cm | Polycarbonate (PC)
L: 200 cm | W: 2.2 cm | H: 0.8 cm

● black Prod. no. **1004939**
○ white Prod. no. **1004940**



END CAP

3.5 cm | Plastic
L: 3.5 cm | W: 3.3 cm | H: 3.2 cm

● black Prod. no. **175060**
○ white Prod. no. **1001380**

PENDANT SUSPENSION

6 cm | Aluminium/Plastic
L: 6 cm | W: 6 cm | H: 4 cm

● black Prod. no. **175160**
○ white Prod. no. **1001390**



JOINT CONNECTOR

18.2 cm | Aluminium
L: 18.2 cm | W: 3.3 cm | H: 2.1 cm

● black Prod. no. **175180**
○ white Prod. no. **1001392**



MECH. 3-PHASE ADAPTOR WITH HOOK

Plastic/Steel
H: 5.2 cm

● black Prod. no. **175190**
○ white Prod. no. **1001393**



EUTRACK®, S-TRACK AND 1-PHASE TRACKS, 5 M, SET OF TWO

500 cm | Stainless steel/Brass
L: 500 cm

● nickel Prod. no. **1002845**



MECH. 3-PHASE ADAPTOR

6.6 cm | Aluminium/Plastic
L: 6.6 cm | W.,6 cm | H: 3.1 cm


● black Prod. no. **175210**
○ white Prod. no. **1001395**



S-TRACK
3-PHASE SURFACE-MOUNTED TRACK, PHASE & DALI





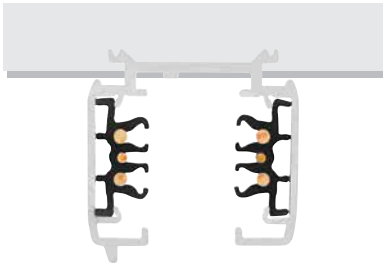


	100 cm	100 cm	200 cm	200 cm
Nominal voltage (V)	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	100 cm x 3.6 cm x 3.6 cm	100 cm x 3.6 cm x 3.6 cm	200 cm x 3.6 cm x 3.6 cm	200 cm x 3.6 cm x 3.6 cm
Prod. no.	**1004937**	**1004938**	**1002631**	**1002632**

	300 cm	300 cm	400 cm	400 cm
Nominal voltage (V)	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	300 cm x 3.6 cm x 3.6 cm	300 cm x 3.6 cm x 3.6 cm	400 cm x 3.6 cm x 3.6 cm	400 cm x 3.6 cm x 3.6 cm
Prod. no.	**1002633**	**1002634**	**1002635**	**1002636**

S-TRACK
3-PHASE SURFACE-MOUNTED TRACK, PHASE & DALI

Planning assistance and accessories at a glance


View of components from above
on the installation side

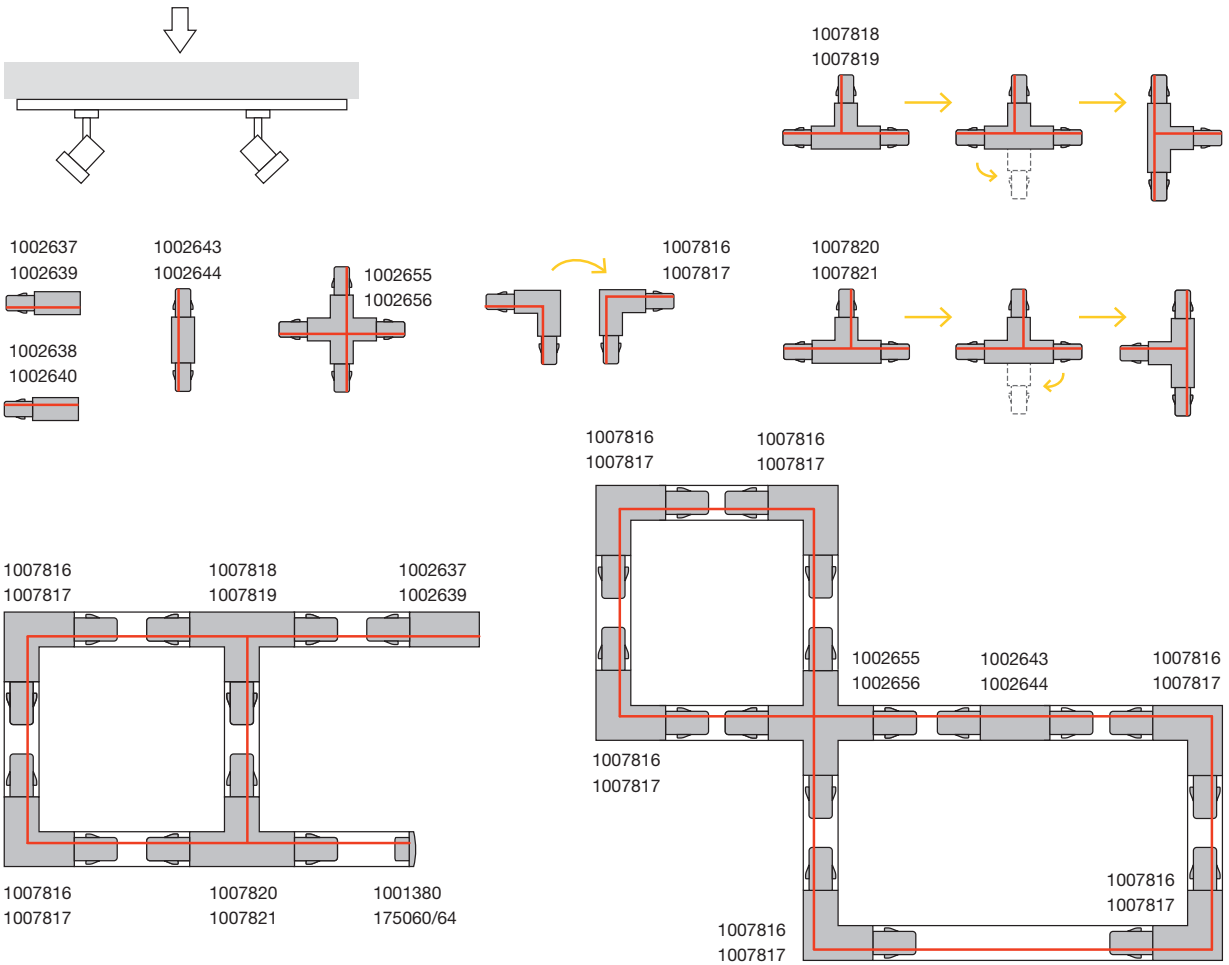



T-CONNECTOR, PHASE & DALI, ADJUSTABLE, LEFT, WITH FEED-IN CAPACITY

16 A max. | 20.3 cm | Polycarbonate (PC)
L: 20.3 cm | W: 11.9 cm | H: 3.3 cm




● black Prod. no. **1007818**
○ white Prod. no. **1007819**



T-CONNECTOR, PHASE & DALI, ADJUSTABLE, RIGHT, WITH FEED-IN CAPACITY

16 A max. | 20.3 cm | Polycarbonate (PC)
L: 20.3 cm | W: 11.9 cm | H: 3.3 cm




● black Prod. no. **1007820**
○ white Prod. no. **1007821**



L-CONNECTOR, PHASE & DALI, ADJUSTABLE, WITH FEED-IN CAPACITY

16 A max. | 11.9 cm | Polycarbonate (PC)
L: 11.9 cm | W: 11.9 cm | H: 3.3 cm



● black Prod. no. **1007816**
○ white Prod. no. **1007817**



FEED-IN, PHASE & DALI, EARTH LEFT

16 A max. | 13.9 cm | Polycarbonate (PC)
L: 13.9 cm | W: 3.5 cm | H: 3.3 cm

● black Prod. no. **1002637**
○ white Prod. no. **1002639**



FEED-IN, PHASE & DALI, EARTH RIGHT

16 A max. | 13.9 cm | Polycarbonate (PC)
L: 13.9 cm | W: 3.5 cm | H: 3.3 cm

● black Prod. no. **1002638**
○ white Prod. no. **1002640**



X-CONNECTOR, PHASE & DALI

16 A max. | 0.3 cm | Polycarbonate (PC)
L: 20.3 cm | W: 20.3 cm | H: 3.3 cm

● black Prod. no. **1002655**
○ white Prod. no. **1002656**



LONGITUDINAL CONNECTOR, PHASE & DALI

16 A max. | 20.3 cm | Polycarbonate (PC)
L: 20.3 cm | W: 3.5 cm | H: 3.3 cm

● black Prod. no. **1002643**
○ white Prod. no. **1002644**



MINI INSULATING CONNECTOR

16 A max. | 6.8 cm | Plastic
L: 6.8 cm | W: 3.1 cm | H: 2.6 cm

● black Prod. no. **175080**
○ white Prod. no. **1001382**



FLEX CONNECTOR, PHASE & DALI

16 A max. | 28.5 cm | Polycarbonate (PC)
L: 28.5 cm | W: 3.5 cm | H: 3.3 cm

● black Prod. no. **1002645**
○ white Prod. no. **1002646**



MINI-CONNECTOR, PHASE & DALI

16 A max. | 10.6 cm | Polycarbonate (PC)
L: 10.6 cm | W: 2.5 cm | H: 2.8 cm

● black Prod. no. **1002641**
○ white Prod. no. **1002642**



PENDANT CLIP

4 cm | Steel
L: 4 cm | W: 3.4 cm | H: 1.3 cm

● black Prod. no. **1002657**
○ white Prod. no. **1002658**



3-PHASE ADAPTER, DALI

16 A max. | 11.3 cm | Polycarbonate (PC)
L: 11.3 cm | W: 5.5 cm | H: 3.3 cm

● black Prod. no. **1002660**
○ white Prod. no. **1002659**



MECH. 3-PHASE ADAPTOR

6.6 cm | Aluminium/Plastic
L: 6.6 cm | W.,6 cm | H: 3.1 cm

● black Prod. no. **175210**
○ white Prod. no. **1001395**



COVER, 2M

200 cm | Polycarbonate (PC)
L: 200 cm | W: 2.2 cm | H: 0.8 cm

● black Prod. no. **1004939**
○ white Prod. no. **1004940**



END CAP

3.5 cm | Plastic
L: 3.5 cm | W: 3.3 cm | H: 3.2 cm

● black Prod. no. **175060**
○ white Prod. no. **1001380**

PENDANT SUSPENSION

6 cm | Aluminium/Plastic
L: 6 cm | W: 6 cm | H: 4 cm

● black Prod. no. **175160**
○ white Prod. no. **1001390**



JOINT CONNECTOR

18.2 cm | Aluminium
L: 18.2 cm | W: 3.3 cm | H: 2.1 cm

● black Prod. no. **175180**
○ white Prod. no. **1001392**



MECH. 3-PHASE ADAPTOR WITH HOOK

Plastic/Steel
H: 5.2 cm

● black Prod. no. **175190**
○ white Prod. no. **1001393**



PHASE & DALI

Polycarbonate (PC)
H: 3.5 cm

● black Prod. no. **1004684**
○ white Prod. no. **1004685**



EUTRACK®, S-TRACK AND 1-PHASE TRACKS, 5 M, SET OF TWO

500 cm | Stainless steel/Brass
L: 500 cm


● nickel Prod. no. **1002845**



S-TRACK
3-PHASE RECESSED TRACK, PHASE & DALI





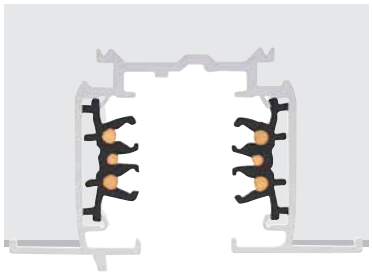


	100 cm	100 cm	200 cm	200 cm
Nominal voltage (V)	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	100 cm x 5.6 cm x 3.6 cm	100 cm x 5.6 cm x 3.6 cm	200 cm x 5.6 cm x 3.6 cm	200 cm x 5.6 cm x 3.6 cm
Prod. no.	**1006511**	**1006512**	**1006513**	**1006514**


	300 cm	300 cm	400 cm	400 cm
Nominal voltage (V)	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	300 cm x 5.6 cm x 3.6 cm	300 cm x 5.6 cm x 3.6 cm	400 cm x 5.6 cm x 3.6 cm	400 cm x 5.6 cm x 3.6 cm
Prod. no.	**1006515**	**1006516**	**1006517**	**1006518**


S-TRACK
3-PHASE RECESSED TRACK, PHASE & DALI


Planning assistance and accessories at a glance

View of components from above
on the installation side

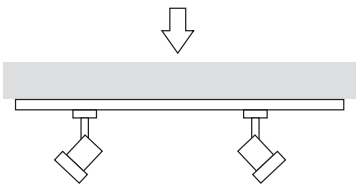

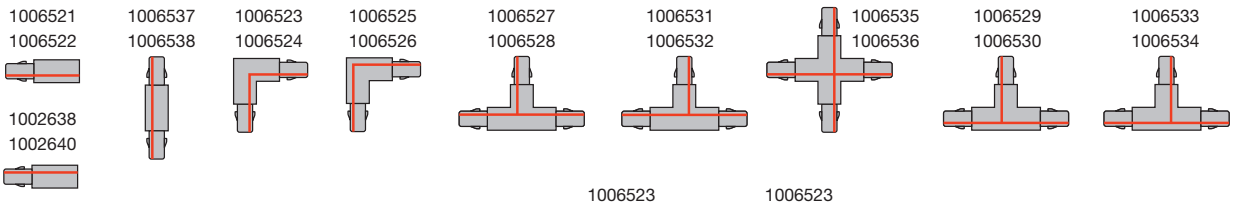

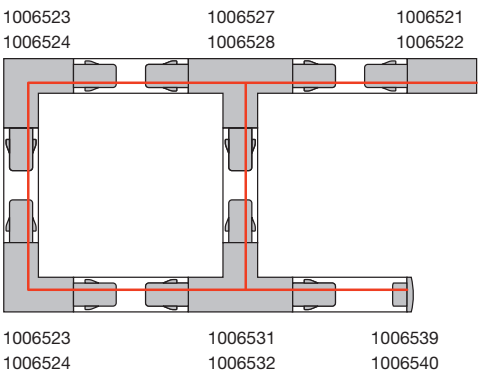

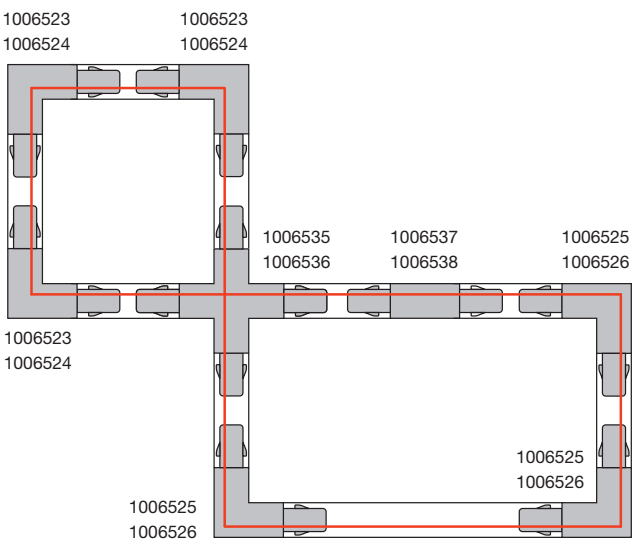



FEED-IN, PHASE & DALI, EARTH LEFT

16 A max. | 14.7 cm | Polycarbonate (PC)
L: 14.7 cm | W: 5.6 cm | H: 3.3 cm

● black Prod. no. **1006521**
○ white Prod. no. **1006522**



FEED-IN, PHASE & DALI, EARTH RIGHT

16 A max. | 14.7 cm | Polycarbonate (PC)
L: 14.7 cm | W: 5.6 cm | H: 3.3 cm

● black Prod. no. **1006519**
○ white Prod. no. **1006520**



L-CONNECTOR, PHASE & DALIE, INTERNAL EARTH, WITH FEED-IN CAPACITY

16 A max. | 13 cm | Polycarbonate (PC)
L: 13 cm | W: 13 cm | H: 3.3 cm

● black Prod. no. **1006523**
○ white Prod. no. **1006524**



L-CONNECTOR, PHASE & DALI, EXTERNAL EARTH, WITH FEED-IN CAPACITY

16 A max. | 13 cm | Polycarbonate (PC)
L: 13 cm | W: 13 cm | H: 3.3 cm

● black Prod. no. **1006525**
○ white Prod. no. **1006526**



T-CONNECTOR, PHASE & DALI, EXTERNAL EARTH RIGHT, WITH FEED-IN CAPACITY

16 A max. | 20.3 cm | Polycarbonate (PC)
L: 20.3 cm | W: 13 cm | H: 3.3 cm

● black Prod. no. **1006529**
○ white Prod. no. **1006530**



T-CONNECTOR, PHASE & DALI, INTERNAL EARTH RIGHT, WITH FEED-IN CAPACITY

16 A max. | 20.3 cm | Polycarbonate (PC)
L: 20.3 cm | W: 13 cm | H: 3.3 cm

● black Prod. no. **1006531**
○ white Prod. no. **1006532**



T-CONNECTOR, PHASE & DALI, INTERNAL EARTH LEFT, WITH FEED-IN CAPACITY

16 A max. | 20.3 cm | Polycarbonate (PC)
L: 20.3 cm | W: 13 cm | H: 3.3 cm

● black Prod. no. **1006527**
○ white Prod. no. **1006528**



T-CONNECTOR, PHASE & DALI, EXTERNAL EARTH LEFT, WITH FEED-IN CAPACITY

16 A max. | 20.3 cm | Polycarbonate (PC)
L: 20.3 cm | W: 13 cm | H: 3.3 cm

● black Prod. no. **1006533**
○ white Prod. no. **1006534**



X-CONNECTOR

16 A max. | 20.3 cm | Polycarbonate (PC)
L: 20.3 cm | W: 20.3 cm | H: 3.3 cm

● black Prod. no. **1006535**
○ white Prod. no. **1006536**



LONGITUDINAL CONNECTOR, PHASE & DALI

16 A max. | 20.3 cm | Polycarbonate (PC)
L: 20.3 cm | W: 5.6 cm | H: 3.3 cm

● black Prod. no. **1006537**
○ white Prod. no. **1006538**



MINI-CONNECTOR, PHASE & DALI

16 A max. | 10.6 cm | Polycarbonate (PC)
L: 10.6 cm | W: 2.5 cm | H: 2.8 cm

● black Prod. no. **1002641**
○ white Prod. no. **1002642**



END CAP FOR 3-PHASE RECESSED TRACK

4.8 cm | Polycarbonate (PC)
L: 4.8 cm | W: 5.6 cm

● black Prod. no. **1006539**
○ white Prod. no. **1006540**



3-PHASE ADAPTER, DALI


16 A max. | 11.3 cm | Polycarbonate (PC)
L: 11.3 cm | W: 5.5 cm | H: 3.3 cm

● black Prod. no. **1002660**
○ white Prod. no. **1002659**



EUTRAC®
3-PHASE, SURFACE MOUNTED TRACK, 2 M



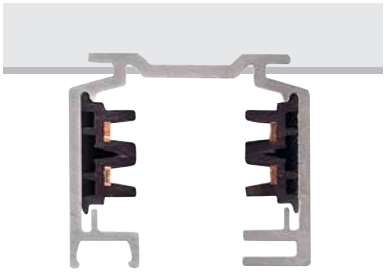


	100 cm	100 cm	100 cm
Nominal voltage (V)	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz
Max. current (A)	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● grey
Material	Aluminium/plastic	Aluminium/plastic	Aluminium/plastic
L x W x H (cm)	100 cm x 3.6 cm x 3.2 cm	100 cm x 3.6 cm x 3.2 cm	100 cm x 3.6 cm x 3.2 cm
Prod. no.	**145100**	**1001510**	**145102**


	200 cm	200 cm	200 cm
Nominal voltage (V)	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz
Max. current (A)	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● grey
Material	Aluminium/plastic	Aluminium/plastic	Aluminium/plastic
L x W x H (cm)	200 cm x 3.6 cm x 3.2 cm	200 cm x 3.6 cm x 3.2 cm	200 cm x 3.6 cm x 3.2 cm
Prod. no.	**145200**	**1001511**	**145202**


	300 cm	300 cm	300 cm
Nominal voltage (V)	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz
Max. current (A)	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● grey
Material	Aluminium/plastic	Aluminium/plastic	Aluminium/plastic
L x W x H (cm)	300 cm x 3.6 cm x 3.2 cm	300 cm x 3.6 cm x 3.2 cm	300 cm x 3.6 cm x 3.2 cm
Prod. no.	**145300**	**1001512**	**145302**

Planning assistance and accessories at a glance

View of components from above on the installation side



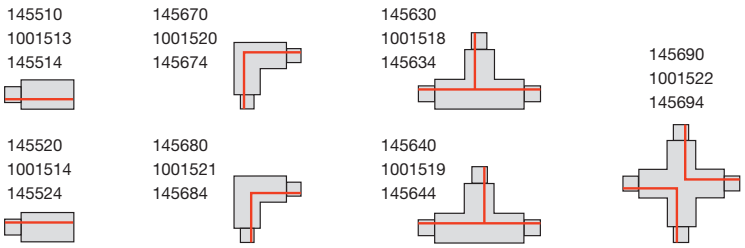

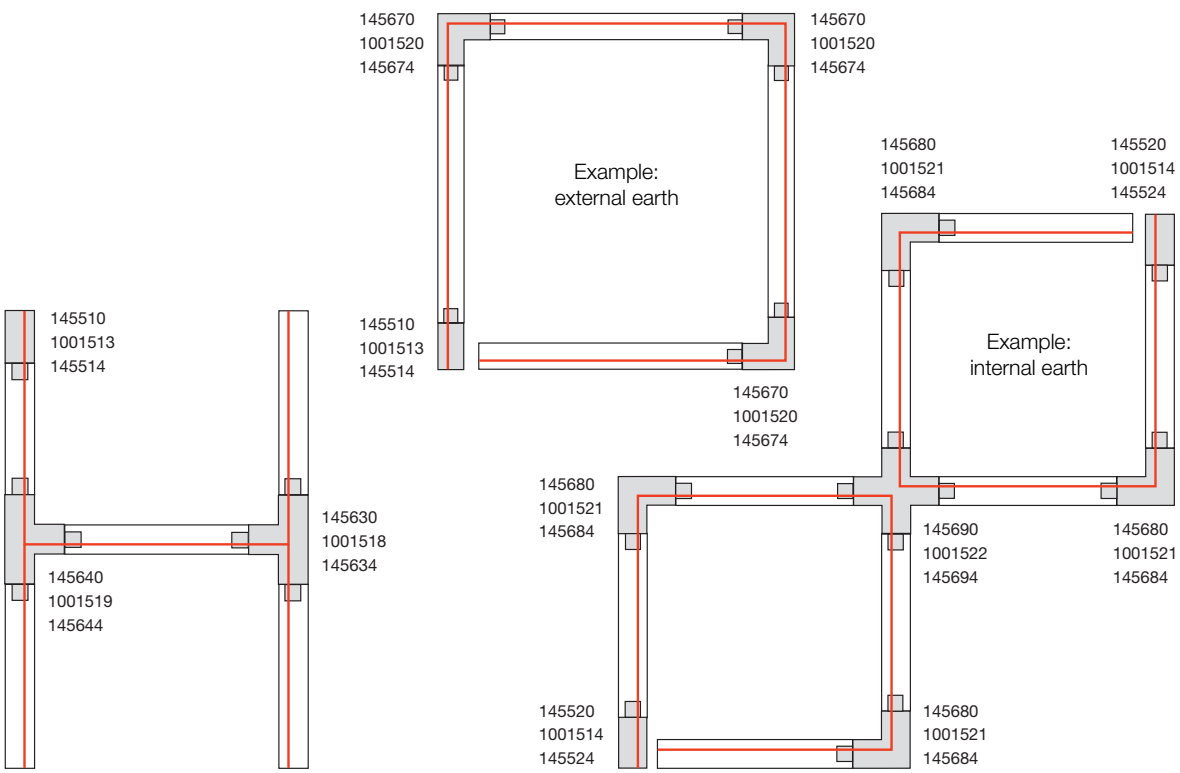



3-PHASE, FEED-IN, EARTH LEFT

16 A max. | 11.2 cm | Plastic
L: 11.2 cm | W: 3.6 cm | H: 3.2 cm
Earth left

●	black	Prod. no. **145510**
○	white	Prod. no. **1001513**
●	grey	Prod. no. **145514**



3-PHASE, FEED-IN, EARTH RIGHT

16 A max. | 11.2 cm | Plastic
L: 11.2 cm | W: 3.6 cm | H: 3.2 cm
Earth right

●	black	Prod. no. **145520**
○	white	Prod. no. **1001514**
●	grey	Prod. no. **145524**



3-PHASE, CENTRE FEED-IN

16 A max. | 13 cm | Plastic
L: 13 cm | W: 3.6 cm | H: 3.6 cm

●	black	Prod. no. **145530**
○	white	Prod. no. **1001515**
●	grey	Prod. no. **145534**



3-PHASE, LONGITUDINAL CONNECTOR WITH FEED-IN CAPACITY

16 A max. | 19.2 cm | Plastic PC
L: 19.2 cm | W: 3.6 cm | H: 3.2 cm
With feed-in capacity

●	black	Prod. no. **145660**
○	white	Prod. no. **1001517**
●	grey	Prod. no. **145664**



3-PHASE, LONGITUDINAL CONNECTOR

16 A max. | 5.8 cm | Plastic
L: 5.8 cm | W: 1.5 cm | H: 2.6 cm

● black	Prod. no.	**145560**
○ white	Prod. no.	**1001516**
● grey	Prod. no.	**145564**



3-PHASE, L-CONNECTOR, INTERNAL EARTH, WITH FEED-IN CAPACITY

16 A max. | 15 cm | Plastic
L: 15 cm | W: 15 cm | H: 3.2 cm

● black	Prod. no.	**145680**
○ white	Prod. no.	**1001521**
● grey	Prod. no.	**145684**



3-PHASE, L-CONNECTOR, EXTERNAL EARTH, WITH FEED-IN CAPACITY

16 A max. | 15 cm | Plastic
L: 15 cm | W: 15 cm | H: 3.2 cm

Earth external, with feed-in capacity

● black	Prod. no.	**145670**
○ white	Prod. no.	**1001520**
● grey	Prod. no.	**145674**



3-PHASE, T-CONNECTOR, INTERNAL EARTH LEFT

16 A max. | 26 cm | Plastic
L: 26 cm | B: 18.5 cm | H: 3.2 cm

Earth internal, left, with feed-in capacity

● black	Prod. no.	**145630**
○ white	Prod. no.	**1001518**
● grey	Prod. no.	**145634**



3-PHASE, T-CONNECTOR, INTERNAL EARTH RIGHT

16 A max. | 26 cm | Plastic
L: 26 cm | B: 18.5 cm | H: 3.2 cm

Earth internal, right, with feed-in capacity

● black	Prod. no.	**145640**
○ white	Prod. no.	**1001519**
● grey	Prod. no.	**145644**



3-PHASE, X-CONNECTOR, WITH FEED-IN CAPACITY

16 A max. | 26 cm | Plastic
L: 26 cm | W: 26 cm | H: 3.2 cm

Two separate power circuits

● black	Prod. no.	**145690**
○ white	Prod. no.	**1001522**
● grey	Prod. no.	**145694**



3-PHASE, JOINT CONNECTOR

16 A max. | 10 cm | Plastic
L: 10 cm | W: 3.6 cm | H: 1.9 cm

● black	Prod. no.	**145600**
○ white	Prod. no.	**1001523**
● grey	Prod. no.	**145604**



3-PHASE, FLEX CONNECTOR

16 A max. | 30.7 cm | Plastic
L: 30.7 cm | W: 3.6 cm | H: 3.2 cm

● black	Prod. no.	**145580**
○ white	Prod. no.	**1001524**
● grey	Prod. no.	**145584**



3-PHASE, SOCKET

6,3 A max. | 9.6 cm | Plastic
L: 9.6 cm | W: 6.5 cm | H: 9 cm

● black	Prod. no.	**145700**
○ white	Prod. no.	**1001525**



3-PHASE, PENDANT LIGHT ADAPTOR

10 A max. | 9.6 cm | Plastic
L: 9.6 cm | W: 3.5 cm | H: 4.5 cm

● black	Prod. no.	**145990**
○ white	Prod. no.	**1001542**
● grey	Prod. no.	**145994**



3-PHASE, PENDANT CLIP

5 cm | Aluminium
L: 5 cm | W: 3.6 cm | H: 1.9 cm

● black	Prod. no.	**145730**
○ white	Prod. no.	**1001530**
● grey	Prod. no.	**145734**



3-PHASE, UNIVERSAL POINT OUTLET

16 A max. | Plastic
H: 3.1 cm

● black	Prod. no.	**145830**
○ white	Prod. no.	**1001526**
● grey	Prod. no.	**145834**



3-PHASE, END CAP

3.6 cm | Plastic
L: 3.6 cm | W: 1.7 cm | H: 3.2 cm

● black	Prod. no.	**145590**
○ white	Prod. no.	**1001527**
● grey	Prod. no.	**145594**



3-PHASE, PENDANT SUSPENSION, RIGID

60 cm | Plastic/Steel
L: 60 cm | H: 63.5 cm

● black	Prod. no.	**145720**
○ white	Prod. no.	**1001529**
● grey	Prod. no.	**145724**

3-PHASE, PENDANT SUSPENSION, RIGID

120 cm | Plastic/Steel
L: 120 cm | H: 122 cm

● black	Prod. no.	**145710**
○ white	Prod. no.	**1001528**
● grey	Prod. no.	**145714**




EUTRACK®, S-TRACK AND 1-PHASE TRACKS, 5 M, SET OF TWO

500 cm | Stainless steel/Brass
L: 500 cm

● nickel	Prod. no.	**1002845**

EUTRAC®
3-PHASE, RECESSED TRACK, 3 M



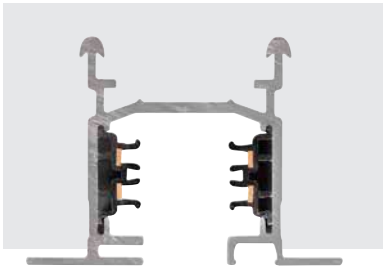

	200 cm	300 cm
Nominal voltage (V)	220-250V ~50/60Hz	220-250V ~50/60Hz
Max. current (A)	16 A max.	16 A max.
Colour	○ white	○ white
Material	Aluminium/plastic	Aluminium/plastic
L x W x H (cm)	200 cm x 5.9 cm x 4.1 cm	300 cm x 5.9 cm x 4.1 cm
Prod. no.	**1001531**	**1001532**



3-PHASE, FEED-IN, EARTH LEFT

16 A max. | 12.2 cm | Plastic/Steel
L: 12.2 cm | W: 6 cm | H: 3.4 cm

○ white Prod. no. **1001533**



3-PHASE, FEED-IN, EARTH RIGHT

16 A max. | 12.2 cm | Plastic/Steel
L: 12.2 cm | W: 6 cm | H: 3.4 cm

○ white Prod. no. **1001534**



3-PHASE, L-CONNECTOR

16 A max. | 16 cm | Plastic/Steel
L: 16 cm | W: 16 cm | H: 3.2 cm
Earth external, with feed-in capacity

○ white Prod. no. **1001536**



3-PHASE, L-CONNECTOR

16 A max. | 16 cm | Plastic/Steel
L: 16 cm | W: 16 cm | H: 3.2 cm
Earth internal, with feed-in capacity

○ white Prod. no. **1001537**



3-PHASE, END CAP

2.7 cm | Plastic
L: 2.7 cm | B: 6 cm | H: 3.2 cm

○ white Prod. no. **1001538**



3-PHASE, LONGITUDINAL CONNECTOR

16 A max. | 6.2 cm | Plastic/Steel
L: 6.2 cm | W: 2.5 cm | H: 2.7 cm

○ white Prod. no. **1001539**



3-PHASE, MOUNTING SPRING CLIP

2 cm | Steel
L: 2 cm | W: 1 cm | H: 2.5 cm

● grey Prod. no. **145551**



3-PHASE LIGHT ADAPTER

10 A max. | 9.6 cm | Plastic
L: 9.6 cm | W: 3.5 cm | H: 4.5 cm


○ white Prod. no. **1001542**


1011688 555

HAVEN 25
3-PHASE, E27

NEW





IP20 200 cm

220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE 40 W

Base: 1xE27

Variant	Prod. no.
● black	**1011687**
○ white	**1011688**
● gold	**1011689**


E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no.: **1005303**


1008268 557

PURI 2.0 TUBE
3-PHASE, QPAR51





IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
● black	**1008266**
◐ black/gold	**1008267**
○ white	**1008268**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

PURI 2.0 CONE
3-PHASE, QPAR51





IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
● black	**1008269**
◐ black/gold	**1008270**
○ white	**1008271**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

PURI 2.0 DOME
3-PHASE, QPAR51





IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
● black	**1008272**
◐ black/gold	**1008273**
○ white	**1008274**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**


1008282 559

PURI 2.0 TUBE
3-PHASE, PD, QPAR51

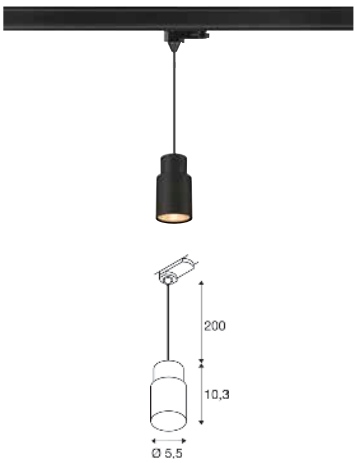

IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
● black	**1008275**
◐ black/gold	**1008276**
○ white	**1008277**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F


Prod. no.: **1005077**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

PURI 2.0 CONE
3-PHASE, PD, QPAR51

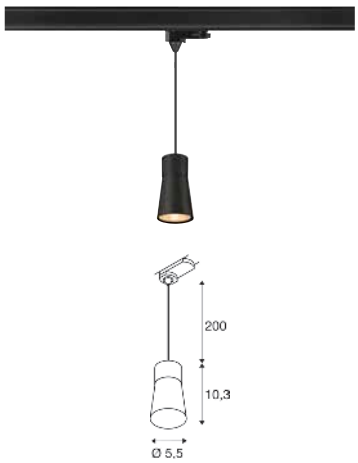

IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
● black	**1008278**
◐ black/gold	**1008279**
○ white	**1008280**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F


Prod. no.: **1005077**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

PURI 2.0 DOME
3-PHASE, PD, QPAR51

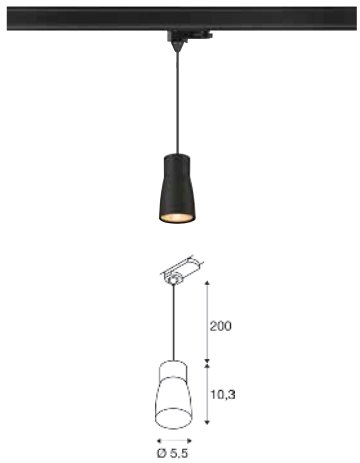

IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
● black	**1008281**
◐ black/gold	**1008282**
○ white	**1008283**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**


1008271 + 1008219
557 + 561

PURI 2.0 TUBE
SHADE



Ø: 5.5 cm
H: 6.5 cm
Material: Aluminium

Variant	Prod. no.
black	**1008214**
white	**1008213**
gold	**1008216**
grey	**1008215**
Bronze	**1008217**
aluminium	**1008376**

PURI 2.0 CONE
SHADE



Ø: 5.5 cm
H: 6.5 cm
Material: Aluminium

Variant	Prod. no.
black	**1008219**
white	**1008218**
gold	**1008221**
grey	**1008220**
Bronze	**1008222**
aluminium	**1008377**

PURI 2.0 DOME
SHADE




Ø: 5.5 cm
H: 6.5 cm
Material: Aluminium

Variant	Prod. no.
black	**1008224**
white	**1008223**
gold	**1008226**
grey	**1008225**
Bronze	**1008227**
aluminium	**1008378**



BIMA 2.0
3-PHASE, SINGLE, QPAR51





IP20 IK02 330° 180°

220-240 V ~50/60 Hz
Material: Aluminium/Plastic

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.4 cm

Variant	Prod. no.
● black	**1011763**
○ white	**1011764**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

Prod. no.: **1005079**

SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

Product	Prod. no.
ENOLA® 2.0/BIMA 2.0 M, Decorative Ring	
● black	**1011749**
○ white	**1011750**
gold	**1011751**
copper	**1011752**

BIMA 2.0
3-PHASE, DOUBLE, QPAR51





IP20 IK02 330° 180°

220-240 V ~50/60 Hz
Material: Aluminium/Plastic

SOCKET INSIDE 10 W

Base: 2xGU10 | max. Ø: 5.1 cm | L: 5.4 cm

Variant	Prod. no.
● black	**1011765**
○ white	**1011766**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

Prod. no.: **1005079**

SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

Product	Prod. no.
ENOLA® 2.0/BIMA 2.0 M, Decorative Ring	
● black	**1011749**
○ white	**1011750**
gold	**1011751**
copper	**1011752**

ENOLA® 2.0 S
3-PHASE, SINGLE,
GU10 MINI, PAR11





IP20 IK02 330° 90°

220-240 V ~50/60 Hz
Material: Aluminium/Plastic PC

SOCKET INSIDE 5 W

Base: 1xGU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.
● black	**1011721**
○ white	**1011722**

GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F


C,L

Prod. no.: **1011670**

Product	Prod. no.
ENOLA® 2.0 S, Decorative Ring	
● black	**1011753**
○ white	**1011754**
● gold	**1011755**
● copper	**1011756**

ENOLA® 2.0 S
3-PHASE, PD, SINGLE,
GU10 MINI, PAR11





IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium/Plastic PC

SOCKET INSIDE 5 W

Base: 1xGU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.
● black	**1011725**
○ white	**1011726**

GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F

C,L

Prod. no.: **1011670**

Product	Prod. no.
ENOLA® 2.0 S, Decorative Ring	
● black	**1011753**
○ white	**1011754**
● gold	**1011755**
● copper	**1011756**

ENOLA® 2.0 S
DECORATIVE RING




Ø: 3.9 cm
H: 1.1 cm
Material: Plastic PC

Variant	Prod. no.
● black	**1011753**
○ white	**1011754**
● gold	**1011755**
● copper	**1011756**

ENOLA® 2.0 M
3-PHASE, SINGLE, GU10, QPAR51





IP20 IK02 330° 90°

220-240 V ~50/60 Hz
Material: Aluminium/Plastic PC

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.
● black	**1011711**
○ white	**1011712**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005076**

SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

Product	Prod. no.
ENOLA® 2.0/BIMA 2.0 M, Decorative Ring	
● black	**1011749**
○ white	**1011750**
gold	**1011751**
copper	**1011752**

ENOLA® 2.0 M
3-PHASE, PD, SINGLE, GU10, QPAR51





IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium/Plastic PC

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.
● black	**1011715**
○ white	**1011716**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005076**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

Product	Prod. no.
ENOLA® 2.0/BIMA 2.0 M, Decorative Ring	
● black	**1011749**
○ white	**1011750**
gold	**1011751**
copper	**1011752**

ENOLA® 2.0/BIMA 2.0 M
DECORATIVE RING




Ø: 5.4 cm
H: 2 cm
Material: Plastic PC

Variant	Prod. no.
● black	**1011749**
○ white	**1011750**
gold	**1011751**
copper	**1011752**

GRIP! M
3-PHASE, DALI, Ø 4,3 CM





Dali Touch IP20 IK02 42° 330° 90° 50 000 h L80B10 UGR 19

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- Honeycomb accessories included

LED INSIDE CRI 90


1008437 **1008438**	Down	3000 K 1540 lm
1008435 **1008436**	Down	2700 K 1450 lm

Variant	Prod. no.
black/gold 1450 lm | 2700 K	**1008436**
black/gold 1540 lm | 3000 K	**1008438**
white/black 1450 lm | 2700 K	**1008435**
white/black 1540 lm | 3000 K	**1008437**

Product	Prod. no.
GRIP! M, decorative ring	
white	**1011833**
black	**1011834**
Nickel	**1011835**
gold	**1011836**
Honeycomb	
black	**1011838**

GRIP! M
3-PHASE, DALI, Ø 4,3 CM





Dali Touch IP20 IK02 42° 330° 90° 50 000 h L80B20 UGR 19

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- Honeycomb accessories included

LED INSIDE DIM TO WARM CRI 90


	Down	2000 K - 3000 K 1000 lm

Variant	Prod. no.
black/gold	**1008440**
white/black	**1008439**

Product	Prod. no.
GRIP! M, decorative ring	
white	**1011833**
black	**1011834**
Nickel	**1011835**
gold	**1011836**
Honeycomb	
black	**1011838**

GRIP! M
3-PHASE, PHASE, Ø 4,3 CM





IP20 IK02 42° 330° 90°

50 000 h L80B10 UGR 19

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- Honeycomb accessories included

INSIDE CRI 90


1008443 **1008444**	Down	3000 K 1540 lm
1008441 **1008442**	Down	2700 K 1450 lm

Variant	Prod. no.
black/gold 1450 lm | 2700 K	**1008442**
black/gold 1540 lm | 3000 K	**1008444**
white/black 1450 lm | 2700 K	**1008441**
white/black 1540 lm | 3000 K	**1008443**

Product	Prod. no.
GRIP! M, decorative ring	
white	**1011833**
black	**1011834**
Nickel	**1011835**
gold	**1011836**
Honeycomb	
black	**1011838**

GRIP! M
3-PHASE, PHASE, Ø 4,3 CM





IP20 IK02 42° 330° 90°

50 000 h L80B20 UGR 19

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- Honeycomb accessories included

INSIDE DIM TO WARM CRI 90

	Down	2000 K - 3000 K 1000 lm

Variant	Prod. no.
black/gold	**1008446**
white/black	**1008445**

Product	Prod. no.
GRIP! M, decorative ring	
white	**1011833**
black	**1011834**
Nickel	**1011835**
gold	**1011836**
Honeycomb	
black	**1011838**

GRIP! M
DECORATIVE RING



NEW

Ø: 4 cm
H: 1.4 cm
Material: Aluminium

- Front panel with spacer
- No honeycomb insert included

Variant	Prod. no.
black	**1011834**
white	**1011833**
gold	**1011836**
Nickel	**1011835**


Product	Prod. no.
Honeycomb	
black	**1011838**


1008452 569

GRIP! L
3-PHASE, QPAR51, Ø 5,7 CM



GERMAN DESIGN AWARD WINNER 2025



IP20 IK02 330° 90°

220-240 V ~50/60 Hz
Material: Aluminium

- Honeycomb accessories included

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
black/gold	1008453
white/black	1008452

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

Prod. no.: 1005080

SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469

GRIP! L
3-PHASE, PD, QPAR51, Ø 5,7 CM



NEW



IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium

- Honeycomb accessories included

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
black/gold	1011710
white/black	1011709

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

Prod. no.: 1005080

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469

GRIP! L
DECORATIVE RING

GERMAN DESIGN AWARD WINNER 2025



Ø: 5.4 cm
H: 2.1 cm
Material: Aluminium

Variant	Prod. no.
black	1008497
white	1008496
gold	1008499
Nickel	1008498


Product	Prod. no.
Honeycomb	
black	1011839



1006119 581


S-WORKS
S-WORKS

NUMINOS® S
3-PHASE








● black

IP20 350° 90° 50000 h L90B10 LED INSIDE

CRI 90

220-240 V ~50/60 Hz | 200 mA
Total wattage: 8 W
Material: Aluminium



○ white

Variant
All S versions
All S versions DALI

Note:
Decorative ring also available in white, gold and copper





Product	Prod. no.
Front ring S	
○ white	**1006167**
● copper	**1008140**
● gold	**1008144**

					Prod. no.	
C	2700 K	950 lm	24°	16	**1004074**	
			36°	16	**1004075**	
			60°	19	**1004076**	
	3000 K	1050 lm	24°	16	**1004082**	
			36°	16	**1004083**	
			60°	19	**1004084**	
	4000 K	1100 lm	24°	16	**1004090**	
			36°	16	**1004091**	
			60°	19	**1004092**	
Dali Touch	2700 K	950 lm	24°	16	**1004362**	
			36°	16	**1004363**	
			60°	19	**1004364**	
	3000 K	1050 lm	24°	16	**1004370**	
			36°	16	**1004371**	
			60°	19	**1004372**	
	4000 K	1100 lm	24°	16	**1004378**	
			36°	16	**1004379**	
			60°	19	**1004380**	
C	2700 K	950 lm	24°	16	**1004078**	
			36°	16	**1004079**	
			60°	19	**1004080**	
	3000 K	1050 lm	24°	16	**1004086**	
			36°	16	**1004087**	
			60°	19	**1004088**	
	4000 K	1100 lm	24°	16	**1004094**	
			36°	16	**1004095**	
			60°	19	**1004096**	
Dali Touch	2700 K	950 lm	24°	16	**1004366**	
			36°	16	**1004367**	
			60°	19	**1004368**	
	3000 K	1050 lm	24°	16	**1004374**	
			36°	16	**1004375**	
			60°	19	**1004376**	
	4000 K	1100 lm	24°	16	**1004382**	
			36°	16	**1004383**	
			60°	19	**1004384**	

NUMINOS® M
3-PHASE








● black

IP20 350° 90° 50000h L90B10 INSIDE

CRI 90

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: Aluminium



○ white

Variant
All M versions
All M versions DALI

Note:
Decorative ring also available in white, gold and copper





Product	Prod. no.
Front ring M	
○ white	**1006168**
● copper	**1008141**
● gold	**1008145**

					Prod. no.	
C	2700 K	1750 lm	24°	16	**1004170**	
			36°	16	**1004171**	
			60°	22	**1004172**	
	3000 K	1800 lm	24°	16	**1004178**	
			36°	16	**1004179**	
			60°	22	**1004180**	
	4000 K	1950 lm	24°	16	**1004186**	
			36°	16	**1004187**	
			60°	22	**1004188**	
Dali Touch	2700 K	1750 lm	24°	16	**1004458**	
			36°	16	**1004459**	
			60°	22	**1004460**	
	3000 K	1800 lm	24°	16	**1004466**	
			36°	16	**1004467**	
			60°	22	**1004468**	
	4000 K	1950 lm	24°	16	**1004474**	
			36°	16	**1004475**	
			60°	22	**1004476**	
C	2700 K	1750 lm	24°	16	**1004174**	
			36°	16	**1004175**	
			60°	22	**1004176**	
	3000 K	1800 lm	24°	16	**1004182**	
			36°	16	**1004183**	
			60°	22	**1004184**	
	4000 K	1950 lm	24°	16	**1004190**	
			36°	16	**1004191**	
			60°	22	**1004192**	
Dali Touch	2700 K	1750 lm	24°	16	**1004462**	
			36°	16	**1004463**	
			60°	22	**1004464**	
	3000 K	1800 lm	24°	16	**1004470**	
			36°	16	**1004471**	
			60°	22	**1004472**	
	4000 K	1950 lm	24°	16	**1004478**	
			36°	16	**1004479**	
			60°	22	**1004480**	

NUMINOS® L
3-PHASE








● black

IP20 350° 90° 50000 h L90B10 LED INSIDE

CRI 90

220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: Aluminium



○ white

Variant
All L versions
All L versions DALI

Note:
Decorative ring also available in white, gold and copper





Product	Prod. no.
Front ring L	
○ white	**1006169**
● copper	**1008142**
● gold	**1008146**

					Prod. no.	
C	2700 K	2300 lm	24°	16	**1004266**	
			36°	16	**1004267**	
			60°	19	**1004268**	
	3000 K	2400 lm	24°	16	**1004274**	
			36°	16	**1004275**	
			60°	19	**1004276**	
	4000 K	2600 lm	24°	16	**1004282**	
			36°	16	**1004283**	
			60°	19	**1004284**	
Dali Touch	2700 K	2300 lm	24°	16	**1004554**	
			36°	16	**1004555**	
			60°	19	**1004556**	
	3000 K	2400 lm	24°	16	**1004562**	
			36°	16	**1004563**	
			60°	19	**1004564**	
	4000 K	2600 lm	24°	16	**1004570**	
			36°	16	**1004571**	
			60°	19	**1004572**	
C	2700 K	2300 lm	24°	16	**1004270**	
			36°	16	**1004271**	
			60°	19	**1004272**	
	3000 K	2400 lm	24°	16	**1004278**	
			36°	16	**1004279**	
			60°	19	**1004280**	
	4000 K	2600 lm	24°	16	**1004286**	
			36°	16	**1004287**	
			60°	19	**1004288**	
Dali Touch	2700 K	2300 lm	24°	16	**1004558**	
			36°	16	**1004559**	
			60°	19	**1004560**	
	3000 K	2400 lm	24°	16	**1004566**	
			36°	16	**1004567**	
			60°	19	**1004568**	
	4000 K	2600 lm	24°	16	**1004574**	
			36°	16	**1004575**	
			60°	19	**1004576**	

NUMINOS® XL
3-PHASE








● black

IP20 350° 90° 50000h L90B10 LED INSIDE

CRI 90

220-240 V ~50/60 Hz | 700 mA
Total wattage: 28 W
Material: Aluminium



○ white

Variant
All XL versions
All XL versions DALI

Note:
Decorative ring also available in white, gold and copper




Product	Prod. no.
Front ring XL	
○ white	**1006170**
● copper	**1008143**
● gold	**1008147**

					Prod. no.	
C	2700 K	3550 lm	24°	16	**1005723**	
			36°	16	**1005724**	
		3150 lm	60°	22	**1005725**	
	3000 K	3550 lm	24°	16	**1005729**	
			36°	16	**1005730**	
		3150 lm	60°	22	**1005731**	
	4000 K	3900 lm	24°	16	**1005735**	
			36°	16	**1005736**	
		3500 lm	60°	22	**1005737**	
Dali Touch	2700 K	3550 lm	24°	16	**1005795**	
			36°	16	**1005796**	
		3150 lm	60°	22	**1005797**	
	3000 K	3550 lm	24°	16	**1005801**	
			36°	16	**1005802**	
		3150 lm	60°	22	**1005803**	
	4000 K	3900 lm	24°	16	**1005807**	
			36°	16	**1005808**	
		3500 lm	60°	22	**1005809**	
C	2700 K	3550 lm	24°	16	**1005726**	
			36°	16	**1005727**	
		3150 lm	60°	22	**1005728**	
	3000 K	3550 lm	24°	16	**1005732**	
			36°	16	**1005733**	
		3150 lm	60°	22	**1005734**	
	4000 K	3900 lm	24°	16	**1005738**	
			36°	16	**1005739**	
		3500 lm	60°	22	**1005740**	
Dali Touch	2700 K	3550 lm	24°	16	**1005798**	
			36°	16	**1005799**	
		3150 lm	60°	22	**1005800**	
	3000 K	3550 lm	24°	16	**1005804**	
			36°	16	**1005805**	
		3150 lm	60°	22	**1005806**	
	4000 K	3900 lm	24°	16	**1005810**	
			36°	16	**1005811**	
		3500 lm	60°	22	**1005812**	

NUMINOS® ZOOM M
3-PHASE








220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: Aluminium/Polycarbonate (PC)

Variant
All M versions
All M versions DALI



● black



○ white


					Prod. no.	
C	2700 K	680 lm	15° – 60°	25	**1006108**	
	3000 K	750 lm		25	**1006110**	
	4000 K	780 lm		25	**1006112**	
Dali	2700 K	680 lm	15°– 60°	25	**1006114**	
	3000 K	750 lm		25	**1006116**	
	4000 K	780 lm		25	**1006118**	
C	2700 K	680 lm	15°– 60°	25	**1006109**	
	3000 K	750 lm		25	**1006111**	
	4000 K	780 lm		25	**1006113**	
Dali	2700 K	680 lm	15°– 60°	25	**1006115**	
	3000 K	750 lm		25	**1006117**	
	4000 K	780 lm		25	**1006119**	


1007654 583

UNIVERSAL TRACKSPOT

3-PHASE M,12/16/20/24W 927/930/940 24°...60°







220-240 V ~50/60 Hz | 300 / 400 / 500 / 600 mA
Total wattage: 12 / 16 / 20 / 24 W
Material: Aluminium/Plastic PC

- Variable beam angle 24°-60°




	2700 K	3000 K	4000 K
1007655	2000 lm	2200 lm	2150 lm
1007654	2700 K	3000 K	4000 K
	2000 lm	2200 lm	2150 lm

Variant	Prod. no.
● black	**1007655**
○ white	**1007654**

UNIVERSAL TRACKSPOT

3-PHASE L,24/28/32/36W 927/930/940 24°...60°







220-240 V ~50/60 Hz | 600 / 700 / 800 / 900 mA
Total wattage: 24 / 28 / 32 / 36 W
Material: Aluminium/Plastic PC

- Variable beam angle 24°-60°




	2700 K	3000 K	4000 K
1007657	2900 lm	3300 lm	3200 lm
1007656	2700 K	3000 K	4000 K
	2900 lm	3300 lm	3200 lm

Variant	Prod. no.
● black	**1007656**
○ white	**1007657**


1007646 585

NOBLO® SPOT
3-PHASE, PHASE





IP20 | 32° | 355° | 90° | 50000 h L80B10

220-240 V ~50/60 Hz | 150 mA
Total wattage: 6 W
Material: Aluminium/Polycarbonate (PC)

LED INSIDE | CRI 90


1007648 **1007649**	4000 K 760 lm
1007646 **1007647**	3000 K 750 lm
1007644 **1007645**	2700 K 740 lm

Variant	Prod. no.
● black 740 lm | 2700 K	**1007644**
● black 750 lm | 3000 K	**1007646**
● black 760 lm | 4000 K	**1007648**
○ white 740 lm | 2700 K	**1007645**
○ white 750 lm | 3000 K	**1007647**
○ white 760 lm | 4000 K	**1007649**

Product	Prod. no.
Decorative ring	
● black	**1008482**
○ white	**1008483**
● gold	**1008484**
● grey	**1008485**
● Bronze	**1008486**
● copper	**1008487**

NOBLO® SPOT
3-PHASE, PHASE





IP20 | 36° | 355° | 90° | 39000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 8.4 W
Material: Aluminium/Polycarbonate (PC)

LED INSIDE | DIM TO WARM | CRI 90


2000 K - 3000 K
30 lm - 450 lm

Variant	Prod. no.
● black	**1007355**
○ white	**1007356**

Product	Prod. no.
Decorative ring	
● black	**1008482**
○ white	**1008483**
● gold	**1008484**
● grey	**1008485**
● Bronze	**1008486**
● copper	**1008487**

EURO CUBE 2 M
3-PHASE, PHASE





C · IP20 · IK02 · 40° · 335° · 90° · 50 000 h L90B10 · UGR 22

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: Aluminium/Plastic PC

LED INSIDE · CRI 90

1010840 **1010842**	Direct	3000 K 1650 lm
1010841 **1010843**	Direct	4000 K 1700 lm


Variant	Prod. no.
● black 1650 lm | 3000 K	**1010842**
● black 1700 lm | 4000 K	**1010843**
◑ white/black 1650 lm | 3000 K	**1010840**
◑ white/black 1700 lm | 4000 K	**1010841**

⊕

Product	Prod. no.
Honeycomb	
● black	**1010856**
Oval filter	
○ white	**1010857**

EURO CUBE 2 M
3-PHASE, DALI





Dali · IP20 · IK02 · 40° · 335° · 90° · 50 000 h L90B10 · UGR 22

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: Aluminium/Plastic PC

LED INSIDE · CRI 90

1010845 **1010847**	Direct	4000 K 1700 lm
1010844 **1010846**	Direct	3000 K 1650 lm

Variant	Prod. no.
● black 1650 lm | 3000 K	**1010846**
● black 1700 lm | 4000 K	**1010847**
◑ white/black 1650 lm | 3000 K	**1010844**
◑ white/black 1700 lm | 4000 K	**1010845**

⊕

Product	Prod. no.
Honeycomb	
● black	**1010856**
Oval filter	
○ white	**1010857**

EURO CUBE 2 M
HONEYCOMB



Ø: 8.9 cm
H: 2.6 cm

Variant	Prod. no.
● black	**1010856**

EURO CUBE 2 M
OVAL FILTER




Ø: 8.9 cm
H: 2.6 cm

Variant	Prod. no.
○ white	**1010857**

EURO CUBE 2 L
3-PHASE, PHASE





C · IP20 · IK02 · 40° · 335° · 90° · 50000 h L90B10 · UGR 19

220-240 V ~50/60 Hz | 550 mA
Total wattage: 21 W
Material: Aluminium/Plastic PC

LED INSIDE · CRI 90

1010849 **1010851**	Down	4000 K 2800 lm	
1010848 **1010850**	Down	3000 K 2750 lm	


Variant	Prod. no.
● black 2750 lm | 3000 K	**1010850**
● black 2800 lm | 4000 K	**1010851**
◑ white/black 2750 lm | 3000 K	**1010848**
◑ white/black 2800 lm | 4000 K	**1010849**

⊕

Product	Prod. no.
Honeycomb	
● black	**1010858**
Oval filter	
○ white	**1010859**

EURO CUBE 2 L
3-PHASE, DALI





Dali · IP20 · IK02 · 40° · 335° · 90° · 50000 h L90B10 · UGR 19

220-240 V ~50/60 Hz | 550 mA
Total wattage: 21 W
Material: Aluminium/Plastic PC

LED INSIDE · CRI 90

1010853 **1010855**	Direct	4000 K 2800 lm	
1010852 **1010854**	Direct	3000 K 2750 lm	

Variant	Prod. no.
● black 2750 lm | 3000 K	**1010854**
● black 2800 lm | 4000 K	**1010855**
◑ white/black 2750 lm | 3000 K	**1010852**
◑ white/black 2800 lm | 4000 K	**1010853**

⊕

Product	Prod. no.
Honeycomb	
● black	**1010858**
Oval filter	
○ white	**1010859**

EURO CUBE 2 L
HONEYCOMB



Ø: 10.6 cm
H: 3 cm

Variant	Prod. no.
● black	**1010858**

EURO CUBE 2 L
OVAL FILTER




Ø: 10.6 cm
H: 3 cm

Variant	Prod. no.
○ white	**1010859**


1010246 589
MA
CHU
SPORTS
ANT BARBECUE

KALU 2.0
3-PHASE, PHASE





C · IP20 · IK02 · 36° · 330° · 90° · 50000 h L90B10 · UGR 22

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: Aluminium

- Discover more lenses and decorative rings in the accessories section

LED INSIDE · CRI 90

1010246 **1010248**	Down	4000 K 1500 lm
1010240 **1010242**	Down	3000 K 1450 lm
1010234 **1010236**	Down	2700 K 1400 lm


Variant	Prod. no.
● black 1400 lm | 2700 K	**1010234**
● black 1450 lm | 3000 K	**1010240**
● black 1500 lm | 4000 K	**1010246**
○ white 1400 lm | 2700 K	**1010236**
○ white 1450 lm | 3000 K	**1010242**
○ white 1500 lm | 4000 K	**1010248**

⊕

Product	Prod. no.
KALU 2.0, decorative ring	
○ white	**1010135**
● black	**1010136**
● gold	**1010138**
● copper	**1010139**
KALU 2.0, lens	
○ transparent | 15°	**1010140**
○ transparent | 24°	**1010141**
○ transparent | 36°	**1010142**
○ transparent | 60°	**1010143**

KALU 2.0
3-PHASE, DALI





Dali · IP20 · IK02 · 36° · 350° · 90° · 50000 h L90B10 · UGR 22

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: Aluminium

- Discover more lenses and decorative rings in the accessories section
- Intrack LED driver adapter

LED INSIDE · CRI 90

1010249 **1010251**	Down	4000 K 1500 lm
1010243 **1010245**	Down	3000 K 1450 lm
1010237 **1010239**	Down	2700 K 1400 lm


Variant	Prod. no.
● black 1400 lm | 2700 K	**1010237**
● black 1450 lm | 3000 K	**1010243**
● black 1500 lm | 4000 K	**1010249**
○ white 1400 lm | 2700 K	**1010239**
○ white 1450 lm | 3000 K	**1010245**
○ white 1500 lm | 4000 K	**1010251**

⊕

Product	Prod. no.
KALU 2.0, decorative ring	
○ white	**1010135**
● black	**1010136**
● gold	**1010138**
● copper	**1010139**
KALU 2.0, lens	
○ transparent | 15°	**1010140**
○ transparent | 24°	**1010141**
○ transparent | 36°	**1010142**
○ transparent | 60°	**1010143**

KALU TRACK
3-PHASE, QPAR111





IP20 · 350° · 90°

220-240 V ~50/60 Hz
Material: Aluminium/Plastic

SOCKET INSIDE · 75 W

Base: 1xGU10


Variant	Prod. no.
● black	**152610**
○ white	**152611**

GU10 | 12 W | 55°
670 lm | 2700 K | EEC = G

C,L

Prod. no.: **1005297**

SIGHT EVO 600
3-PHASE, SINGLE

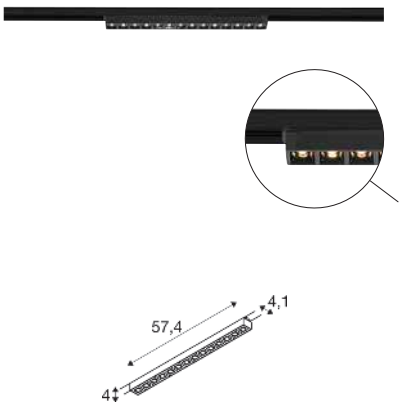

IP20 IK02 60° 50000h L80B20 UGR 19


220-240 V ~50/60 Hz | 500 mA
Total wattage: 18 W
Material: Aluminium/Plastic PC

INSIDE CRI 90

1010144	3000 K
1010146	2250 lm
1010145	4000 K
1010147	2250 lm

Variant	Prod. no.
● black 3000 K	**1010146**
● black 4000 K	**1010147**
◐ white/black 3000 K	**1010144**
◐ white/black 4000 K	**1010145**

SIGHT EVO 1200
3-PHASE, SINGLE

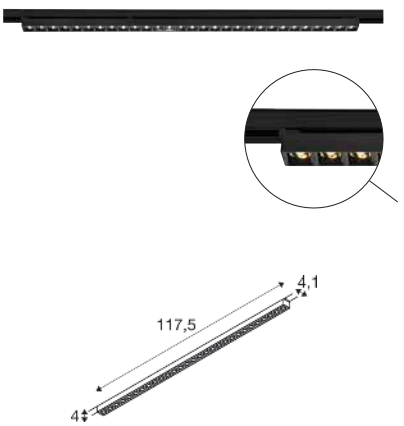

IP20 IK02 60° 50000h L80B20 UGR 16


220-240 V ~50/60 Hz | 700 mA
Total wattage: 25 W
Material: Aluminium/Plastic PC

INSIDE CRI 90

1010148	3000 K
1010150	3200 lm
1010149	4000 K
1010151	3200 lm

Variant	Prod. no.
● black 3000 K	**1010150**
● black 4000 K	**1010151**
◐ white/black 3000 K	**1010148**
◐ white/black 4000 K	**1010149**

SIGHT EVO 600
3-PHASE, DOUBLE

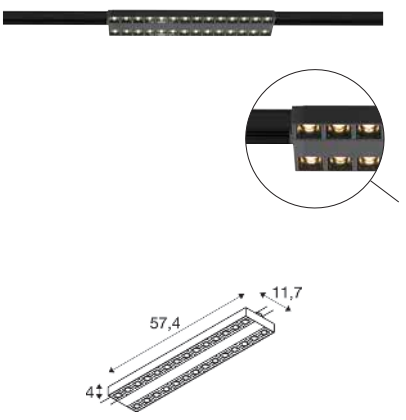

IP20 IK02 60° 50000h L80B20 UGR 16


220-240 V ~50/60 Hz | 700 mA
Total wattage: 25 W
Material: Aluminium/Plastic PC

INSIDE CRI 90

1010152	3000 K
1010154	3250 lm
1010153	4000 K
1010155	3350 lm

Variant	Prod. no.
● black 3250 lm | 3000 K	**1010154**
● black 3350 lm | 4000 K	**1010155**
◐ white/black 3250 lm | 3000 K	**1010152**
◐ white/black 3350 lm | 4000 K	**1010153**

SIGHT EVO 600
3-PHASE, SINGLE DALI

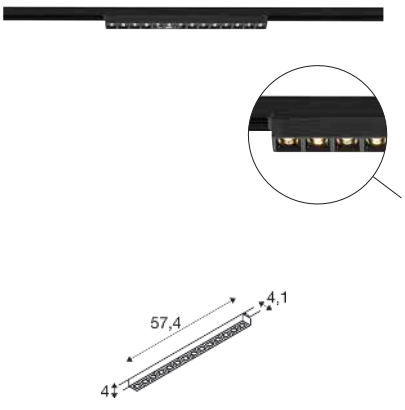

Dali | IP20 | IK02 | 60° | 50000 h L80B20 | UGR 19


220-240 V ~50/60 Hz | 500 mA
Total wattage: 18 W
Material: Aluminium/Plastic PC

LED INSIDE | CRI 90

1010156	3000 K
1010158	2250 lm
1010157	4000 K
1010159	2250 lm

Variant	Prod. no.
● black 3000 K	**1010158**
● black 4000 K	**1010159**
◐ white/black 3000 K	**1010156**
◐ white/black 4000 K	**1010157**

SIGHT EVO 1200
3-PHASE, SINGLE DALI

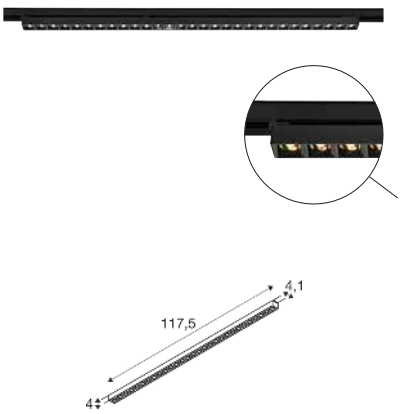

Dali | IP20 | IK02 | 60° | 50000 h L80B20 | UGR 16


220-240 V ~50/60 Hz | 700 mA
Total wattage: 25 W
Material: Aluminium/Plastic PC

LED INSIDE | CRI 90

1010381	3000 K
1010383	3200 lm
1010382	4000 K
1010384	3200 lm

Variant	Prod. no.
● black 3000 K	**1010383**
● black 4000 K	**1010384**
◐ white/black 3000 K	**1010381**
◐ white/black 4000 K	**1010382**

SIGHT EVO 600
3-PHASE, DOUBLE DALI

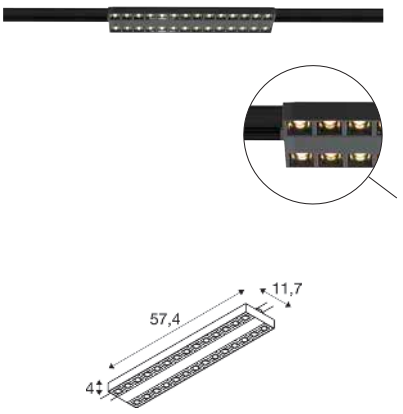

Dali | IP20 | IK02 | 60° | 50000 h L80B20 | UGR 16


220-240 V ~50/60 Hz | 700 mA
Total wattage: 25 W
Material: Aluminium/Plastic PC

LED INSIDE | CRI 90

1010385	3000 K
1010387	3250 lm
1010386	4000 K
1010388	3350 lm

Variant	Prod. no.
● black 3250 lm | 3000 K	**1010387**
● black 3350 lm | 4000 K	**1010388**
◐ white/black 3250 lm | 3000 K	**1010385**
◐ white/black 3350 lm | 4000 K	**1010386**

SIGHT PANEL
3-PHASE

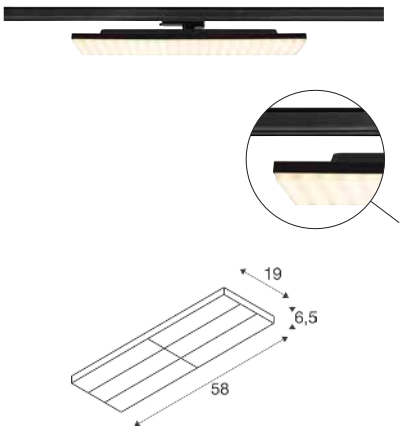

IP20 IK02 70° 50000h L80B10 UGR 25


220-240 V ~50/60 Hz | 210 / 260 / 310 / 380 mA
Total wattage: 38 / 48 / 58 / 72 W

INSIDE CRI 90

1009146 **1009147**	38 W	3000 K 6300 lm
	48 W	3000 K 7700 lm
	58 W	3000 K 9000 lm
	72 W	3000 K 10800 lm
1009148 **1009149**	38 W	4000 K 6500 lm
	48 W	4000 K 7950 lm
	58 W	4000 K 9350 lm
	72 W	4000 K 11350 lm

Variant	Prod. no.
● black 6300 lm | 3000 K	**1009146**
● black 6500 lm | 4000 K	**1009148**
○ white 6300 lm | 3000 K	**1009147**
○ white 6500 lm | 4000 K	**1009149**

SIGHT PANEL
3-PHASE, DALI

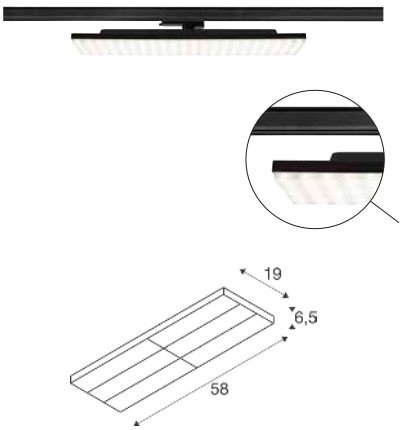

Dali IP20 IK02 70° 50000h L80B10 UGR 25


220-240 V ~50/60 Hz | 330 mA
Total wattage: 65 W

INSIDE CRI 90

1009152 **1009153**		4000 K 11600 lm
1009150 **1009151**		3000 K 10100 lm

Variant	Prod. no.
● black 10100 lm | 3000 K	**1009150**
● black 11600 lm | 4000 K	**1009152**
○ white 10100 lm | 3000 K	**1009151**
○ white 11600 lm | 4000 K	**1009153**

SIGHT EASY
3-PHASE

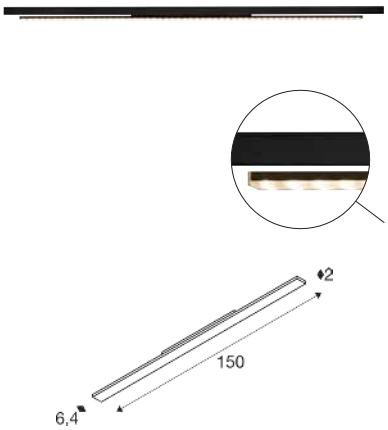

IP20 IK06 2x 25° 50000h L80B10 UGR 25


220-240 V ~50/60 Hz | 250 / 300 / 350 / 400 mA
Total wattage: 41 / 49 / 58 / 66 W
Material: Aluminium

LED INSIDE CRI 90

1008676 1008677	41 W	3000 K 6500 lm
	49 W	3000 K 7700 lm
	58 W	3000 K 9100 lm
	66 W	3000 K 10200 lm
1008678 1008679	41 W	4000 K 7100 lm
	49 W	4000 K 8200 lm
	58 W	4000 K 9600 lm
	66 W	4000 K 10900 lm

Variant	Prod. no.
● black 650 lm | 3000 K	**1008676**
● black 2100 lm | 4000 K	**1008678**
○ white 650 lm | 3000 K	**1008677**
○ white 2100 lm | 4000 K	**1008679**

SIGHT EASY
3-PHASE, DALI

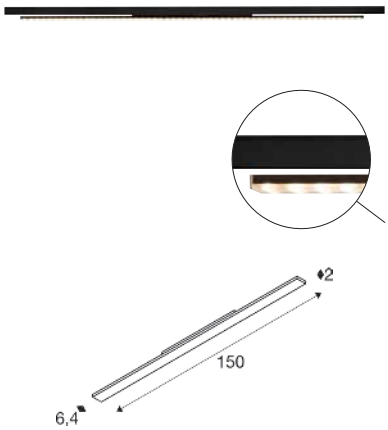

Dali IP20 IK06 2x 25° 50000h L80B10 UGR 25

220-240 V ~50/60 Hz | 250 / 300 / 350 / 400 mA
Total wattage: 41 / 49 / 58 / 66 W
Material: Aluminium


LED INSIDE CRI 90

1008728 1008729	41 W	3000 K 6500 lm
	49 W	3000 K 7700 lm
	58 W	3000 K 9100 lm
	66 W	3000 K 10200 lm
1008730 1008731	41 W	4000 K 7100 lm
	49 W	4000 K 8200 lm
	58 W	4000 K 9600 lm
	66 W	4000 K 10900 lm

Variant	Prod. no.
● black 650 lm | 3000 K	**1008728**
● black 2100 lm | 4000 K	**1008730**
○ white 650 lm | 3000 K	**1008729**
○ white 2100 lm | 4000 K	**1008731**

SIGHT TRACK
3-PHASE, DALI





Dali IP20 120° 30000h L70B50 UGR 25

220-240 V ~50/60 Hz | 700 mA
Total wattage: 39 W
Material: Aluminium/Acrylic


LED INSIDE CCT CRI 90

3000 K	4000 K
3000 lm	3000 lm

Variant	Prod. no.
● black	**1005397**
○ white	**1005399**

SIGHT TRACK
3-PHASE





IP20 120° 30000h L70B50 UGR 25

220-240 V ~50/60 Hz | 700 mA
Total wattage: 37 W
Material: Aluminium/Acrylic


LED INSIDE CCT CRI 90

3000 K	4000 K
3000 lm	3000 lm

Variant	Prod. no.
● black	**1005400**
○ white	**1005401**
● grey	**1005402**

SIGHT MOVE
3-PHASE, DALI





Dali IP20 75° 120° 30000h L70B50 UGR 25

220-240 V ~50/60 Hz | 350 mA
Total wattage: 26 W
Material: Aluminium/Polymethylmethacrylate (PMMA)


LED INSIDE CRI 90

1004692 **1004693**	4000 K 3100 lm
1004690 **1004691**	3000 K 2700 lm

Variant	Prod. no.
● black 2700 lm | 3000 K	**1004690**
● black 3100 lm | 4000 K	**1004692**
○ white 2700 lm | 3000 K	**1004691**
○ white 3100 lm | 4000 K	**1004693**

SIGHT MOVE
3-PHASE





IP20 75° 120° 30000h L70B50 UGR 25

220-240 V ~50/60 Hz | 350 mA
Total wattage: 26 W
Material: Aluminium/Polymethylmethacrylate (PMMA)

LED INSIDE CRI 90


1004688 **1004689**	4000 K 3100 lm
1004687	3000 K 2700 lm

Variant	Prod. no.
● black 2700 lm | 3000 K	**1004686**
● black 3100 lm | 4000 K	**1004688**
○ white 2700 lm | 3000 K	**1004687**
○ white 3100 lm | 4000 K	**1004689**



PARA CONE 14
3-PHASE, GU10







220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE 25 W

Base: 1xGU10

Variant	Prod. no.
black/gold	**1008055**
white/gold	**1008056**
copper/white	**1008057**
aluminium	**1009139**


GU10 | 3 W | 360°
270 lm | 2700 K | EEC = G



Prod. no.: **1006321**

PARA CONE 14
3-PHASE, PD, GU10





IP20 | 150 cm

220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE | 35 W

Base: 1xGU10

Variant	Prod. no.
black/gold	**1008061**
white/gold	**1008062**
copper/white	**1008063**
aluminium	**1009141**

GU10 | 3 W | 360°
270 lm | 2700 K | EEC = G

Prod. no.: **1006321**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469**

PARA CONE GL
3-PHASE, GU10





IP20 | 300° | 90°

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE | 25 W

Base: 1xGU10


Variant	Prod. no.
black	**1006157**
white	**1006158**

GU10 | 3 W | 360°
270 lm | 2700 K | EEC = G

Prod. no.: **1006321**

PARA CONE GL
PD, GU10





IP20 | 250

220-240 V ~50/60 Hz
Material: Aluminium/Glass

- Open cable end

SOCKET INSIDE | 25 W

Base: 1xGU10

Variant	Prod. no.
black	**1006159**
white	**1006160**

GU10 | 3 W | 360°
270 lm | 2700 K | EEC = G


Prod. no.: **1006321**

Product	Prod. no.
Fitu | Single ceiling rosette	
black	**132600**
white	**132601**
chrome	**132605**
1-phase light adapter	
black	**143120**
white	**143121**
grey	**143124**
3-phase light adapter	
black	**145990**
grey	**145994**
white	**1001542**
Recessed ceiling rosette	
black	**1004674**
white	**1004675**
Surface-mounted ceiling rosette	
black	**1004744**


1008541 599

FORCHINI M 40 TRACK
3-PHASE, PD, E27





IP20 150 cm

220-240 V ~50/60 Hz
Material: Steel/Aluminium

SOCKET INSIDE 40 W

Base: 1xE27	max. Ø: 6.8 cm	L: 15.2 cm

Variant	Prod. no.
black/gold	**1008541**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no.: **1005303**

SMART

E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no.: **1012471**



LIGHT EYE® 90
3-PHASE, PD, QPAR51



IP20 150 cm

220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.35 cm

Variant	Prod. no.
● black	**1008170**
○ white	**1008171**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F


C,L

Prod. no.: **1005080**

Product	Prod. no.
Decorative ring Ø 5.7 cm	
● black	**1008186**
○ white	**1008187**
● gold	**1008188**
◑ chrome	**151049**

LIGHT EYE® 150
3-PHASE, PD, QPAR111





IP20 | 150 cm

220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE | 13 W

Base: 1xGU10 | max. Ø: 11.1 cm | L: 7 cm

Variant	Prod. no.
● black	**1008176**
○ white	**1008177**


GU10 | 12 W | 55°
680 lm | 3000 K | EEC = G

Prod. no.: **1005298**

Product	Prod. no.
Decorative ring Ø 13.6 cm	
● black	**1008189**
○ white	**1008190**
◑ chrome	**1008191**
● gold	**1008192**

LIGHT EYE® 150
3-PHASE, QPAR111





IP20 | 330° | 90°

220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE | 13 W

Base: 1xGU10 | max. Ø: 11.1 cm | L: 7 cm

Variant	Prod. no.
● black	**1008184**
○ white	**1008185**

GU10 | 12 W | 55°
680 lm | 3000 K | EEC = G

Prod. no.: **1005298**

Product	Prod. no.
Decorative ring Ø 13.6 cm	
● black	**1008189**
○ white	**1008190**
◑ chrome	**1008191**
● gold	**1008192**

LIGHT EYE® 90
DECORATIVE RING Ø 5.7 CM



Ø: 5.9 cm
H: 1.4 cm
Material: Steel

Variant	Prod. no.
● black	**1008186**
○ white	**1008187**
● gold	**1008188**
◑ chrome	**151049**

LIGHT EYE® 150
DECORATIVE RING Ø 13.6 CM




Ø: 13.6 cm
H: 2.3 cm
Material: Steel

Variant	Prod. no.
● black	**1008189**
○ white	**1008190**
● gold	**1008192**
◑ chrome	**1008191**


"KEEP OFF"

EURO SPOT TRACK
3-PHASE, QPAR111





IP20 350° 100°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 17.5 W

Base: 1xGU10


Variant	Prod. no.
● black	**153420**
○ white	**153421**

GU10 | 13 W | 10°
900 lm | 2700 K | EEC = G

Prod. no.: 1005275

EURO SPOT TRACK
3-PHASE, QPAR51





IP20 350° 100°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 25 W

Base: 1xGU10

Variant	Prod. no.
● black	**153850**
○ white	**153851**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: 1005077

SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469


152961 605

HELIA 50 TRACK
3-PHASE







220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: Aluminium



	3000 K
152960	920 lm
152961	970 lm

Variant	Prod. no.
● black 920 lm	**152960**
○ white 970 lm	**152961**



PROFILES AND LED STRIPS

SETS



S


LED STRIP SETS –
LED STRIP S + DRIVER | 612



S

PROFILE SETS –
S SURFACE-MOUNTED PROFILE + DIFFUSER | 613

LED STRIPS



XS

COB LED STRIPS | 614



XS

SMD LED STRIPS | 615



S

COB LED STRIPS | 616



S

SMD LED STRIPS | 617



S

LED STRIPS COB
TW & RGBW | 618



S

LED STRIPS SMD
TW & RGBW | 619



S

LED STRIPS COB IP67 |
620



S

LED STRIPS SMD IP67 |
621



M

COB LED STRIPS | 622



M

SMD LED STRIPS | 623



ACCESSORIES |
624–625

PROFILES




XS

PROFILE SETS
AND ACCESSORIES |
626–627



S

PROFILE SETS
AND ACCESSORIES |
628–629



M

PROFILE SETS
AND ACCESSORIES |
630–631




L

RECESSED PROFILE
AND ACCESSORIES |
632

THE NEW LED STRIP SYSTEM

The new LED strip system makes selection, planning and installation easier. Thanks to the standardised sizing system, LED strips, profiles and accessories can be combined quickly and intuitively.

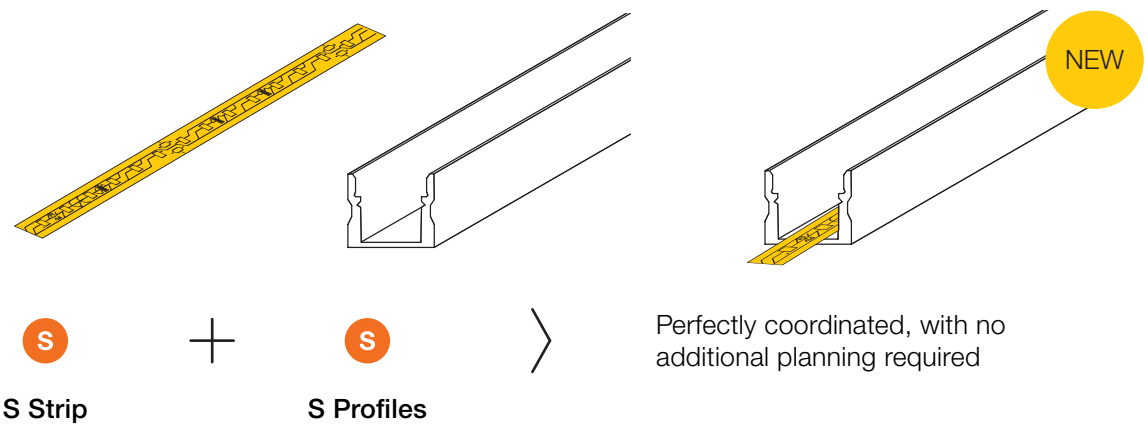


SIZES AND APPLICATIONS


Size	LED STRIP width	Internal width of the profile	Typical application
XS	5 mm	8–10 mm	Furniture, shelving, display cabinets and accent lighting
S	8–12 mm	12–14 mm	Living spaces, direct and indirect lighting
M	15–18 mm	20 mm	High-performance lighting for indirect lighting schemes and general lighting
L	–	40 mm	Architectural lighting, extra-wide light lines and special applications

PROFILES FOR EVERY APPLICATION


Surface-mounted




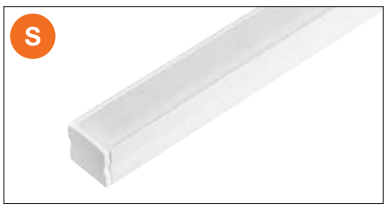

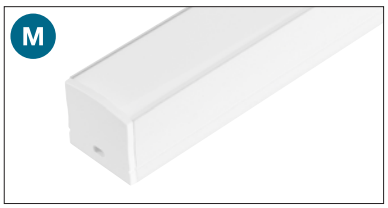

Surface-mounted, flat

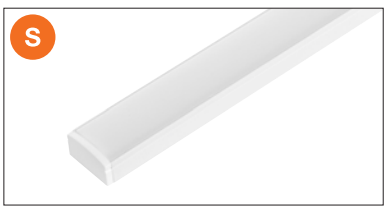


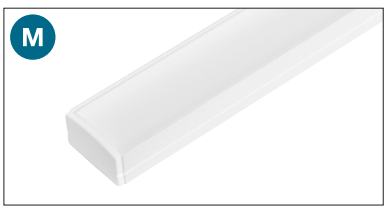


Recessed






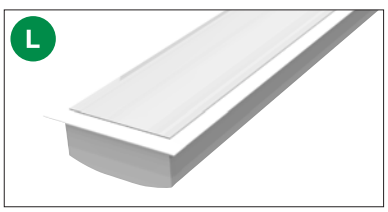


Recessed, corner

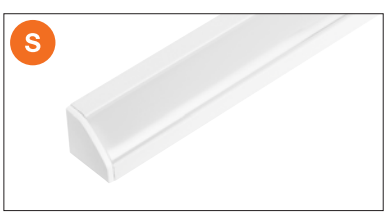


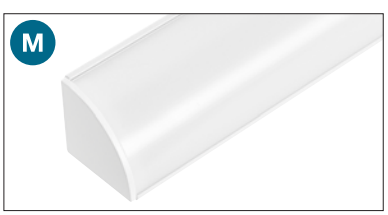

Tiles

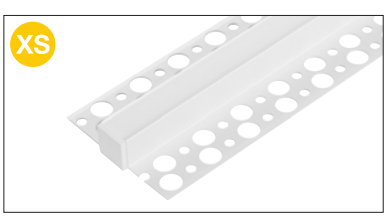

Plaster

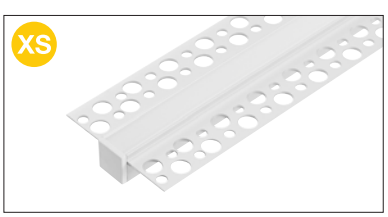

SLV profiles are supplied with accessories such as end caps, covers and mounting clips. This reduces the effort involved in placing orders and simplifies planning.

Accessories included

SOPHISTICATED TECHNOLOGY

COB OR SMD – THE CHOICE IS YOURS

COB strips produce a uniform light pattern with no visible light spots. SMD strips offer high efficiency and light output for a wide range of applications.


	COB	SMD
Light pattern	Continuous light line	Visible LED dots
Light output & efficiency	High	Very high
Key strength	A uniform and high-quality lighting effect	High light efficiency and cost-effectiveness
Typical application	Visible light lines, indirect lighting, sophisticated lighting concepts	High-efficiency general and task lighting

EASY PLANNING

All SLV profiles are supplied with the necessary accessories, such as end caps and mounting clips. In addition, pre-configured sets simplify planning, ordering and installation.

PROFILE SETS

Pre-configured sets comprising profiles, end caps, covers and mounting clips.

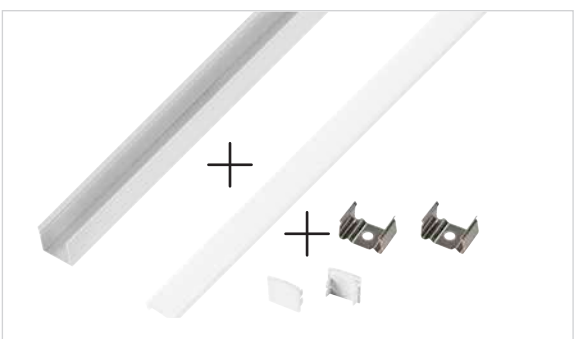

STRIP SETS

Pre-configured sets comprising LED strips, drivers and connecting components.



EASY TO INSTALL


QUICK CABLING

All LED strips are supplied with exposed cable ends at both ends.
For static white lighting, plug-in and HUB solutions enable a quick connection between the driver and the LED strip – with no soldering required.



FLEXIBLE CONNECTION SOLUTIONS

A range of connectors makes it easier to create customised strip layouts.
A suitable accessory kit is available for IP67 strips, enabling the connectors and connection points to comply with the IP67 standard.

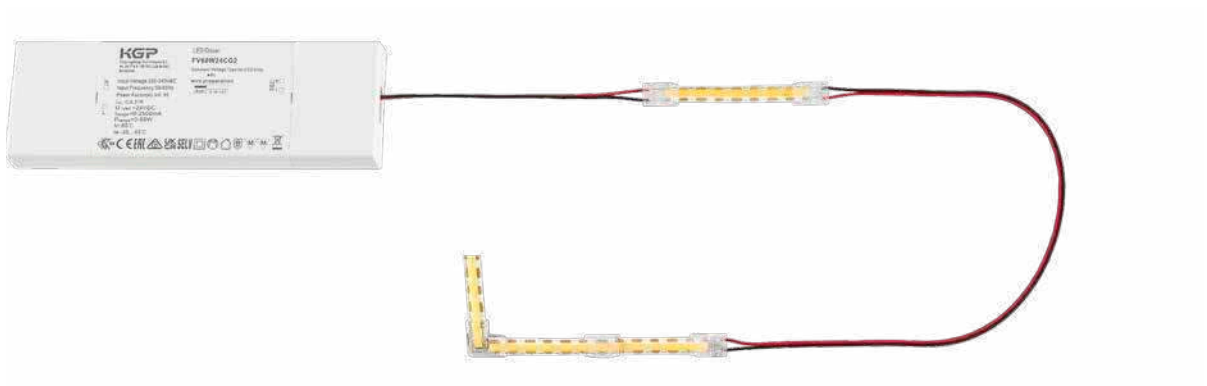


S LED STRIP SETS

LED STRIP S + DRIVER

L: 500 cm
SDMC: 3

NEW

50000h L80B20 | CRI 90

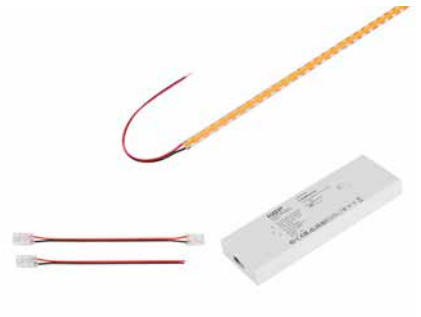

* The stated value applies only to the first metre of the LED strip.

Variant	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.
LED STRIP SET STRIP COB + DRIVER | S	880	9.5	2700 K	0.8 cm	480	0.83 cm	**1012464**
	950		3000 K				**1012465**
	980		4000 K				**1012466**
LED STRIP SET IP67 STRIP COB + IP67 DRIVER | S	850	9.5	3000 K	1 cm	480	0.83 cm	**1012467**
LED STRIP SET STRIP SMD + DRIVER | S	1110	9	2700 K	0.8 cm	100	1 cm	**1012474**
	1150		3000 K				**1012475**
	1170		4000 K				**1012476**
LED STRIP SET IP67 STRIP SMD + IP67 DRIVER | S	1060	9	3000 K	1 cm	160	5 cm	**1012473**



S PROFILE SETS

SURFACE-MOUNTED PROFILE S + DIFFUSER

NEW



IP20

Set contents: 5 x 1 m profiles, 10 x end caps, 10 x mounting clips, 5 x 1 m diffusers

Variant	Size	Length	Colour	Prod. no.	
LED STRIP SET PROFIL SURFACE+ DIFFUSER 5*1M	S	5 x 100 cm	● Black	**1012477**	
LED STRIP SET PROFIL SURFACE+ DIFFUSER 5*1M	S	5 x 100 cm	○ white	**1012478**	
LED STRIP SET PROFILE SURFACE FLAT+ DIFFUSER 5*1M	S	5 x 100 cm	● Black	**1012479**	
LED STRIP SET PROFILE SURFACE FLAT+ DIFFUSER 5*1M	S	5 x 100 cm	○ white	**1012480**	



XS COB LED STRIPS

LED STRIP COB | XS

L: 500 cm
SDCM: 3

NEW



IP20 | 50000h L80B20 | CRI 90

* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.
	480	5.4	2700 K	0.5 cm	480	0.83 cm	**1012239**
	480		3000 K				**1012240**
	510		4000 K				**1012241**






Accessories	LED STRIP CONNECTOR[2] COB | FEEDER XS	LED STRIP CONNECTOR[2] COB | 90° XS	LED STRIP CONNECTOR[2] COB | DIRECT XS	LED STRIP CONNECTOR[2] COB | WIRE XS
Prod. no.	**1012283**	**1012298**	**1012293**	**1012288**

[2] Packaging unit: 5 pieces

XS SMD LED STRIPS

LED STRIP SMD | XS

L: 500 cm
SDCM: 3

NEW



IP20 | 50000 h L80B20 | CRI 90

* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.
	500	4.8	2700 K	0.5 cm	140	5 cm	**1012259**
	510		3000 K				**1012260**
	520		4000 K				**1012261**






Accessories	LED STRIP CONNECTOR[2] SMD | FEEDER XS	LED STRIP CONNECTOR[2] SMD | 90° XS	LED STRIP CONNECTOR[2] SMD | DIRECT XS	LED STRIP CONNECTOR[2] SMD | WIRE XS
Prod. no.	**1012304**	**1012319**	**1012314**	**1012309**

[2] Packaging unit: 5 pieces

S COB LED STRIPS

LED STRIP COB | S

L: 500 cm
SDCM: 3

NEW



IP20 | 50000h L80B20 | CRI 90

* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.
	880	9.5	2700 K	0.8 cm	480	0.83 cm	**1012242**
	950		3000 K				**1012243**
	980		4000 K				**1012244**
	1370	12	2700 K	0.8 cm	480	0.83 cm	**1012245**
	1350		3000 K				**1012246**
	1600		4000 K				**1012247**






Accessories	LED STRIP CONNECTOR[2] COB | FEEDER S	LED STRIP CONNECTOR[2] COB | WIRE S	LED STRIP CONNECTOR[2] COB | DIRECT S	LED STRIP CONNECTOR[2] COB | 90° S
Prod. no.	**1012284**	**1012289**	**1012294**	**1012299**

[2] Packaging unit: 5 pieces

S SMD LED STRIPS

LED STRIP SMD | S

L: 500 cm
SDCM: 3

NEW



IP20 | 50000h L80B20 | CRI 90

* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.
	1000	9	2700 K	0.8 cm	100	1 cm	**1012262**
	1050		3000 K				**1012263**
	1100		4000 K				**1012264**
	1600	13.5	2700 K	0.8 cm	160	1.25 cm	**1012265**
	1650		3000 K				**1012266**
	1760		4000 K				**1012267**
	1900	15.2	2700 K	1 cm	160	5 cm	**1012268**
	2000		3000 K				**1012269**
	2100		4000 K				**1012270**






Accessories	LED STRIP CONNECTOR[2] SMD | FEEDER S 8MM	LED STRIP CONNECTOR[2] SMD | WIRE S 8MM	LED STRIP CONNECTOR[2] SMD | DIRECT S 8MM	LED STRIP CONNECTOR[2] SMD | 90° S 8MM
Prod. no.	**1012305**	**1012310**	**1012315**	**1012320**

Accessories	LED STRIP CONNECTOR[2] SMD | FEEDER S 10MM	LED STRIP CONNECTOR[2] SMD | WIRE S 10MM	LED STRIP CONNECTOR[2] SMD | DIRECT S 10MM	LED STRIP CONNECTOR[2] SMD | 90° S 10MM
Prod. no.	**1012306**	**1012311**	**1012316**	**1012321**

[2] Packaging unit: 5 pieces

S LED STRIPS COB TW & RGBW

LED STRIP COB TW | S

L: 500 cm
SDCM: 5

IP20 | 50000h L80B20 | CRI 90

NEW



* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.	
	800 / 900	14.4	2700 K / 6500 K	1 cm	640	2.5 cm	**1012253**	

LED STRIP COB RGBW | S

L: 500 cm
SDCM: 5

IP20 | 50000h L80B20 | CRI 90

NEW



* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.	
	440 700 1140	18.4	3000 K RGB	1.2 cm	672	8.3 cm	**1012251**	





Accessories	LED STRIP CONNECTOR[2] COB | FEEDER TW S	LED STRIP CONNECTOR[2] COB | DIRECT TW S	LED STRIP CONNECTOR[2] COB | WIRE TW S
Prod. no.	**1012287**	**1012297**	**1012292**

Accessories	LED STRIP CONNECTOR[2] COB | FEEDER RGBW S	LED STRIP CONNECTOR[2] COB | DIRECT RGBW S	LED STRIP CONNECTOR[2] COB | WIRE RGBW S
Prod. no.	**1012286**	**1012296**	**1012291**

[2] Packaging unit: 5 pieces

S LED STRIPS SMD TW & RGBW

LED STRIP SMD TW | S

L: 500 cm
SDCM: 3

IP20 | 50000 h L80B20 | CRI 90

NEW



* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.	
	930 / 1000	18	2700 K / 6500 K	1 cm	224	6.3 cm	**1012277**	

LED STRIP SMD RGBW | S

L: 500 cm
SDCM: 3

IP20 | 50000 h L80B20 | CRI 80

NEW



* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.	
	400 650 1050	20	3000 K RGB	1 cm	120	5 cm	**1012275**	






Accessories	LED STRIP CONNECTOR[2] SMD | FEEDER TW S	LED STRIP CONNECTOR[2] SMD | 90° TW S	LED STRIP CONNECTOR[2] SMD | DIRECT TW S	LED STRIP CONNECTOR[2] SMD | WIRE TW S
Prod. no.	**1012308**	**1012323**	**1012318**	**1012313**

Accessories	LED STRIP CONNECTOR[2] SMD | FEEDER RGBW S	LED STRIP CONNECTOR[2] SMD | 90° RGBW S	LED STRIP CONNECTOR[2] SMD | DIRECT RGBW S	LED STRIP CONNECTOR[2] SMD | WIRE RGBW S
Prod. no.	**1012307**	**1012322**	**1012317**	**1012312**

[2] Packaging unit: 5 pieces

S LED STRIPS COB IP67

LED STRIP COB IP67 | S

L: 500 cm
SDCM: 3
Find the compatible sealing kit on page 653.

IP67 · 50000h L80B20 · CRI 90

NEW



* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.
	800	10	2700 K	1 cm	480	0.83 cm	**1012255**
	900		3000 K				**1012256**
	1320	12	2700 K				**1012257**
	1400		3000 K				**1012258**

LED STRIP COB IP67 TW | S

TW

L: 500 cm
SDCM: 5
Find the compatible sealing kit on page 653.

IP67 · 50000h L80B20 · CRI 90

NEW



* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.
	760 / 860	14.4	2700 K / 6500 K	1.2 cm	640	2.5 cm	**1012254**

LED STRIP COB IP67 RGBW | S

RGB +W

L: 500 cm
SDCM: 5
Find the compatible sealing kit on page 653.

IP67 · 50000h L80B20 · CRI 90

NEW



* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.
	1070	18	3000 K	1.4 cm	672	8.3 cm	**1012252**

S LED STRIPS SMD IP67

LED STRIP SMD IP67 | S

L: 500 cm
SDCM: 5
Find the compatible sealing kit on page 653.

IP67 · 50000h L80B20 · CRI 90

NEW



* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.
	980	8.6	2700 K	1 cm	160	5 cm	**1012279**
	1000		3000 K				**1012280**
	1650	15.5	2700 K				**1012281**
	1750		3000 K				**1012282**

LED STRIP SMD TW | S

TW

L: 500 cm
SDCM: 5
Find the compatible sealing kit on page 653.

IP67 · 50000h L80B20 · CRI 90

NEW



* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.
	880 / 950	18	2700 K / 6500 K	1.2 cm	224	6.3 cm	**1012278**

LED STRIP SMD RGBW | S

RGB +W

L: 500 cm
SDCM: 5
Find the compatible sealing kit on page 653.

IP67 · 50000h L80B20 · CRI 80

NEW



* The stated value applies only to the first metre of the LED strip.


	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.
	1000	20	3000 K	1.2 cm	120	5 cm	**1012276**

M COB LED STRIPS

LED STRIP COB | M

L: 500 cm
SDCM: 3

NEW

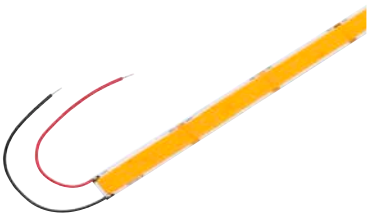

IP20 | 50000 h L80B20 | CRI 90

* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.
	2700	25	2700 K	1.5 cm	960	5 cm	**1012248**
	2800		3000 K				**1012249**
	2800		4000 K				**1012250**

M SMD LED STRIPS

LED STRIP SMD | M

L: 500 cm
SDCM: 3

NEW



IP20 | 50000h L80B20 | CRI 90

* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.
	2400	20	2700 K	1.8 cm	320	5 cm	**1012272**
	2600		3000 K				**1012273**
	2650		4000 K				**1012274**

⊕ ACCESSORIES

COMPACT POWER SUPPLY | ON/OFF

	Variant	Output	Length	Width	Height	Prod. no.
	LED POWER SUPPLY 24V | 24W	24 W	13.7 cm	5 cm	1.6 cm	**1008653**
	LED POWER SUPPLY 24V | 36W	36 W	17 cm	5.7 cm	1.8 cm	**1008654**
	LED POWER SUPPLY 24V | 60W	60 W				**1008655**

COMPACT POWER SUPPLY | PHASE DIMMING

	Variant	Output	Length	Width	Height	Prod. no.
	POWER SUPPLY | 50W | 24V	50 W	18.4 cm	6.1 cm	3.2 cm	**1003104**
	POWER SUPPLY | 100W | 24V DC	100 W	21 cm	6.7 cm	3.4 cm	**1003105**
	LED POWER SUPPLY | 25W | 24V	25 W	12.8 cm	5.2 cm	3 cm	**1006336**

SLIM POWER SUPPLY | ON/OFF

	Variant	Output	Length	Width	Height	Prod. no.
	LED POWER SUPPLY | 30W | 24V DC INCL. STRAIN RELIEF	30 W	30 cm	3 cm	1.6 cm	**1007250**
	LED POWER SUPPLY | 100W | 24V DC INCL. STRAIN RELIEF	100 W	35 cm		1.8 cm	**1007251**
	LED POWER SUPPLY | 150W | 24V DC INCL. STRAIN RELIEF	150 W				**1007252**
	LED POWER SUPPLY | 250W | 24V DC INCL. STRAIN RELIEF	250 W	40 cm	4 cm	2.2 cm	**1007253**

SLIM POWER SUPPLY | DALI

	Variant	Output	Length	Width	Height	Prod. no.
	LED POWER SUPPLY | 30W | 24V DC DALI DIMMABLE INCL. STRAIN RELIEF	30 W	30 cm	3 cm	1.6 cm	**1007254**
	LED POWER SUPPLY | 100W | 24V DC DALI DIMMABLE INCL. STRAIN RELIEF	100 W	35 cm		1.8 cm	**1007255**
	LED POWER SUPPLY | 150W | 24V DC DALI DIMMABLE INCL. STRAIN RELIEF	150 W				**1007256**
	LED POWER SUPPLY | 250W | 24V DC DALI DIMMABLE INCL. STRAIN RELIEF	250 W	40 cm	4 cm	2.2 cm	**1007257**

ROUND POWER SUPPLY

	Variant	Output		Ø	Height	Prod. no.	
	LED POWER SUPPLY 24V | 25W, ROUND	25 W		5.5 cm	2.5 cm	**1008652**	

IP67 POWER SUPPLY

	Variant	Output	Length	Width	Height	Prod. no.	
	LED POWER SUPPLY 24V | 60W, IP67	60 W	16.5 cm	4.5 cm	3.2 cm	**1012605**	

CONTROL UNITS

	Variant	Output	Length	Width	Height	Prod. no.	
	CONTROLLER | LED STRIP CCT / RGBW	96 W	14.5 cm	4.7 cm	1.6 cm	**1006348**	
	REMOTE CONTROL | ZIGBEE, CCT/RGBW	-	14 cm	4.4 cm	1.7 cm	**1007827**	
	CONTROLLER DALI, DT8 | 5 CHANNEL	180 W	17 cm	5.3 cm	2.8 cm	**1007997**	

CONNECTOR

	Variant		Length	Width	Height	Prod. no.	
	LED STRIP QUICK PLUG[2]		2.2 cm	1 cm	0.6 cm	**1012325**	
	LED STRIP HUB | 2 PLUGS		3.1 cm	2.8 cm	1 cm	**1012328**	
	LED STRIP HUB | 4 PLUGS		5.7 cm	3.1 cm	0.9 cm	**1012329**	


SEALING KITS

	Variant					Prod. no.	
	LED STRIP IP SEALING KIT | 8MM					**1012303**	
	LED STRIP IP SEALING KIT | 10MM					**1012603**	
	LED STRIP IP SEALING KIT | 12MM					**1012604**	


[2]Packaging unit: 5 pieces

XS PROFILE SETS


LED STRIP PROFILE SURFACE | XS

	Variant	Size	Length	Colour	Material	Prod. no.
	LED STRIP PROFILE SURFACE	XS	200 cm	○ white	Aluminium/PC	**1012331**
	LED STRIP PROFILE SURFACE			● Black		**1012330**


LED STRIP PROFILE RECESSED TILES | XS

	Variant	Size	Length	Colour	Material	Prod. no.
	LED STRIP PROFILE RECESSED TILES	XS	200 cm	Aluminium	Aluminium/PC	**1012348**

LED STRIP PROFILE RECESSED PLASTER | XS

	Variant	Size	Length	Colour	Material	Prod. no.
	LED STRIP PROFILE RECESSED PLASTER	XS	200 cm	Aluminium	Aluminium/PC	**1012349**

⊕

	Variant	Size	Length	Colour	Material	Prod. no.
	BLACK SURFACE DIFFUSER	XS	200 cm	● Black	Plastic PC	**1012538**
	OPAL SURFACE DIFFUSER	XS	200 cm	○ Opal	Plastic PC	**1012536**
	END CAPS SURFACE	XS	-	● Black	Plastic PC	**1012554**
	END CAPS SURFACE	XS	-	○ white	Plastic PC	**1012555**
	MOUNTING CLIP SURFACE	XS	1.2 cm	Silver	Stainless steel	**1012574**
	SURFACE PENDANT KIT		200 cm	Silver	Stainless steel	**1012583**


[1] Packaging unit: 2 pieces

Set contents: 2m profile, 2m diffuser, 2 x end caps, 4 x mounting clips (for the Surface version only)









	Variant	Size	Length	Colour	Material	Prod. no.
	DIFFUSER TILES AND BLACK PLASTER	XS	200 cm	● Black	Plastic PC	**1012541**
	DIFFUSER TILES AND OPAL PLASTER	XS	200 cm	○ Opal	Plastic PC	**1012539**
	END CAPS[1] TILES	XS	-	● Grey	Plastic PC	**1012556**
	END CAPS[1] PLASTER	XS	-	● Grey	Plastic PC	**1012557**

S PROFILE SETS


LED STRIP PROFILE SURFACE | S

	Variant	Size	Length	Colour	Material	Prod. no.
	LED STRIP PROFILE SURFACE	S	200 cm	● Black	Aluminium/PC	**1012332**
	LED STRIP PROFILE SURFACE	S	200 cm	○ white	Aluminium/PC	**1012333**


LED STRIP PROFILE SURFACE FLAT | S

	Variant	Size	Length	Colour	Material	Prod. no.
	LED STRIP PROFILE SURFACE FLAT	S	200 cm	● Black	Aluminium/PC	**1012336**
	LED STRIP PROFILE SURFACE FLAT	S	200 cm	○ white	Aluminium/PC	**1012337**

LED STRIP PROFILE CORNER | S

	Variant	Size	Length	Colour	Material	Prod. no.
	LED STRIP PROFILE CORNER	S	200 cm	● Black	Aluminium/PC	**1012340**
	LED STRIP PROFILE CORNER	S	200 cm	○ white	Aluminium/PC	**1012341**

LED STRIP PROFILE RECESSED | S

	Variant	Size	Length	Colour	Material	Prod. no.
	LED STRIP PROFILE RECESSED	S	200 cm	● Black	Aluminium/PC	**1012344**
	LED STRIP PROFILE RECESSED	S	200 cm	○ white	Aluminium/PC	**1012345**

⊕

	Variant	Size	Length	Colour	Material	Prod. no.
	DIFFUSER BLACK	S	200 cm	● Black	Plastic PC	**1012547**
	DIFFUSER OPAL	S	200 cm	○ Opal	Plastic PC	**1012545**
	END CAPS [1]SURFACE	S	-	● Black	Plastic PC	**1012558**
	END CAPS[1] SURFACE	S	-	○ white	Plastic PC	**1012559**
	CONNECTOR SURFACE FLAT	S	3.5 cm	● Grey	Plastic PC	**1012584**
	END CAPS[1] SURFACE FLAT	S	-	● Black	Plastic PC	**1012560**
	END CAPS[1] SURFACE FLAT	S	-	○ white	Plastic PC	**1012561**
	MOUNTING CLIP[1] SURFACE	S	1.2 cm	● Silver	Stainless steel	**1012575**
	MOUNTING CLIP[1] SURFACE FLAT	S	1.2 cm	● Silver	Stainless steel	**1012576**

[1] Packaging unit: 2 pieces

Set contents: 2 m profile, 2 m diffuser, 2 x end caps, 4 x mounting clips











	Variant	Size	Length	Colour	Material	Prod. no.
	SURFACE PENDANT KIT		200 cm	Silver	Stainless steel	**1012583**
	END CAPS[1] CORNER	S	-	Black	Plastic PC	**1012562**
	END CAPS[1] CORNER	S	-	white	Plastic PC	**1012563**
	MOUNTING CLIP[1] CORNER	S	2 cm	Silver	Stainless steel	**1012577**
	END CAPS[1] RECESSED	S	-	Black	Plastic PC	**1012564**
	END CAPS[1] RECESSED	S	-	white	Plastic PC	**1012565**
	MOUNTING SPRINGS[1] RECESSED	S	-	Silver	Stainless steel	**1012578**

M PROFILE SETS


LED STRIP PROFILE SURFACE | M

	Variant	Size	Length	Colour	Material	Prod. no.
	LED STRIP PROFILE SURFACE	M	200 cm	● Black	Aluminium/PC	**1012334**
	LED STRIP PROFILE SURFACE	M	200 cm	○ white	Aluminium/PC	**1012335**


LED STRIP PROFILE SURFACE FLAT | M

	Variant	Size	Length	Colour	Material	Prod. no.
	LED STRIP PROFILE SURFACE FLAT	M	200 cm	● Black	Aluminium/PC	**1012338**
	LED STRIP PROFILE SURFACE FLAT	M	200 cm	○ white	Aluminium/PC	**1012339**

LED STRIP PROFILE CORNER | M

	Variant	Size	Length	Colour	Material	Prod. no.
	LED STRIP PROFILE CORNER	M	200 cm	● Black	Aluminium/PC	**1012342**
	LED STRIP PROFILE CORNER	M	200 cm	○ white	Aluminium/PC	**1012343**

LED STRIP PROFILE RECESSED | M

	Variant	Size	Length	Colour	Material	Prod. no.
	LED STRIP PROFILE RECESSED	M	200 cm	● Black	Aluminium/PC	**1012346**
	LED STRIP PROFILE RECESSED	M	200 cm	○ white	Aluminium/PC	**1012347**

⊕

	Variant	Size	Length	Colour	Material	Prod. no.
	DIFFUSER BLACK	M	200 cm	● Black	Plastic PC	**1012550**
	DIFFUSER OPAL	M	200 cm	○ Opal	Plastic PC	**1012548**
	END CAPS[1] SURFACE	M	-	● Black	Plastic PC	**1012566**
	END CAPS[1] SURFACE	M	-	○ white	Plastic PC	**1012567**
	MOUNTING CLIP[1] SURFACE	M	1.6 cm	Silver	Stainless steel	**1012579**
	MOUNTING CLIP[1] SURFACE FLAT	M	1.6 cm	Silver	Stainless steel	**1012580**
	END CAPS[1] SURFACE FLAT	M	-	● Black	Plastic PC	**1012568**
	END CAPS[1] SURFACE FLAT	M	-	○ white	Plastic PC	**1012569**
	SURFACE PENDANT KIT		200 cm	Silver	Stainless steel	**1012583**

[1] Packaging unit: 2 pieces

Set contents: 2 m profile, 2 m diffuser, 2 x end caps, 4 x mounting clips











	Variant	Size	Length	Colour	Material	Prod. no.
	END CAPS[1] RECESSED	M	-	● Black	Plastic PC	**1012572**
	END CAPS[1] RECESSED	M	-	○ white	Plastic PC	**1012573**
	MOUNTING SPRINGS[1] RECESSED	M	-	Silver	Stainless steel	**1012582**
	DIFFUSER CORNER BLACK	M	200 cm	● Black	Plastic PC	**1012553**
	DIFFUSER CORNER OPAL	M	200 cm	○ Opal	Plastic PC	**1012551**
	END CAPS[1] CORNER	M	-	● Black	Plastic PC	**1012570**
	END CAPS[1] CORNER	M	-	○ white	Plastic PC	**1012571**
	MOUNTING CLIPS[1] CORNER	M	3.4 cm	Silver	Stainless steel	**1012581**

L RECESSED PROFILE



RECESSED PROFILE | L

	Variant	Size	Length	Colour	Material	Prod. no.
	LED STRIP PROFILE RECESSED	L	150 cm	● Black	Aluminium	**1004905**
	LED STRIP PROFILE RECESSED	L	150 cm	○ white	Aluminium	**1004906**
	LED STRIP PROFILE RECESSED	L	300 cm	● Black	Aluminium	**1004907**
	LED STRIP PROFILE RECESSED	L	300 cm	○ white	Aluminium	**1004908**

⊕

	Variant	Size	Length	Colour	Material	Prod. no.
	COVER	L	150 cm	○ Opal	Polymethyl-methacrylate (PMMA)	**1004916**
	COVER	L		○ Opal	Polycarbonate (PC)	**1004914**
	COVER	L	300 cm	○ Opal	Polymethyl-methacrylate (PMMA)	**1004917**
	COVER	L		○ Opal	Polycarbonate (PC)	**1004915**
	END CAPS[1]	L	-	● Black	Aluminium	**1004909**
	END CAP[1]	L	-	○ white	Aluminium	**1004910**
	MOUNTING CLIP[1]	L	13 cm	◑ Chrome	Aluminium	**1004911**


[1] Packaging unit: 2 pieces




229431 689


229432 689

OUTDOOR | MOBILE LIGHTS AND FLOOR LIGHTS


GRID CUBE | 639


GRID SUN | 539


ADEGAN| 641


NEW
SEJERO | 643


NEW
ALEGRIA | 645


NEW
QUADRASYL PRO | 645


S-TUBE | 646


T-TUBE | 646–647


PHOTONI CYL | 648–469


PHOTONI | 649


S-CUBE | 650–651


R-CUBE | 651


I-RING 65 | 653


LID I | 654


QUAD PRO | 655


M-POL | 660–667


CONCRETE | 670


CONCRETO | 671


RASTERLYS 70 | 673


FLATT II | 674–675


FLATT | 675


ESKINA FRAME | 676–677


LOGS | 679


GRAFIT | 681


GRAFIT | 683


QUADRULO | 685


RUSTY® SLOT | 686–687


RUSTY® PATHLIGHT | 688


RUSTY® CONE | 689


RUSTY® | 692–693


RUSTY® | 693


ARROCK GRANITE 40 | 694


ARROCK ARC | 694


ARROCK STONE | 695



ARROCK SLOT | 695



L-LINE OUT | 696–697



TAHA II | 698–699



OVALISK | 701



GLOO PURE 27 | 702

ROTOBALL | 703



PHOTONIA | 705



OTOS GLAS | 705



CUBIX | 705



CONE | 707



MOLAT | 707



LISENNE | 708



ALPA MUSHROOM | 709



ALPA CONE 100 | 709



APONI | 710–711



TRUST | 711



BIG NAILS | 712



ROX ACRYL | 713



VAP SLIM | 714



C-POL 90 | 715



F-POL 85 | 715



SQUARE | 717



SLOTS | 719



H-POL | 720



SLOTBOX | 721



ORDI II | 723



ABRIDOR HYBRID | 724



ABRIDOR | 725



IPERI 50 | 726



QUADRASYL 75 | 726



QUAD | 726



MYRA SPOT | 727



SITRA 360 | 727




THEO PATHLIGHT 73 | 729



1008477 639

GRID CUBE
FL





IP44/ IP65 · IK03 · 30000 h L70B50

220-240 V ~50/60 Hz | 24 V
Total wattage: 8 W
Material: Steel

- IP44 24 V plug-in power supply


LED INSIDE · CRI 80

2700 K
250 lm

Variant	Prod. no.
● black	**1008477**

GRID SUN
FL





IP44/ IP65 · IK03 · 30000 h L70B50

220-240 V ~50/60 Hz | 24 V
Total wattage: 8 W
Material: Steel/Plastic PC

- IP44 24 V plug-in power supply

LED INSIDE · CRI 80


2700 K
500 lm

Variant	Prod. no.
◐ black/Opaque	**1008476**


1008387 641

ADEGAN
FL, FLAT SOLAR





Touch IP65 IK03 50000 h L80B20

Power consumption: 4.4 W
Material: PE/Steel/Plastic PC


- 2.5m USB-C charging cable included
- The light switches off while charging via USB cable
- The light can be dimmed in 3 stages (100%/50%/25%)

LED INSIDE CRI 80

	2200 K		
1008389	85 lm	40 lm	20 lm
1008388	75 lm	35 lm	20 lm

Variant	Prod. no.
black 75 lm	**1008388**
brown/black 85 lm	**1008389**

ADEGAN
FL, SOLAR

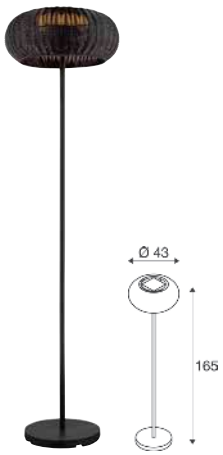

Touch IP65 IK03 50000 h L80B20

Power consumption: 4.4 W
Material: PE/Steel/Steel

- 2.5m USB-C charging cable included
- The light switches off while charging via USB cable
- The light can be dimmed in 3 stages (100%/50%/25%)

LED INSIDE CRI 80

	2200 K		
1008387	100 lm	45 lm	20 lm
1008386	85 lm	40 lm	20 lm


Variant	Prod. no.
black 85 lm	**1008386**
brown/black 100 lm	**1008387**


1011024 643

SEJERO 90
POLE, E27

NEW





IP65 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Glass

- Open cable end

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 6.5 cm | L: 12 cm

Variant	Prod. no.
anthracite	**1011023**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F


Prod. no.: **1005303**

Product	Prod. no.
Connection box IP68, 3-pole	
black	**228730**

SEJERO 90
POLE, E27

NEW





IP65 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Glass

- Open cable end

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 6.5 cm | L: 12 cm

Variant	Prod. no.
beige	**1011024**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no.: **1005303**

Product	Prod. no.
Connection box IP68, 3-pole	
black	**228730**








ALEGRIA 75
POLE, TRIAC

NEW





IP65 IK08 50000 h L80B20 50

220-240 V ~50/60 Hz | 580 mA
Total wattage: 29 W
Material: Aluminium/Plastic PC

- Uniform path lighting is ensured by a single-sided top light.
- IP68 connection box

LED INSIDE CCT CRI 80


2200 K	2700 K
1100 lm	1200 lm

Variant	Prod. no.
anthracite	1012138

QUADRASYL PRO 70
POLE, DALI

NEW





IP65 IK08 70000 h L80B20

100-240 V ~50/60 Hz | 5 V
Total wattage: 12 W
Material: Aluminium/Glass

- IP68 connection box

LED INSIDE CCT CRI 80


2200 K	2700 K
950 lm	1000 lm

Variant	Prod. no.
anthracite	1012141

QUADRASYL PRO 90
POLE, DALI

NEW





IP65 IK08 70000 h L80B20

100-240 V ~50/60 Hz | 5 V
Total wattage: 12 W
Material: Aluminium/Glass

- Asymmetrical design for luminaire spacing of up to appx. 9 m
- IP68 connection box


LED INSIDE CCT CRI 80

2200 K	2700 K
950 lm	1000 lm

Variant	Prod. no.
anthracite	1012142

S-TUBE 32
POLE, GU10





IP65 IK06 340° 130°

220-240 V ~50/60 Hz
Material: Aluminium

- Open cable end
- Streamlined design

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
● black	**1007651**


GU10 | 2 W | 36°
230 lm | 2700 K | EEC = E

Prod. no.: 1007230

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**

S-TUBE 75
POLE, GU10





IP65 IK06 340° 130°

220-240 V ~50/60 Hz
Material: Aluminium

- Open cable end
- Streamlined design

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
● black	**1007652**

GU10 | 2 W | 36°
230 lm | 2700 K | EEC = E


Prod. no.: 1007230

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**

T-TUBE 70
POLE, GU10, SINGLE, SENSOR

GERMAN DESIGN AWARD WINNER 2026





IP44 IK06 300°

220-240 V ~50/60 Hz
Material: Aluminium

- PIR sensor, adjustable range 10-2000 lx and 5 s-10 min. Detection range up to 8 m depending on the mounting height
- IP connection box

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
● black	**1008014**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: 1005077


SMART

GU10 | 5 W | 100°
300 lm | 2000 K-6500 K | EEC = G

Prod. no.: 1012470

T-TUBE 70
POLE, GU10, DOUBLE, SENSOR





IP44 IK06 300° IR

220-240 V ~50/60 Hz
Material: Aluminium

- Primary and replica functionality possible with accessories
- PIR sensor, adjustable range 10-2000 lx and 5 s-10 min. Detection range up to 8 m depending on the mounting height of the light
- IP connection box

SOCKET INSIDE 10 W

Base: 1xGU10	max. Ø: 5.1 cm	L: 5.5 cm

Variant	Prod. no.
● black	**1008015**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077**


SMART

GU10 | 5 W | 100°
300 lm | 2000 K-6500 K | EEC = G

Prod. no.: **1012470**

T-TUBE 70
POLE, GU10, SINGLE





IP65 IK06 300°

220-240 V ~50/60 Hz
Material: Aluminium

- IP connection box

SOCKET INSIDE 10 W

Base: 1xGU10	max. Ø: 5.1 cm	L: 5.5 cm

Variant	Prod. no.
● black	**1008016**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077**


SMART

GU10 | 5 W | 100°
300 lm | 2000 K-6500 K | EEC = G

Prod. no.: **1012470**

T-TUBE 70
POLE, GU10, DOUBLE





IP65 IK06 300°

220-240 V ~50/60 Hz
Material: Aluminium

- IP connection box

SOCKET INSIDE 10 W

Base: 2xGU10	max. Ø: 5.1 cm	L: 5.5 cm

Variant	Prod. no.
● black	**1008017**


GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077**

SMART


GU10 | 5 W | 100°
300 lm | 2000 K-6500 K | EEC = G

Prod. no.: **1012470**

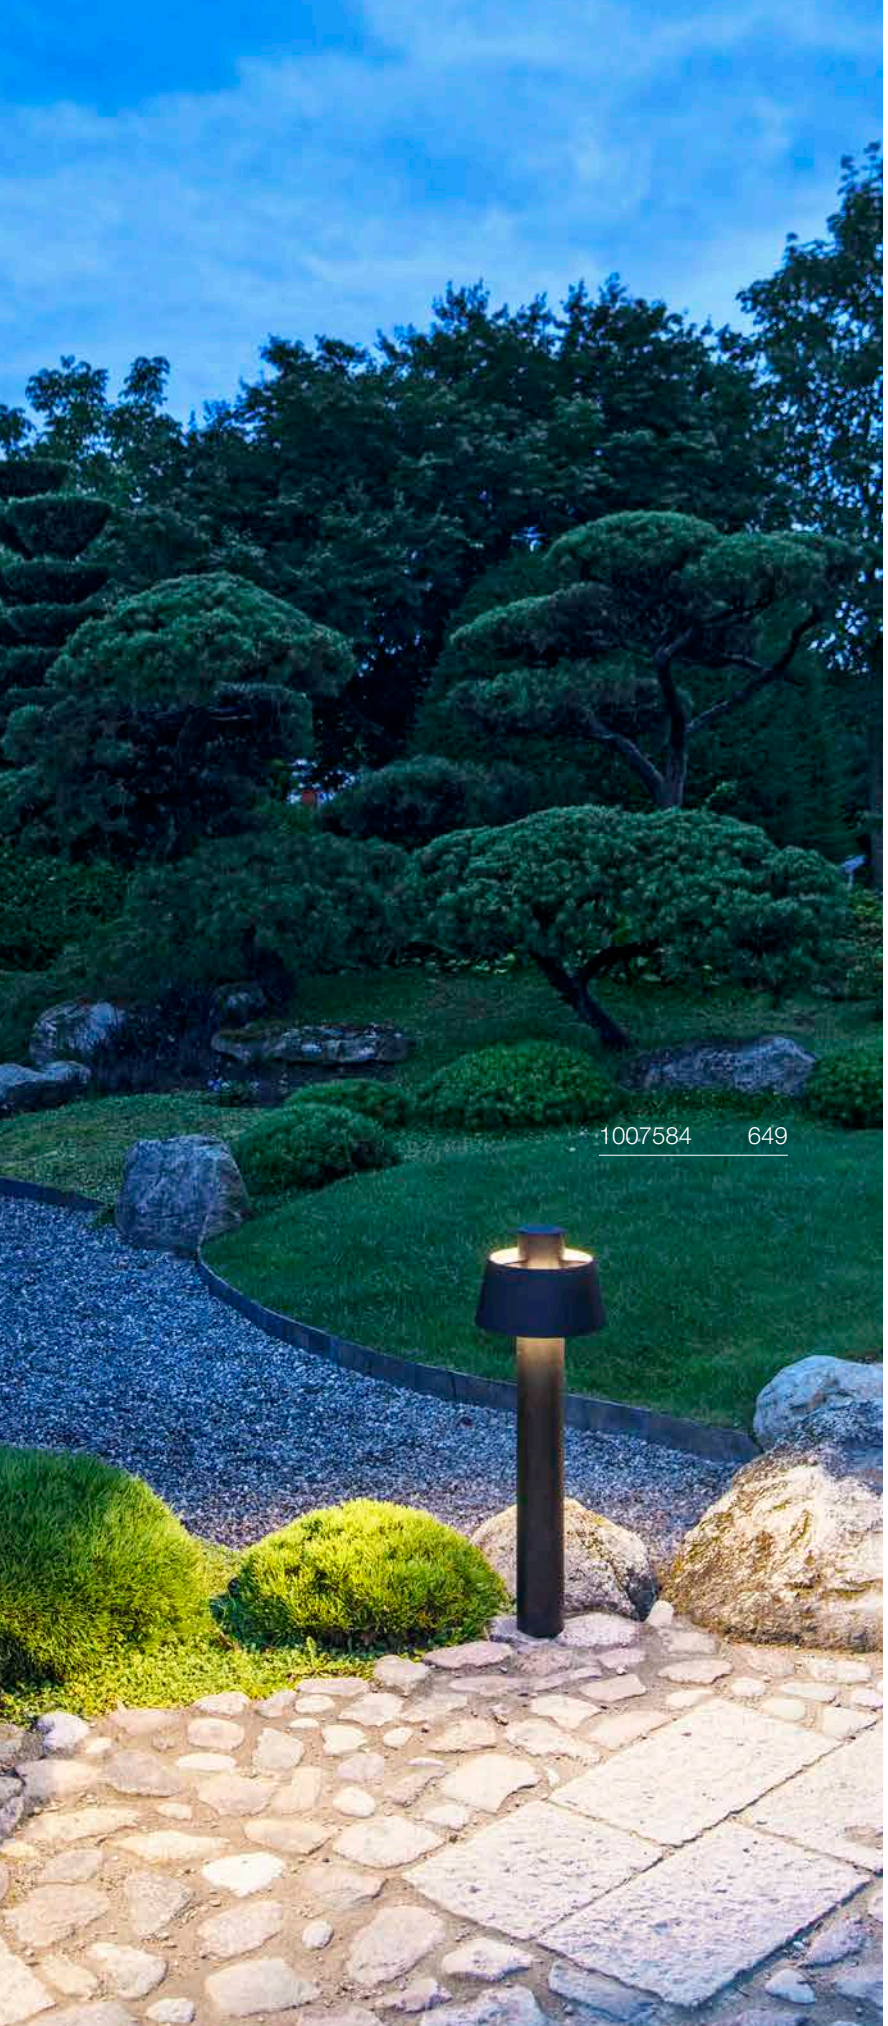

PHOTONI CYL 45
POLE, E27





IP65 IK08

220-240 V ~50/60 Hz
Material: Aluminium

- IP connection box

SOCKET INSIDE 13 W

Base: 1xE27	max. Ø: 6 cm	L: 11.6 cm

Variant	Prod. no.
black	**1008195**
rust	**1008196**

E27 | 8 W | 180°
720 lm | 2700 K | EEC = F

Prod. no.: **1005305**


SMART

E27 | 9 W | 200°
806 lm | 2000 K-6500 K | EEC = F

Prod. no.: **1012472**

PHOTONI CYL 75
POLE, E27





IP65 IK08

220-240 V ~50/60 Hz
Material: Aluminium

- IP connection box

SOCKET INSIDE 13 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.6 cm

Variant	Prod. no.
black	1008193
rust	1008194

E27 | 8 W | 180°
720 lm | 2700 K | EEC = F

Prod. no.: 1005305

SMART


E27 | 9 W | 200°
806 lm | 2000 K-6500 K | EEC = F

Prod. no.: 1012472

PHOTONI 45
POLE, E27

GERMAN DESIGN AWARD WINNER 2024





IP65 IK08

220-240 V ~50/60 Hz
Material: Aluminium

- Sea-air resistant
- IP connection box

SOCKET INSIDE 13 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.6 cm

Variant	Prod. no.
black	1007587
rust	1007583

E27 | 8 W | 180°
720 lm | 2700 K | EEC = F

Prod. no.: 1005305

SMART


E27 | 9 W | 200°
806 lm | 2000 K-6500 K | EEC = F

Prod. no.: 1012472

PHOTONI 75
POLE, E27

GERMAN DESIGN AWARD WINNER 2024





IP65 IK08

220-240 V ~50/60 Hz
Material: Aluminium

- Sea-air resistant
- IP connection box

SOCKET INSIDE 13 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.6 cm

Variant	Prod. no.
black	1007584
rust	1007580

E27 | 8 W | 180°
720 lm | 2700 K | EEC = F

Prod. no.: 1005305

SMART


E27 | 9 W | 200°
806 lm | 2000 K-6500 K | EEC = F

Prod. no.: 1012472



S-CUBE 35
POLE, PHASE







220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- The light colour must be set prior to installation
- Open cable end




2700 K	3000 K
1000 lm	1200 lm

Variant	Prod. no.
● anthracite	**1007460**

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**

S-CUBE 75
POLE, PHASE







220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- The light colour must be set prior to installation
- Open cable end




2700 K	3000 K
1000 lm	1200 lm

Variant	Prod. no.
● anthracite	**1007459**

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**

R-CUBE 35
POLE, PHASE







220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- The light colour must be set prior to installation
- Open cable end




2700 K	3000 K
800 lm	800 lm

Variant	Prod. no.
● anthracite	**1007513**

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**

R-CUBE 75
POLE, PHASE







220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- The light colour must be set prior to installation
- Open cable end



2700 K	3000 K
800 lm	800 lm


Variant	Prod. no.
● anthracite	**1007512**

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**


1007237 653

I-RING 65
POLE







100-240 V ~50/60 Hz | 350 mA
Total wattage: 9.2 W
Material: Aluminium

- IP68 connection box




3000 K
670 lm

Variant	Prod. no.
● anthracite	**1007237**

Product	Prod. no.
Screw set	
◐ Stainless steel	**228753**

LID I 45
POLE, SINGLE, PHASE





IP65 IK07 100° 330° 50000h L70B20

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- Open cable end
- The light colour must be set prior to installation

LED INSIDE CCT CRI 80


	2700 K	3000 K
	900 lm	1050 lm

Variant	Prod. no.
● anthracite	**1007670**

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**

LID I 75
POLE, DOUBLE, PHASE





IP65 IK07 2x 100° 330° 50000h L70B20

220-240 V ~50/60 Hz | 700 mA
Total wattage: 29 W
Material: Aluminium

- Open cable end
- The light colour must be set prior to installation

LED INSIDE CCT CRI 80


	2700 K	3000 K
Direct	850 lm	1000 lm
Direct	2700 K	3000 K
	850 lm	1000 lm

Variant	Prod. no.
● anthracite	**1007669**

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**

QUAD PRO 60
POLE, DALI





Dali IP65 IK10 45° 50000h L80B20 120

100-240 V ~50/60 Hz | 500 mA
Total wattage: 14 W
Material: Aluminium

- Asym. light distribution for optimum illumination of paths
- ULOR <2% to mimimise light pollution
- IP connection box


LED INSIDE CRI 80

1010204	2200 K 450 lm	
1010205	2700 K 500 lm	

Variant	Prod. no.
● anthracite 450 lm | 2200 K	**1010204**
● anthracite 500 lm | 2700 K	**1010205**

QUAD PRO 90
POLE, DALI





Dali IP65 IK10 45° 50000h L80B20 120

100-240 V ~50/60 Hz | 500 mA
Total wattage: 14 W
Material: Aluminium

- Asym. light distribution for optimum illumination of paths
- ULOR <2% to mimimise light pollution
- Luminaire spacing of up to 6.40 m enables fewer light points and more efficient use of resources.
- IP connection box

LED INSIDE CRI 80

1010202	2200 K 450 lm	
1010203	2700 K 500 lm	

Variant	Prod. no.
● anthracite 450 lm | 2200 K	**1010202**
● anthracite 500 lm | 2700 K	**1010203**

M-POL SYSTEM CONFIGURATION

The modular M-POL system enables flexible outdoor lighting solutions.

Different bollard heights and lamp heads with varying light characteristics can be combined as required and adapted to the specific application.

Clean lines, durable materials and a choice of on/off or DALI control highlight the system's architectural character.


CONFIGURING THE SYSTEM

1. Specify the bollard height: 30 / 60 / 90


2. Select a lamp head:

   - S or M
   - Clear, Shader, Louver, 180° or 360°
   - On/Off or DALI
   - 2700 K or CCT switch 2700 / 3000 K

LAMP HEADS

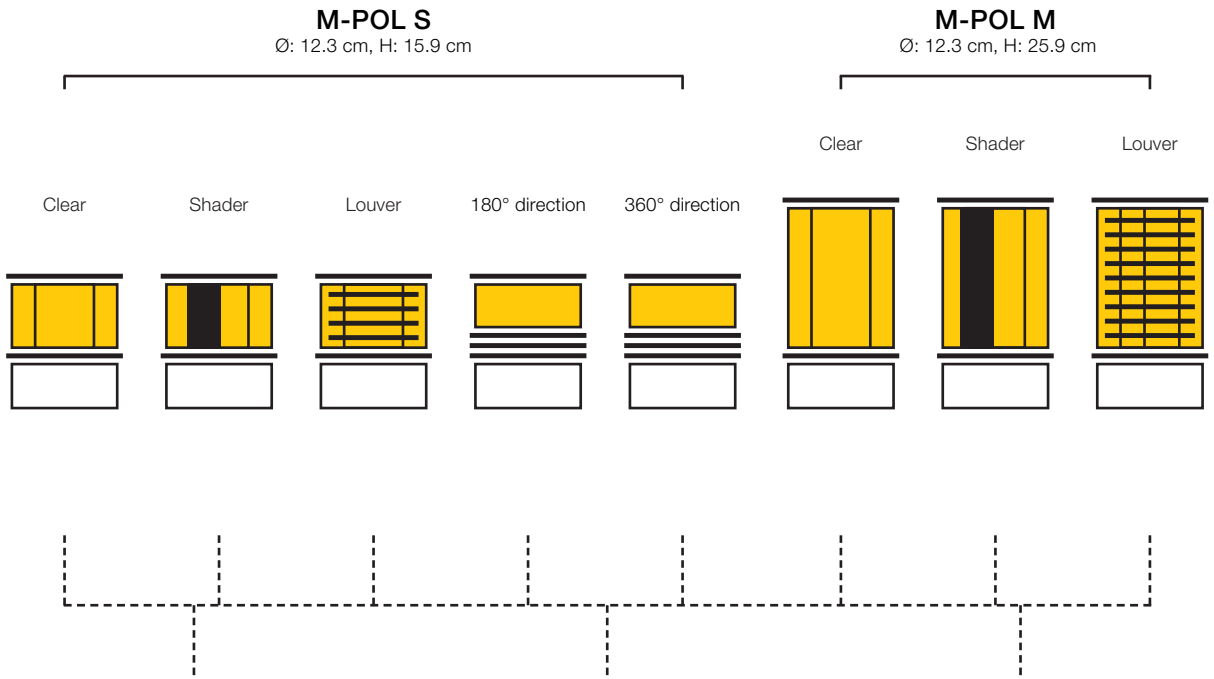

BOLLARD

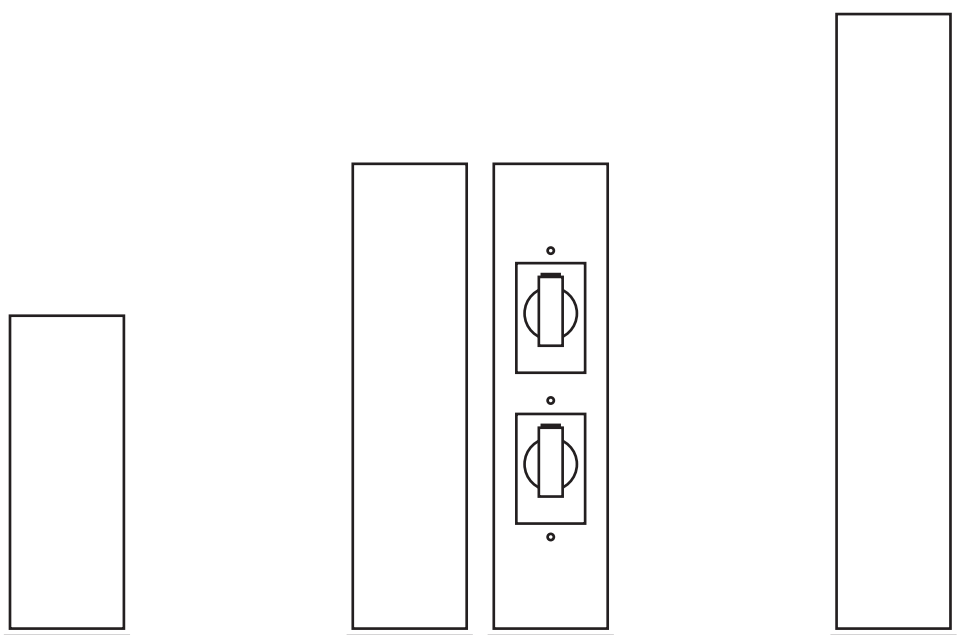

M-POL 30
Ø: 12.4 cm, H: 23.4 cm

M-POL 60
Ø: 12.4 cm, H: 53.4 cm


M-POL 90
Ø: 12.4 cm, H: 83.4 cm


1007233 + 1006381
660 + 667


1006394 + 1006380
665 + 667

M-POL S
POLEHEAD 360A°, GLARE-FREE







220-240 V ~50/60 Hz | 500 mA
Total wattage: 10 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end




2700 K
750 lm

Variant	Prod. no.
● anthracite	**1007232**

Product	Prod. no.
Y-connector box	
● black	**228726**
Connection box IP68, 3-pole	
● black	**228730**
Ground spike	
● grey	**230060**
Pole 30 cm	
● anthracite	**1006379**
Pole 60 cm	
● anthracite	**1006380**
Pole 90 cm	
● anthracite	**1006381**
Ground anchor set	
● Stainless steel	**1006382**
Pole 60 Socket	
● anthracite	**1008474**

M-POL S
POLEHEAD 360A°, GLARE-FREE, DALI







220-240 V ~50/60 Hz | 500 mA
Total wattage: 10 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end




2700 K
750 lm

Variant	Prod. no.
● anthracite	**1007233**

Product	Prod. no.
Connection box	
● black	**228725**
Ground spike	
● grey	**230060**
Pole 30 cm	
● anthracite	**1006379**
Pole 60 cm	
● anthracite	**1006380**
Pole 90 cm	
● anthracite	**1006381**
Ground anchor set	
● Stainless steel	**1006382**
IP68 connection box, 5-pole	
● black	**1006453**
Pole 60 Socket	
● anthracite	**1008474**

M-POL S
POLEHEAD 180A°, GLARE-FREE







220-240 V ~50/60 Hz | 500 mA
Total wattage: 10 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end




2700 K
700 lm

Variant	Prod. no.
● anthracite	**1007234**

Product	Prod. no.
Y-connector box	
● black	**228726**
Connection box IP68, 3-pole	
● black	**228730**
Ground spike	
● grey	**230060**
Pole 30 cm	
● anthracite	**1006379**
Pole 60 cm	
● anthracite	**1006380**
Pole 90 cm	
● anthracite	**1006381**
Ground anchor set	
● Stainless steel	**1006382**
Pole 60 Socket	
● anthracite	**1008474**

M-POL S
POLEHEAD 180A°, GLARE-FREE, DALI





Dali IP65 IK10 50000h L80B50 90 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 10 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end

LED INSIDE CRI 80


	2700 K
	700 lm

Variant	Prod. no.
● anthracite	**1007235**

Product	Prod. no.
Connection box	
● black	**228725**
Ground spike	
● grey	**230060**
Pole 30 cm	
● anthracite	**1006379**
Pole 60 cm	
● anthracite	**1006380**
Pole 90 cm	
● anthracite	**1006381**
Ground anchor set	
● Stainless steel	**1006382**
IP68 connection box, 5-pole	
● black	**1006453**
Pole 60 Socket	
● anthracite	**1008474**

M-POL S
POLEHEAD





IP65 IK10 50000h L80B50 90

220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end

LED INSIDE CCT CRI 90


	2700 K	3000 K
Indirect	470 lm	510 lm

Variant	Prod. no.
● anthracite	**1006383**

Product	Prod. no.
Y-connector box	
● black	**228726**
Connection box IP68, 3-pole	
● black	**228730**
Ground spike	
● grey	**230060**
Pole 30 cm	
● anthracite	**1006379**
Pole 60 cm	
● anthracite	**1006380**
Pole 90 cm	
● anthracite	**1006381**
Ground anchor set	
● Stainless steel	**1006382**
Pole 60 Socket	
● anthracite	**1008474**

M-POL S
POLEHEAD, DALI





Dali IP65 IK10 50000h L80B50 90

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end

LED INSIDE CCT CRI 90


	2700 K	3000 K
Indirect	890 lm	950 lm

Variant	Prod. no.
● anthracite	**1006389**

Product	Prod. no.
Connection box	
● black	**228725**
Ground spike	
● grey	**230060**
Pole 30 cm	
● anthracite	**1006379**
Pole 60 cm	
● anthracite	**1006380**
Pole 90 cm	
● anthracite	**1006381**
Ground anchor set	
● Stainless steel	**1006382**
IP68 connection box, 5-pole	
● black	**1006453**
Pole 60 Socket	
● anthracite	**1008474**

M-POL S
POLEHEAD, SHADER





IP65 IK10 50 000 h L80B50 90

220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end

LED INSIDE CCT CRI 90


Indirect	2700 K	3000 K
	285 lm	310 lm

Variant	Prod. no.
● anthracite	**1006387**

Product	Prod. no.
Y-connector box	
● black	**228726**
Connection box IP68, 3-pole	
● black	**228730**
Ground spike	
● grey	**230060**
Pole 30 cm	
● anthracite	**1006379**
Pole 60 cm	
● anthracite	**1006380**
Pole 90 cm	
● anthracite	**1006381**
Ground anchor set	
◐ Stainless steel	**1006382**
Pole 60 Socket	
● anthracite	**1008474**

M-POL S
POLEHEAD, SHADER, DALI





Dali IP65 IK10 50 000 h L80B50 90

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end

LED INSIDE CCT CRI 90


Indirect	2700 K	3000 K
	520 lm	550 lm

Variant	Prod. no.
● anthracite	**1006393**

Product	Prod. no.
Connection box	
● black	**228725**
Ground spike	
● grey	**230060**
Pole 30 cm	
● anthracite	**1006379**
Pole 60 cm	
● anthracite	**1006380**
Pole 90 cm	
● anthracite	**1006381**
Ground anchor set	
◐ Stainless steel	**1006382**
IP68 connection box, 5-pole	
● black	**1006453**
Pole 60 Socket	
● anthracite	**1008474**

M-POL S
POLEHEAD, LOUVER





IP65 IK10 50 000 h L80B50 90

220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end

LED INSIDE CCT CRI 90


Indirect	2700 K	3000 K
	145 lm	155 lm

Variant	Prod. no.
● anthracite	**1006385**

Product	Prod. no.
Y-connector box	
● black	**228726**
Connection box IP68, 3-pole	
● black	**228730**
Ground spike	
● grey	**230060**
Pole 30 cm	
● anthracite	**1006379**
Pole 60 cm	
● anthracite	**1006380**
Pole 90 cm	
● anthracite	**1006381**
Ground anchor set	
◐ Stainless steel	**1006382**
Pole 60 Socket	
● anthracite	**1008474**

M-POL S
POLEHEAD, LOUVER, DALI





Dali IP65 IK10 50000h L80B50 90

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end

LED INSIDE CCT CRI 90


	2700 K	3000 K
Indirect	260 lm	270 lm

Variant	Prod. no.
anthracite	**1006391**

Product	Prod. no.
Connection box	
black	**228725**
Ground spike	
grey	**230060**
Pole 30 cm	
anthracite	**1006379**
Pole 60 cm	
anthracite	**1006380**
Pole 90 cm	
anthracite	**1006381**
Ground anchor set	
Stainless steel	**1006382**
IP68 connection box, 5-pole	
black	**1006453**
Pole 60 Socket	
anthracite	**1008474**

M-POL M
POLEHEAD





IP65 IK10 50000h L80B50 90

220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end

LED INSIDE CCT CRI 90


	2700 K	3000 K
Indirect	590 lm	660 lm

Variant	Prod. no.
anthracite	**1006384**

Product	Prod. no.
Y-connector box	
black	**228726**
Connection box IP68, 3-pole	
black	**228730**
Ground spike	
grey	**230060**
Pole 30 cm	
anthracite	**1006379**
Pole 60 cm	
anthracite	**1006380**
Pole 90 cm	
anthracite	**1006381**
Ground anchor set	
Stainless steel	**1006382**
Pole 60 Socket	
anthracite	**1008474**

M-POL M
POLEHEAD, DALI





Dali IP65 IK10 50000h L80B50 90

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end

LED INSIDE CCT CRI 90


	2700 K	3000 K
Indirect	1150 lm	1230 lm

Variant	Prod. no.
anthracite	**1006390**

Product	Prod. no.
Connection box	
black	**228725**
Ground spike	
grey	**230060**
Pole 30 cm	
anthracite	**1006379**
Pole 60 cm	
anthracite	**1006380**
Pole 90 cm	
anthracite	**1006381**
Ground anchor set	
Stainless steel	**1006382**
IP68 connection box, 5-pole	
black	**1006453**
Pole 60 Socket	
anthracite	**1008474**

M-POL M
POLEHEAD, SHADER







220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end




	2700 K	3000 K
Indirect	420 lm	460 lm

Variant	Prod. no.
● anthracite	**1006388**

Product	Prod. no.
Y-connector box	
● black	**228726**
Connection box IP68, 3-pole	
● black	**228730**
Ground spike	
● grey	**230060**
Pole 30 cm	
● anthracite	**1006379**
Pole 60 cm	
● anthracite	**1006380**
Pole 90 cm	
● anthracite	**1006381**
Ground anchor set	
● Stainless steel	**1006382**
Pole 60 Socket	
● anthracite	**1008474**

M-POL M
POLEHEAD, SHADER, DALI





Dali · IP65 · IK10 · 50000 h L80B50 · 90

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end

LED INSIDE · CCT · CRI 90


	2700 K	3000 K
Indirect	820 lm	870 lm

Variant	Prod. no.
anthracite	**1006394**

Product	Prod. no.
Connection box	
black	**228725**
Ground spike	
grey	**230060**
Pole 30 cm	
anthracite	**1006379**
Pole 60 cm	
anthracite	**1006380**
Pole 90 cm	
anthracite	**1006381**
Ground anchor set	
Stainless steel	**1006382**
IP68 connection box, 5-pole	
black	**1006453**
Pole 60 Socket	
anthracite	**1008474**

M-POL M
POLEHEAD, LOUVER





IP65 · IK10 · 50000 h L80B50 · 90

220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end

LED INSIDE · CCT · CRI 90


	2700 K	3000 K
Indirect	190 lm	210 lm

Variant	Prod. no.
anthracite	**1006386**

Product	Prod. no.
Y-connector box	
black	**228726**
Connection box IP68, 3-pole	
black	**228730**
Ground spike	
grey	**230060**
Pole 30 cm	
anthracite	**1006379**
Pole 60 cm	
anthracite	**1006380**
Pole 90 cm	
anthracite	**1006381**
Ground anchor set	
Stainless steel	**1006382**
Pole 60 Socket	
anthracite	**1008474**

M-POL M
POLEHEAD, LOUVER, DALI





Dali · IP65 · IK10 · 50000 h L80B50 · 90

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: Aluminium

- The light colour must be set prior to installation
- Sea-air resistant
- Open cable end

LED INSIDE · CCT · CRI 90

	2700 K	3000 K
Indirect	350 lm	370 lm

Variant	Prod. no.
anthracite	**1006392**

Product	Prod. no.
Connection box	
black	**228725**
Ground spike	
grey	**230060**
Pole 30 cm	
anthracite	**1006379**
Pole 60 cm	
anthracite	**1006380**
Pole 90 cm	
anthracite	**1006381**
Ground anchor set	
Stainless steel	**1006382**
IP68 connection box, 5-pole	
black	**1006453**
Pole 60 Socket	
anthracite	**1008474**


M-POL
COVER



Ø: 12 cm
H: 2.2 cm
Material: Aluminium

Variant	Prod. no.
● anthracite	**1008475**

M-POL 60
POLE, SOCKET

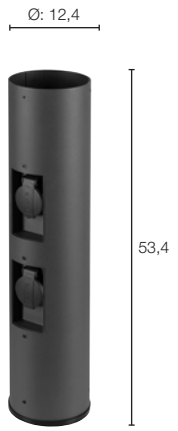

IP54 IK10

220-250 V ~50/60 Hz
Material: Aluminium

• Open cable end

Variant	Prod. no.
● anthracite	**1008474**

⊕

Product	Prod. no.
Y-connector box	
● black	**228726**
Connection box IP68, 3-pole	
● black	**228730**
Ground spike	
● grey	**230060**
Ground anchor set	
◐ Stainless steel	**1006382**
IP68 connection box, 5-pole	
● black	**1006453**
Cover	
● anthracite	**1008475**

M-POL 30
POLE




Ø: 12.4 cm
H: 23.4 cm
Material: Aluminium

• Sea-air resistant

Variant	Prod. no.
● anthracite	**1006379**

Product	Prod. no.
Y-connector box	
● black	**228726**
Connection box IP68, 3-pole	
● black	**228730**
Ground spike	
● grey	**230060**
Ground anchor set	
◐ Stainless steel	**1006382**
IP68 connection box, 5-pole	
● black	**1006453**

M-POL 60
POLE

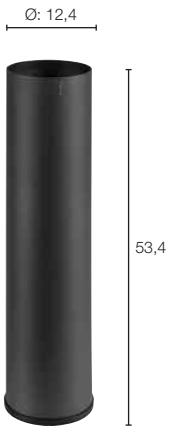


Ø: 12.4 cm
H: 53.4 cm
Material: Aluminium

• Sea-air resistant

Variant	Prod. no.
● anthracite	**1006380**

Product	Prod. no.
Y-connector box	
● black	**228726**
Connection box IP68, 3-pole	
● black	**228730**
Ground spike	
● grey	**230060**
Ground anchor set	
◐ Stainless steel	**1006382**
IP68 connection box, 5-pole	
● black	**1006453**

M-POL 90
POLE

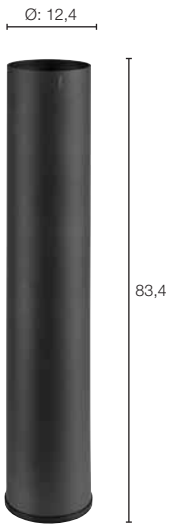

Ø: 12.4 cm
H: 83.4 cm
Material: Aluminium

• Sea-air resistant

Variant	Prod. no.
● anthracite	**1006381**

Product	Prod. no.
Y-connector box	
● black	**228726**
Connection box IP68, 3-pole	
● black	**228730**
Ground spike	
● grey	**230060**
Ground anchor set	
◐ Stainless steel	**1006382**
IP68 connection box, 5-pole	
● black	**1006453**






1006394 + 1006381 665 + 667

CONCRETE 35
POLE, PHASE





220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Concrete

- Bayonet lock enables easy assembly
- IP connection box


INSIDE CRI 80

Down	2700 K 600 lm

Variant	Prod. no.
grey	**1008838**

CONCRETE 55
POLE, PHASE





220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Concrete

- Bayonet lock enables easy assembly
- IP connection box


INSIDE CRI 80

Down	2700 K 600 lm

Variant	Prod. no.
grey	**1008839**

CONCRETO
FL, ROUND, QPAR51





IP65 IK05 200

220-240 V ~50/60 Hz
Material: concrete/aluminium

- IP44 safety plug

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.
grey/black	**1006408**

GU10 | 2 W | 36°
230 lm | 2700 K | EEC = E

Prod. no.: 1007230


SMART

GU10 | 5 W | 100°
300 lm | 2000 K-6500 K | EEC = G

Prod. no.: 1012470

CONCRETO
FL, SQUARE, QPAR51





IP65 IK05 200

220-240 V ~50/60 Hz
Material: concrete/aluminium

- IP44 safety plug

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.
grey/black	**1006409**

GU10 | 2 W | 36°
230 lm | 2700 K | EEC = E

Prod. no.: 1007230

SMART


GU10 | 5 W | 100°
300 lm | 2000 K-6500 K | EEC = G

Prod. no.: 1012470


1008385 673

RASTERLYS 70
POLE, PHASE







220-240 V ~0/50/60 Hz | 700 mA
Total wattage: 27 W
Material: Aluminium

- The light colour must be set prior to installation
- Suitable for DC operation
- Open cable end



2700 K	3000 K
350 lm	375 lm

2700 K	3000 K
350 lm	375 lm


Variant	Prod. no.
● anthracite	**1008385**

Product	Prod. no.
Y-connector box	
● black	**228726**
Connection box IP68, 3-pole	
● black	**228730**



FLATT II 36
POLE, PHASE







220-240 V ~50/60 Hz | 240 mA
Total wattage: 10 W
Material: Aluminium

- Open cable end




	2700 K
	650 lm

Variant	Prod. no.
● black	**1010104**
● anthracite/brown	**1010103**

Product	Prod. no.
T-connector box	
● black	**228726**
Connection box IP68, 3-pole	
● black	**228730**

FLATT II 62
POLE, PHASE





C,L · IP65 · IK03 · 50000 h L80B20 · 200

220-240 V ~50/60 Hz | 240 mA
Total wattage: 10 W
Material: Aluminium

- Open cable end

LED INSIDE · CRI 80


2700 K
650 lm

Variant	Prod. no.
black	**1010106**
anthracite/brown	**1010105**

Product	Prod. no.
T-connector box	
black	**228726**
Connection box IP68, 3-pole	
black	**228730**

FLATT 65
POLE





IP65 · IK03 · 30000 h L70B50

100-240 V ~50/60 Hz | 350 mA
Total wattage: 10 W
Material: Aluminium

- The light colour must be set prior to installation
- Open cable end

LED INSIDE · CCT · CRI 80


3000 K	4000 K
400 lm	400 lm

Variant	Prod. no.
anthracite	**1002956**
brown/anthracite	**1002957**

Product	Prod. no.
Connection box IP68, 3-pole	
black	**228730**

FLATT 100
POLE





IP65 · IK03 · 30000 h L70B50

100-240 V ~50/60 Hz | 350 mA
Total wattage: 10 W
Material: Aluminium

- The light colour must be set prior to installation
- Open cable end

LED INSIDE · CCT · CRI 80


3000 K	4000 K
400 lm	400 lm

Variant	Prod. no.
anthracite	**1002958**
brown/anthracite	**1002959**

Product	Prod. no.
Connection box IP68, 3-pole	
black	**228730**

ESKINA FRAME 45
POLE, SINGLE





C,L IP65 IK06 95° 320° 30000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- The light colour must be set prior to installation
- Open cable end

INSIDE CCT CRI 80


	3000 K	4000 K
Spot	1100 lm	1200 lm

Variant	Prod. no.
● anthracite	**1004749**

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**

ESKINA FRAME 75
POLE, SINGLE





C,L IP65 IK06 95° 320° 30000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- The light colour must be set prior to installation
- Open cable end

INSIDE CCT CRI 80


	3000 K	4000 K
Spot	1100 lm	1200 lm

Variant	Prod. no.
● anthracite	**1004750**

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**

ESKINA FRAME 75
POLE, DOUBLE





IP65 IK06 95° 320° 30000 h L70B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 27 W
Material: Aluminium

- The light colour must be set prior to installation
- Open cable end

INSIDE CCT CRI 80

	3000 K	4000 K
Spot 1	1100 lm	1200 lm
Spot 2	1100 lm	1200 lm


Variant	Prod. no.
● anthracite	**1004751**

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**

ESKINA FRAME 125
POLE, DOUBLE

GERMAN DESIGN AWARD WINNER 2022







220-240 V ~50/60 Hz | 700 mA
Total wattage: 27 W
Material: Aluminium

- The light colour must be set prior to installation
- Open cable end



	3000 K	4000 K
Spot 1	1100 lm	1200 lm
Spot 2	1100 lm	1200 lm


Variant	Prod. no.
● anthracite	**1005439**

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**

ESKINA FRAME 175
POLE, DOUBLE

GERMAN DESIGN AWARD WINNER 2022







220-240 V ~50/60 Hz | 700 mA
Total wattage: 27 W
Material: Aluminium

- The light colour must be set prior to installation
- Open cable end



	3000 K	4000 K
Spot 1	1100 lm	1200 lm
Spot 2	1100 lm	1200 lm

Variant	Prod. no.
● anthracite	**1005440**


Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**



232115 679

LOGS 40
POLE





IP65 IK04 40000h L70B50 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: Aluminium

- Open cable end

LED INSIDE CRI 80

3000 K
570 lm


Variant	Prod. no.
● anthracite	**232115**

⊕

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**
Screw set	
◐ Stainless steel	**228754**
Ground spike	
● grey	**231230**
Concrete anchor	
● grey	**232119**

LOGS 70
POLE





IP65 IK04 40000h L70B50 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: Aluminium

- Open cable end

LED INSIDE CRI 80

3000 K
570 lm

Variant	Prod. no.
● anthracite	**232125**


⊕

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**
Screw set	
◐ Stainless steel	**228754**
Ground spike	
● grey	**231230**
Concrete anchor	
● grey	**232119**



1006181 681

GRAFIT 30
POLE, ROUND, E27



IP44 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Acrylic

• Open cable end

SOCKET INSIDE 11 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.5 cm

Variant	Prod. no.
● anthracite	**1006180**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no.: 1005303

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**

GRAFIT 60
POLE, ROUND, E27



IP44 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Acrylic

• Open cable end

SOCKET INSIDE 11 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.5 cm

Variant	Prod. no.
● anthracite	**1006181**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no.: 1005303

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**

GRAFIT 90
POLE, ROUND, E27



IP44 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Acrylic

• Open cable end

SOCKET INSIDE 11 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.5 cm

Variant	Prod. no.
● anthracite	**1006182**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E


Prod. no.: 1005289

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**


231225 683

GRAFIT 30
POLE, E27





IP44

220-240 V ~50/60 Hz
Material: Aluminium/Plastic

• Open cable end

SOCKET INSIDE 11 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.5 cm

Variant	Prod. no.
● anthracite	**231215**


E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no.: 1005303

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**
Screw set	
◐ Stainless steel	**228754**
Ground spike	
● grey	**231230**

GRAFIT 60
POLE, E27





IP44

220-240 V ~50/60 Hz
Material: Aluminium/Plastic

• Open cable end

SOCKET INSIDE 11 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.5 cm

Variant	Prod. no.
● anthracite	**231225**


E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no.: 1005289

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**
Screw set	
◐ Stainless steel	**228754**
Ground spike	
● grey	**231230**

GRAFIT 90
POLE, E27





IP44 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Acrylic

• Open cable end

SOCKET INSIDE 11 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.5 cm

Variant	Prod. no.
● anthracite	**1006184**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E


Prod. no.: 1005289

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**
Ground spike	
● grey	**231230**


1005442 685

QUADRULO
FL







100-277 V ~50/60 Hz | 500 mA
Total wattage: 7 W
Material: Aluminium/Acrylic

- IP connection box



3000 K
340 lm


Variant	Prod. no.
● anthracite	**1005442**



229411 687

RUSTY® SLOT 50
POLE







220-240 V ~50/60 Hz
Total wattage: 9 W
Material: FeCSi Steel/Polycarbonate (PC)

- Open cable end

LED INSIDE


	3000 K
	30 lm

Variant	Prod. no.
● rust	**233447**

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**
Ground spike	
● grey	**231230**

RUSTY® SLOT 80
POLE





IP55 | 35000 h L70B50

220-240 V ~50/60 Hz
Total wattage: 9 W
Material: FeCSi Steel/Polycarbonate (PC)

- Open cable end

LED INSIDE


3000 K
30 lm

Variant	Prod. no.
rust	233457

Product	Prod. no.
Connection box IP68, 3-pole	
black	228730
Ground spike	
grey	231230

RUSTY® SLOT 50
POLE, E27





IP44

220-240 V ~50/60 Hz
Material: FeCSi Steel/Polycarbonate (PC)

- Open cable end

SOCKET INSIDE | 11 W

Base: 1xE27 | max. Ø: 4.8 cm | L: 13.9 cm

Variant	Prod. no.
rust	229410


E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no.: 1005289

Product	Prod. no.
Connection box IP68, 3-pole	
black	228730
Ground spike	
grey	231230

RUSTY® SLOT 80
POLE, E27





IP44

220-240 V ~50/60 Hz
Material: FeCSi Steel/Polycarbonate (PC)

- Open cable end

SOCKET INSIDE | 11 W

Base: 1xE27 | max. Ø: 4.8 cm | L: 13.9 cm

Variant	Prod. no.
rust	229411


E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no.: 1005289

Product	Prod. no.
Connection box IP68, 3-pole	
black	228730
Ground spike	
grey	231230

RUSTY® PATHLIGHT
POLE, TCR-TSE





IP44

220-240 V ~50/60 Hz
Material: FeCSi Steel/Polycarbonate (PC)

- Open cable end

SOCKET INSIDE 9 W

Base: 1xG53 | max. Ø: 7.5 cm | L: 2.7 cm

Variant	Prod. no.
rust	230090


GX53 | 6 W | 120°
490 lm | 2700 K | EEC = G

Prod. no.: 1005272

Product	Prod. no.
Connection box IP68, 3-pole	
black	228730
Ground spike	
grey	229422

RUSTY® PATHLIGHT 40
POLE





IP55 IK06 90° 25000 h L70B50 20

220-240 V ~50/60 Hz
Total wattage: 8.8 W
Material: Steel/Acrylic

- Open cable end

LED INSIDE CRI 80


3000 K
470 lm

Variant	Prod. no.
rust	1006346

Product	Prod. no.
Connection box IP68, 3-pole	
black	228730
Ground spike	
grey	229422

RUSTY® PATHLIGHT 70
POLE





IP55 IK06 90° 25000 h L70B50 20

220-240 V ~50/60 Hz
Total wattage: 8.8 W
Material: Steel/Acrylic

- Open cable end

LED INSIDE CRI 80


3000 K
470 lm

Variant	Prod. no.
rust	1006347

Product	Prod. no.
Connection box IP68, 3-pole	
black	228730
Ground spike	
grey	229422

RUSTY® CONE 24
FL, E14





IP54 IK02

220-240 V ~50/60 Hz
Material: FeCSi Steel/Glass

SOCKET INSIDE 40 W

Base: 1xE14 | max. Ø: 4.8 cm | L: 13.9 cm


Variant	Prod. no.
rust	**229430**

E14 | 4 W | 320°
380 lm | 2700 K | EEC = F

Prod. no.: 1005284

RUSTY® CONE 40
POLE, E27





IP54 IK02

220-240 V ~50/60 Hz
Material: FeCSi Steel/Glass

- Open cable end

SOCKET INSIDE 11 W

Base: 1xE27 | max. Ø: 4.8 cm | L: 13.9 cm

Variant	Prod. no.
rust	**229431**


E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no.: 1005289

Product	Prod. no.
Connection box IP68, 3-pole	
black	**228730**
Ground spike	
grey	**229423**

RUSTY® CONE 70
POLE, E27





IP54 IK02

220-240 V ~50/60 Hz
Material: FeCSi Steel/Polycarbonate (PC)

- Open cable end

SOCKET INSIDE 11 W

Base: 1xE27 | max. Ø: 4.8 cm | L: 13.9 cm

Variant	Prod. no.
rust	**229432**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no.: 1005289


Product	Prod. no.
Connection box IP68, 3-pole	
black	**228730**
Ground spike	
grey	**229423**


229432 689
229430 689


229021 693

RUSTY® 40
POLE





IP55 IK02 35 000 h L70B50

220-240 V ~50/60 Hz
Total wattage: 9 W
Material: FeCSi Steel/Polycarbonate (PC)

- Open cable end

LED INSIDE CRI 80


3000 K
90 lm

Variant	Prod. no.
rust	233427

Product	Prod. no.
Connection box IP68, 3-pole	
black	228730
Ground spike	
grey	229422

RUSTY® 70
POLE





IP55 IK02 35 000 h L70B50

220-240 V ~50/60 Hz
Total wattage: 9 W
Material: FeCSi Steel/Polycarbonate (PC)

- Open cable end

LED INSIDE CRI 80


3000 K
90 lm

Variant	Prod. no.
rust	233437

Product	Prod. no.
Connection box IP68, 3-pole	
black	228730
Ground spike	
grey	229422

RUSTY® 40
POLE, E27





IP55 IK02

220-240 V ~50/60 Hz
Material: FeCSi Steel/Polycarbonate (PC)

- Open cable end

SOCKET INSIDE 11 W

Base: 1xE27	max. Ø: 4.8 cm	L: 13.9 cm

Variant	Prod. no.
rust	229420


E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no.: **1005289**

Product	Prod. no.
Connection box IP68, 3-pole	
black	228730
Ground spike	
grey	229422

RUSTY® 70
POLE, E27





IP55 IK02

220-240 V ~50/60 Hz
Material: FeCSi Steel/Polycarbonate (PC)

- Open cable end

SOCKET INSIDE 11 W

Base: 1xE27	max. Ø: 4.8 cm	L: 13.9 cm

Variant	Prod. no.
rust	**229421**


E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no.: 1005289

Product	Prod. no.
Connection box IP68, 3-pole	
black	**228730**
Ground spike	
grey	**229422**

RUSTY® 40
POLE, E27





IP55 IK02

220-240 V ~50/60 Hz
Material: FeCSi Steel/Polycarbonate (PC)

- Open cable end

SOCKET INSIDE 11 W

Base: 1xE27	max. Ø: 4.8 cm	L: 13.9 cm

Variant	Prod. no.
rust	**229020**


E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no.: 1005289

Product	Prod. no.
Connection box IP68, 3-pole	
black	**228730**
Ground spike	
Stainless steel	**229022**

RUSTY® 70
POLE, E27





IP55 IK02

220-240 V ~50/60 Hz
Material: FeCSi Steel/Polycarbonate (PC)

- Open cable end

SOCKET INSIDE 11 W

Base: 1xE27	max. Ø: 4.8 cm	L: 13.9 cm

Variant	Prod. no.
rust	**229021**


E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no.: 1005289

Product	Prod. no.
Connection box IP68, 3-pole	
black	**228730**
Ground spike	
Stainless steel	**229022**

ARROCK GRANITE 40
POLE, SQUARE, E27





IP44 IK02

220-240 V ~50/60 Hz
Material: Granite/Stainless steel 304

- Open cable end

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 5.2 cm | L: 11.5 cm

Variant	Prod. no.
grey/chrome	**231410**


E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no.: **1005289**

Product	Prod. no.
Connection box IP68, 3-pole	
black	**228730**
Ground spike	
grey	**229422**

ARROCK GRANITE 70
POLE, SQUARE, E27





IP44 IK02

220-240 V ~50/60 Hz
Material: Granite/Stainless steel 304

- Open cable end

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 5.2 cm | L: 11.5 cm

Variant	Prod. no.
grey/chrome	**231411**


E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no.: **1005289**

Product	Prod. no.
Connection box IP68, 3-pole	
black	**228730**
Ground spike	
grey	**229422**

ARROCK ARC
POLE, QPAR51





IP44 IK02

220-240 V ~50/60 Hz
Material: Granite/Stainless steel 304

SOCKET INSIDE 35 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 7.6 cm

Variant	Prod. no.
grey/chrome	**231420**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077**

SMART


GU10 | 5 W | 100°
300 lm | 2000 K-6500 K | EEC = G

Prod. no.: **1012470**

Product	Prod. no.
Ground spike	
grey	**231233**

ARROCK STONE 50
POLE





IP55 IK02 30000 h L70B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 9 W
Material: Basalt/Stainless steel 304

- IP connection box

LED INSIDE CRI 80

3000 K
330 lm


Variant	Prod. no.
grey	**231370**

Ground spike

Product	Prod. no.
grey	**231235**

ARROCK STONE 75
POLE





IP55 IK02 30000 h L70B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 9 W
Material: Basalt/Stainless steel 304

- Open cable end

LED INSIDE CRI 80

3000 K
330 lm


Variant	Prod. no.
grey	**231371**

Ground spike

Product	Prod. no.
grey	**231235**

ARROCK SLOT
POLE, QPAR51





IP55 IK02

220-240 V ~50/60 Hz
Material: Granite/Stainless steel 304

- Open cable end

SOCKET INSIDE 4 W

Base: 1xGU10

Variant	Prod. no.
grey/chrome	**231440**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F


Prod. no.: **1005077**

Connection box IP68, 3-pole

Product	Prod. no.
black	**228730**


Ground spike

Product	Prod. no.
grey	**231235**

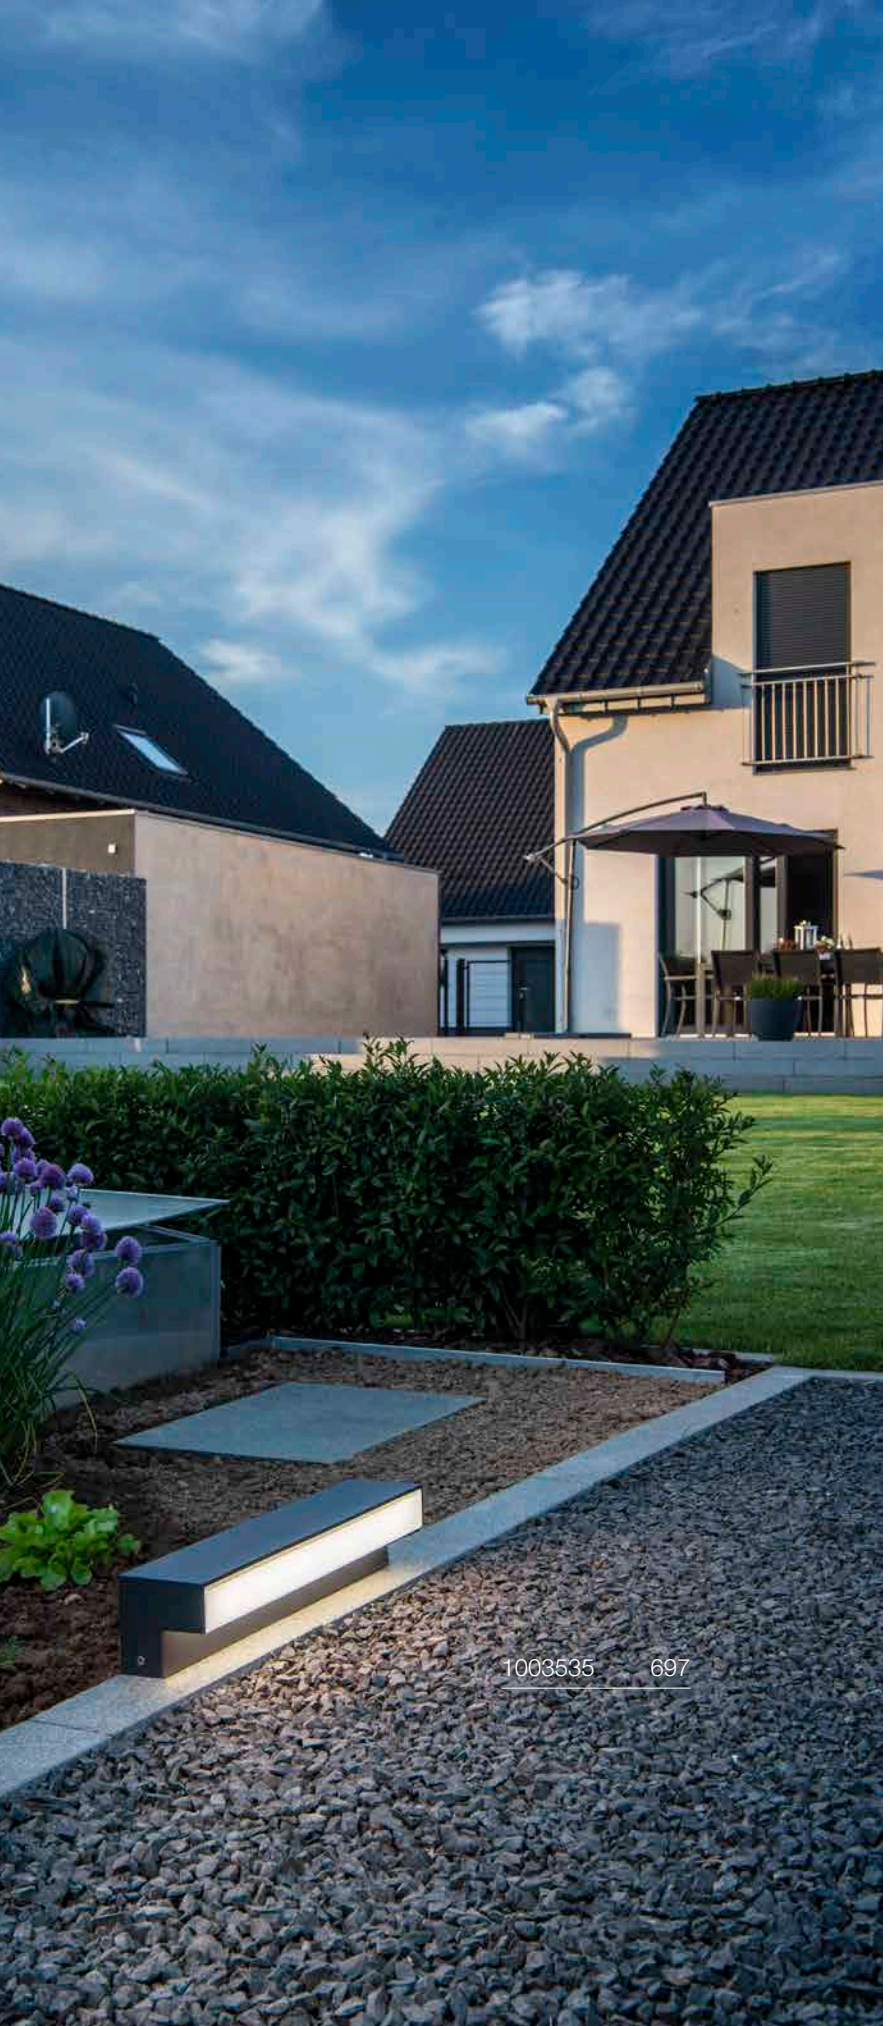

L-LINE OUT 30
FL, HORIZONTAL







220-240 V ~50/60 Hz | 500 mA
Total wattage: 11.5W
Material: Aluminium/Polycarbonate (PC)

- The light colour must be set prior to installation
- Open cable end




3000 K	4000 K
800 lm	810 lm

Variant	Prod. no.
● anthracite	**1003536**

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**

L-LINE OUT 60
FL, HORIZONTAL





IP65 IK02 30000h L70B50 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 11.5W
Material: Aluminium/Polycarbonate (PC)

- The light colour must be set prior to installation
- Open cable end

LED INSIDE CCT CRI 80


3000 K	4000 K
780 lm	800 lm

Variant	Prod. no.
● anthracite	**1003535**

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**

L-LINE OUT 50
POLE





IP65 IK02 30000h L70B50 20

220-240 V ~50/60 Hz | 350 mA
Total wattage: 7 W
Material: Aluminium/Polycarbonate (PC)

- The light colour must be set prior to installation
- Open cable end

LED INSIDE CCT CRI 80


3000 K	4000 K
490 lm	530 lm

Variant	Prod. no.
● anthracite	**1003537**

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**

L-LINE OUT 80
POLE





IP65 IK02 30000h L70B50 20

220-240 V ~50/60 Hz | 350 mA
Total wattage: 7 W
Material: Aluminium/Polycarbonate (PC)

- The light colour must be set prior to installation
- Open cable end

LED INSIDE CCT CRI 80


3000 K	4000 K
490 lm	530 lm

Variant	Prod. no.
● anthracite	**1003538**

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**

TAHA II 45
POLE, PHASE





C,L IP65 IK02 50 000 h L80B20

220-240 V ~50/60 Hz | 240 mA
Total wattage: 10 W
Material: Aluminium

- IP connection box


LED INSIDE CCT CRI 80

2200 K	2700 K
450 lm	500 lm

Variant	Prod. no.
● black	**1010197**

TAHA II 70
POLE, PHASE





C,L IP65 IK02 50 000 h L80B20

220-240 V ~50/60 Hz | 240 mA
Total wattage: 10 W
Material: Aluminium

- IP connection box


LED INSIDE CCT CRI 80

2200 K	2700 K
450 lm	500 lm

Variant	Prod. no.
● black	**1010198**

TAHA II 90
POLE, PHASE





C,L IP65 IK02 50 000 h L80B20

220-240 V ~50/60 Hz | 240 mA
Total wattage: 10 W
Material: Aluminium

- IP connection box


LED INSIDE CCT CRI 80

2200 K	2700 K
450 lm	500 lm

Variant	Prod. no.
● black	**1010199**

TAHA II 70
POLE , SENSOR





IP54 IK02 50000 h L80B20 IR

100-240 V ~50/60 Hz | 240 mA
Total wattage: 10 W
Material: Aluminium

- Primary and replica functionality, option to control additional lights without a sensor
- IP connection box

LED INSIDE CCT CRI 80

2200 K	2700 K
450 lm	500 lm

Variant	Prod. no.
● black	**1010200**

TAHA II 90
POLE , SENSOR





IP54 IK02 50000 h L80B20 IR

100-240 V ~50/60 Hz | 240 mA
Total wattage: 10 W
Material: Aluminium

- Primary and replica functionality, option to control additional lights without a sensor
- IP connection box

LED INSIDE CCT CRI 80

2200 K	2700 K
450 lm	500 lm


Variant	Prod. no.
● black	**1010201**



1004681 701

OVALISK 75
POLE





IP65 IK02 30000h L70B50 19

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.6 W
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Open cable end

LED INSIDE CCT CRI 80


3000 K	4000 K
580 lm	630 lm

Variant	Prod. no.
anthracite	**1004680**

Product	Prod. no.
Concrete anchor	
silver	**228712**
Ground spike	
grey	**228722**
Connection box IP68, 3-pole	
black	**228730**

OVALISK 100
POLE





IP65 IK02 30000h L70B50 19

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.6 W
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Open cable end

LED INSIDE CCT CRI 80


3000 K	4000 K
580 lm	630 lm

Variant	Prod. no.
anthracite	**1004681**

Product	Prod. no.
Concrete anchor	
silver	**228712**
Ground spike	
grey	**228722**
Connection box IP68, 3-pole	
black	**228730**

GLOO PURE 27
POLE, E27





IP44 IK02 30

220-240 V ~50/60 Hz
Material: Aluminium/Glass

• Open cable end

SOCKET INSIDE 23 W

Base: 1xE27 | max. Ø: 4.8 cm | L: 18 cm

Variant	Prod. no.
● anthracite	**1001999**


E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no.: **1005289**

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**
Ground spike	
● grey	**231234**

GLOO PURE 44
POLE, E27





IP44 IK02 20

220-240 V ~50/60 Hz
Material: Aluminium/Glass

• Open cable end

SOCKET INSIDE 23 W

Base: 1xE27 | max. Ø: 4.8 cm | L: 18 cm

Variant	Prod. no.
● anthracite	**1002000**


E27 | 14 W | 240°
1520 lm | 3000 K | EEC = E

Prod. no.: **1005307**

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**
Ground spike	
● grey	**231234**

GLOO PURE 70
POLE, E27





IP44 IK02 20

220-240 V ~50/60 Hz
Material: Aluminium/Glass

• Open cable end

SOCKET INSIDE 23 W

Base: 1xE27 | max. Ø: 4.8 cm | L: 18 cm


Variant	Prod. no.
● anthracite	**1002001**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no.: **1005289**

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**
Ground spike	
● grey	**231234**

ROTOBALL 25
FL, E27

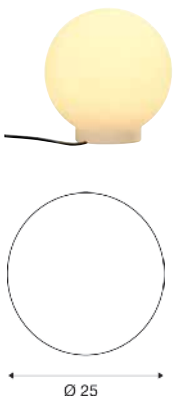

IP44 IK04

220-240 V ~50/60 Hz
Material: Steel/Polyethylene (PE)

- IP44 safety plug

SOCKET INSIDE 24 W


Base: 1xE27 max. Ø: 7 cm

Variant	Prod. no.
○ white	**227219**

E27 | 13 W | 220°
1300 lm | 2700 K | EEC = F

Prod. no.: **1005302**

ROTOBALL 40
FL, E27

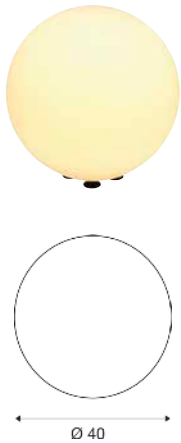

IP44 IK04

220-240 V ~50/60 Hz
Material: Steel/Polyethylene (PE)

- IP44 safety plug

SOCKET INSIDE 24 W


Base: 1xE27 max. Ø: 9.5 cm

Variant	Prod. no.
○ white	**227220**

E27 | 13 W | 220°
1300 lm | 2700 K | EEC = F

Prod. no.: **1005302**

ROTOBALL 50
FL, E27

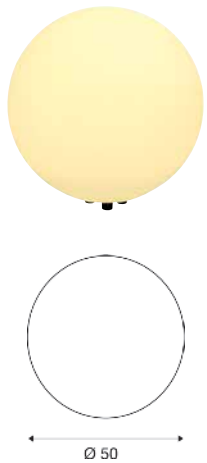

IP44 IK04

220-240 V ~50/60 Hz
Material: Steel/Polyethylene (PE)

- IP44 safety plug

SOCKET INSIDE 24 W

Base: 1xE27 max. Ø: 9.5 cm

Variant	Prod. no.
○ white	**227221**

E27 | 13 W | 220°
1300 lm | 2700 K | EEC = F


Prod. no.: **1005302**



232075 705

PHOTONIA
POLE, E27





IP55 IK03 20

220-240 V ~50/60 Hz
Material: Aluminium/Glass

- Open cable end

SOCKET INSIDE 60 W

Base: 1xE27 | max. Ø: 9 cm | L: 15 cm

Variant	Prod. no.
anthracite	**232075**


E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no.: 1005303

Product	Prod. no.
Connection box IP68, 3-pole	
black	**228730**
Concrete anchor	
Stainless steel	**232085**

OTOS GLAS
POLE, E27





IP43 IK04

220-240 V ~50/60 Hz
Material: Aluminium/Glass

- Concrete anchor included

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 6.5 cm | L: 14.5 cm

Variant	Prod. no.
anthracite	**230465**

E27 | 13 W | 220°
1300 lm | 2700 K | EEC = F

Prod. no.: 1005302

SMART


E27 | 9 W | 200°
806 lm | 2000 K-6500 K | EEC = F

Prod. no.: 1012472

Product	Prod. no.
Connection box IP68, 3-pole	
black	**228730**
Screw set	
Stainless steel	**228753**

CUBIX
FL, QPAR51





IP44 IK04 100°

220-240 V ~50/60 Hz
Material: Aluminium/Glass

- IP44 safety plug

SOCKET INSIDE 25 W

Base: 1xGU10

Variant	Prod. no.
anthracite	**132835**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: 1005077

SMART


GU10 | 5 W | 100°
300 lm | 2000 K-6500 K | EEC = G

Prod. no.: 1012470


230435 707

CONE
FL, E27





IP54 IK05

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 100 W

Base: 1xE27 | L: 15 cm

Variant	Prod. no.
anthracite	230435

E27 | 13 W | 220°
1300 lm | 2700 K | EEC = F

Prod. no.: 1005302


SMART

E27 | 9 W | 200°
806 lm | 2000 K-6500 K | EEC = F

Prod. no.: 1012472

MOLAT
PD, E27





IP44 IK04 250 cm

220-240 V ~50/60 Hz
Material: Aluminium/Glass

- Suspension chain included
- IP44 safety plug

SOCKET INSIDE 60 W

Base: 1xE27 | max. Ø: 6.5 cm | L: 14.5 cm

Variant	Prod. no.
anthracite	1000821


E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no.: 1005268

Product	Prod. no.
Ceiling rosette	
anthracite	1000398

MOLAT 100
POLE, E27





IP44 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 60 W

Base: 1xE27 | max. Ø: 6.5 cm | L: 14.5 cm

Variant	Prod. no.
anthracite	1000822


E27 | 8 W | 320°
700 lm | 2500 K | EEC = F

Prod. no.: 1005265

Product	Prod. no.
Ground spike	
grey	230060

LISENNE 40
POLE, E27





IP54 IK02

220-240 V ~50/60 Hz
Material: Basalt/Glass

• Open cable end

SOCKET INSIDE 23 W

Base: 1xE27 | max. Ø: 5.9 cm | L: 15 cm

Variant	Prod. no.
grey	**1000665**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F


C,L

Prod. no.: **1005268**

Product	Prod. no.
Ground spike	
grey	**229422**

LISENNE 70
POLE, E27





IP54 IK02

220-240 V ~50/60 Hz
Material: Basalt/Glass

• Open cable end

SOCKET INSIDE 23 W

Base: 1xE27 | max. Ø: 5.9 cm | L: 15 cm

Variant	Prod. no.
grey	**1000666**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F


C,L

Prod. no.: **1005268**

Product	Prod. no.
Ground spike	
grey	**229422**

ALPA MUSHROOM 45
POLE, E27





IP55 IK03

220-240 V ~50/60 Hz
Material: Aluminium/Polycarbonate (PC)

- Open cable end

SOCKET INSIDE 24 W

Base: 1xE27 | max. Ø: 5.2 cm | L: 16 cm

Variant	Prod. no.
anthracite	**228935**


E27 | 14 W | 240°
1520 lm | 3000 K | EEC = E

Prod. no.: 1005307

Product	Prod. no.
Concrete anchor	
silver	**228712**
Ground spike	
grey	**228722**
Connection box IP68, 3-pole	
black	**228730**
Screw set	
Stainless steel	**228752**

ALPA MUSHROOM 75
POLE, E27





IP55 IK03

220-240 V ~50/60 Hz
Material: Aluminium/Polycarbonate (PC)

- Open cable end

SOCKET INSIDE 24 W

Base: 1xE27 | max. Ø: 5.2 cm | L: 16 cm

Variant	Prod. no.
anthracite	**228945**


E27 | 14 W | 240°
1520 lm | 3000 K | EEC = E

Prod. no.: 1005307

Product	Prod. no.
Concrete anchor	
silver	**228712**
Ground spike	
grey	**228722**
Connection box IP68, 3-pole	
black	**228730**
Screw set	
Stainless steel	**228752**

ALPA CONE 100
POLE, E27





IP55 IK03

220-240 V ~50/60 Hz
Material: Aluminium/Polycarbonate (PC)

- Open cable end

SOCKET INSIDE 24 W

Base: 1xE27 | max. Ø: 5.2 cm | L: 17.5 cm

Variant	Prod. no.
anthracite	**228925**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E


Prod. no.: 1005289

Product	Prod. no.
Concrete anchor	
silver	**228712**
Ground spike	
grey	**228722**
Connection box IP68, 3-pole	
black	**228730**
Screw set	
Stainless steel	**228752**



APONI 90
POLE, PHASE







220-240 V ~50/60 Hz | 500 mA
Total wattage: 6.6 W
Material: Aluminium

- Open cable end




	3000 K
	610 lm

Variant	Prod. no.
● anthracite	**1000682**

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**

APONI 120
POLE, PHASE





IP65 | 50000 h L70B50 | 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 6.6 W
Material: Aluminium

- Open cable end

INSIDE | CRI 80


3000 K
610 lm

Variant	Prod. no.
anthracite	**1000683**

Product	Prod. no.
Connection box IP68, 3-pole	
black	**228730**

TRUST 30
POLE





IP55 | IK07 | 30000 h L70B50

220-240 V ~50/60 Hz
Total wattage: 9 W
Material: Stainless steel 316

- Open cable end

INSIDE | CRI 80


3000 K
400 lm

Variant	Prod. no.
Stainless steel	**228100**

Product	Prod. no.
Ground spike	
black	**227922**
Ring-shaped grid	
Stainless steel	**228130**
Connection box IP68, 3-pole	
black	**228730**
Spiral-shaped grid	
black	**1000449**

TRUST 60
POLE





IP55 | IK07 | 30000 h L70B50

220-240 V ~50/60 Hz
Total wattage: 9 W
Material: Stainless steel 316

- Open cable end

INSIDE | CRI 80


3000 K
400 lm

Variant	Prod. no.
Stainless steel	**228110**

Product	Prod. no.
Ground spike	
black	**227922**
Ring-shaped grid	
Stainless steel	**228130**
Connection box IP68, 3-pole	
black	**228730**
Spiral-shaped grid	
black	**1000449**

BIG NAILS 50
POLE, E27





IP44

220-240 V ~50/60 Hz
Material: Stainless steel 304/Polycarbonate (PC)

- Open cable end

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 4.5 cm | L: 17 cm

Variant	Prod. no.
Stainless steel	**229162**


E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no.: **1005289**

Product	Prod. no.
Ground spike	
black	**227922**

BIG NAILS 80
POLE, E27





IP44

220-240 V ~50/60 Hz
Material: Stainless steel 304/Polycarbonate (PC)

- Open cable end

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 4.5 cm | L: 17 cm

Variant	Prod. no.
Stainless steel	**229172**


E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no.: **1005289**

Product	Prod. no.
Ground spike	
black	**227922**

ROX ACRYL 30
POLE, E27





IP65 IK02

220-240 V ~50/60 Hz
Material: Stainless steel 304

- Open cable end

SOCKET INSIDE 20 W

Base: 1xE27 | max. Ø: 6 cm | L: 15 cm

Variant	Prod. no.
Stainless steel	**1001488**


E27 | 4 W | 280°
830 lm | 2700 K | EEC = A

Prod. no.: **1008641**

Product	Prod. no.
T-connector box	
black	**228726**
Ground spike	
grey	**231234**
Concrete anchor	
Stainless steel	**1001494**

ROX ACRYL 60
POLE, E27





IP65 IK02

220-240 V ~50/60 Hz
Material: Stainless steel 304

- Open cable end

SOCKET INSIDE 20 W

Base: 1xE27 | max. Ø: 6 cm | L: 15 cm

Variant	Prod. no.
Stainless steel	**1001489**

E27 | 13 W | 220°
1300 lm | 2700 K | EEC = F

Prod. no.: **1005302**

SMART


E27 | 9 W | 200°
806 lm | 2000 K-6500 K | EEC = F

Prod. no.: **1012472**

Product	Prod. no.
T-connector box	
black	**228726**
Ground spike	
grey	**231234**
Concrete anchor	
Stainless steel	**1001494**

ROX ACRYL 90
POLE, E27





IP65 IK02

220-240 V ~50/60 Hz
Material: Stainless steel 304

- Open cable end

SOCKET INSIDE 20 W

Base: 1xE27 | max. Ø: 6 cm | L: 15 cm


Variant	Prod. no.
Stainless steel	**1001490**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no.: **1005303**

Product	Prod. no.
T-connector box	
black	**228726**
Ground spike	
grey	**231234**
Concrete anchor	
Stainless steel	**1001494**

VAP SLIM 30
POLE, E27



IP44

220-240 V ~50/60 Hz
Material: Stainless steel 304

• Open cable end

SOCKET INSIDE 20 W

Base: 1xE27 | max. Ø: 5.1 cm | L: 12.6 cm


Variant	Prod. no.
Stainless steel	**230063**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no.: 1005289

Product	Prod. no.
Ground spike	
grey	**230060**
Concrete anchor	
Stainless steel	**230061**

VAP SLIM 60
POLE, E27



IP44

220-240 V ~50/60 Hz
Material: Stainless steel 304

• Open cable end

SOCKET INSIDE 20 W

Base: 1xE27 | max. Ø: 5.1 cm | L: 12.6 cm


Variant	Prod. no.
Stainless steel	**230066**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no.: 1005289

Product	Prod. no.
Ground spike	
grey	**230060**
Concrete anchor	
Stainless steel	**230061**

VAP SLIM 90
POLE, E27



IP44

220-240 V ~50/60 Hz
Material: Stainless steel 304

• Open cable end

SOCKET INSIDE 20 W

Base: 1xE27 | max. Ø: 5.1 cm | L: 12.6 cm

Variant	Prod. no.
Stainless steel	**230069**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no.: 1005289

Product	Prod. no.
Ground spike	
grey	**230060**
Concrete anchor	
Stainless steel	**230061**

C-POL 90
POLE, E27





IP54 IK03

220-240 V ~50/60 Hz
Material: Aluminium/Polycarbonate (PC)

- Open cable end

SOCKET INSIDE 24 W

Base: 1xE27 | max. Ø: 5.2 cm | L: 17.3 cm

Variant	Prod. no.
anthracite	**231475**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no.: 1005289

Product	Prod. no.
Connection box IP68, 3-pole	
black	**228730**

F-POL 85
POLE, E27





IP54 IK05

220-240 V ~50/60 Hz
Material: Aluminium/Polycarbonate (PC)

- Open cable end

SOCKET INSIDE 20 W

Base: 1xE27 | max. Ø: 5.1 cm | L: 14.8 cm

Variant	Prod. no.
anthracite	**231595**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no.: 1005289


Product	Prod. no.
Connection box IP68, 3-pole	
black	**228730**



1000344 717

SQUARE 30
POLE, E27





IP44 IK02

220-240 V ~50/60 Hz
Material: Stainless steel 304

• Open cable end

SOCKET INSIDE 20 W

Base: 1xE27 | max. Ø: 6 cm | L: 15 cm

Variant	Prod. no.
Stainless steel	**1000344**


E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no.: 1005303

Product	Prod. no.
Connection box IP68, 3-pole	
black	**228730**
Ground spike	
grey	**231234**
Concrete anchor	
Stainless steel	**1000343**

SQUARE 60
POLE, E27





IP44 IK02

220-240 V ~50/60 Hz
Material: Stainless steel 304

• Open cable end

SOCKET INSIDE 20 W

Base: 1xE27 | max. Ø: 6 cm | L: 15 cm

Variant	Prod. no.
Stainless steel	**1000345**


E27 | 4 W | 280°
830 lm | 2700 K | EEC = A

Prod. no.: 1008641

Product	Prod. no.
Connection box IP68, 3-pole	
black	**228730**
Ground spike	
grey	**231234**
Concrete anchor	
Stainless steel	**1000343**

SQUARE 90
POLE, E27





IP44 IK02

220-240 V ~50/60 Hz
Material: Stainless steel 304

• Open cable end

SOCKET INSIDE 20 W

Base: 1xE27 | max. Ø: 6 cm | L: 15 cm

Variant	Prod. no.
Stainless steel	**1000346**

E27 | 13 W | 220°
1300 lm | 2700 K | EEC = F


Prod. no.: 1005302

Product	Prod. no.
Connection box IP68, 3-pole	
black	**228730**
Ground spike	
grey	**231234**
Concrete anchor	
Stainless steel	**1000343**


231455 787

SLOTS 45
POLE





IP44 68° 25000 h L70B50

220-240 V ~50/60 Hz
Total wattage: 4.5 W
Material: Aluminium

- Concrete anchor included
- Open cable end


LED INSIDE CRI 80

3000 K
200 lm

Variant	Prod. no.
anthracite	**231815**
rust	**231817**

SLOTS 65
POLE





IP44 68° 25000 h L70B50

220-240 V ~50/60 Hz
Total wattage: 4.5 W
Material: Aluminium

- Concrete anchor included
- Open cable end


LED INSIDE CRI 90

3000 K
200 lm

Variant	Prod. no.
anthracite	**231455**
rust	**231457**

H-POL 30
POLE





IP65 IK03 120° 30000h L70B50 36

100-277 V ~50/60 Hz | 480 mA
Total wattage: 9.7 W
Material: Aluminium/Plastic

- This product is intended for in-floor installation
- A larger recessed fixing kit is available for optional installation in the floor, with installation dimensions L: 14 cm W: 14 cm D: 16 cm

LED INSIDE CRI 80


	3000 K
	350 lm

Variant	Prod. no.
● anthracite	**232155**

Product	Prod. no.
Recessed fixing kit, 14x14 cm	
● black	**232195**

H-POL 60
POLE





IP65 IK03 120° 30000h L70B50 18

100-277 V ~50/60 Hz | 500 mA
Total wattage: 18 W
Material: Aluminium/Plastic

- This product is intended for in-floor installation
- A larger recessed fixing kit is available for optional installation in the floor, with installation dimensions L: 14 cm W: 14 cm D: 16 cm

LED INSIDE CRI 80


	3000 K
	700 lm

Variant	Prod. no.
● anthracite	**232165**

Product	Prod. no.
Recessed fixing kit, 14x14 cm	
● black	**232195**

H-POL TWIN 60
POLE





IP65 IK03 120° 30000h L70B50 9

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 35 W
Material: Aluminium/Plastic

- This product is intended for in-floor installation
- A larger recessed fixing kit is available for optional installation in the floor, with installation dimensions L: 14 cm W: 14 cm D: 16 cm

LED INSIDE CRI 80


	3000 K
Direct	700 lm
	700 lm

Variant	Prod. no.
● anthracite	**232185**

Product	Prod. no.
Recessed fixing kit, 14x14 cm	
● black	**232195**

SLOTBOX 40
POLE







100-277 V ~50/60 Hz | 700 mA
Total wattage: 8 W
Material: Aluminium

- Open cable end

INSIDE


3000 K
160 lm

Variant	Prod. no.
● anthracite	**232135**

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**

SLOTBOX 70
POLE







100-277 V ~50/60 Hz | 700 mA
Total wattage: 8.7 W
Material: Aluminium

- Open cable end

INSIDE

3000 K
160 lm


Variant	Prod. no.
● anthracite	**232145**

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**


1008727 723

ORDI II 45
POLE, PHASE





C,L · IP65 · IK07 · 50000 h L80B20 · 150

220-240 V ~50/60 Hz | 240 mA
Total wattage: 9.5 W
Material: Aluminium

- The light colour must be set prior to installation
- IP connection box


LED INSIDE · CCT · CRI 80

2200 K	3000 K
700 lm	850 lm

Variant	Prod. no.
● black	**1008725**

ORDI II 70
POLE, PHASE





C,L · IP65 · IK07 · 50000 h L80B20 · 150

220-240 V ~50/60 Hz | 240 mA
Total wattage: 9.5 W
Material: Aluminium

- The light colour must be set prior to installation
- IP connection box


LED INSIDE · CCT · CRI 80

2200 K	3000 K
700 lm	850 lm

Variant	Prod. no.
● black	**1008726**

ORDI II 70
POLE, SENSOR





IP54 · IK07 · 50000 h L80B20 · 150 · IR

100-240 V ~50/60 Hz | 240 mA
Total wattage: 9.5 W
Material: Aluminium

- The light colour must be set prior to installation
- Primary and replica functionality
- IP connection box


LED INSIDE · CCT · CRI 80

2200 K	3000 K
700 lm	850 lm

Variant	Prod. no.
● black	**1008727**

ABRIDOR HYBRID 60
POLE





IP65 IK07 30000h L80B50 80 IR

100-240 V ~50/60 Hz | 380 mA
Total wattage: 6.8 W
Material: Aluminium

- Solar and 230V operation possible
- 3 different modes
- Battery charging via solar
- IP68 connection box


LED INSIDE CCT CRI 80

2200 K	2700 K
600 lm	650 lm

Variant	Prod. no.
● anthracite	**1008543**

ABRIDOR HYBRID 100
POLE





IP65 IK07 30000h L80B50 80 IR

100-240 V ~50/60 Hz | 380 mA
Total wattage: 6.8 W
Material: Aluminium

- Solar and 230V operation possible
- 3 different modes
- Battery charging via solar
- IP68 connection box


LED INSIDE CCT CRI 80

2200 K	2700 K
600 lm	650 lm

Variant	Prod. no.
● anthracite	**1008544**

ABRIDOR 60
POLE







100-240 V ~50/60 Hz | 300 mA
Total wattage: 12 W
Material: Aluminium

- Open cable end




3000 K	4000 K
950 lm	980 lm

Variant	Prod. no.
● anthracite	**1002991**

ABRIDOR 100
POLE







100-240 V ~50/60 Hz | 300 mA
Total wattage: 12 W
Material: Aluminium

- The light colour must be set prior to installation
- Open cable end




3000 K	4000 K
950 lm	980 lm

Variant	Prod. no.
● anthracite	**1002992**

IPERI 50
POLE





IP44 IK02 100° 25000h L70B50

220-240 V ~50/60 Hz
Total wattage: 4.5 W
Material: Aluminium/Plastic

- Open cable end

LED INSIDE CRI 80


4000 K
400 lm

Variant	Prod. no.
anthracite	**231305**

Product	Prod. no.
Ground spike	
grey	**231231**

QUADRASYL 75
POLE, TCR-TSE





IP44

220-240 V ~50/60 Hz
Material: Aluminium

- Concrete anchor included
- Open cable end

SOCKET INSIDE 11 W

Base: 1xG53 | max. Ø: 7.5 cm | L: 2.7 cm

Variant	Prod. no.
anthracite	**232295**
grey	**232294**

GX53 | 6 W | 120°
490 lm | 2700 K | EEC = G


C,L

Prod. no.: **1005272**

Product	Prod. no.
T-connector box	
black	**228726**

QUAD
POLE





IP65 IK02 100° 180° 25000h L70B50

100-277 V ~50/60 Hz | 500 mA
Total wattage: 18 W
Material: Aluminium/Glass

- Open cable end

LED INSIDE CRI 80


3000 K
1550 lm

Variant	Prod. no.
anthracite	**1003001**

Product	Prod. no.
Connection box IP68, 3-pole	
black	**228730**

MYRA SPOT
DOUBLE, GU10





IP44 340° 45° 300

220-240 V ~50/60 Hz
Material: Aluminium

- The height of the light can be increased by a maximum of 2 extension rods.
- Open cable end

SOCKET INSIDE 4,5 W

Base: 2xGU10	max. Ø: 5.1 cm	L: 5.7 cm

Variant	Prod. no.
anthracite	**233185**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F


C,L

Prod. no.: 1005077

Product	Prod. no.
Concrete anchor	
silver	**228712**
Screw set	
Stainless steel	**228752**
Pedestal	
anthracite	**233145**
Extension rod 30 cm	
anthracite	**233165**

SITRA 360
POLE, TCR-TSE





IP44 90° 90°

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 9 W

Base: 2xG53	max. Ø: 7.5 cm	L: 3.5 cm

Variant	Prod. no.
anthracite	**231505**

GX53 | 6 W | 120°
490 lm | 2700 K | EEC = G

C,L

Prod. no.: 1005272


Product	Prod. no.
Ground spike	
grey	**230060**
Ground spike	
Stainless steel	**1000736**



1002871 729

THEO PATHLIGHT 73
POLE, DOUBLE





IP44 IK02 90°

220-240 V ~50/60 Hz
Material: Aluminium

- Open cable end

SOCKET INSIDE 7 W

Base: 2xGU10

Variant	Prod. no.
● anthracite	**1002871**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: **1005077**

Product	Prod. no.
Connection box IP68, 3-pole	
● black	**228730**


1007146 733

OUTDOOR | SPOTLIGHTS



SYNA WIDE | 732



SYNA SHADE | 732



SYNA PLANT | 733



SYNA GARDEN | 733



SYNA | 733

NEW



PL-BEAM PRO | 734–735



GALEN | 738



GALEN PRO | 739



HELIA SPOT | 740



FLAC BEAM | 741



SAMRINA | 741



NAUTILUS 10 | 742



NAUTILUS 10 | 743



BIG NAUTILUS | 743



NAUTILUS | 744





NAUTILUS 10 SPOT | 744



DASAR® PROJECTOR | 745



DASAR® 920 | 745



HELIA SLIM | 747



THEO BRACKET | 749




LED SPIKE | 749



SITRA 360 SPIKE | 751

SYNA WIDE
SP





IP65 IK06 115° 160° 30000 h L80B10 150

220-240 V ~50/60 Hz | 500 mA
Total wattage: 5.5 W
Material: Aluminium

- IP44 safety plug


LED INSIDE CRI 80

1008478	2200 K 500 lm
1008479	3000 K 650 lm

Variant	Prod. no.
● black 500 lm | 2200 K	**1008478**
● black 650 lm | 3000 K	**1008479**

SYNA SHADE
SP, GU10





IP65 IK06 160° 150

220-240 V ~50/60 Hz
Material: Aluminium

- IP44 safety plug

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5 cm | L: 5.3 cm

Variant	Prod. no.
● black	**1008480**
● rust	**1012354** ●

GU10 | 2 W | 36°
230 lm | 2700 K | EEC = E



Prod. no.: **1007230**

SMART


GU10 | 5 W | 100°
300 lm | 2000 K-6500 K | EEC = G



Prod. no.: **1012470**

SYNA PLANT
SP





IP65 IK06 36° 180° 50000 h L70B30 150

220-240 V ~50/60 Hz | 300 mA
Total wattage: 6 W
Material: Aluminium

- IP44 safety plug


LED INSIDE CRI 80

1007146	3000 K 600 lm
1011599	2200 K 400 lm

Variant	Prod. no.
● black 600 lm | 3000 K	**1007146**
● black 400 lm | 2200 K	**1011599** ●

SYNA GARDEN
SP





IP44/ IP65 IK06 36° 300° 50000 h L70B30 150

220-240 V ~50/60 Hz | 300 mA
Total wattage: 6 W
Material: Aluminium

- IP44 safety plug


LED INSIDE CRI 80

1007147	3000 K 600 lm
1011598	2200 K 400 lm

Variant	Prod. no.
● black 600 lm | 3000 K	**1007147**
● black 400 lm | 2200 K	**1011598** ●

SYNA
SP





IP55 IK04 50° 180° 30000 h L70B50 150

220-240 V ~50/60 Hz
Total wattage: 9 W
Material: Aluminium

- IP44 safety plug

LED INSIDE CRI 80


	3000 K 470 lm

Variant	Prod. no.
● anthracite	**227505**

PL-BEAM PRO S
SP, DALI

NEW





Dali IP66 IK08 23/64° 50000h L80B20

220-240 V ~50/60 Hz | 600 mA
Total wattage: 12 W
Material: Aluminium/Glass

- A versatile spotlight, suitable for use as a façade or mast light.

LED INSIDE CRI 80

1012113	2700 K 1400 lm
1012114	2700 K 1300 lm
1012115	2200 K 1300 lm
1012116	2200 K 1250 lm
1012127	3000 K 1450 lm
1012128	3000 K 1400 lm


Variant	Prod. no.
anthracite 1400 lm | 2700 K | 23°	**1012113**
anthracite 1300 lm | 2700 K | 64°	**1012114**
anthracite 1300 lm | 2200 K | 23°	**1012115**
anthracite 1250 lm | 2200 K | 64°	**1012116**
anthracite 1450 lm | 3000 K | 23°	**1012127**
anthracite 1400 lm | 3000 K | 64°	**1012128**

Product	Prod. no.
Wall bracket	
black	**234350**
Lamp shield	
anthracite	**1012131**
Honeycomb grid	
black	**1012133**
Mast clamp	
anthracite	**1012135**

PL-BEAM PRO S
SP, DALI, ASYM

NEW





Dali IP66 IK08 33/25° 50000h L80B20

220-240 V ~50/60 Hz | 600 mA
Total wattage: 12 W
Material: Aluminium/Glass

- A versatile spotlight, suitable for use as a façade or mast light.

LED INSIDE CRI 80

1012117	2700 K 1350 lm
1012118	2200 K 1250 lm
1012125	3000 K 1450 lm


Variant	Prod. no.
anthracite 1350 lm | 2700 K	**1012117**
anthracite 1250 lm | 2200 K	**1012118**
anthracite 1450 lm | 3000 K	**1012125**

Product	Prod. no.
Wall bracket	
black	**234350**
Lamp shield	
anthracite	**1012131**
Honeycomb grid	
black	**1012133**
Mast clamp	
anthracite	**1012135**

PL-BEAM PRO M
SP, DALI

NEW





Dali IP66 IK08 23°/64° 70000h L80B20

220-240 V ~0/50/60 Hz | 700 mA
Total wattage: 26 W
Material: Aluminium/Glass

- A versatile spotlight, suitable for use as a façade or mast light.

LED INSIDE CRI 80

1012119	2700 K 3350 lm
1012120	2700 K 3200 lm
1012121	2200 K 3050 lm
1012122	2200 K 2900 lm
1012129	3000 K 3500 lm
1012130	3000 K 3300 lm


Variant	Prod. no.
anthracite 3350 lm | 2700 K | 23°	**1012119**
anthracite 3200 lm | 2700 K | 64°	**1012120**
anthracite 3050 lm | 2200 K | 23°	**1012121**
anthracite 2900 lm | 2200 K | 64°	**1012122**
anthracite 3500 lm | 3000 K | 23°	**1012129**
anthracite 3300 lm | 3000 K | 64°	**1012130**

Product	Prod. no.
Wall bracket	
black	**234350**
Lamp shield	
anthracite	**1012132**
Honeycomb grid	
black	**1012134**
Mast clamp	
anthracite	**1012135**

PL-BEAM PRO M
SP, DALI, ASYM

NEW





Dali IP66 IK08 33/25° 70000h L80B20

220-240 V ~0/50/60 Hz | 700 mA
Total wattage: 26 W
Material: Aluminium/Glass

- A versatile spotlight, suitable for use as a façade or mast light.

LED INSIDE CRI 80

1012123	2700 K 3300 lm
1012124	2200 K 3000 lm
1012126	3000 K 3400 lm

Variant	Prod. no.
anthracite 3300 lm | 2700 K	**1012123**
anthracite 3000 lm | 2200 K	**1012124**
anthracite 3400 lm | 3000 K	**1012126**

Product	Prod. no.
Wall bracket	
black	**234350**
Lamp shield	
anthracite	**1012131**
Honeycomb grid	
black	**1012133**
Mast clamp	
anthracite	**1012135**





PL-BEAM PRO S
LAMP SHIELD

NEW



Ø: 9.4 cm
H: 0.4 cm
Material: Aluminium

Variant	Prod. no.
anthracite	**1012131**

PL-BEAM PRO S
HONEYCOMB GRID

NEW



L: 13.7 cm
B: 13.8 cm
H: 7.4 cm
Material: Aluminium

Variant	Prod. no.
black	**1012133**

PL-BEAM PRO S/M
MAST CLAMP

NEW



L: 15 cm
W: 3.5 cm
H: 9.2 cm
Material: Aluminium

Variant	Prod. no.
anthracite	**1012135**

PL-BEAM PRO M
LAMP SHIELD

NEW




Ø: 13.3 cm
H: 0.4 cm
Material: Aluminium

Variant	Prod. no.
anthracite	**1012132**

PL-BEAM PRO M
HONEYCOMB GRID

NEW



L: 17.7 cm
W: 17.8 cm
H: 8.4 cm
Material: Aluminium

Variant	Prod. no.
black	**1012134**

PL-BEAM
WALL BRACKET

NEW




L: 82 cm
W: 18 cm
H: 11 cm
Material: Steel

Variant	Prod. no.
black	**234350**

GALEN 60
SP







220-240 V ~50/60 Hz | 450 mA
Total wattage: 18 W
Material: Aluminium




3000 K	4000 K
1570 lm	1570 lm

Variant	Prod. no.
● anthracite	**1003447**

Product	Prod. no.
5m connection cable with open cable end	
● black	**231960**
Connecting cable 1 m	
● black	**231961**

GALEN 120
SP







220-240 V ~50/60 Hz | 900 mA
Total wattage: 34 W
Material: Aluminium

• IP67 plug-in system




3000 K	4000 K
3000 lm	3100 lm

Variant	Prod. no.
● anthracite	**1003448**

Product	Prod. no.
5m connection cable with open cable end	
● black	**231960**
Connecting cable 1 m	
● black	**231961**

GALEN PRO 60
WL, DALI





Dali Touch IP65 IK06 26/54 180 50 000 h L80B20 17

220-240 V ~0/50/60 Hz | 305 mA
Total wattage: 20 W
Material: Aluminium/Glass

- Asym. light distribution for optimum illumination of paths
- IP connection box

LED INSIDE CRI 80


3000 K
2300 lm

Variant	Prod. no.
● anthracite	**1009107**

Product	Prod. no.
wall mount extension	
● black	**234350**

GALEN PRO 120
WL, DALI





Dali Touch IP65 IK06 26/54 180 50 000 h L80B20 17

220-240 V ~0/50/60 Hz | 335 mA
Total wattage: 40 W
Material: Aluminium/Glass

- Asym. light distribution for optimum illumination of paths
- IP connection box

LED INSIDE CRI 80


3000 K
5150 lm

Variant	Prod. no.
● anthracite	**1009108**

Product	Prod. no.
wall mount extension	
● black	**234350**

HELIA SPOT S
SP, SINGLE





IP66 IK04 35° 330° 90° 30000h L70B50 300

220-240 V ~50/60 Hz | 500 mA
Total wattage: 6.5 W
Material: Aluminium

- IP44 safety plug

LED INSIDE CRI 80

3000 K
440 lm


Variant	Prod. no.
● anthracite	**1000735**

⊕

Product	Prod. no.
Ground spike	
◐ stainless steel	**1000736**

HELIA SPOT L
SP, SINGLE, PHASE





C IP66 IK04 40° 320° 90° 40000h L70B50 300

220-240 V ~50/60 Hz | 700 mA
Total wattage: 15 W
Material: Aluminium

- IP44 safety plug

LED INSIDE CRI 80

3000 K
1340 lm


Variant	Prod. no.
● anthracite	**228555**

⊕

Product	Prod. no.
Ground spike	
◐ stainless steel	**228560**

FLAC BEAM
SP





IP65 IK04 60° 120° 170° 50 000 h L70B50 200

220-240 V ~50/60 Hz
Total wattage: 27 W
Material: Aluminium

- IP44 safety plug


LED INSIDE CRI 80

3000 K
1600 lm

Variant	Prod. no.
grey	**231072**

SAMRINA
SP, SINGLE, GU10





IP65 IK04 280° 150

220-240 V ~50/60 Hz
Material: Plastic

- Contains recycled material
- IP44 safety plug

SOCKET INSIDE 7 W

Base: GU10 | max. Ø: 6 cm | L: 6 cm

Variant	Prod. no.
black	**1004757**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L


Prod. no.: **1005077**



231035 742

NAUTILUS 10
SP, SQUARE







100-277 V ~50/60 Hz | 700 mA
Total wattage: 8.5 W
Material: Aluminium/Glass

- IP44 safety plug




3000 K
660 lm

Variant	Prod. no.
● anthracite	**231035**

NAUTILUS 10
SP, ROUND, QPAR51





IP65 IK04 180° 150

220-240 V ~50/60 Hz
Material: Aluminium

- IP44 safety plug

SOCKET INSIDE 10 W

Base: 1xGU10 | L: 5.7 cm

Variant	Prod. no.
grey	**227418**


GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077**

Better value as a set at slv.com

BIG NAUTILUS
SP, ROUND, QPAR51





IP44/ IP65 IK06 180° 150

220-240 V ~50/60 Hz
Material: Aluminium

- Ground spike made from recycled plastic
- IP44 safety plug

SOCKET INSIDE 11 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 8.3 cm

Variant	Prod. no.
black	**227410**
rust	**1001964**
green	**1001965**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077**


SMART

GU10 | 5 W | 100°
300 lm | 2000 K-6500 K | EEC = G

Prod. no.: **1012470**

NAUTILUS 10
SP, ROUND, QPAR51





IP55 IK04 180° 150

220-240 V ~50/60 Hz
Material: Stainless steel 316

- IP44 safety plug

SOCKET INSIDE 25 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.7 cm

Variant	Prod. no.
stainless steel	**229740**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077**


SMART

GU10 | 5 W | 100°
300 lm | 2000 K-6500 K | EEC = G

Prod. no.: **1012470**

NAUTILUS
SP, QR-C51





IP67 IK03 180° 150

12 V 50/60 Hz
Material: Stainless steel 304/glass

• Open cable end

SOCKET INSIDE 35 W

Base: 1xGX5.3


Variant	Prod. no.
stainless steel	**229090**

GU5.3 | 6 W | 36°
450 lm | 2700 K | EEC = G

Prod. no.: **1001574**

NAUTILUS 10 SPOT
SP, QPAR51





IP55 IK03 360° 180° 150

220-240 V ~50/60 Hz
Material: Stainless steel 316

• Open cable end

SOCKET INSIDE 25 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.
stainless steel	**229741**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077**

SMART


GU10 | 5 W | 100°
300 lm | 2000 K-6500 K | EEC = G

Prod. no.: **1012470**

Product	Prod. no.
Connection box IP68, 3-pin	
black	**228730**

NAUTILUS 10 SPOT
SP, LED





IP55 IK04 60° 180° 30000 h L70B50

220-240 V ~50/60 Hz
Total wattage: 9 W
Material: Stainless steel 316

• IP44 safety plug

LED INSIDE CRI 80


3000 K
690 lm

Variant	Prod. no.
stainless steel	**1001962**

Product	Prod. no.
Plastic ground spike	
black	**900011**
Mounting plate	
stainless steel	**1001963**

DASAR® PROJECTOR
SP, 12/24V





IP68 IK04 40° 90° 25000h L70B50 250

12-24 V
Power consumption: 6.5 W
Material: Stainless steel 316/glass

- Open cable end

LED INSIDE CRI 80


3000 K
520 lm

Variant	Prod. no.
stainless steel	**233570**

Product	Prod. no.
Stainless steel 316 ground spike	
stainless steel	**233580**
Stainless steel 316 mounting plate	
stainless steel	**233582**
Plastic ground spike	
black	**900011**
LED power supply 12V | 24W, round	
white	**1008651**
LED power supply 24V | 25W, round	
white	**1008652**

DASAR® 920
SP, 230V





IP67 IK04 40° 90° 25000h L70B50 200

220-240 V ~50/60 Hz | 400 mA
Total wattage: 4.6 W
Material: Stainless steel 316/glass

- IP44 safety plug

LED INSIDE CRI 80

3000 K
300 lm

Variant	Prod. no.
stainless steel	**233571**

Product	Prod. no.
Stainless steel 316 ground spike	
stainless steel	**233580**
Stainless steel 316 mounting plate	
stainless steel	**233582**
Plastic ground spike	
black	**900011**


1007868 747

HELIA SLIM
POLE, SINGLE



IP65 IK03 38° 180° 50000h L70B50 150

220-240 V ~50/60 Hz | 150 mA
Total wattage: 6 W
Material: Aluminium

- IP44 safety plug

LED INSIDE CRI 80

1007868 Spot	3000 K	450 lm
1011034 Spot	2200 K	500 lm

Variant	Prod. no.
● black 450 lm | 3000 K	**1007868**
● black 500 lm | 2200 K	**1011034** ●

HELIA SLIM
POLE, DOUBLE



IP65 IK03 38° 180° 50000h L70B50 150

220-240 V ~50/60 Hz | 150 mA
Total wattage: 12 W
Material: Aluminium

- IP44 safety plug

LED INSIDE CRI 80


	Spot 1	3000 K 450 lm
1007869	Spot 2	3000 K 450 lm
	Spot 1	2200 K 500 lm
1011033	Spot 2	2200 K 500 lm

Variant	Prod. no.
● black 450 lm | 3000 K	**1007869**
● black 500 lm | 2200 K	**1011033** ●


1004652 749

THEO BRACKET
SP





IP44/ IP65 | IK02 | 70° | 150

220-240 V ~50/60 Hz
Material: Aluminium/Glass

- IP44 safety plug

SOCKET INSIDE 7 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.7 cm

Variant	Prod. no.
anthracite	**1004652**


GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: **1005077**

LED SPIKE
SP





IP55 | IK06 | 40° | 30000 h L80B50 | 150

100-240 V ~50/60 Hz | 240 mA
Total wattage: 6 W
Material: Aluminium/Glass

- IP44 safety plug

LED INSIDE CRI 80

3000 K
400 lm


Variant	Prod. no.
anthracite	**1002201**
Rust	**1002203**



231535 751

SITRA 360 SPIKE
SP, SINGLE, TCR-TSE





IP44 IK04 90° 150

220-240 V ~50/60 Hz
Material: Aluminium/Glass

- Ground spike made from recycled plastic
- IP44 safety plug

SOCKET INSIDE 9 W

Base: 1xG53 | max. Ø: 7.5 cm | L: 3.5 cm

Variant	Prod. no.
● anthracite	**231525**


GX53 | 6 W | 120°
490 lm | 2700 K | EEC = G

C,L

Prod. no.: 1005272

SITRA 360 SPIKE
SP, DOUBLE, TCR-TSE





IP44 IK04 90° 90° 150

220-240 V ~50/60 Hz
Material: Aluminium/Glass

- IP44 safety plug

SOCKET INSIDE 9 W


Base: 2xG53 | max. Ø: 7.5 cm | L: 3.5 cm

Variant	Prod. no.
● anthracite	**231535**

GX53 | 6 W | 120°
490 lm | 3000 K | EEC = G

C,L

Prod. no.: 1005271

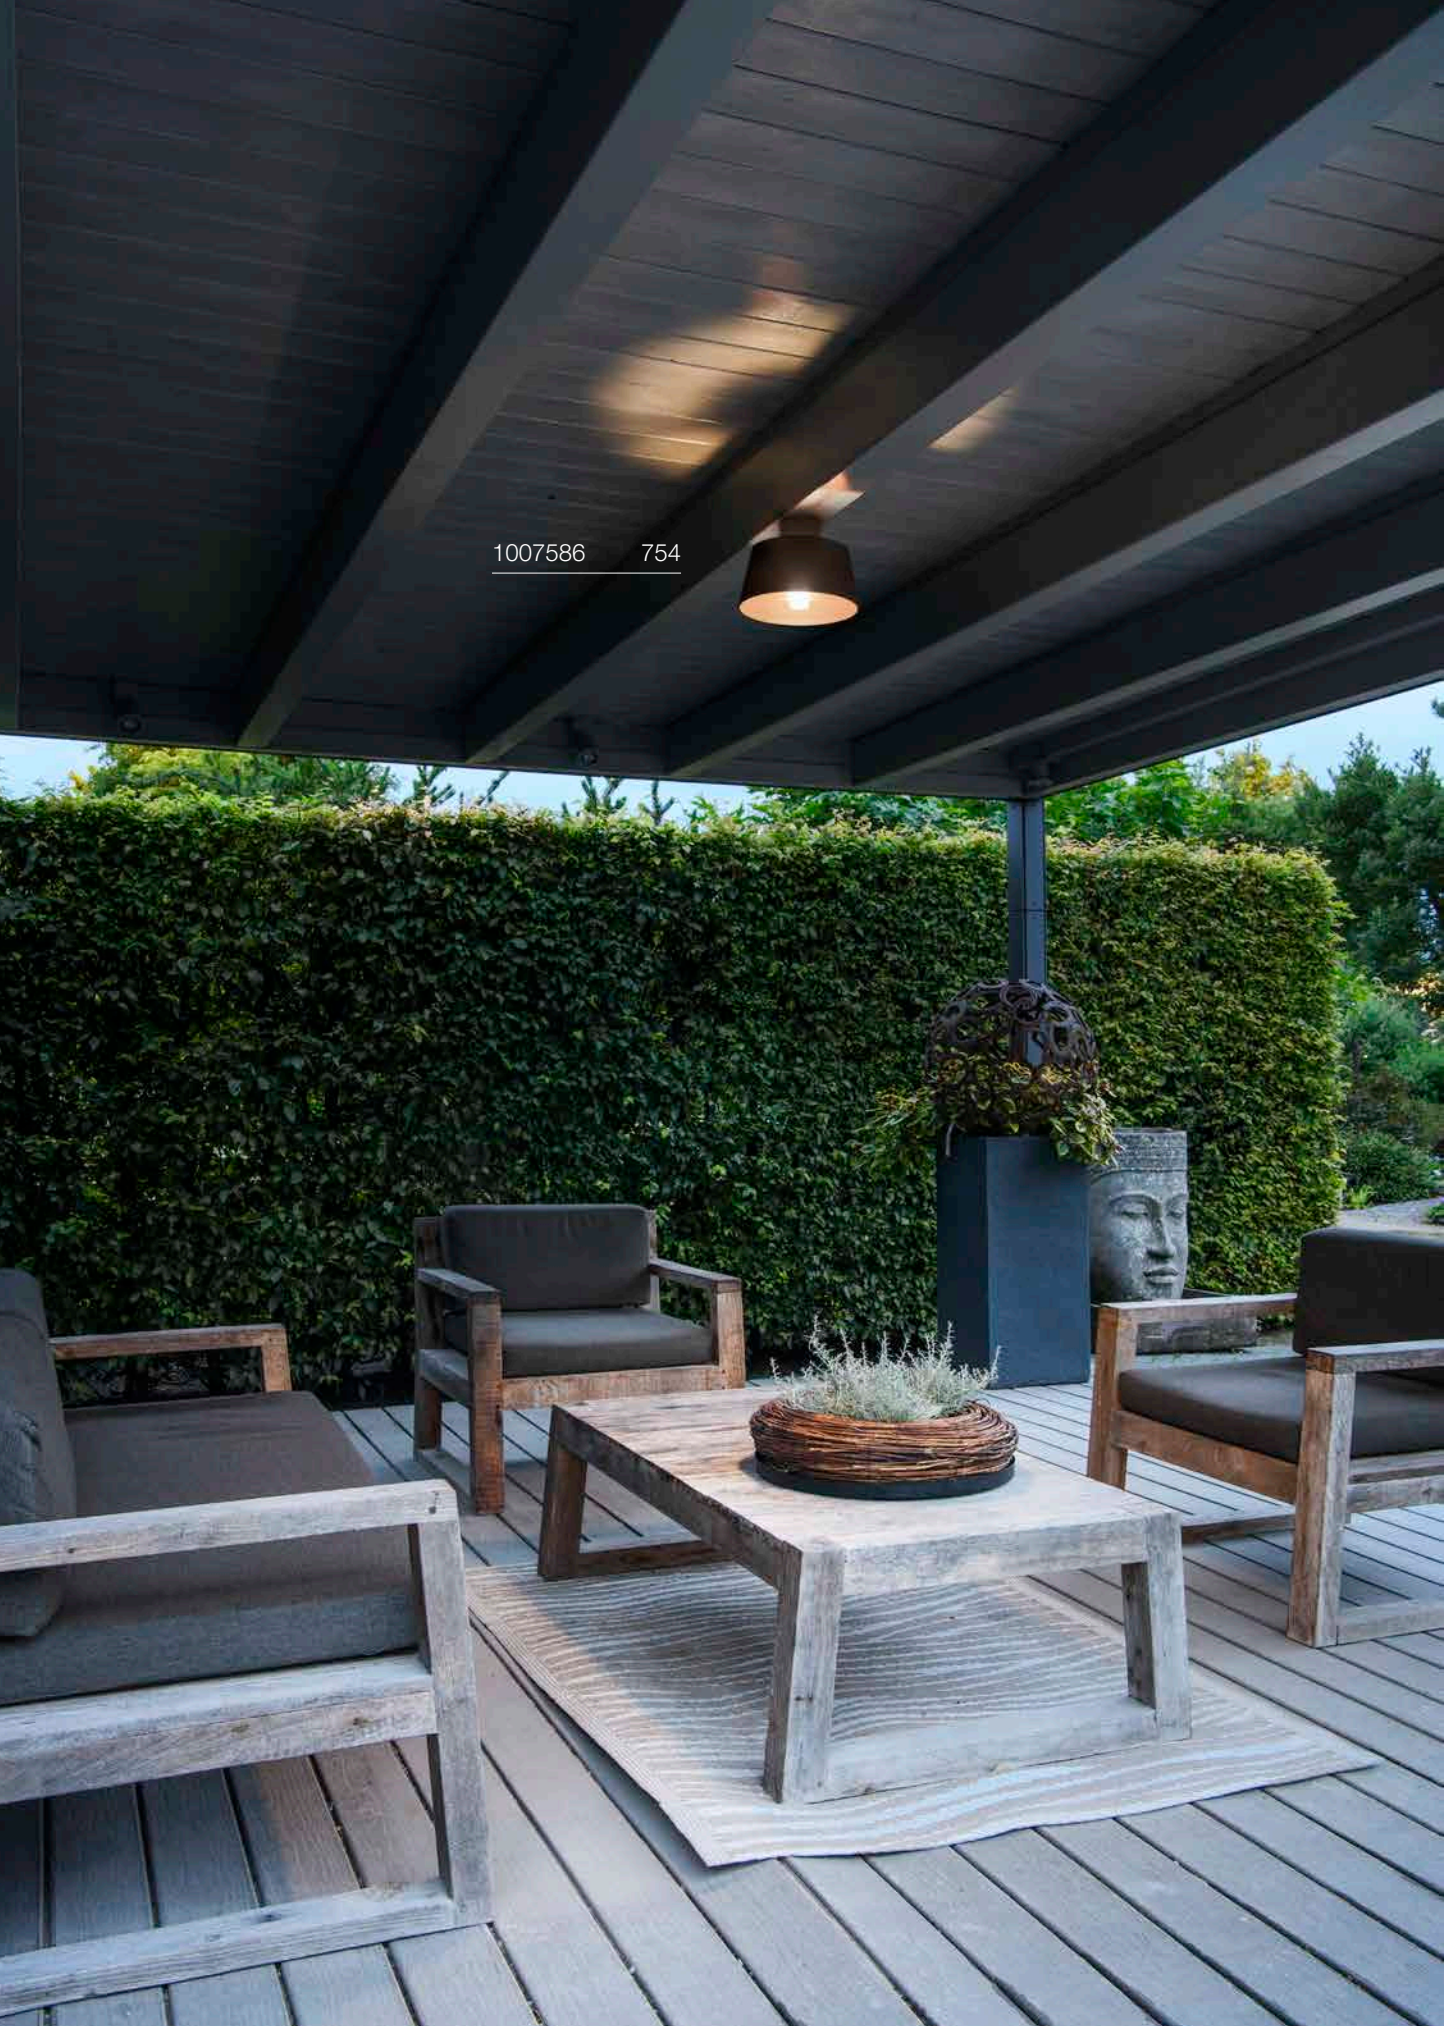
1007586 754

OUTDOOR | CEILING LIGHTS



SOCKET

PHOTONI CYL | 754




SOCKET

PHOTONI | 754



SOCKET

SEJERO | 755



LED

CUBE | 757



LED

ESKINA FRAME | 757



LED

ENOLA® OCULUS | 758



LED

ENOLA® ROUND | 759



LED


ENOLA® SQUARE | 760–761



LED

SOCKET

BIG THEO | 761





LED

OVALISK | 763



SOCKET

MOLAT | 763



SOCKET

SITRA | 765




SOCKET

ROX | 765



PHOTONI CYL
CL, E27





IP65 IK08

220-240 V ~50/60 Hz
Material: Aluminium

• Sea-air resistant

SOCKET INSIDE 13 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.6 cm

Variant	Prod. no.
● black	**1008199**
● Rust	**1008200**


E27 | 4 W | 280°
830 lm | 2700 K | EEC = A

Prod. no.: 1008641

PHOTONI
CL, E27

GERMAN DESIGN AWARD WINNER 2024





IP65 IK08

220-240 V ~50/60 Hz
Material: Aluminium

• Sea-air resistant

SOCKET INSIDE 13 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.6 cm

Variant	Prod. no.
● black	**1007586**
● Rust	**1007582**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no.: 1005289

SEJERO
PD, E27



IP65 IK02 49,1 cm

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 15 W


Base: 1xE27 max. Ø: 6.5 cm | L: 12 cm

Variant	Prod. no.
anthracite	**1011025**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no.: **1005303**

SEJERO
PD, E27

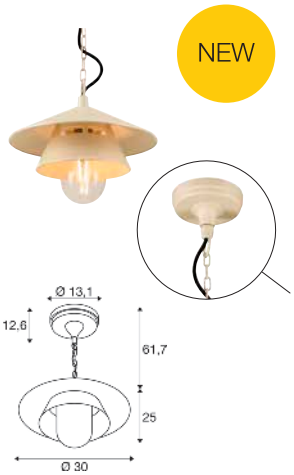

IP65 IK02 49,1 cm

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 15 W

Base: 1xE27 max. Ø: 6.5 cm | L: 12 cm

Variant	Prod. no.
beige	**1011026**


E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no.: **1005303**


1007461 757

CUBE
CL, PHASE





IP65 IK04 80° 50000 h L70B20

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- The light colour must be set prior to installation

LED INSIDE CCT CRI 80


2700 K	3000 K
1000 lm	1200 lm

Variant	Prod. no.
● anthracite	**1007461**

ESKINA FRAME
CL, SINGLE, PHASE

GERMAN DESIGN AWARD WINNER 2022





IP65 IK06 95° 320° 30000 h L70B50


220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Light head is pivoting

LED INSIDE CCT CRI 80


	3000 K	4000 K
Direct	1100 lm	1200 lm

Variant	Prod. no.
● anthracite	**1006316**

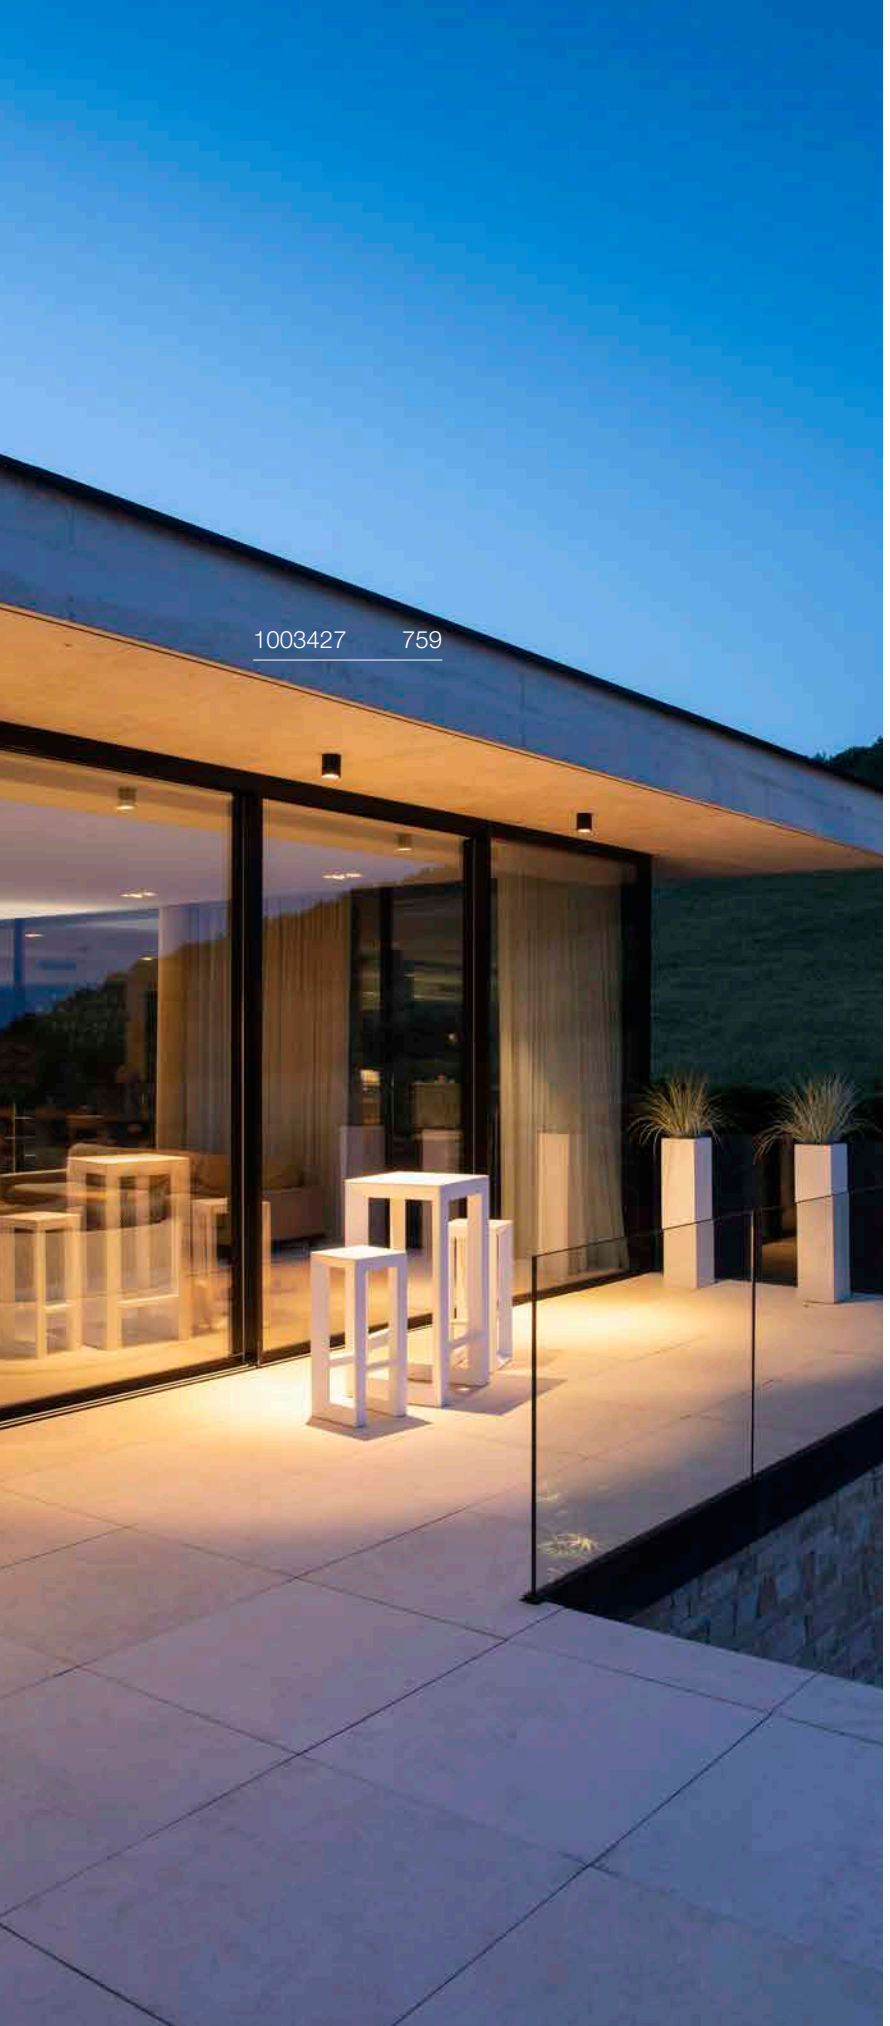

ENOLA® OCULUS
CL







220-240 V ~50/60 Hz | 500 mA
Total wattage: 10.3 W
Material: Aluminium/Glass

- The light colour must be set prior to installation




3000 K	4000 K
1050 lm	1130 lm

Variant	Prod. no.
● anthracite	**1006327**

Product	Prod. no.
Spacer	
● anthracite	**1003479**

ENOLA® ROUND S
CL





IP65 IK06 38° 50000h L80B20 10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9 W
Material: Aluminium/Glass

- The light colour must be set prior to installation

LED INSIDE CCT CRI 90


3000 K	4000 K
610 lm	720 lm

Variant	Prod. no.
anthracite	**1003426**

Product	Prod. no.
Spacer	
anthracite	**1003479**
Lens 19°	
black	**1005205**
Asymmetrical lens	
black/chrome	**1005206**
Reflector 60°	
chrome	**1005207**

ENOLA® ROUND M
CL





IP65 IK06 38° 50000h L80B20 10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 10.5 W
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using interchangeable 19°, 60° and asymmetric optics as accessories

LED INSIDE CCT CRI 90


3000 K	4000 K
1010 lm	1050 lm

Variant	Prod. no.
anthracite	**1003427**

Product	Prod. no.
Spacer	
anthracite	**1003479**
Lens 19°	
black	**1005205**
Asymmetrical lens	
black/chrome	**1005206**
Reflector 60°	
chrome	**1005207**

ENOLA® ROUND L
CL





IP65 IK06 38° 50000h L80B50 10

220-240 V ~50/60 Hz | 900 mA
Total wattage: 36 W
Material: Aluminium/Glass


- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory

LED INSIDE CCT CRI 90

3000 K	4000 K
3380 lm	3770 lm


Variant	Prod. no.
anthracite	**1003442**

Product	Prod. no.
Spacer	
anthracite	**1003479**
Reflector 60°	
chrome	**1005263**

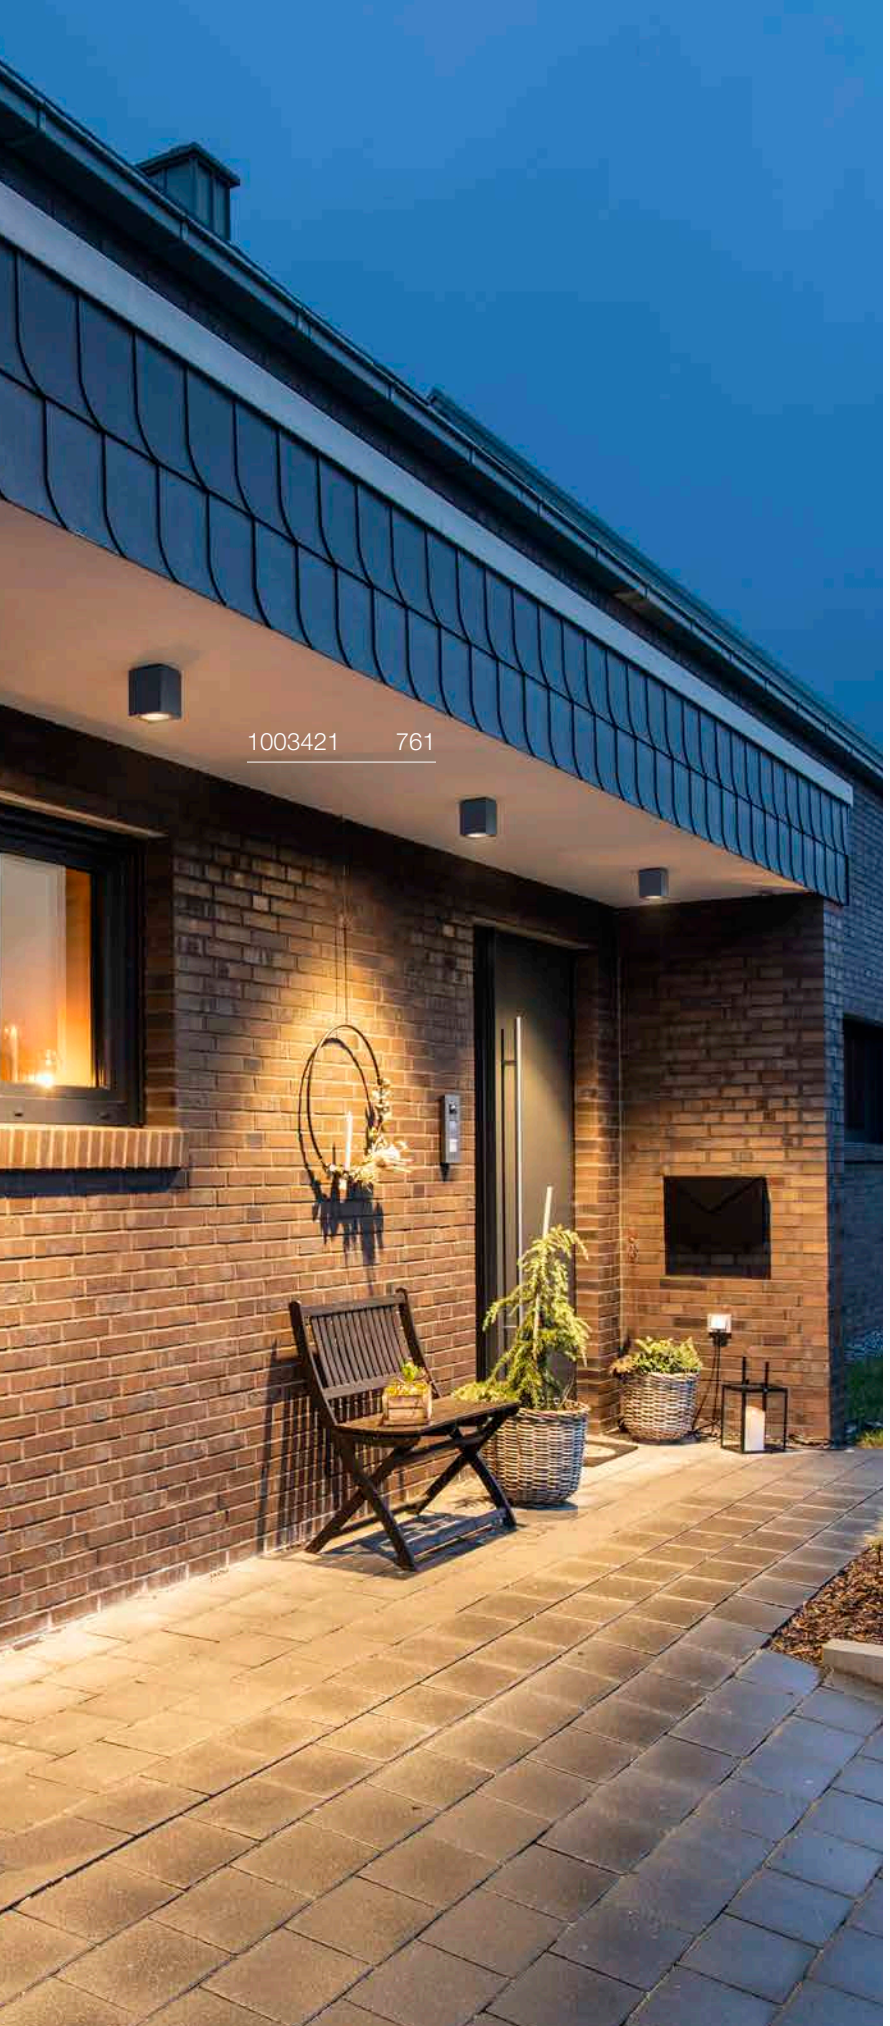

ENOLA® SQUARE S
CL







220-240 V ~50/60 Hz | 500 mA
Total wattage: 9 W
Material: Aluminium/Glass

- The light colour must be set prior to installation




3000 K	4000 K
610 lm	720 lm

Variant	Prod. no.
anthracite	**1003420**

Product	Prod. no.
Spacer	
anthracite	**1003479**
Lens 19°	
black	**1005205**
Asymmetrical lens	
black/chrome	**1005206**
Reflector 60°	
chrome	**1005207**

ENOLA® SQUARE M
CL





IP65 IK06 38° 50000h L80B20 10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 10.5 W
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using interchangeable 19°, 60° and asymmetric optics as accessories

LED INSIDE CCT CRI 90


3000 K	4000 K
1010 lm	1050 lm

Variant	Prod. no.
anthracite	**1003421**

Product	Prod. no.
Spacer	
anthracite	**1003479**
Lens 19°	
black	**1005205**
Asymmetrical lens	
black/chrome	**1005206**
Reflector 60°	
chrome	**1005207**

BIG THEO
CL





IP44 IK02 24° 30000h L70B50

100-277 V ~50/60 Hz | 500 mA
Total wattage: 21 W
Material: Aluminium/Glass


LED INSIDE CRI 80

3000 K
2000 lm

Variant	Prod. no.
anthracite	**234535**

BIG THEO
CL, QPAR111





IP44 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 75 W

Base: 1xGU10

Variant	Prod. no.
anthracite	**229555**
white	**229551**
grey	**229554**


GU10 | 13 W | 12°
650 lm | 3000 K | EEC = F

Prod. no.: **1005278**


1004677 763

OVALISK
CL





IP65 IK02 30000 h L70B50 20

220-240 V ~50/60 Hz | 350 mA
Total wattage: 7.9 W
Material: Aluminium/Glass

- The light colour must be set prior to installation


LED INSIDE CCT CRI 80

3000 K	4000 K
540 lm	570 lm

Variant	Prod. no.
● anthracite	**1004677**

MOLAT
CL, E27





IP44 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 60 W

Base: 1xE27	max. Ø: 6.5 cm	L: 14.5 cm

Variant	Prod. no.
● anthracite	**1000823**

E27 | 8 W | 320°
700 lm | 2500 K | EEC = F


C,L

Prod. no.: **1005265**


1000339 765

SITRA
CL, TCR-TSE





IP44 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 9 W

Base: 1xG53 max. Ø: 7.5 cm | L: 3.5 cm

Variant	Prod. no.
● anthracite	**231545**
○ white	**231541**


GX53 | 6 W | 120°
490 lm | 2700 K | EEC = G

C,L

Prod. no.: 1005272

ROX
CL, QPAR111





IP44 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 50 W

Base: 1xGU10

Variant	Prod. no.
● aluminium	**1000332**


GU10 | 13 W | 12°
650 lm | 3000 K | EEC = F

C

Prod. no.: 1005278

ROX
CL, GX53





IP44

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 11 W

Base: 1xG53 max. Ø: 7.5 cm | L: 3.5 cm

Variant	Prod. no.
● aluminium	**1000339**

GX53 | 6 W | 120°
490 lm | 3000 K | EEC = G

C,L

Prod. no.: 1005271


1010161 802

OUTDOOR | WALL AND CEILING LIGHTS



SOCKET

SEJERO | 771



ALEGRIA | 773





AINOS SLIDE | 774–775



QUADRASYL PRO | 777



S-CUBE | 778



R-CUBE | 778



MODELA | 778




PHOTONI CYL | 779



PHOTONI | 779





LID I | 780–781





LID II | 781



Q-RING | 782



I-RING | 783



D-RING | 783



OVAL | 784



CONCRETO | 785





RASTERLYS | 787





T-TUBE | 788–789



S-TUBE | 791



FLATT II | 793



FLATT | 794



THEO UP/DOWN | 795



BIG THEO | 795–796



THEO | 796



BIG THEO FLOOD



BIG THEO | 797



THEO PRO | 798–801



HELIA PRO | 802–805



SITRA | 807–809




SITRA CUBE | 809



BIG QUAD | 810



QUAD | 811



RUSTY® UP/DOWN | 812





ENOLA® OCULUS | 813



ENOLA® ROUND | 816–817



ENOLA® SQUARE | 818–819





GRAFIT | 822–823



SQUARE | 824







QUADRULO | 824–825



MERIDIAN | 826




MERIDIAN BOX | 827





ESKINA FRAME | 829



BOOKAT | 830



TAHA II | 830



OVALISK SENSOR | 831







PEMA® | 832–833



ASTINA | 834



ASTINA STEEL | 834



ANGOLUX | 835



VILUA | 837



MYRA UP/DOWN | 839





SITRA | 839



ROX | 840



DELWA | 840



WALLYX | 840



DOWNUNDER OUT | 841





ABRIDOR | 843



NEW

ORDI | 844



ORDI II | 845



BOX-L | 846



BOX | 846



LOGS | 487



OUT-BEAM UP/
FLOOD DOWN | 847



L-LINE OUT | 847



PHOTONIA | 848



MOLAT | 848



GLOO PURE | 848




F-POL | 849



IPERI | 849



QUADRASYL | 849



SQUARE TURN | 850



TODAY PRO | 850



ESKINA D | 851



MYRA DISPLAY | 851



MYRA | 851



LED SPOT | 853



NAUTILUS | 853



MYRA | 853



ESKINA SPOT | 855



SITRA 360 | 856



THEO BRACKET | 856





HELIA | 857





AINOS | 858–859



TERANG 200 | 861



BULAN | 861




BULAN GRID | 861


1011021 771

SEJERO
WL, E27








220-240 V ~50/60 Hz
Material: Aluminium/Glass



Base: 1xE27 | max. Ø: 6.5 cm | L: 12 cm


Variant	Prod. no.
anthracite	**1011021**



Prod. no. **1005303**

SEJERO
WL, E27








220-240 V ~50/60 Hz
Material: Aluminium/Glass



Base: 1xE27 | max. Ø: 6.5 cm | L: 12 cm

Variant	Prod. no.
beige	**1011022**




Prod. no. **1005303**


1012140 773

ALEGRIA
WL, TRIAC

NEW







220-240 V ~50/60 Hz | 160 mA
Total wattage: 9 W
Material: Aluminium/Plastic PC

- 10° accent light combined with 120° general lighting.



	2200 K	2700 K
Up	5 lm	5 lm
Down	2200 K	2700 K
	495 lm	545 lm


Variant	Prod. no.
anthracite	**1012140**



AINOS SLIDE
WL, SQUARE, PHASE

NEW







220-240 V ~0/50/60 Hz | 350 mA
Total wattage: 11 W
Material: Aluminium/Plastic PC




2700 K	3000 K
900 lm	950 lm

Variant	Prod. no.
● black	**1011260** ●

AINOS SLIDE
WL, ROUND, PHASE

NEW





C,L IP65 IK08 50000h L80B20 20

220-240 V ~0/50/60 Hz | 350 mA
Total wattage: 11 W
Material: Aluminium/Plastic PC

LED INSIDE CCT CRI 80


2700 K	3000 K
850 lm	900 lm

Variant	Prod. no.
● black	**1011261** ●

AINOS SLIDE
WL, SQUARE, SENSOR

NEW





IP65 IK08 50000h L80B20 20

220-240 V ~0/50/60 Hz | 350 mA
Total wattage: 11.5W
Material: Aluminium/Plastic PC

LED INSIDE CCT CRI 80


2700 K	3000 K
900 lm	950 lm

Variant	Prod. no.
● black	**1011262** ●

AINOS SLIDE
WL, ROUND, SENSOR

NEW





IP65 IK08 50000h L80B20 20

220-240 V ~0/50/60 Hz | 350 mA
Total wattage: 11.5W
Material: Aluminium/Plastic PC

LED INSIDE CCT CRI 80

2700 K	3000 K
850 lm	900 lm


Variant	Prod. no.
● black	**1011263** ●


10121444 777

QUADRASYL PRO
WL, SINGLE, DALI, ASYM

NEW





Dali IP65 IK08 69/138° 70000h L80B20

100-240 V ~50/60 Hz | 300 mA
Total wattage: 12 W
Material: Aluminium/Glass

- Asymmetrical light distribution for targeted illumination of driveways and access routes along façades or walls

LED INSIDE CCT CRI 80


	2200 K	2700 K
1012147	850 lm	1200 lm
1012146	750 lm	1100 lm

Variant	Prod. no.
● anthracite 750 lm	**1012146**
○ white 850 lm	**1012147**

QUADRASYL PRO
WL, UP/DOWN, DALI

NEW





Dali IP65 IK08 23° 23° 70000h L80B20

100-240 V ~50/60 Hz | 300 mA
Total wattage: 12 W
Material: Aluminium/Glass


LED INSIDE CCT CRI 80

	2200 K	2700 K
Up	500 lm	650 lm
Down	500 lm	650 lm

Variant	Prod. no.
● anthracite	**1012144**
○ white	**1012145**

S-CUBE
CW, PHASE





IP65 IK04 80° 180° 50000 h L70B20

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- The light colour must be set prior to installation


LED INSIDE CCT CRI 80

2700 K	3000 K
1000 lm	1200 lm

Variant	Prod. no.
anthracite	**1007458**

R-CUBE
WL, PHASE





IP65 IK04 70° 350° 130° 48000 h L70B20

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- The light colour must be set prior to installation


LED INSIDE CCT CRI 80

2700 K	3000 K
800 lm	800 lm

Variant	Prod. no.
anthracite	**1007511**

MODELA
WL, UP/DOWN, PHASE





IP65 IK07 60° 50000 h L80B50 65

220-240 V ~50/60 Hz | 95 mA
Total wattage: 7.5 W
Material: Aluminium


LED INSIDE CRI 80

		2700 K
1007808	Up	385 lm
	Down	2700 K 385 lm
1007807 **1007806**	Up	2700 K 405 lm
	Down	2700 K 405 lm
1007809	Up	2700 K 400 lm
	Down	2700 K 400 lm

Variant	Prod. no.
black/gold	**1007807**
black	**1007808**
white/gold	**1007806**
white	**1007809**

PHOTONI CYL
WL, E27





IP65 IK08

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 13 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.6 cm

Variant	Prod. no.
black	**1008197**
rust	**1008198**

E27 | 8 W | 180°
720 lm | 2700 K | EEC = F

Prod. no. **1005305**

SMART


E27 | 9 W | 200°
806 lm | 2000 K-6500 K | EEC = F

Prod. no. **1012472**

PHOTONI
WL, E27

GERMAN DESIGN AWARD WINNER 2024





IP65 IK08

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 13 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.6 cm

Variant	Prod. no.
black	**1007585**
rust	**1007581**


E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no. **1005289**



LID I
WL, SINGLE, PHASE







220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- The light colour must be set prior to installation




2700 K	3000 K
900 lm	1050 lm

Variant	Prod. no.
anthracite	**1007667**

LID I
WL, DOUBLE, PHASE







220-240 V ~50/60 Hz | 700 mA
Total wattage: 29 W
Material: Aluminium

- The light colour must be set prior to installation


LED INSIDE CCT CRI 80

	2700 K	3000 K
Direct	850 lm	1000 lm
Direct	850 lm	1000 lm

Variant	Prod. no.
anthracite	**1007668**

LID II
WL, SINGLE, PHASE







220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- The light colour must be set prior to installation


LED INSIDE CCT CRI 80

	2700 K	3000 K
	800 lm	800 lm

Variant	Prod. no.
anthracite	**1007282**

LID II
WL. UP/DOWN, PHASE







220-240 V ~50/60 Hz | 700 mA
Total wattage: 28 W
Material: Aluminium

- The light colour must be set prior to installation


LED INSIDE CCT CRI 80

	2700 K	3000 K
Up	750 lm	750 lm
Down	750 lm	750 lm

Variant	Prod. no.
anthracite	**1007281**

Q-RING
WL, PHASE







220-240 V ~50/60 Hz | 240 mA
Total wattage: 10 W
Material: Aluminium/Plastic




3000 K
950 lm

Variant	Prod. no.
● black	**1007918**
○ white	**1007919**

Q-RING
WL, SENSOR







220-240 V ~50/60 Hz | 240 mA
Total wattage: 10 W
Material: Aluminium/Plastic




3000 K
950 lm

Variant	Prod. no.
● black	**1007916**
○ white	**1007917**

I-RING
WL





IP65 IK05 350° 90° 50000 h L70B50 20


100-240 V ~50/60 Hz | 350 mA
Total wattage: 9.2 W
Material: Aluminium

	3000 K
	670 lm

Variant	Prod. no.
● anthracite	**1007236**

D-RING S
WL, PHASE





C,L IP65 IK06 50000 h L80B20 160

220-240 V ~50/60 Hz | 95 mA
Total wattage: 7.5 W
Material: Aluminium


- The light colour must be set prior to installation

	2700 K	3000 K
1007912	790 lm	820 lm
1007911	630 lm	650 lm

Variant	Prod. no.
● black	**1007911**
○ white	**1007912**

D-RING M
WL, PHASE





C,L IP65 IK06 50000 h L80B20 80

220-240 V ~50/60 Hz | 190 mA
Total wattage: 15 W
Material: Aluminium


- The light colour must be set prior to installation

	2700 K	3000 K
1007914	1540 lm	1590 lm
1007913	1260 lm	1360 lm

Variant	Prod. no.
● black	**1007913**
○ white	**1007914**

OVAL 14
WL, UP/DOWN







220-240 V ~50/60 Hz | 145 mA
Total wattage: 5.7 W
Material: Aluminium/Polycarbonate (PC)

- The light colour must be set prior to installation




	2700 K	3000 K
Up	280 lm	280 lm
Down	280 lm	280 lm

Variant	Prod. no.
● black/frosted	**1007142**
○ white/frosted	**1007143**

OVAL 18
WL, UP/DOWN







220-240 V ~50/60 Hz | 275 mA
Total wattage: 9.3 W
Material: Aluminium/Polycarbonate (PC)

- The light colour must be set prior to installation




	2700 K	3000 K
Up	430 lm	430 lm
Down	430 lm	430 lm

Variant	Prod. no.
● black/frosted	**1007144**
○ white/frosted	**1007145**

CONCRETO M
WL





IP65 IK02 50000h L80B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 8.5 W
Material: Concrete/Aluminium


LED INSIDE CRI 80

3000 K
270 lm

Variant	Prod. no.
grey	**1006404**

CONCRETO L
WL






IP65 IK03 50000h L80B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 12 W
Material: Concrete/Aluminium

LED INSIDE CRI 80


3000 K
470 lm

Variant	Prod. no.
grey	**1006405**

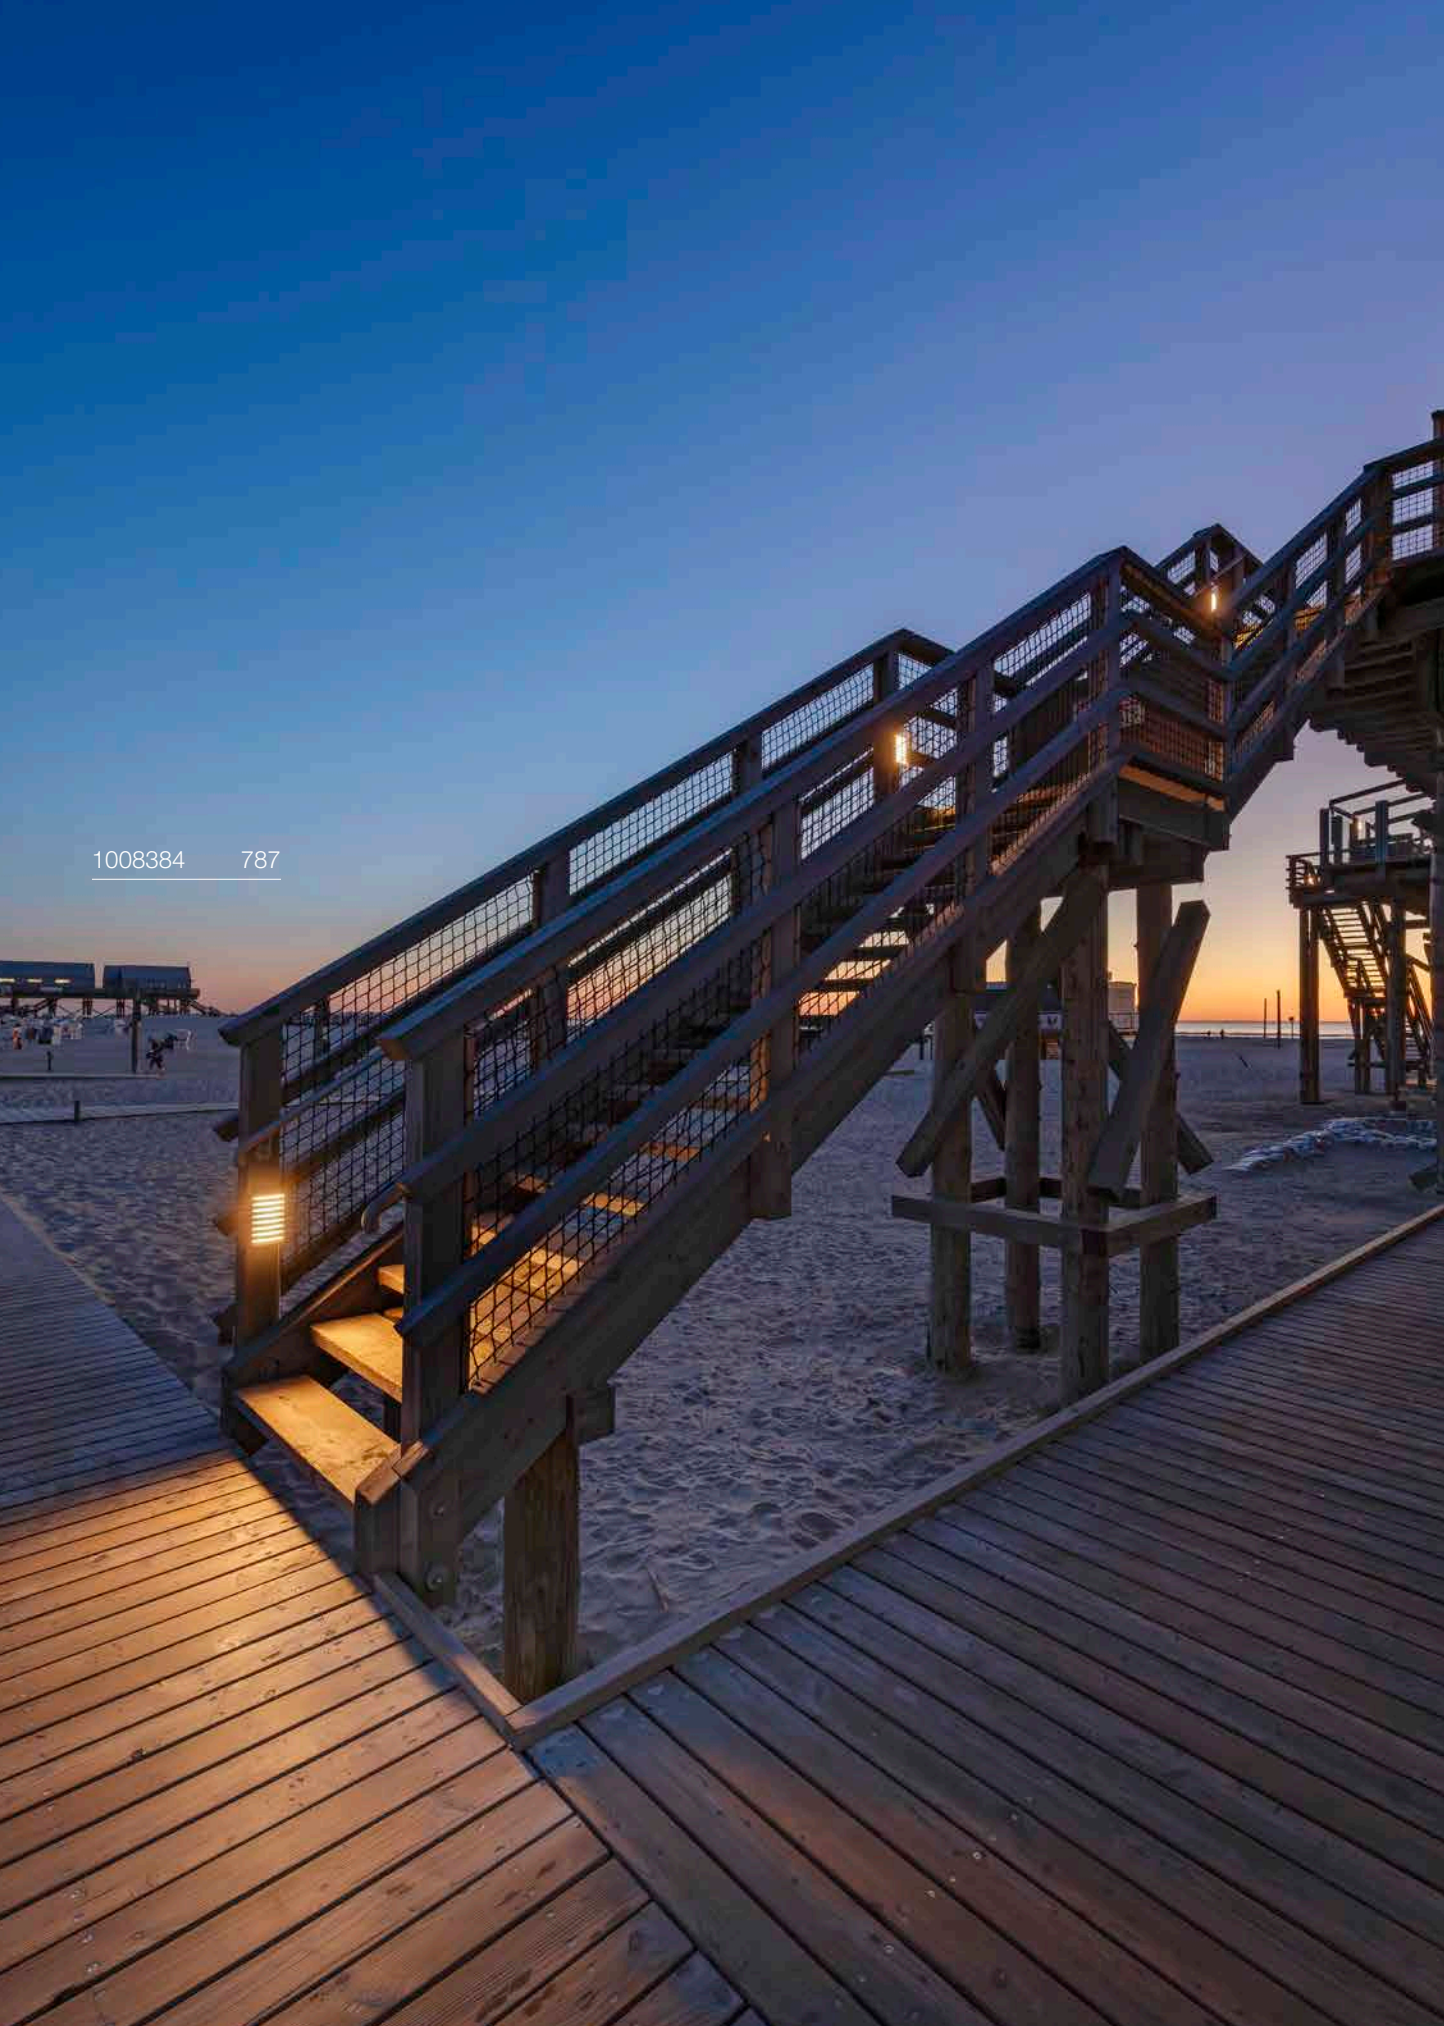
1008384 787

RASTERLYS
WL, PHASE





C,L IP65 IK06 70° 50000h L80B50 50

220-240 V ~0/50/60 Hz | 350 mA
Total wattage: 14 W
Material: Aluminium

- The light colour must be set prior to installation
- Suitable for DC operation

LED INSIDE CCT CRI 80


2700 K	3000 K
350 lm	400 lm

Variant	Prod. no.
● anthracite	**1008384**

RASTERLYS
WL, UP/DOWN, PHASE

NEW





C,L IP65 IK03 45° 50000h L80B20

220-240 V ~0/50/60 Hz | 350 mA
Total wattage: 16 W
Material: Aluminium/Glass

LED INSIDE CRI 80

	3000 K
Up	450 lm
Down	100 lm


Variant	Prod. no.
● anthracite	**1011020** ●



T-TUBE
WL GU10, SINGLE, SENSOR

GERMAN DESIGN AWARD WINNER 2026





IP44 IK06 90°

220-240 V ~50/60 Hz
Material: Aluminium

- PIR sensor, adjustable range 10-2000 lx and 5 s-10 min. Detection range up to 8 m depending on the mounting height of the light

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
● black	**1008010**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no. **1005077**

SMART


GU10 | 5 W | 100°
300 lm | 2000 K-6500 K | EEC = G

Prod. no. **1012470**

T-TUBE
WL GU10, DOUBLE, SENSOR

GERMAN DESIGN AWARD WINNER 2026





IP44 IK06 90° IR

220-240 V ~50/60 Hz
Material: Aluminium

- Lower luminaire head 90° - Upper luminaire head 180° swivelling
- PIR sensor, adjustable range 10-2000 lx and 5 s-10 min. Detection range up to 8 m depending on the mounting height of the light

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
● black	**1008011**


GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no. **1005077**

T-TUBE
WL GU10, SINGLE

GERMAN DESIGN AWARD WINNER 2026





IP65 IK06 90°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
● black	**1008012**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no. **1005077**

SMART


GU10 | 5 W | 100°
300 lm | 2000 K-6500 K | EEC = G

Prod. no. **1012470**

T-TUBE
WL GU10, DOUBLE

GERMAN DESIGN AWARD WINNER 2026





IP65 IK06 90°

220-240 V ~50/60 Hz
Material: Aluminium

- Lower luminaire head 90° - Upper luminaire head 180° swivelling

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.
● black	**1008013**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F


Prod. no. **1005077**

SMART

GU10 | 5 W | 100°
300 lm | 2000 K-6500 K | EEC = G


Prod. no. **1012470**


1007653 791

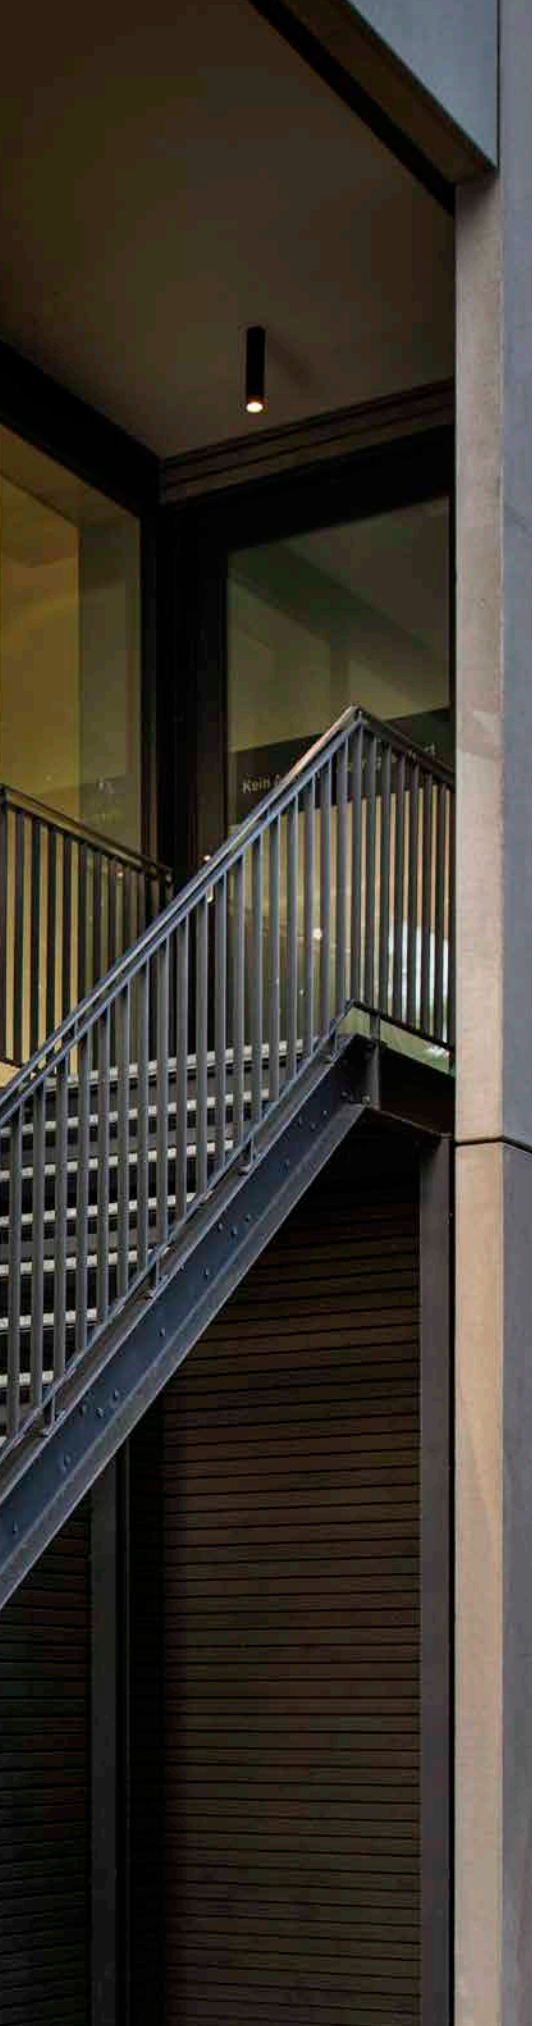

S-TUBE
CW







220-240 V ~50/60 Hz
Material: Aluminium

- Streamlined design

SOCKET INSIDE 10 W

Base: 1xGU10	max. Ø: 5.1 cm	L: 5.5 cm

Variant	Prod. no.
● black	**1007653**

GU10 | 2 W | 36°
230 lm | 2700 K | EEC = E


Prod. no. **1007230**



1010107 793

FLATT II
WL, UP/DOWN, PHASE








220-240 V ~50/60 Hz | 240 mA
Total wattage: 9.5 W
Material: Aluminium

1010102	Up	2700 K / 310 lm
	Down	2700 K / 310 lm
1010101	Up	2700 K / 320 lm
	Down	2700 K / 320 lm

Variant	Prod. no.
black	**1010102**
anthracite/brown	**1010101**

FLATT II
WL, UP/DOWN, SENSOR







100-240 V ~50/60 Hz | 240 mA
Total wattage: 10 W
Material: Aluminium


- Primary and replica functionality. Option to control additional lights without a sensor.

1010108	Up	2700 K / 310 lm
	Down	2700 K / 310 lm
1010107	Up	2700 K / 320 lm
	Down	2700 K / 320 lm

Variant	Prod. no.
black	**1010108**
anthracite/brown	**1010107**

FLATT
WL





IP65 IK03 30000h L70B50

100-240 V ~50/60 Hz | 300 mA
Total wattage: 13 W
Material: Aluminium


LED INSIDE CCT CRI 80

	3000 K	4000 K
1002953	500 lm	550 lm
1002952	500 lm	530 lm

Variant	Prod. no.
anthracite 500 lm	**1002952**
anthracite/brown 500 lm	**1002953**

FLATT SENSOR
WL





IP54 IK03 30000h L70B50

100-240 V ~50/60 Hz | 300 mA
Total wattage: 13 W
Material: Aluminium

- PIR sensor, adjustable range 15-2000 lx and 5 s-10 min. Detection range between 6-9 m depending on the mounting height of the light


LED INSIDE CCT CRI 80

	3000 K	4000 K
1002955	500 lm	550 lm
1002954	500 lm	530 lm

Variant	Prod. no.
anthracite 500 lm	**1002954**
anthracite/brown 500 lm	**1002955**

THEO UP/DOWN
WL, QPAR51





IP44 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 35 W

Base: 2xGU10

Variant	Prod. no.
● anthracite	**229535**
○ white	**229531**
● grey	**229532**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no. **1005077**


SMART

GU10 | 5 W | 100°
300 lm | 2000 K-6500 K | EEC = G

Prod. no. **1012470**

BIG THEO
WL, BEAM UP FLOOD DOWN





IP44 IK02 2° 24° 25 000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 29 W
Material: Aluminium/Glass

- The 2° light effect is particularly suitable for contouring and structuring high surfaces and building facades such as hotels, restaurants or even apartment blocks and shopping centres.


LED INSIDE CRI 80

Down	3000 K 2000 lm
Up	3000 K 130 lm

Variant	Prod. no.
● anthracite	**234515**

BIG THEO UP/DOWN
WL, QPAR111





IP44 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 75 W

Base: 2xGU10


Variant	Prod. no.
anthracite	**229575**
grey	**229574**

GU10 | 13 W | 12°
650 lm | 3000 K | EEC = F

Prod. no. **1005278**

THEO
WL, QPAR51





IP44 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 35 W

Base: 1xGU10

Variant	Prod. no.
anthracite	**229525**
grey	**229524**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no. **1005077**


SMART

GU10 | 5 W | 100°
300 lm | 2000 K-6500 K | EEC = G

Prod. no. **1012470**

BIG THEO FLOOD
WL, UP/DOWN





IP44 IK02 24° 30000 h L70B50


220-240 V ~50/60 Hz | 1000 mA
Total wattage: 42 W
Material: Aluminium/Glass


LED INSIDE CRI 80

Up	3000 K 2000 lm
Down	3000 K 2000 lm

Variant	Prod. no.
anthracite	**234505**

BIG THEO
WL, QPAR111





IP44 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 75 W

Base: 1xGU10

Variant	Prod. no.
anthracite	**229565**
grey	**229564**


GU10 | 13 W | 12°
650 lm | 3000 K | EEC = F



Prod. no. **1005278**

BIG THEO
WL





IP44 IK02 24° 30000h L70B50

100-277 V ~50/60 Hz | 500 mA
Total wattage: 21 W
Material: Aluminium/Glass


LED INSIDE CRI 80

3000 K
2000 lm

Variant	Prod. no.
anthracite	**234525**

THEO PRO S
WL, SINGLE, DALI P1





Dali IP65 IK06 24° 50000 h L80B10 15

220-240 V ~50/60 Hz | 350 mA
Total wattage: 3 W
Material: Aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version

LED INSIDE CRI 80


Down	2700 K / 300 lm

Variant	Prod. no.
● anthracite	**1010177**
○ white	**1010178**

Product	Prod. no.
Reflector S 10°	
◑ chrome	**1010939**

THEO PRO S
WL, UP/DOWN, DALI P1





Dali IP65 IK06 24° 50000 h L80B10 15

220-240 V ~50/60 Hz | 400 mA
Total wattage: 6 W
Material: Aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version

LED INSIDE CRI 80


Up	2700 K / 300 lm
Down	2700 K / 300 lm

Variant	Prod. no.
● anthracite	**1010179**
○ white	**1010180**

Product	Prod. no.
Reflector S 10°	
◑ chrome	**1010939**

THEO PRO S
WL, SINGLE, DALI P2





Dali IP65 IK06 24° 50000 h L80B10 15

220-240 V ~50/60 Hz | 150 mA
Total wattage: 6 W
Material: Aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version

LED INSIDE CRI 80


Down	2700 K / 600 lm

Variant	Prod. no.
● anthracite	**1010181**
○ white	**1010182**

Product	Prod. no.
Reflector S 10°	
◑ chrome	**1010939**

THEO PRO S
WL, UP/DOWN, DALI P2





Dali IP65 IK06 24° 50000 h L80B10 15

220-240 V ~50/60 Hz | 300 mA
Total wattage: 12 W
Material: Aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version

LED INSIDE CRI 80

Up	2700 K / 600 lm
Down	2700 K / 600 lm


Variant	Prod. no.
● anthracite	**1010183**
○ white	**1010184**

⊕

Product	Prod. no.
Reflector S 10°	
◑ chrome	**1010939**

THEO PRO L
WL, SINGLE, DALI P1





Dali IP65 IK08 24° 50000 h L80B10 15

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: Aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version

LED INSIDE CRI 80

Down	2700 K / 1200 lm


Variant	Prod. no.
● anthracite	**1010185**
○ white	**1010186**

⊕

Product	Prod. no.
Reflector L 10°	
◑ chrome	**1010940**

THEO PRO L
WL, UP/DOWN, DALI P1





Dali Touch IP65 IK08 24° 50000 h L80B10 40

220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: Aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version

LED INSIDE CRI 80

Up	2700 K / 1200 lm
Down	2700 K / 1200 lm

Variant	Prod. no.
● anthracite	**1010187**
○ white	**1010188**


⊕

Product	Prod. no.
Reflector L 10°	
◑ chrome	**1010940**


1010191 801

THEO PRO L
WL, SINGLE, DALI P2





Dali IP65 IK08 24° 50000 h L80B10 15

220-240 V ~50/60 Hz | 400 mA
Total wattage: 15 W
Material: Aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version

LED INSIDE CRI 80

Down	2700 K / 1800 lm


Variant	Prod. no.
● anthracite	**1010189**
○ white	**1010190**

⊕

Product	Prod. no.
Reflector L 10°	
◑ chrome	**1010940**

THEO PRO L
WL, UP/DOWN, DALI P2





Dali Touch IP65 IK08 24° 50000 h L80B10 28

220-240 V ~50/60 Hz | 800 mA
Total wattage: 30 W
Material: Aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version

LED INSIDE CRI 80

Up	2700 K / 1800 lm
Down	2700 K / 1800 lm


Variant	Prod. no.
● anthracite	**1010191**
○ white	**1010192**

⊕

Product	Prod. no.
Reflector L 10°	
◑ chrome	**1010940**

HELIA PRO S
WL, SINGLE, DALI P1





Dali IP65 IK06 24° 50000 h L80B10 15

220-240 V ~50/60 Hz | 350 mA
Total wattage: 3 W
Material: Aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version

LED INSIDE CRI 80


Down	2700 K 300 lm

Variant	Prod. no.
● anthracite	**1010161**
○ white	**1010162**

Product	Prod. no.
Reflector S 10°	
◑ chrome	**1010939**

HELIA PRO S
WL, UP/DOWN, DALI P1





Dali IP65 IK06 24° 50000 h L80B10 15

220-240 V ~50/60 Hz | 400 mA
Total wattage: 6 W
Material: Aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version

LED INSIDE CRI 80


Up	2700 K 300 lm
Down	2700 K 300 lm

Variant	Prod. no.
● anthracite	**1010163**
○ white	**1010164**

Product	Prod. no.
Reflector S 10°	
◑ chrome	**1010939**

HELIA PRO S
WL, SINGLE, DALI P2







220-240 V ~50/60 Hz | 150 mA
Total wattage: 6 W
Material: Aluminium

- Conveniently adjustable light distribution using 15° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version

LED INSIDE CRI 80


Down	2700 K 600 lm

Variant	Prod. no.
● anthracite	**1010165**
○ white	**1010166**

Product	Prod. no.
Reflector S 10°	
◑ chrome	**1010939**

HELIA PRO S
WL, UP/DOWN, DALI P2







220-240 V ~50/60 Hz | 300 mA
Total wattage: 12 W
Material: Aluminium

- Conveniently adjustable light distribution using 15° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version

LED INSIDE CRI 80


Up	2700 K 600 lm
Down	2700 K 600 lm

Variant	Prod. no.
● anthracite	**1010167**
○ white	**1010168**

Product	Prod. no.
Reflector S 10°	
◑ chrome	**1010939**

HELIA PRO L
WL, SINGLE, DALI P1







220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: Aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version


Down	2700 K 1200 lm

Variant	Prod. no.
● anthracite	**1010169**
○ white	**1010170**

Product	Prod. no.
Reflector L 10°	
◑ chrome	**1010940**

HELIA PRO L
WL, UP/DOWN, DALI P1







220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: Aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version


Up	2700 K 1200 lm
Down	2700 K 1200 lm

Variant	Prod. no.
● anthracite	**1010171**
○ white	**1010172**

Product	Prod. no.
Reflector L 10°	
◑ chrome	**1010940**

HELIA PRO L
WL, SINGLE, DALI P2







220-240 V ~50/60 Hz | 380 mA
Total wattage: 15 W
Material: Aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version




Down	2700 K 1800 lm


Variant	Prod. no.
● anthracite	**1010173**
○ white	**1010174**

Product	Prod. no.
Reflector L 10°	
◑ chrome	**1010940**

HELIA PRO L
WL, UP/DOWN, DALI P2







220-240 V ~50/60 Hz | 800 mA
Total wattage: 30 W
Material: Aluminium

- Conveniently adjustable light distribution using 10° interchangeable optics
- Includes 1 film for symmetrical light distribution
- Optimised frame end design thanks to standardised dimensions and luminous flux (top and top/bottom) in a single version



Up	2700 K 1800 lm
Down	2700 K 1800 lm


Variant	Prod. no.
● anthracite	**1010175**
○ white	**1010176**

Product	Prod. no.
Reflector L 10°	
◑ chrome	**1010940**


1005149 807

SITRA S
WL, SINGLE





IP65 IK05 105° 50000h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 6.2 W
Material: Aluminium


LED INSIDE CCT CRI 80

3000 K	4000 K
580 lm	620 lm

Variant	Prod. no.
● anthracite	**1005148**
○ white	**1005149**
● rust	**1005150**

SITRA S
WL, UP/DOWN





IP65 IK05 105° 50000h L70B50

100-277 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: Aluminium

LED INSIDE CCT CRI 80

	3000 K	4000 K
Up	550 lm	635 lm
Down	550 lm	635 lm


Variant	Prod. no.
● anthracite	**1002032**
○ white	**1002033**
● rust	**1002034**



232535 809

SITRA M
WL, UP/DOWN





IP65 IK05 95° 50000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: Aluminium


LED INSIDE CCT CRI 80

	3000 K	4000 K
Up	850 lm	940 lm
Down	850 lm	940 lm

Variant	Prod. no.
● anthracite	**1005151**
○ white	**1005153**
● rust	**1005154**

SITRA L
WL, UP/DOWN, SQUARE





IP65 IK05 105° 50000 h L70B50

220-240 V ~50/60 Hz | 600 mA
Total wattage: 24 W
Material: Aluminium


LED INSIDE CCT CRI 80

	3000 K	4000 K
Up	1400 lm	1530 lm
Down	1400 lm	1530 lm

Variant	Prod. no.
● anthracite	**1005155**
○ white	**1005156**
● rust	**1005157**

SITRA CUBE
WL, TCR-TSE





IP44 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 9 W

Base: 2xG53 | max. Ø: 7.5 cm | L: 2.7 cm

Variant	Prod. no.
● anthracite	**232535**
○ white	**232531**
● rust	**232537**


GX53 | 6 W | 120°
490 lm | 2700 K | EEC = G

C,L

Prod. no.: **1005272**

BIG QUAD
WL





IP44 IK05 110° 30000h L70B50

100-240 V ~50/60 Hz | 350 mA
Total wattage: 4 W
Material: Aluminium/Glass


LED INSIDE CRI 80

232431	3000 K	290 lm
232435	3000 K	260 lm

Variant	Prod. no.
● anthracite 260 lm	**232435**
○ white 290 lm	**232431**

BIG QUAD UP/DOWN
WL





IP54 30° 36000h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 8.2 W
Material: Aluminium/Glass


LED INSIDE CRI 80

Up	3000 K	320 lm
Down	3000 K	320 lm

Variant	Prod. no.
● anthracite	**1005126**
○ white	**1005125**

QUAD
WL





IP44 IK02 90° 30000h L70B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 4.6 W
Material: Aluminium/Glass


INSIDE

232461		3000 K 100 lm
232465		3000 K 80 lm

Variant	Prod. no.
● anthracite 80 lm	**232465**
○ white 100 lm	**232461**

QUAD UP/DOWN 15
WL





IP44 IK02 110° 30000h L70B50

100-277 V ~50/60 Hz | 350 mA
Total wattage: 8 W
Material: Aluminium/Glass


INSIDE

232441	Up	3000 K 290 lm
	Down	3000 K 290 lm
232445	Up	3000 K 260 lm
	Down	3000 K 260 lm

Variant	Prod. no.
● anthracite	**232445**
○ white	**232441**

RUSTY® UP/DOWN
WL, SQUARE





IP65 IK02 65° 25000h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: FeCSi Steel/Aluminium


LED INSIDE CCT CRI 80

	3000 K	4000 K
Up	259 lm	260 lm
Down	285 lm	288 lm

Variant	Prod. no.
rust/anthracite	**1004650**

RUSTY® UP/DOWN
WL, ROUND





IP65 IK02 65° 25000h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: FeCSi Steel/Aluminium


LED INSIDE CCT CRI 80

	3000 K	4000 K
Up	249 lm	254 lm
Down	267 lm	271 lm

Variant	Prod. no.
rust/anthracite	**1004651**

ENOLA® OCULUS
WL, SINGLE







220-240 V ~50/60 Hz | 500 mA
Total wattage: 10.5 W
Material: Aluminium/Glass

- The light colour must be set prior to installation
- The Occulus optic creates a contoured, cleanly defined light effect on the respective surface




3000 K	4000 K
1070 lm	1150 lm

Variant	Prod. no.
● anthracite	**1006328**

Product	Prod. no.
Spacer	
● anthracite	**1002853**

ENOLA® OCULUS
WL, UP/DOWN







220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: Aluminium/Glass

- The light colour must be set prior to installation
- The Occulus optic creates a contoured, cleanly defined light effect on the respective surface



	3000 K	4000 K
Up	940 lm	1060 lm
Down	940 lm	1060 lm

Variant	Prod. no.
● anthracite	**1006329**


Product	Prod. no.
Spacer	
● anthracite	**1002853**


1003440 816
1003441 817



ENOLA® ROUND S
WL, SINGLE





IP65 IK06 30° 50000h L80B20 10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 5.6 W
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory

LED INSIDE CCT CRI 90


3000 K	4000 K
530 lm	570 lm

Variant	Prod. no.
● anthracite	**1003422**

Product	Prod. no.
Spacer	
● anthracite	**1002853**
Reflector 60°	
◑ chrome	**1005262**

ENOLA® ROUND M
WL, SINGLE





IP65 IK06 38° 50000h L80B20 10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 10.5 W
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using interchangeable 19°, 60° and asymmetric optics as accessories

LED INSIDE CCT CRI 90


3000 K	4000 K
1010 lm	1090 lm

Variant	Prod. no.
● anthracite	**1003423**

Product	Prod. no.
Spacer	
● anthracite	**1002853**
Lens 19°	
● black	**1005205**
Asymmetrical lens	
◐ black/chrome	**1005206**
Reflector 60°	
◑ chrome	**1005207**

ENOLA® ROUND L
WL, SINGLE





IP65 IK06 38° 50000h L80B50 10

220-240 V ~50/60 Hz | 900 mA
Total wattage: 36 W
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory

LED INSIDE CCT CRI 90


3000 K	4000 K
3380 lm	3770 lm

Variant	Prod. no.
● anthracite	**1003440**

Product	Prod. no.
Spacer	
● anthracite	**1002853**
Reflector 60°	
◑ chrome	**1005263**

ENOLA® ROUND S
WL, UP/DOWN







220-240 V ~50/60 Hz | 350 mA
Total wattage: 7.6 W
Material: Aluminium/Glass

- The light colour must be set prior to installation




	3000 K	4000 K
Up	380 lm	400 lm
Down	380 lm	400 lm

Variant	Prod. no.
anthracite	**1003424**

Product	Prod. no.
Spacer	
anthracite	**1002853**
Reflector 60°	
chrome	**1005262**

ENOLA® ROUND M
WL, UP/DOWN







220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using interchangeable 19°, 60° and asymmetric optics as accessories




	3000 K	4000 K
Up	925 lm	1015 lm
Down	925 lm	1015 lm

Variant	Prod. no.
anthracite	**1003425**

Product	Prod. no.
Spacer	
anthracite	**1002853**
Lens 19°	
black	**1005205**
Asymmetrical lens	
black/chrome	**1005206**
Reflector 60°	
chrome	**1005207**

ENOLA® ROUND L
WL, UP/DOWN







220-240 V ~50/60 Hz | 700 mA
Total wattage: 54 W
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory




	3000 K	4000 K
Up	2700 lm	3000 lm
Down	2700 lm	3000 lm

Variant	Prod. no.
anthracite	**1003441**

Product	Prod. no.
Spacer	
anthracite	**1002853**
Reflector 60°	
chrome	**1005263**

ENOLA® SQUARE S
WL, SINGLE





IP65 IK06 30° 50000 h L80B20 10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 5.6 W
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory

LED INSIDE CCT CRI 90


3000 K	4000 K
530 lm	570 lm

Variant	Prod. no.
anthracite	**1003416**

Product	Prod. no.
Spacer	
anthracite	**1002853**
Reflector 60°	
chrome	**1005262**

ENOLA® SQUARE M
WL, SINGLE





IP65 IK06 38° 50000 h L80B20 10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 10.5 W
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using interchangeable 19°, 60° and asymmetric optics as accessories

LED INSIDE CCT CRI 90


3000 K	4000 K
1010 lm	1090 lm

Variant	Prod. no.
anthracite	**1003417**

Product	Prod. no.
Spacer	
anthracite	**1002853**
Lens 19°	
black	**1005205**
Asymmetrical lens	
black/chrome	**1005206**
Reflector 60°	
chrome	**1005207**

ENOLA® SQUARE L
WL, SINGLE





IP65 IK06 38° 50000 h L80B50 10

220-240 V ~50/60 Hz | 900 mA
Total wattage: 36 W
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory

LED INSIDE CCT CRI 90


3000 K	4000 K
3380 lm	3770 lm

Variant	Prod. no.
anthracite	**1003437**

Product	Prod. no.
Spacer	
anthracite	**1002853**
Reflector 60°	
chrome	**1005263**

ENOLA® SQUARE S
WL, UP/DOWN





IP65 IK06 30° 50000h L80B20 10

220-240 V ~50/60 Hz | 350 mA
Total wattage: 7.6 W
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory

LED INSIDE CCT CRI 90


	3000 K	4000 K
Up	380 lm	400 lm
Down	380 lm	400 lm

Variant	Prod. no.
● anthracite	**1003418**

Product	Prod. no.
Spacer	
● anthracite	**1002853**
Reflector 60°	
◑ chrome	**1005262**

ENOLA® SQUARE M
WL, UP/DOWN





IP65 IK06 38° 50000h L80B20 10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using interchangeable 19°, 60° and asymmetric optics as accessories

LED INSIDE CCT CRI 90


	3000 K	4000 K
Up	925 lm	1015 lm
Down	925 lm	1015 lm

Variant	Prod. no.
● anthracite	**1003419**

Product	Prod. no.
Spacer	
● anthracite	**1002853**
Lens 19°	
● black	**1005205**
Asymmetrical lens	
◐ black/chrome	**1005206**
Reflector 60°	
◑ chrome	**1005207**

ENOLA® SQUARE L
WL, UP/DOWN





IP65 IK06 38° 50000h L80B20 10

220-240 V ~50/60 Hz | 700 mA
Total wattage: 55 W
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory

LED INSIDE CCT CRI 90

	3000 K	4000 K
UP	2700 lm	3000 lm
Down	2700 lm	3000 lm

Variant	Prod. no.
● anthracite	**1003438**

Product	Prod. no.
Spacer	
● anthracite	**1002853**
Reflector 60°	
◑ chrome	**1005263**


1003441 817
Arredo3

ENOLA® S/M/L
REFLECTOR



S | H: 1.85 cm Ø: 4.5 cm
M | H: 4 cm Ø: 7.5 cm
L | H: 7 cm Ø: 11 cm
Material: Polycarbonate (PC)

Variant	Prod. no.
chrome | **S**	**1005207**
chrome | **M**	**1005262**
chrome | **L**	**1005263**

ENOLA® M
LENS 19°





Ø: 7.5 cm
H: 3.8 cm
Material: Steel/Polycarbonate (PC)

Variant	Prod. no.
black	**1005205**








231205 823

GRAFIT
WL, ROUND, SENSOR, E27





IP44 IK02 IR

220-240 V ~50/60 Hz
Material: Aluminium/Acrylic

- PIR sensor, adjustable range 10-2000 lx and 8 s-8 min. Detection range between 6-10 m depending on the mounting height of the light

SOCKET INSIDE 11 W

Base: 1xE27	max. Ø: 6 cm	L: 11.5 cm


Variant	Prod. no.
● anthracite	**1006179**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no. **1005303**

GRAFIT
WL, ROUND, E27





IP44 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Acrylic

SOCKET INSIDE 11 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.5 cm


Variant	Prod. no.
● anthracite	**1006178**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no. **1005303**

GRAFIT
WL, SQUARE, SENSOR, E27





IP44 IK02 IR

220-240 V ~50/60 Hz
Material: Aluminium/Acrylic

- PIR sensor, adjustable range 10-2000 lx and 8 s-8 min. Detection range between 6-10 m depending on the mounting height of the light

SOCKET INSIDE 11 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.5 cm


Variant	Prod. no.
● anthracite	**1006183**

E27 | 13 W | 220°
1300 lm | 2700 K | EEC = F

Prod. no.: **1005302**

GRAFIT
WL, SQUARE, E27





IP44 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Plastic

SOCKET INSIDE 11 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.5 cm


Variant	Prod. no.
● anthracite	**231205**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no.: **1005303**

SQUARE
WL, E27





IP44 IK02

220-240 V ~50/60 Hz
Material: Stainless Steel 304

SOCKET INSIDE 20 W

Base: 1xE27 | max. Ø: 7 cm | L: 13 cm


Variant	Prod. no.
Stainless steel	**1000336**

E27 | 4 W | 280°
830 lm | 2700 K | EEC = A

Prod. no. **1008641**

QUADRULO
WL





IP55 IK04 30000 h L70B50 20

100-277 V ~50/60 Hz | 350 mA
Total wattage: 7.4 W
Material: Aluminium/Polyvinylchloride (PVC)


LED INSIDE CRI 80

1007207	3000 K 280 lm
1005201	3000 K 270 lm

Variant	Prod. no.
anthracite/brown 280 lm	**1007207**
anthracite 270 lm	**1005201**

QUADRULO SENSOR
WL, E27





IP44 IK02 20 IR

220-240 V ~50/60 Hz
Material: Aluminium/Glass

- PIR sensor, detection range up to 8 m depending on the mounting height of the light

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 8 cm | L: 18 cm

Variant	Prod. no.
anthracite	**1002402**


E27 | 8 W | 320°
700 lm | 2500 K | EEC = F

Prod. no. **1005265**

Better value as a set at slv.com

QUADRULO
WL, E27





IP44 IK02 20

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 8 cm | L: 18 cm

Variant	Prod. no.
● anthracite	**1002403**


E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

C,L

Prod. no. **1005268**

QUADRULO
CL





IP55 IK02 30000 h L70B50 20


100-277 V ~50/60 Hz | 480 mA
Total wattage: 7.5 W
Material: Aluminium/Acrylic

LED INSIDE CRI 80

3000 K
230 lm


Variant	Prod. no.
● anthracite	**1005202**

Better value as a set at slv.com

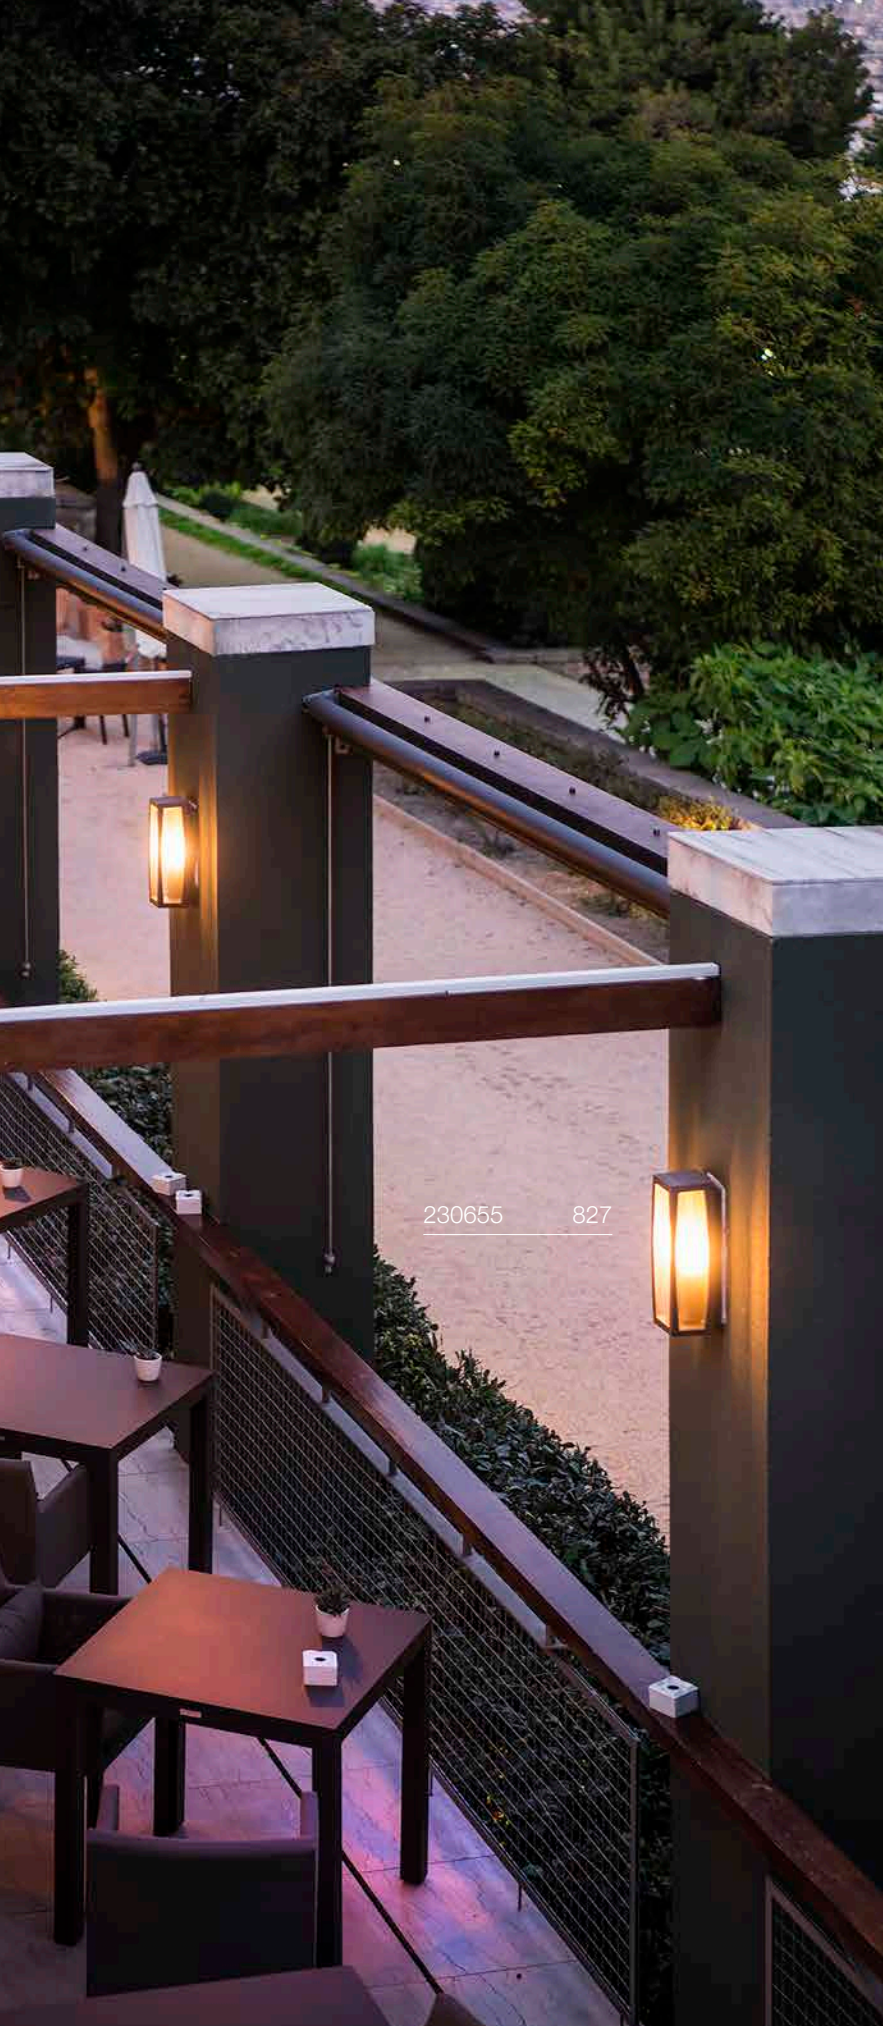

MERIDIAN
WL, E27





IP54 IK03

220-240 V ~50/60 Hz
Material: Aluminium/Polycarbonate (PC)

SOCKET INSIDE 25 W

Base: 1xE27 | max. Ø: 7 cm | L: 17.5 cm


Variant	Prod. no.
anthracite	**230445**
grey	**230444**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no. **1005289**

MERIDIAN BOX
WL, E27





IP54 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Polycarbonate (PC)

SOCKET INSIDE 25 W

Base: 1xE27 | max. Ø: 7 cm | L: 17.5 cm


Variant	Prod. no.
anthracite	**230045**
grey	**230044**

E27 | 14 W | 240°
1520 lm | 3000 K | EEC = E

Prod. no. 1005307

MERIDIAN BOX
WL, E27, SENSOR





IP54 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Polycarbonate (PC)

- The ambient brightness and operating time can be adjusted.

SOCKET INSIDE 25 W

Base: 1xE27 | max. Ø: 7 cm | L: 17.5 cm


Variant	Prod. no.
anthracite	**230085**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no. 1005289

MERIDIAN BOX
WL, E27





IP54 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Polycarbonate (PC)

SOCKET INSIDE 25 W

Base: 1xE27 | max. Ø: 7 cm | L: 17.5 cm

Variant	Prod. no.
anthracite	**230655**
rust	**230657**


E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no. 1005268


1004748 829

ESKINA FRAME
WL





IP65 IK06 95° 320° 30000h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- The light colour must be set prior to installation


LED INSIDE CCT CRI 80

	3000 K	4000 K
Direct	1100 lm	1200 lm

Variant	Prod. no.
● anthracite	**1004747**

ESKINA FRAME
WL, DOUBLE





IP65 IK06 95° 320° 30000h L70B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 27 W
Material: Aluminium

- The light colour must be set prior to installation


LED INSIDE CCT CRI 80

	3000 K	4000 K
Spot 1	1100 lm	1200 lm
Spot 2	1100 lm	1200 lm

Variant	Prod. no.
● anthracite	**1004748**

ESKINA FRAME
WL, DOUBLE





IP65 IK06 95° 320° 30000h L70B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 27 W
Material: Aluminium

- The light colour must be set prior to installation


LED INSIDE CCT CRI 80

	3000 K	4000 K
Spot 1	1100 lm	1200 lm
Spot 2	1100 lm	1200 lm

Variant	Prod. no.
● anthracite	**1006314**

BOOKAT
WL





IP65 IK05 30000h L70B50 20

100-277 V ~50/60 Hz | 700 mA
Total wattage: 15 W
Material: Aluminium


INSIDE CCT CRI 80

3000 K	4000 K
920 lm	990 lm

Variant	Prod. no.
● anthracite	**1005443**

TAHA II
WL, PHASE





C,L IP65 IK02 50000h L80B20 120

220-240 V ~50/60 Hz | 240 mA
Total wattage: 10 W
Material: Aluminium


INSIDE CCT CRI 80

2200 K	2700 K
450 lm	500 lm

Variant	Prod. no.
● black	**1010195**

TAHA II
WL, SENSOR





IP54 IK02 50000h L80B20 120 IR

100-240 V ~50/60 Hz | 240 mA
Total wattage: 10 W
Material: Aluminium

- Primary and replica functionality, option to control additional lights without a sensor


INSIDE CCT CRI 80

2200 K	2700 K
450 lm	500 lm

Variant	Prod. no.
● black	**1010196**

OVALISK SENSOR
WL





IP65 IK02 30000h L70B50 19 IR

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.6 W
Material: Aluminium/Glass

- The light colour must be set prior to installation
- PIR sensor, adjustable range 3-1000 lx and 8 s-12 min. Detection range up to 8 m depending on the mounting height of the light


LED INSIDE CCT CRI 80

3000 K	4000 K
580 lm	630 lm

Variant	Prod. no.
● anthracite	**1004679**

OVALISK
WL





IP65 IK02 30000h L70B50


220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.2 W
Material: Aluminium/Glass

- The light colour must be set prior to installation

LED INSIDE CCT CRI 80


3000 K	4000 K
580 lm	630 lm

Variant	Prod. no.
● anthracite	**1004678**

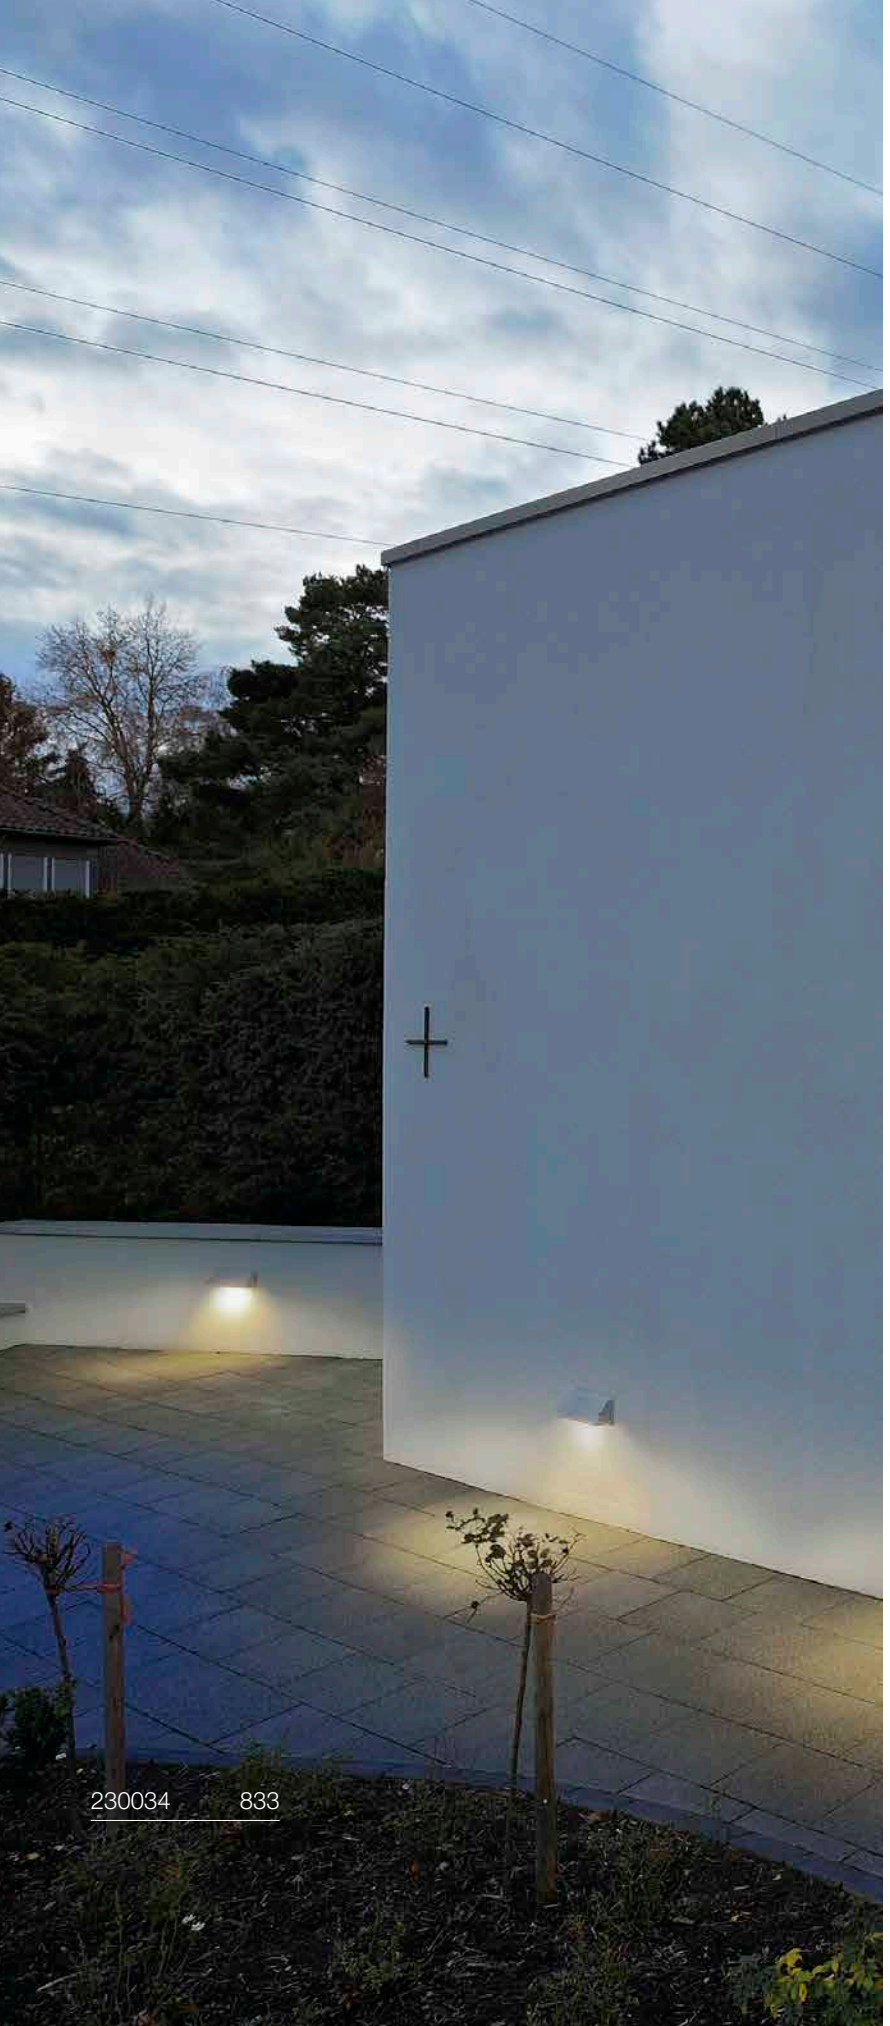

PEMA®
WL







220-240 V ~50/60 Hz
Total wattage: 3.8 W
Material: Aluminium




3000 K
190 lm

Variant	Prod. no.
● anthracite	**231015**
○ white	**231010**
● grey	**231012**

PEMA®
WL





IP54 IK05 110° 30000 h L70B50

220-240 V ~50/60 Hz
Total wattage: 7.7 W
Material: Aluminium/Glass

- Protection rating IP44 only when mounted with light emission downwards


LED INSIDE CRI 80

3000 K
640 lm

Variant	Prod. no.
● anthracite	**1002069**
○ white	**1002070**

PEMA®
WL





IP65 IK02 30000 h L70B50 10

100-277 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: Aluminium/Glass


LED INSIDE CCT CRI 80

3000 K	4000 K
1340 lm	1420 lm

Variant	Prod. no.
● black	**1003453**
● grey	**1003454**

PEMA®
WL, E27





IP65 20

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 15 W

Base: 1xE27	max. Ø: 4.5 cm	L: 21 cm


Variant	Prod. no.
● black	**230030**
● grey	**230034**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no. **1005289**

ASTINA
WL, QPAR51





IP44

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 11 W

Base: 2xGU10 | L: 9 cm

Variant	Prod. no.
anthracite	**228775**
white	**228771**
aluminium	**228776**

GU10 | 6 W | 36°
360 lm | 2200 K-2700 K | EEC = G

Prod. no. 1005273


SMART

GU10 | 5 W | 100°
300 lm | 2000 K-6500 K | EEC = G

Prod. no. 1012470

ASTINA STEEL
WL, QPAR51





IP44

220-240 V ~50/60 Hz
Material: Stainless Steel 304

SOCKET INSIDE 35 W

Base: 2xGU10 | max. Ø: 5.1 cm | L: 5.7 cm

Variant	Prod. no.
Stainless steel	**233302**

GU10 | 6 W | 36°
360 lm | 2200 K-2700 K | EEC = G

Prod. no. 1005273


SMART

GU10 | 5 W | 100°
300 lm | 2000 K-6500 K | EEC = G

Prod. no. 1012470

ANGOLUX SENSOR
WL





IP44 IK02 100° 25000h L80B50 20 IR

100-240 V ~50/60 Hz | 240 mA
Total wattage: 9.8 W
Material: Aluminium

- PIR sensor, adjustable range 10-2000 lx and 8 s-8 min. Detection range between 6-10 m depending on the mounting height of the light
- IP44 protection rating only when mounted with light emission downwards.


LED INSIDE CRI 80

3000 K
750 lm

Variant	Prod. no.
● anthracite	**1001969**
○ white	**1001970**

ANGOLUX
WL





IP44 IK02 120° 25000h L70B50

220-240 V ~50/60 Hz | 80 mA
Total wattage: 6.8 W
Material: Aluminium

- Protection rating IP44 only when mounted with light emission downwards

LED INSIDE CRI 80


3000 K
550 lm

Variant	Prod. no.
● anthracite	**231355**
○ white	**231351**


1002505 837

VILUA S
WL





IP54 IK02 100° 30000 h L70B50

100-277 V ~50/60 Hz | 700 mA
Total wattage: 9 W
Material: Aluminium/Glass


LED INSIDE CRI 80

3000 K
405 lm

Variant	Prod. no.
● anthracite	**1002503**

VILUA L
WL





IP54 IK02 100° 30000 h L70B50

100-277 V ~50/60 Hz | 350 mA
Total wattage: 17 W
Material: Aluminium/Glass


LED INSIDE CRI 80

3000 K
940 lm

Variant	Prod. no.
● anthracite	**1002504**

VILUA
WL, UP/DOWN





IP54 IK02 100° 30000 h L70B50

100-277 V ~50/60 Hz | 700 mA
Total wattage: 16 W
Material: Aluminium/Glass

LED INSIDE CRI 80


	3000 K
Up	400 lm
Down	400 lm

Variant	Prod. no.
● anthracite	**1002505**


233114 839

MYRA UP/DOWN
WL, QPAR51





IP55 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 35 W

Base: 2xGU10 | max. Ø: 5.1 cm | L: 5.7 cm

Variant	Prod. no.
● anthracite	**233115**
● grey	**233114**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F


C,L

Prod. no. 1005077

Product	Prod. no.
Surface-mounting frames	
● anthracite	**233215**

SITRA
WL, UP/DOWN, TCR-TSE





IP44

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 9 W

Base: 2xG53 | max. Ø: 7.5 cm | L: 3.5 cm

Variant	Prod. no.
● anthracite	**230365**


GX53 | 6 W | 120°
490 lm | 2700 K | EEC = G

C,L

Prod. no. 1005272

SITRA
WL, TCR-TSE





IP44

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 9 W

Base: 1xG53 | max. Ø: 7.5 cm | L: 3.5 cm

Variant	Prod. no.
● anthracite	**230355**


GX53 | 6 W | 120°
490 lm | 3000 K | EEC = G

C,L

Prod. no. 1005271

ROX
WL, UP/DOWN, QPAR111





IP44

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 50 W

Base: 2xGU10


Variant	Prod. no.
aluminium	**1000334**

GU10 | 12 W | 55°
680 lm | 3000 K | EEC = G

Prod. no. **1005298**

DELWA
WL





IP44 IK02 100° 30000h L70B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 10 W
Material: Aluminium/Glass


LED INSIDE CRI 80

3000 K
840 lm

Variant	Prod. no.
anthracite	**1000342**
white	**1000340**

WALLYX
WL, QPAR51





IP44 IK06

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 50 W

Base: 1xGU10 | L: 7.6 cm


Variant	Prod. no.
anthracite	**227195**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no. **1005077**

DOWNUNDER OUT
WL, ROUND





IP65 IK02 60° 30000 h L70B50

100-240 V ~50/60 Hz | 500 mA
Total wattage: 4.3 W
Material: Aluminium


LED INSIDE CCT CRI 80

3000 K	4000 K
150 lm	160 lm

Variant	Prod. no.
● anthracite	**1002868**

DOWNUNDER OUT
WL, SQUARE





IP65 IK02 60° 30000 h L70B50

100-240 V ~50/60 Hz | 500 mA
Total wattage: 4.3 W
Material: Aluminium

LED INSIDE CCT CRI 80


3000 K	4000 K
150 lm	160 lm

Variant	Prod. no.
● anthracite	**1002869**


1002990 843

ABRIDOR HYBRID
WL





IP65 IK07 90° 30000 h L80B50 80 IR

100-240 V ~50/60 Hz | 380 mA
Total wattage: 6.8 W
Material: Aluminium

- Solar and 230 V operation possible
- 3 different modes
- Battery charging via solar


LED INSIDE CCT CRI 80

2200 K	2700 K
600 lm	650 lm

Variant	Prod. no.
anthracite	**1008542**

ABRIDOR
WL





IP55 IK03 100° 90° 30000 h L70B50

100-240 V ~50/60 Hz | 300 mA
Total wattage: 12 W
Material: Aluminium


LED INSIDE CCT CRI 80

3000 K	4000 K
950 lm	980 lm

Variant	Prod. no.
anthracite	**1002989**

ABRIDOR SENSOR
WL





IP55 IK03 100° 90° 30000 h L70B50 IR

100-240 V ~50/60 Hz | 300 mA
Total wattage: 12 W
Material: Aluminium

- PIR sensor, adjustable range 15-2000 lx and 5 s-10 min. Detection range between 6-9 m depending on the mounting height of the light

LED INSIDE CCT CRI 80


3000 K	4000 K
950 lm	980 lm

Variant	Prod. no.
anthracite	**1002990**

ORDI
WL

NEW





IP54 IK07 50 000 h L90B10 160°

100-240 V ~50/60 Hz | 110 mA
Total wattage: 6 W | 8.5 W
Material: Aluminium

- Power Switch 70% (6 W) or 100% (8.5 W) for adjusting the intensity

LED INSIDE CCT CRI 80


	2700 K	3000 K
6 W	600 lm	600 lm
8,5 W	850 lm	850 lm

Variant	Prod. no.
anthracite	**1011572**

ORDI
WL, SENSOR

NEW





IP54 IK07 50 000 h L90B10 160° IR

100-240 V ~50/60 Hz | 110 mA
Total wattage: 6 W | 8.5 W
Material: Aluminium

- Power Switch 70% (6 W) or 100% (8.5 W) for adjusting the intensity,
- Two different detection ranges: approx. 8 m or approx. 4 m
- Sensor with additional standby function 10%


LED INSIDE CCT CRI 80

	2700 K	3000 K
6 W	600 lm	600 lm
8,5 W	850 lm	850 lm

Variant	Prod. no.
anthracite	**1011573**

ORDI II
WL, SENSOR





IP54 IK07 50000h L80B20 10 IR

100-240 V ~50/60 Hz | 240 mA
Total wattage: 9.5 W
Material: Aluminium

- The light colour must be set prior to installation
- Primary and replica functionality
- PIR sensor, adjustable range 20-2000 lx and 8 s-8 min. Detection range between 8-9 m depending on the mounting height of the light


LED INSIDE CCT CRI 80

	2200 K	3000 K
1008724	750 lm	900 lm
1008723	700 lm	850 lm

Variant	Prod. no.
● black	**1008723**
○ white	**1008724**

ORDI II
WL, PHASE





C,L IP65 IK07 50000h L80B20

220-240 V ~50/60 Hz | 240 mA
Total wattage: 9.5 W
Material: Aluminium

- The light colour must be set prior to installation


LED INSIDE CCT CRI 80

	2200 K	3000 K
1008722	750 lm	900 lm
1008721	700 lm	850 lm

Variant	Prod. no.
● black	**1008721**
○ white	**1008722**

BOX-L
WL, E27





IP54

220-240 V ~50/60 Hz
Material: Aluminium/Acrylic

SOCKET INSIDE 18 W

Base: 1xE27 | max. Ø: 6 cm | L: 17.5 cm


Variant	Prod. no.
anthracite	**232495**
white	**232491**
rust	**232497**

E27 | 14 W | 240°
1520 lm | 3000 K | EEC = E

Prod. no. **1005307**

BOX-L
WL





IP54 IK05 30000 h L70B50

100-277 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: Aluminium/Acrylic


LED INSIDE CRI 80

3000 K
600 lm

Variant	Prod. no.
anthracite	**1002035**

BOX
WL, UP/DOWN, QT-DE12





IP44 IK03

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 80 W

Base: 1xR7s 78 mm


Variant	Prod. no.
anthracite	**232485**

R7s 78mm | 9 W | 330°
1050 lm | 3000 K | EEC = E

Prod. no. **1005287**

LOGS
WL





IP65 IK04 40000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: Aluminium


INSIDE CRI 80

	3000 K
232101	800 lm
232105	520 lm

Variant	Prod. no.
● anthracite 520 lm	**232105**
○ white 800 lm	**232101**

OUT-BEAM UP/ FLOOD DOWN
WL, UP/FLOOD DOWN





IP44 IK03 80° 25000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 18 W
Material: Aluminium/Glass

- The 2° light effect is particularly suitable for contouring and structuring surfaces and building facades.


INSIDE CRI 80

	3000 K
Down	690 lm
Beam	50 lm

Variant	Prod. no.
● anthracite	**229665**
● grey	**229664**

L-LINE OUT
WL





IP65 IK02 30000 h L70B50 10

220-240 V ~50/60 Hz | 350 mA
Total wattage: 7 W
Material: Aluminium/Polycarbonate (PC)

- The light colour must be set prior to installation


INSIDE CCT CRI 80

3000 K	4000 K
500 lm	570 lm

Variant	Prod. no.
● anthracite	**1003539**

PHOTONIA
WL, E27





IP55 IK03 20

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 60 W

Base: 1xE27 | max. Ø: 9 cm | L: 15 cm

Variant	Prod. no.
● anthracite	**232045**


E27 | 8 W | 320°
700 lm | 2500 K | EEC = F

Prod. no. **1005265**

Product	Prod. no.
Spacer	
● anthracite	**1002853**

MOLAT
WL, E27





IP44 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 60 W

Base: 1xE27 | max. Ø: 6.5 cm | L: 14.5 cm


Variant	Prod. no.
● anthracite	**1000820**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no. **1005303**

GLOO PURE
WL, E27





IP44 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 23 W

Base: 1xE27 | max. Ø: 4.8 cm | L: 18 cm


Variant	Prod. no.
● anthracite	**1002002**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no. **1005289**

F-POL
WL, E27





IP54 IK07

220-240 V ~50/60 Hz
Material: Aluminium/Polycarbonate (PC)

SOCKET INSIDE 20 W

Base: 1xE27 | max. Ø: 5.1 cm | L: 14 cm

Variant	Prod. no.
● anthracite	**231585**


E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

C

Prod. no. 1005289

IPERI
WL





IP44 IK02 25000 h L70B50

220-240 V ~50/60 Hz
Total wattage: 4.5 W
Material: Aluminium

- IP44 protection rating only when mounted with light emission downwards.


LED INSIDE CRI 80

4000 K
400 lm

Variant	Prod. no.
● anthracite	**231315**

QUADRASYL
WL, TCR-TSE





IP44

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 11 W

Base: 1xG53 | max. Ø: 7.5 cm | L: 2.7 cm


Variant	Prod. no.
● anthracite	**232285**


GX53 | 6 W | 120°
490 lm | 2700 K | EEC = G

C,L

Prod. no. 1005272

SQUARE TURN
WL, G9





IP44 360°

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 42 W

Base: 1xG69	max. Ø: 3.5 cm	L: 8 cm


Variant	Prod. no.
● grey	**1000335**

G9 | 4 W | 300°
400 lm | 3000 K | EEC = E

Prod. no. **1005286**

TODAY PRO
DISPLAY





IP65 IK02 140° 90° 50000h L80B50 20

100-240 V ~50/60 Hz | 550 mA
Total wattage: 31 W
Material: Aluminium

LED INSIDE CRI 80


	4000 K
	3700 lm

Variant	Prod. no.
● black	**1000880**
○ white	**1000881**

ESKINA D
DISPLAY, PHASE

GERMAN DESIGN AWARD WINNER 2020





IP65 IK02 95° 340° 105° 36000 h L70B50 20

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14.5 W
Material: Aluminium

• CCT switch on light head


LED INSIDE CCT CRI 80

	3000 K	4000 K
1000 lm		

Variant	Prod. no.
anthracite	**1002905**

MYRA DISPLAY
WL, CURVED, QPAR51





IP55 IK02 340° 45°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 50 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.7 cm

Variant	Prod. no.
anthracite	**233135**
grey	**233134**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no. **1005077**

SMART


GU10 | 5 W | 100°
300 lm | 2000 K-6500 K | EEC = G

Prod. no. **1012470**

Product	Prod. no.
Surface-mounting frames	
anthracite	**233215**

MYRA
WL, DOUBLE, QPAR51





IP55 IK02 340° 45° 20

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 50 W

Base: 2xGU10 | max. Ø: 5.1 cm | L: 5.7 cm

Variant	Prod. no.
anthracite	**233095**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F


Prod. no. **1005077**

Product	Prod. no.
Spacer	
anthracite	**1002853**


1002867 853

LED SPOT
SP





IP55 IK06 40° 330° 180° 30000h L80B50

100-240 V ~50/60 Hz | 240 mA
Total wattage: 6 W
Material: Aluminium/Glass

LED INSIDE CRI 80


3000 K
400 lm

Variant	Prod. no.
anthracite	**1004649**
rust	**1004957**

Product	Prod. no.
NAUTILUS | Mounting plate	
black	**1002884**

NAUTILUS
WL QPAR51





IP54 IK02 330° 180°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 11 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 8.3 cm

Variant	Prod. no.
black	**1002867**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F


C,L

Prod. no. 1005077

Product	Prod. no.
NAUTILUS | Mounting plate	
black	**1002884**

MYRA
CW, SINGLE, QPAR51





IP55 IK02 340° 45°

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 50 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 5.7 cm

Variant	Prod. no.
anthracite	**233105**
grey	**233104**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no. 1005077

SMART

GU10 | 5 W | 100°
300 lm | 2000 K-6500 K | EEC = G


Prod. no. 1012470

Product	Prod. no.
Surface-mounting frames	
anthracite	**233215**


1002904 855

ESKINA SPOT SENSOR
CW, PHASE





IP54 IK02 95° 340° 105° 36 000 h L70B50 20 IR

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- Motion sensor in the wall rosette
- PIR sensor, adjustable range 0-100 lx and 8 s-12 min. Detection range up to 10 m depending on the mounting height of the light


LED INSIDE CCT CRI 80

3000 K	4000 K
1200 lm	1300 lm

Variant	Prod. no.
● anthracite	**1002904**

ESKINA SPOT
CW, PHASE





C IP65 IK02 95° 340° 105° 36 000 h L70B50 20

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14.5 W
Material: Aluminium


LED INSIDE CCT CRI 80

3000 K	4000 K
1200 lm	1300 lm

Variant	Prod. no.
● anthracite	**1002903**

SITRA 360
CW, TCR-TSE





IP44 90° 90°

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 9 W

Base: 1xG53 | max. Ø: 7.5 cm | L: 3.5 cm


Variant	Prod. no.
● anthracite	**231515**

GX53 | 6 W | 120°
490 lm | 2700 K | EEC = G

Prod. no. 1005272

THEO BRACKET
CW





IP65 IK02 340° 70°

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 7 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.7 cm

Variant	Prod. no.
● anthracite	**1004653**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no. 1005077


SMART

GU10 | 5 W | 100°
300 lm | 2000 K-6500 K | EEC = G

Prod. no. 1012470

HELIA
CW, SINGLE





IP65 IK04 35° 350° 90° 30 000 h L70B50 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 6.5 W
Material: Aluminium/Glass

LED INSIDE CRI 80


3000 K
440 lm

Variant	Prod. no.
● anthracite	**233245**

Product	Prod. no.
Spacer	
● anthracite	**1002853**

HELIA
CW, DOUBLE





IP65 IK04 35° 350° 90° 30 000 h L70B50 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 13 W
Material: Aluminium/Glass

LED INSIDE CRI 80

3000 K
2 x 440lm


Variant	Prod. no.
● anthracite	**233255**

Product	Prod. no.
Spacer	
● anthracite	**1002853**



229971 859

AINOS
CW





220-240 V ~50/60 Hz | 500 mA
Total wattage: 21 W
Material: Aluminium/Polycarbonate (PC)




3000 K
1430 lm

Variant	Prod. no.
● anthracite	**229965**
○ white	**229961**

AINOS
CW, SENSOR





IP44 IK02 120° 30000h L70B50 MR

220-240 V ~50/60 Hz | 500 mA
Total wattage: 22 W
Material: Aluminium/Polycarbonate (PC)


- Sensor in the light housing

LED INSIDE CRI 80

3000 K
1430 lm

Variant	Prod. no.
● anthracite	**229975**
○ white	**229971**

AINOS
CW, SQUARE



IP65 IK02 120° 30000h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 17 W
Material: Aluminium/Polycarbonate (PC)


LED INSIDE CCT CRI 80

3000 K	4000 K
1300 lm	1300 lm

Variant	Prod. no.
● anthracite	**1003450**
○ white	**1003449**

AINOS
CW, SENSOR, SQUARE





IP65 IK02 120° 30000h L70B50 MR

220-240 V ~50/60 Hz | 500 mA
Total wattage: 18 W
Material: Aluminium/Polycarbonate (PC)

- Sensor in the light housing

LED INSIDE CCT CRI 80


3000 K	4000 K
1300 lm	1300 lm

Variant	Prod. no.
● anthracite	**1003452**
○ white	**1003451**


229085 861

TERANG 200
CW





IP44 IK03 120° 20000 h L70B50

220-240 V ~50/60 Hz
Total wattage: 11 W
Material: Aluminium/Polycarbonate (PC)


LED INSIDE CRI 80

	3000 K
	830 lm

Variant	Prod. no.
● anthracite	**229935**
○ white	**229931**

BULAN
CW, E14





IP44 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 60 W

Base: 1xE14 | max. Ø: 4.8 cm | L: 13 cm


Variant	Prod. no.
● anthracite	**229075**
○ white	**229071**
● grey	**229072**

E14 | 4 W | 320°
350 lm | 2700 K | EEC = G

Prod. no. 1005285

BULAN GRID
CW, E27





IP55 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Polycarbonate (PC)


SOCKET INSIDE 25 W

Base: 2xE27 | max. Ø: 5.2 cm | L: 17.3 cm

Variant	Prod. no.
● anthracite	**229085**
○ white	**229081**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no. 1005289

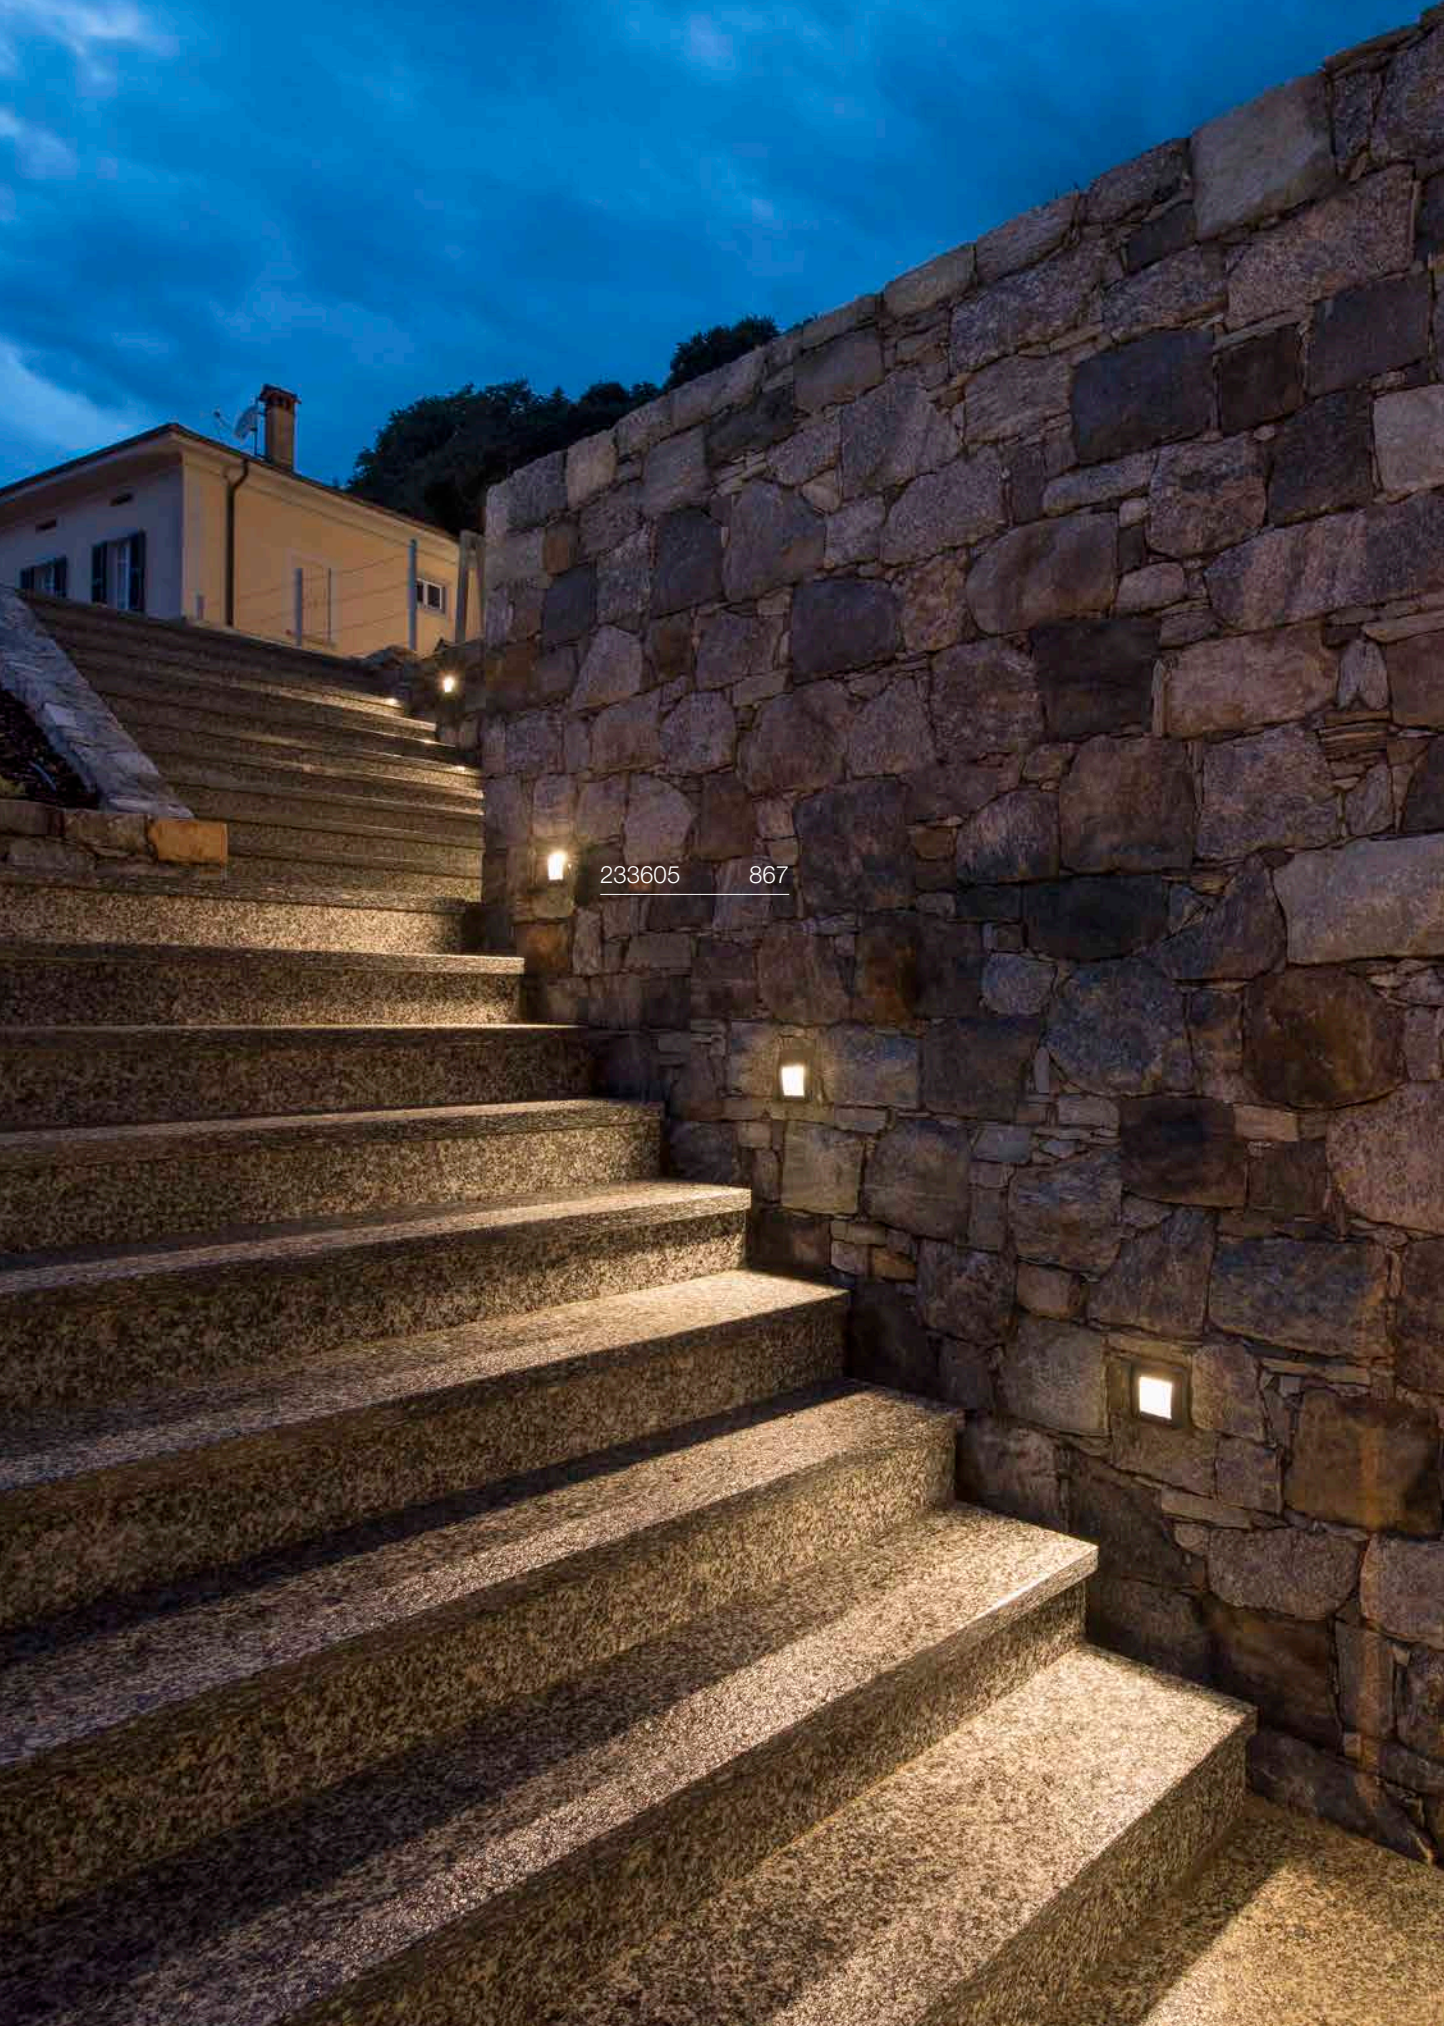
233605 867

OUTDOOR | RECESSED LIGHTS





CONCRETO | 865



ADI | 866




DOWNUNDER OUT | 867



BRICK MESH | 868




BRICK | 868




SOCKET

BRICK DOWNUNDER | 869


1006407 865

CONCRETO
EL, WING





IP65 IK03 120° 50000h L80B50

100-240 V ~50/60 Hz | 700 mA
Total wattage: 3.2 W
Material: concrete/aluminium

- Recessed fixing kit included


LED INSIDE CRI 80

3000 K
45 lm

Variant	Prod. no.
grey/black	**1006406**

CONCRETO
EL, CUT





IP65 IK03 15° 50000h L80B50

100-240 V ~50/60 Hz | 700 mA
Total wattage: 3.2 W
Material: concrete/aluminium

- Recessed fixing kit included

LED INSIDE CRI 80

3000 K
15 lm


Variant	Prod. no.
grey/black	**1006407**



233625 867

ADI
EL







100-277 V ~50/60 Hz | 500 mA
Total wattage: 18 W
Material: aluminium/polycarbonate (PC)

- Only fit the light with the light beam pointing downwards
- Recessed fixing kit must be ordered separately




3000 K
940 lm

Variant	Prod. no.
● anthracite	**233635**

Product	Prod. no.
Recessed fixing kit	
● black	**233639**

DOWNUNDER OUT S
EL





IP55 IK02 25000 h L70B50

220-240 V ~50/60 Hz | 300 mA
Total wattage: 1.7 W
Material: aluminium/plastic

- Only fit the light with the light beam pointing downwards
- Recessed fixing kit included


LED INSIDE CRI 80

233605	3000 K 25 lm
233601	3000 K 65 lm

Variant	Prod. no.
● anthracite	**233605**
○ white	**233601**

DOWNUNDER OUT M
EL





IP55 IK02 25000 h L70B50

220-240 V ~50/60 Hz | 300 mA
Total wattage: 4 W
Material: aluminium/plastic

- Only fit the light with the light beam pointing downwards
- Recessed fixing kit included


LED INSIDE CRI 80

233621	3000 K 155 lm
233625	3000 K 85 lm

Variant	Prod. no.
● anthracite	**233625**
○ white	**233621**

DOWNUNDER OUT L
EL





IP55 IK02 25000 h L70B50

220-240 V ~50/60 Hz | 300 mA
Total wattage: 4 W
Material: aluminium/plastic

- Only fit the light with the light beam pointing downwards
- Recessed fixing kit included


LED INSIDE CRI 80

	3000 K 85 lm

Variant	Prod. no.
● anthracite	**233615**

BRICK MESH
EL





IP65 IK08 50 000 h L80B50 64

220-240 V ~50/60 Hz | 500 mA
Total wattage: 5 W
Material: stainless steel 304

- Light does not need to be opened from the front for connection
- Recessed fixing kit with break-out openings of different sizes
- Recessed fixing kit included


LED INSIDE CRI 80

3000 K
150 lm

Variant	Prod. no.
stainless steel	**1008481**

BRICK
EL, SYMMETRICAL





IP65 IK02 40° 25 000 h L70B50 20

220-240 V ~50/60 Hz | 144 mA
Total wattage: 9.5 W
Material: aluminium/stainless steel 316

- Recessed fixing kit included


LED INSIDE CRI 80

3000 K
950 lm

Variant	Prod. no.
stainless steel	**233650**

BRICK
EL, ASYMMETRICAL





IP65 IK02 25 000 h L70B50 20

220-240 V ~50/60 Hz | 144 mA
Total wattage: 9.5 W
Material: aluminium/stainless steel 316

- Recessed fixing kit included


LED INSIDE CRI 80

3000 K
850 lm

Variant	Prod. no.
stainless steel	**233660**

BRICK DOWNUNDER
EL, E14





IP44 IK02 10

220-240 V ~50/60 Hz
Material: aluminium/glass

- No recessed fixing kit required

SOCKET INSIDE 40 W

Base: 1 × E14 | max. Ø: 4.3 cm | L: 12 cm


Variant	Prod. no.
grey	**229062**

E14 | 4 W | 320°
380 lm | 2700 K | EEC = F

Prod. no.: **1005284**

BRICK DOWNUNDER
EL





IP54 IK02 20 000 h L70B50


220-240 V ~50/60 Hz
Total wattage: 1.4 W
Material: aluminium/glass

- Recessed fixing kit included

LED INSIDE CRI 80

3000 K
30 lm

Variant	Prod. no.
grey	**229702**

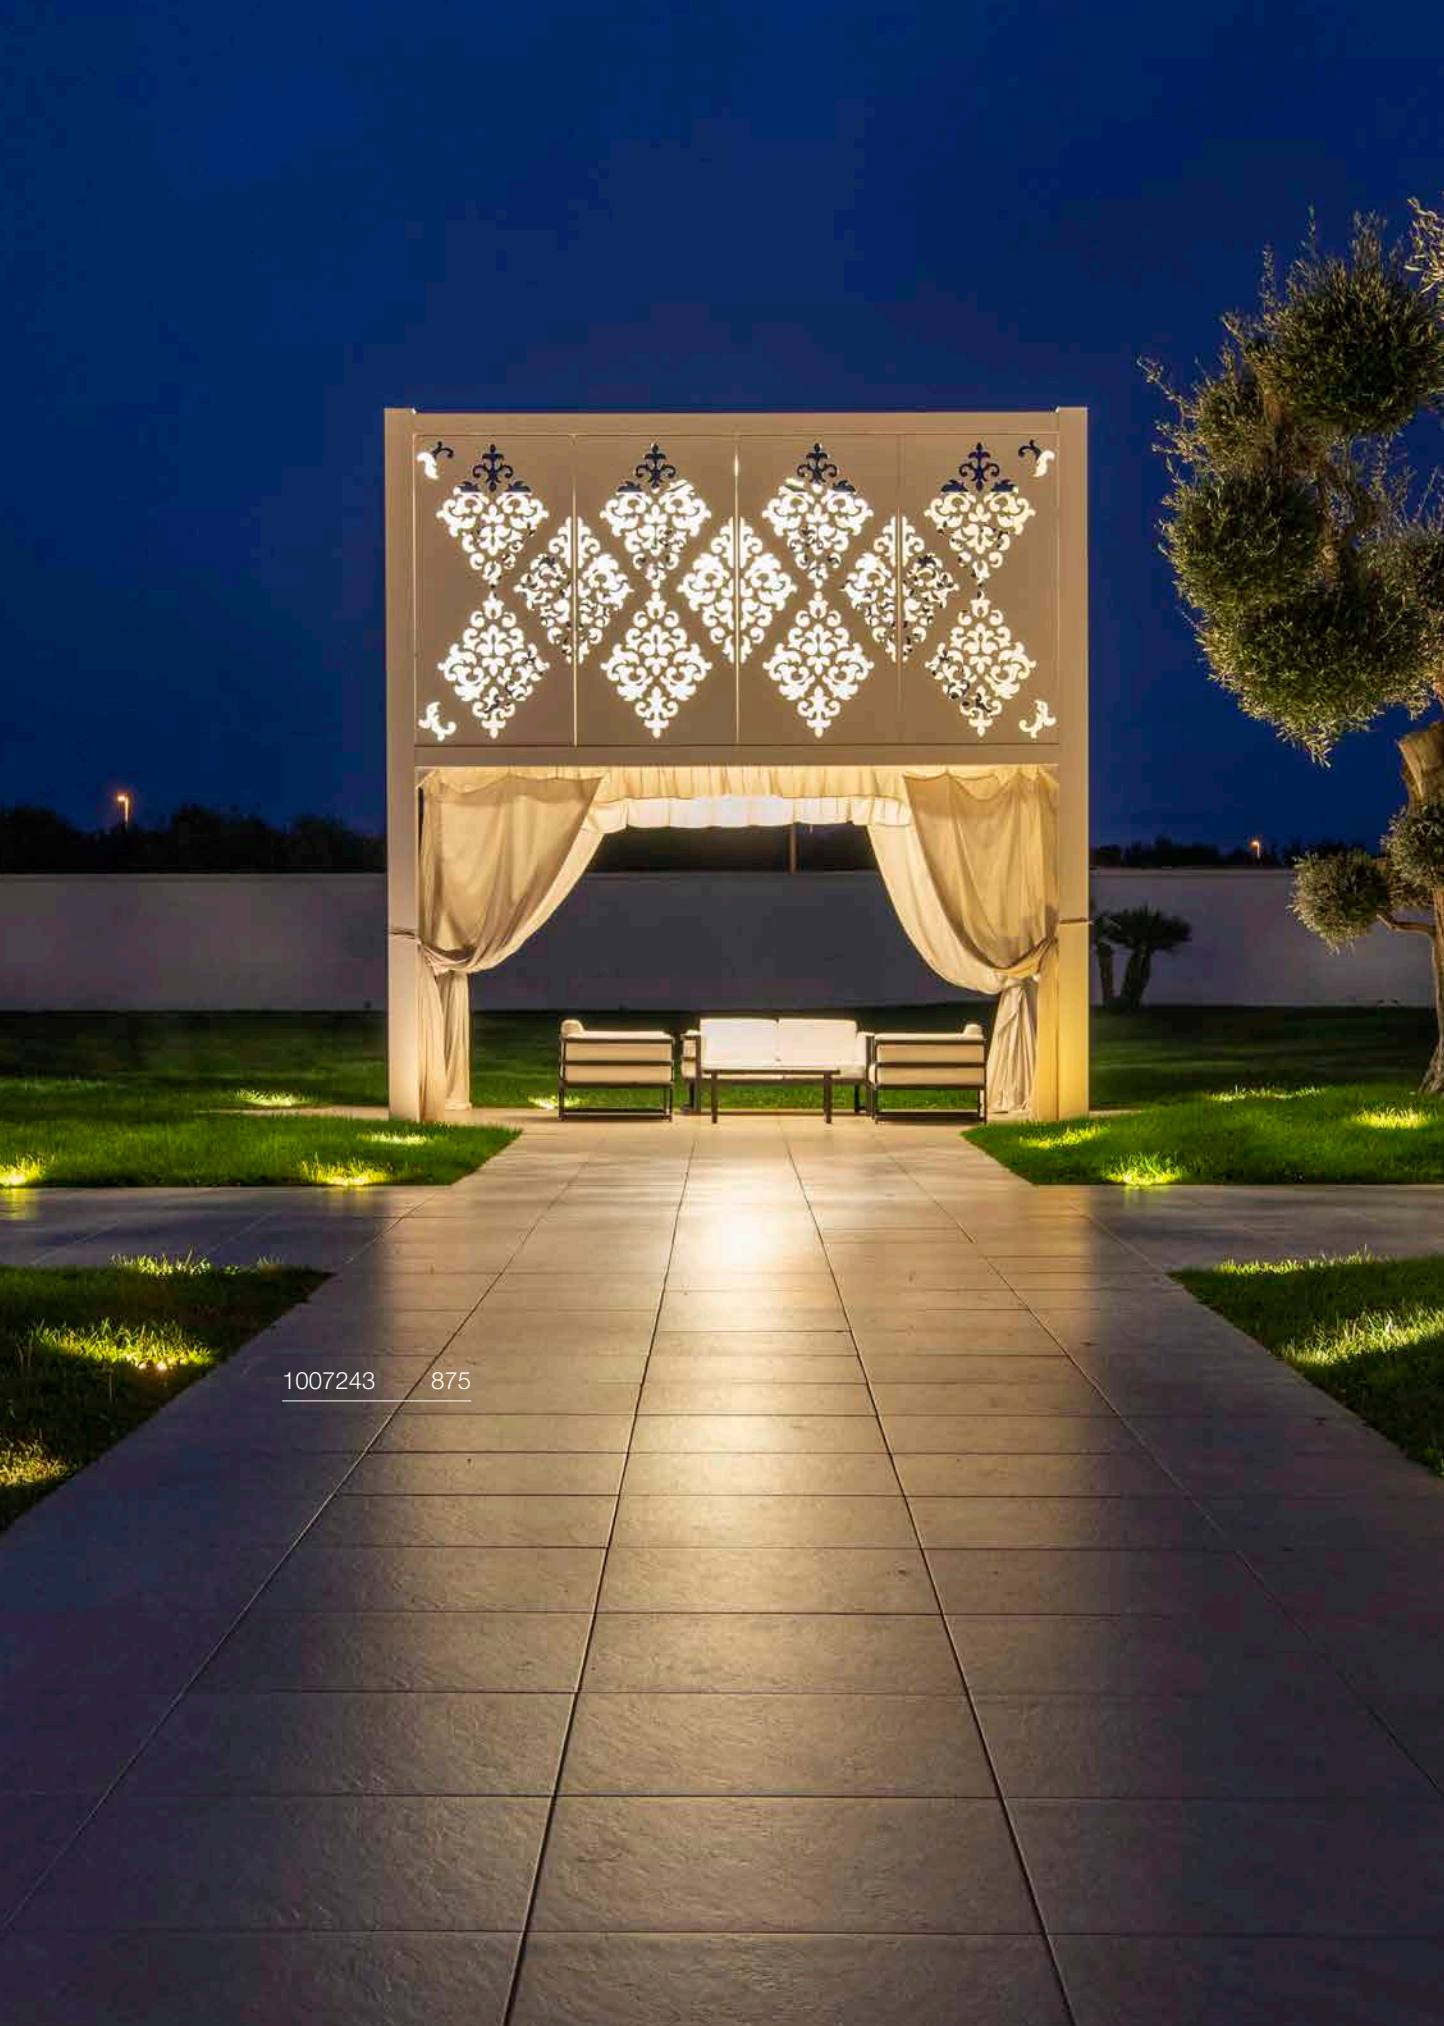

1007243 875

OUTDOOR | RECESSED FLOOR LIGHTS



DASAR® | 873



DASAR® | 874–877



DASAR® FLAT | 880



DASAR® | 880–881



DASAR® 920 | 881



DASAR® 115 | 882







DASAR® EXACT 116 | 883



DASAR® 215 | 885



DASAR® 215 | 885



DASAR® 370 | 885





TRAIL-LITE® | 886





POWER TRAIL-LITE® | 887



SMALL PLOT | 888



BIG PLOT | 889





ROCCI | 890





ROCCI 200 | 891






SOLASTO | 893



1007196 873

DASAR® 600
EL, DALI







220-240V ~0/50/60 Hz | 550mA
Total wattage: 18W
Material: Stainless steel 316/aluminium

- marked installation direction
- Recessed fixing kit and cover can be ordered separately
- BEG-eligible
- IP connection box

LED INSIDE CRI 80

3000 K
2200 lm


Variant	Prod. no.
stainless steel	**1007195**

⊕

Product	Prod. no.
Recessed fixing kit	
black	**1007198**

DASAR® 1200
EL, DALI







220-240V ~0/50/60 Hz | 900mA
Total wattage: 34W
Material: Stainless steel 316/aluminium

- marked installation direction
- Recessed fixing kit and cover can be ordered separately
- BEG-eligible
- IP connection box

LED INSIDE CRI 80

3000 K
4100 lm


Variant	Prod. no.
stainless steel	**1007196**

⊕

Product	Prod. no.
Recessed fixing kit	
black	**1007197**

DASAR® S
RL, ROUND





IP67 IK10 24° 15° 50000 h L80B50 50 20 kN

220-240V ~50/60 Hz | 200mA
Total wattage: 4W
Material: Stainless steel 316/aluminium

- Conveniently adjustable light distribution using 15°, 36° and 50° interchangeable optics
- Recessed fixing kit incl. cover can be ordered separately
- IP connection box

LED INSIDE CRI 80


3000 K
350 lm

Variant	Prod. no.
stainless steel/anthracite	**1007680**

Product	Prod. no.
Recessed floor fixing kit S	
● black	**1007682**
Reflector 15°	
○ silver	**1007683**
Reflector 36°	
○ silver	**1007684**
Reflector 50°	
○ silver	**1007685**

DASAR® S
RL, ANGULAR





IP67 IK10 24° 15° 50000 h L80B50 50 20 kN

220-240V ~50/60Hz | 200mA
Total wattage: 4W
Material: Stainless steel 316/aluminium

- Conveniently adjustable light distribution using 15°, 36° and 50° interchangeable optics
- Recessed fixing kit incl. cover can be ordered separately
- IP connection box

LED INSIDE CRI 80


3000 K
350 lm

Variant	Prod. no.
stainless steel/anthracite	**1007681**

Product	Prod. no.
Recessed floor fixing kit S	
● black	**1007682**
Reflector 15°	
○ silver	**1007683**
Reflector 36°	
○ silver	**1007684**
Reflector 50°	
○ silver	**1007685**

DASAR® M
RL, ROUND, DALI





Dali Touch IP67 IK10 24° 15° 50 50000 h L80B50 20 20 kN

220-240 V ~50/60 Hz | 300 mA
Total wattage: 6.5W
Material: stainless steel 316/aluminium

- Conveniently adjustable light distribution using 15°, 36° and 50° interchangeable optics
- Recessed fixing kit incl. cover can be ordered separately
- Y-IP68 connection box

LED INSIDE CRI 80


3000 K
450 lm

Variant	Prod. no.
stainless steel/anthracite	**1007810**

Product	Prod. no.
Recessed floor fixing kit M	
● black	**1007822**
Reflector 15°	
○ silver	**1007683**
Reflector 36°	
○ silver	**1007684**
Reflector 50°	
○ silver	**1007685**

DASAR® M
RL, SQUARE, DALI





Dali · Touch · IP67 · IK10 · 24° · 15° · 50 · 50000 h L80B50 · 20 · 20 kN

220-240V ~50/60Hz | 300mA
Total wattage: 6.5W
Material: Stainless steel 316/aluminium

- Conveniently adjustable light distribution using 15°, 36° and 50° interchangeable optics
- Recessed fixing kit incl. cover can be ordered separately
- Y-IP68 connection box

LED INSIDE · CRI 80

3000 K
450 lm


Variant	Prod. no.
stainless steel/anthracite	**1007811**

⊕

Product	Prod. no.
Recessed floor fixing kit M	
black	**1007822**
Reflector 15°	
silver	**1007683**
Reflector 36°	
silver	**1007684**
Reflector 50°	
silver	**1007685**

DASAR® L
RL, ROUND, DALI





Dali · Touch · IP65/IP67 · IK10 · 24° · 60° · 50000 h L80B50 · 100 · 45 · 2 t · 20 kN

220-240V ~50/60Hz | 500mA
Total wattage: 19W
Material: Stainless steel 316/aluminium

- Recessed fixing kit incl. cover can be ordered separately
- Conveniently adjustable light distribution using 15°, 36° and 60° interchangeable optics
- IP connection box

LED INSIDE · CRI 80

3000 K
1950 lm


Variant	Prod. no.
stainless steel	**1007243**

⊕

Product	Prod. no.
Recessed fixing kit for DASAR L	
black	**1007245**
Reflector 15° for L / XL	
silver	**1007238**
Reflector 36° for L / XL	
silver	**1007239**
Reflector 60° for L / XL	
silver	**1007240**

DASAR® L
RL, SQUARE, DALI





Dali · Touch · IP65/IP67 · IK10 · 24° · 60° · 50000 h L80B50 · 100 · 45 · 2 t · 20 kN

220-240V ~50/60Hz | 500mA
Total wattage: 19W
Material: Stainless steel 316/aluminium

- Recessed fixing kit incl. cover can be ordered separately
- Conveniently adjustable light distribution using 15°, 36° and 60° interchangeable optics
- IP connection box

LED INSIDE · CRI 80

3000 K
1950 lm


Variant	Prod. no.
stainless steel	**1007244**

⊕

Product	Prod. no.
Recessed fixing kit for DASAR L	
black	**1007245**
Reflector 15° for L / XL	
silver	**1007238**
Reflector 36° for L / XL	
silver	**1007239**
Reflector 60° for L / XL	
silver	**1007240**

DASAR® L
RL, ASYM, ROUND, DALI







220-240V ~50/60Hz | 500mA
Total wattage: 19W
Material: Stainless steel 316/aluminium

- Recessed fixing kit incl. cover can be ordered separately
- IP connection box

LED INSIDE CRI 80


3000 K
1800 lm

Variant	Prod. no.
stainless steel/black	**1009168**

Product	Prod. no.
Recessed fixing kit for DASAR L	
black	**1007245**

DASAR® L
RL, ASYM, SQUARE, DALI







220-240V ~50/60Hz | 500mA
Total wattage: 19W
Material: Stainless steel 316/aluminium

- Recessed fixing kit incl. cover can be ordered separately
- IP connection box

LED INSIDE CRI 80


3000 K
1800 lm

Variant	Prod. no.
stainless steel/black	**1009169**

Product	Prod. no.
Recessed fixing kit for DASAR L	
black	**1007245**

DASAR® XL
RL, ROUND, DALI







220-240V ~50/60Hz | 700mA
Total wattage: 27W
Material: Stainless steel 316/aluminium

- Recessed fixing kit incl. cover can be ordered separately
- Conveniently adjustable light distribution using 15°, 36° and 60° interchangeable optics
- IP connection box

LED INSIDE CRI 80


3000 K
2790 lm

Variant	Prod. no.
stainless steel	**1007241**

Product	Prod. no.
Recessed fixing kit for DASAR XL	
black	**1007246**
Reflector 15° for L / XL	
silver	**1007238**
Reflector 36° for L / XL	
silver	**1007239**
Reflector 60° for L / XL	
silver	**1007240**

DASAR® XL
RL, SQUARE, DALI







220-240V ~50/60Hz | 700mA
Total wattage: 27W
Material: Stainless steel 316/aluminium

- Recessed fixing kit incl. cover can be ordered separately
- Conveniently adjustable light distribution using 15°, 36° and 60° interchangeable optics
- IP connection box

LED INSIDE CRI 80


	3000 K
	2790 lm

Variant	Prod. no.
stainless steel	**1007242**

Product	Prod. no.
Recessed fixing kit for DASAR XL	
black	**1007246**
Reflector 15° for L / XL	
silver	**1007238**
Reflector 36° for L / XL	
silver	**1007239**
Reflector 60° for L / XL	
silver	**1007240**

DASAR® XL
RL, ASYM, ROUND, DALI







220-240V ~50/60Hz | 700mA
Total wattage: 27W
Material: Stainless steel 316/aluminium

- Recessed fixing kit incl. cover can be ordered separately
- IP connection box

LED INSIDE CRI 80


	3000 K
	2600 lm

Variant	Prod. no.
stainless steel/black	**1009170**

Product	Prod. no.
Recessed fixing kit for DASAR XL	
black	**1007246**

DASAR® XL
RL, ASYM, SQUARE, DALI







220-240V ~50/60Hz | 700mA
Total wattage: 27W
Material: Stainless steel 316/aluminium

- Recessed fixing kit incl. cover can be ordered separately
- IP connection box

LED INSIDE CRI 80

	3000 K
	2600 lm

Variant	Prod. no.
stainless steel/black	**1009171**

Product	Prod. no.
Recessed fixing kit for DASAR XL	
black	**1007246**






1007242 877

DASAR® FLAT 80
EL





IP65/ IP67 · IK08 · 30000 h L70B50 · 150 · 5 t · 50 kN

220-240V ~50/60Hz
Total wattage: 3.5W
Material: stainless steel 304/glass

- Recessed fixing kit included
- This light is suitable for installation in wood,
- Open cable end


LED INSIDE · CRI 80

	3000 K
Up	140 lm

Variant	Prod. no.
stainless steel	**228412**

DASAR® FLAT 120
EL





IP65/ IP67 · IK08 · 30000 h L70B50 · 150 · 50 kN

220-240V ~50/60Hz | 350mA
Total wattage: 7W
Material: stainless steel 304/aluminium

- Recessed fixing kit included
- Open cable end


LED INSIDE · CRI 80

	3000 K
	490 lm

Variant	Prod. no.
stainless steel	**1006106**

DASAR® 255
EL





IP65/ IP67 · IK08 · 50000 h L70B50 · 2 t · 20 kN

220-240V ~50/60Hz | 750mA
Total wattage: 31W
Material: stainless steel 316/glass

LED INSIDE · CRI 90


	3000 K
	1660 lm

Variant	Prod. no.
stainless steel	**229383**

Product	Prod. no.
Connection box IP68, 3-pole	
black	**228730**

DASAR® 255
EL







220-240V ~50/60Hz | 750mA
Total wattage: 31W
Material: stainless steel 316/glass

- Recessed fixing kit included



12-24V
Total wattage: 6.5W
Material: stainless steel 316/glass

- Recessed fixing kit included
- Open cable end



220-240V ~50/60Hz | 400mA
Total wattage: 5.5W
Material: stainless steel 316/glass

- Recessed fixing kit included
- Open cable end

LED INSIDE CRI 90

4000 K
1720 lm

Variant	Prod. no.
stainless steel	**229381**

LED INSIDE CRI 80

3000 K
520 lm

Variant	Prod. no.
stainless steel	**233500**

Product	Prod. no.
LED power supply 12 V | 24 W, round	
white	**1008651**
LED power supply 24 V | 25 W, round	
white	**1008652**


LED INSIDE CRI 80

3000 K
300 lm

Variant	Prod. no.
stainless steel	**233520**

DASAR® 115
RL, ROUND, QPAR51





IP67 IK08 90° 30° 20 kN

220-240V ~50/60Hz
Material: stainless steel 316/glass

- Recessed fixing kit included

SOCKET INSIDE 35 W

Base: 1 × GU10 | max. Ø: 5.1 cm | L: 6 cm


Variant	Prod. no.
stainless steel	**229320**

GU10 | 2W | 36°
230lm | 2700K | EEC = E

Prod. no.: **1007230**

DASAR® 115
RL, SQUARE, QPAR51





IP67 IK08 90° 30° 20 kN

220-240V ~50/60Hz
Material: stainless steel 316/glass

- Recessed fixing kit included

SOCKET INSIDE 35 W

Base: 1 × GU10 | max. Ø: 5.1 cm | L: 6 cm


Variant	Prod. no.
stainless steel	**229324**

GU10 | 2W | 36°
230lm | 2700K | EEC = E

Prod. no.: **1007230**

DASAR® 115
RL, SQUARE, QPAR51





IP67 IK08 90° 30° 20 kN

220-240V ~50/60Hz
Material: stainless steel 316/glass

- Recessed fixing kit included

SOCKET INSIDE 35 W

Base: 1 × GU10 | max. Ø: 5.1 cm | L: 6 cm


Variant	Prod. no.
stainless steel	**229374**

GU10 | 2W | 36°
230lm | 2700K | EEC = E

Prod. no.: **1007230**

DASAR® EXACT 116
EL, ROUND, QPAR51







220-240V ~50/60Hz
Material: stainless steel 316/glass

- Recessed fixing kit included

SOCKET INSIDE 35 W

Base: 1 × GU10 max. Ø: 5.1 cm	L: 6 cm

Variant	Prod. no.
stainless steel	**228430**


GU10 | 2W | 36°
230lm | 2700K | EEC = E



Prod. no.: **1007230**

DASAR® EXACT 116
EL, SQUARE, QPAR51







220-240V ~50/60Hz
Material: stainless steel 316/glass

- Recessed fixing kit included

SOCKET INSIDE 35 W

Base: 1 × GU10 max. Ø: 5.1 cm	L: 6 cm

Variant	Prod. no.
stainless steel	**228434**

GU10 | 2W | 36°
230lm | 2700K | EEC = E




Prod. no.: **1007230**



DASAR® 215
RL, ROUND, QPAR111





IP67 IK08 20 20 kN

220-240V ~50/60Hz
Material: stainless steel 316/glass

- Recessed fixing kit included

SOCKET INSIDE 75 W

Base: 1 × GU10


Variant	Prod. no.
stainless steel	**229230**

GU10 | 13W | 12°
650lm | 3000K | EEC = F

Prod. no.: **1005278**

DASAR® 215
RL, SQUARE, QPAR111





IP67 IK08 20 20 kN

220-240V ~50/60Hz
Material: stainless steel 316/glass

- Recessed fixing kit included

SOCKET INSIDE 75 W

Base: 1 × GU10


Variant	Prod. no.
stainless steel	**229234**

GU10 | 13W | 12°
650 lm | 3000K | EEC = F

Prod. no.: **1005278**

DASAR® 370
EL, ROUND





IP67 IK08 30° 25000 h L70B50 150 2500 kN

12-24V
Power consumption: 2W
Material: stainless steel 316/glass

- This light is suitable for installation in wood
- Open cable end

LED INSIDE CRI 80


3000 K
120 lm

Variant	Prod. no.
stainless steel	**233540**

Product	Prod. no.
LED power supply 12 V | 24 W, round	
white	**1008651**
LED power supply 24 V | 25 W, round	
white	**1008652**

TRAIL-LITE® 60
EL





IP65 IK08 20000 h L70B50

12V 50/60Hz
Power consumption: 0.3W
Material: stainless steel 316/glass


- Only operate with conventional transformer,
- Recessed fixing kit included
- This light is suitable for installation in wood


LED INSIDE CRI 80

3000 K
4 lm

Variant	Prod. no.
stainless steel	227462

TRAIL-LITE® 60 SET
EL



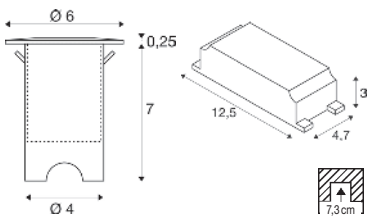

IP44/ IP67 IK08 30000 h L70B50 5 kN

220-240V ~50/60Hz | 24V
Total wattage: 4.6W
Material: stainless steel 316/aluminium

- Set consisting of 4 lights, each with a 5m cable, connector, cable and plug-in power supply unit
- This light is suitable for installation in wood
- IP44 safety plug


LED INSIDE CRI 80

3000 K
25 lm

Variant	Prod. no.
stainless steel/aluminium	1008841

TRAIL-LITE® 60 SINGLE
EL





IP67 IK08 30000 h L70B50 5 kN

24V
Power consumption: 0.9W
Material: stainless steel 316/aluminium

- Light incl. 5m connection cable, recessed fixing kit included
- This light is suitable for installation in wood
- Low-voltage secondary socket

LED INSIDE CRI 80

3000 K
25 lm

Variant	Prod. no.
stainless steel/aluminium	1008842

Product	Prod. no.
Power supply	
black	1008843

TRAIL-LITE® 60
POWER SUPPLY



IP44/ IP67


L: 12.5 cm
W: 4.7 cm
H: 3 cm
Material: plastic PC

Output voltage	22.8–25.2V
Output from	11.4W
Output up to	12.6W
Number of sec. outputs	1

Variant	Prod. no.
● black	**1008843**

POWER TRAIL-LITE®
EL, SQUARE





IP67 IK08 60° 30000h L70B50 200

350mA
Power consumption: 1W
Material: stainless steel 316/glass

- Operate only with 350mA driver. Only wire together multiple power LEDs in series! Installation sleeve incl.
- This light is suitable for installation in wood
- Open cable end

LED INSIDE CRI 90

3000 K
45 lm


Variant	Prod. no.
◐ stainless steel	**228342**

⊕

Product	Prod. no.
LED driver 4 W | 350 mA	
○ white	**1008656**

POWER TRAIL-LITE®
EL, ROUND





IP67 IK08 60° 30000h L70B50 200

350mA
Power consumption: 1W
Material: stainless steel 316/glass

- Operate only with 350mA driver. Only wire together multiple power LEDs in series!
- This light is suitable for installation in wood
- Open cable end

LED INSIDE CRI 90

3000 K
45 lm


Variant	Prod. no.
◐ stainless steel	**228332**

⊕

Product	Prod. no.
LED driver 4 W | 350 mA	
○ white	**1008656**

SMALL PLOT
MODULE





IP67 IK06 180° 40000 h L70B50 50

24V
Power consumption: 2.6W
Material: aluminium/polymethylmethacrylate (PMMA)

- This product is delivered without a cover
- Open cable end

LED INSIDE CRI 80


3000 K
240 lm

Variant	Prod. no.
aluminium	**1006172**

Product	Prod. no.
LED power supply 24 V | 25 W, round	
white	**1008652**
LED power supply 24 V | 24 W	
white	**1008653**

SMALL PLOT
MODULE





IP67 IK06 180° 40000 h L70B50 50

24V
Power consumption: 2.6W
Material: stainless steel/polymethylacrylate (PMMA)

- This product is delivered without a cover
- Open cable end

LED INSIDE CRI 80

3000 K
240 lm

Variant	Prod. no.
stainless steel	**1006171**

Product	Prod. no.
LED power supply 24 V | 25 W, round	
white	**1008652**
LED power supply 24 V | 24 W	
white	**1008653**

SMALL PLOT
COVER, 2-PACK



Ø: 10.3 cm
H: 1.7 cm
Material: stainless steel

Variant	Prod. no.
anthracite	**1006174**
stainless steel	**1006173**

SMALL PLOT
COVER, 4-PACK




Ø: 10.3 cm
H: 1.7 cm
Material: aluminium

Variant	Prod. no.
anthracite	**1006176**
stainless steel	**1006175**

BIG PLOT
MODULE





IP67 IK06 180° 35000h L70B50 150

220-240 V ~50/60 Hz
Total wattage: 4.9W
Material: aluminium/polymethylmethacrylate (PMMA)

- This product is delivered without a cover
- Open cable end

LED INSIDE CRI 80


3000 K
540 lm

Variant	Prod. no.
aluminium	**1008000**

Product	Prod. no.
T-connector box	
black	**228726**
Connection box IP68, 3-pole	
black	**228730**
aluminium cover two light emissions	
anthracite	**1001262**
aluminium cover four light emissions	
anthracite	**1001263**

BIG PLOT
MODULE





IP67 IK06 180° 35000h L70B50 150

220-240V ~50/60Hz
Total wattage: 4.9W
Material: stainless steel/polymethylacrylate (PMMA)

- This product is delivered without a cover
- Open cable end

LED INSIDE CRI 80

3000 K
540 lm

Variant	Prod. no.
stainless steel	**1008001**

Product	Prod. no.
T-connector box	
black	**228726**
Connection box IP68, 3-pole	
black	**228730**
SST316L cover two light emissions	
stainless steel	**1001254**
SST316L cover four light emissions	
stainless steel	**1001255**

BIG PLOT
COVER, 2-PACK



Ø: 17 cm
H: 2 cm
Material: stainless steel 316

- 1001262 loadable up to 0.5t
- 1001254 loadable up to 0.8t

Variant	Prod. no.
anthracite	**1001262**
stainless steel	**1001254**

BIG PLOT
COVER, 4-PACK




Ø: 17 cm
H: 2 cm
Material: aluminium

- 1001255 loadable up to 0.8t
- 1001263 loadable up to 0.8t

Variant	Prod. no.
anthracite	**1001263**
stainless steel	**1001255**

ROCCI
EL, ROUND





IP67 IK08 120° 40000 h L70B50 5 kN

100-277V ~50/60Hz | 700mA
Total wattage: 8.6W
Material: stainless steel 316/glass

- Recessed fixing kit included


LED INSIDE CRI 80

3000 K
580 lm

Variant	Prod. no.
stainless steel	**227600**

ROCCI
EL, SQUARE





IP67 IK08 120° 40000 h L70B50 5 kN

100-277V ~50/60Hz | 700mA
Total wattage: 8.6W
Material: stainless steel 316/glass

- Recessed fixing kit included


LED INSIDE CRI 80

3000 K
580 lm

Variant	Prod. no.
stainless steel	**227604**

ROCCI 200
EL, ROUND







100-277V ~50/60Hz | 350mA
Total wattage: 16W
Material: stainless steel 316/glass

- Recessed fixing kit included


LED INSIDE CRI 80

3000 K
1530 lm

Variant	Prod. no.
stainless steel	**1006104**

ROCCI 200
EL, ANGULAR







100-277V ~50/60Hz | 350mA
Total wattage: 16W
Material: stainless steel 316/glass

- Recessed fixing kit included

LED INSIDE CRI 80


3000 K
1530 lm

Variant	Prod. no.
stainless steel	**1006105**


227680 893

SOLASTO
EL, ROUND





IP67 IK08 6000 kN

220-240V ~50/60Hz
Material: stainless steel 304/glass

- Recessed fixing kit included

SOCKET INSIDE 6 W

Base: 1 × GU10

Variant	Prod. no.
stainless steel	**227680**


GU10 | 6W | 38°
470lm | 3000K | EEC = F

C,L

Prod. no.: **1005079**

SOLASTO
EL, SQUARE





IP67 IK08 6000 kN

220-240V ~50/60Hz
Material: stainless steel 304/glass

- Recessed fixing kit included

SOCKET INSIDE 6 W

Base: 1 × GU10

Variant	Prod. no.
stainless steel	**227684**

GU10 | 6W | 38°
470lm | 3000K | EEC = F

C,L

Prod. no.: **1005079**


1008164 901

LIGHT BULBS



LED QT14 | 896



LED QT–DE12 | 896



LED G45 GOLD | 896



LED C35 GOLD | 896



LED C35 | 896– 897

LED TCR–TSE | 897



LED QR51 | 897



LED A60 | 897, 900, 903



LED T32 | 897



LED QPAR51 | 898



LED PAR11 | 899



LED QPAR111 | 899




LED GLOBE 150 | 900–901



LED GLOBE 125 | 900–901, 903



LED GLOBE 200 | 901



LED GLOBE 300 | 901



LED T32 | 902



LED T38 | 902



LED T45 | 902



LED ST64 | 902–903



LED ST58 | 903



SLVconnect® LED PAR16 SMART | 904



SLVconnect® LED A60 SMART | 904

LED QT14
G9



220-240 V ~50/60 Hz
Material: ceramic
Ø: 1.8 cm | L: 5.4 cm

Luminous flux	450 lm
Lamp current	0.03 A
Colour rendering	90
Output	3.6 W

Variant	Prod. no.
transparent 400 lm | 3000 K	**1005286**
transparent 450 lm | 2700 K	**1007455**

LED QT-DE12
R7S, 78 MM



220-240 V ~50/60 Hz
Material: polycarbonate (PC)
Ø: 2.9 cm | L: 2.9 cm

Luminous flux	1050 lm
Lamp current	0.04 A
Colour rendering	90
Output	9 W

Variant	Prod. no.
transparent 3000 K	**1005287**

LED QT-DE12
R7S, 118 MM



220-240 V ~50/60 Hz
Material: polycarbonate (PC)
Ø: 2.9 cm | L: 11.8 cm

Luminous flux	2000 lm
Lamp current	0.07 A
Colour rendering	90
Output	15 W

Variant	Prod. no.
transparent 3000 K	**1005288**

LED G45
E14, GOLD CURLY FILAMENT



220-240 V ~50/60 Hz
Material: glass
Ø: 4.5 cm | L: 7.5 cm

Luminous flux	75 lm
Lamp current	0.01 A
Colour rendering	80
Output	2 W

Variant	Prod. no.
gold/transparent 70 lm | 1800 K	**1008649**
gold/transparent 75 lm | 2200 K	**1008650**

LED C35
E14, GOLD CURLY FILAMENT



220-240 V ~50/60 Hz
Material: glass
Ø: 3.5 cm | L: 9.8 cm

Luminous flux	80 lm
Lamp current	0.01 A
Colour rendering	80
Output	2 W

Variant	Prod. no.
gold/transparent 1800 K	**1008647**
gold/transparent 2200 K	**1008648**

LED C35
E14



220-240 V ~50/60 Hz
Material: glass
Ø: 3.5 cm | L: 9.8 cm

Luminous flux	380 lm
Lamp current	0.03 A
Colour rendering	90
Output	4.2 W

Variant	Prod. no.
transparent 2700 K	**1005284**

LED C35
E14



220-240 V ~50/60 Hz
Material: glass
Ø: 3.5 cm | L: 9.8 cm

Luminous flux	350 lm
Lamp current	0.03 A
Colour rendering	90
Output	4.2 W

Variant	Prod. no.
○ frosted 2700 K	**1005285**

LED TCR-TSE
GX53

230 V 50/60 Hz
Material: polycarbonate (PC)
Ø: 7.5 cm | L: 2.4 cm

Luminous flux	490 lm | 520 lm
Lamp current	0.03 A
Colour rendering	90
Output	6.1 W

Variant	Prod. no.
○ white 520 lm | 4000 K	**1005269**
○ white 490 lm | 3000 K	**1005271**
○ white 490 lm | 2700 K	**1005272**

LED QR51
GU5.3



12 V
Material: glass
Ø: 5 cm | L: 4.5 cm

Manufacturer	Philips
Luminous flux	460 lm
Lamp current	0.63 A
Colour rendering	90
Output	5.8 W

Variant	Prod. no.
○ transparent 450 lm | 2700 K	**1001574**
○ transparent 460 lm | 3000 K	**1001575**

LED A60
GU10



220-240 V ~50/60 Hz
Material: glass
Ø: 6 cm | L: 11 cm

Manufacturer	Segula
Luminous flux	400 lm
Lamp current	0.03 A
Colour rendering	90
Output	5 W

Variant	Prod. no.
○ transparent 2200 K	**1008154**

LED A60
GU10



220-240 V ~50/60 Hz
Material: glass
Ø: 6 cm | L: 11 cm

Manufacturer	Segula
Luminous flux	650 lm
Lamp current	0.04 A
Colour rendering	90
Output	6.5 W

Variant	Prod. no.
○ transparent 2700 K	**1008375**

LED T32
GU10



220-240 V ~50/60 Hz
Material: glass
Ø: 3.2 cm | L: 10 cm

Manufacturer	Segula
Luminous flux	270 lm
Lamp current	0.02 A
Colour rendering	90
Output	3.2 W

Variant	Prod. no.
○ transparent 2700 K	**1006321**

LED QPAR51
GU10



220-240 V ~50/60 Hz
Material: glass
Ø: 5 cm | L: 5 cm

Luminous flux	360 lm
Lamp current	0.03 A
Colour rendering	90
Output	6 W

Variant	Prod. no.
○ silver 2200 K	**1005273**

LED QPAR51
GU10



220-240 V ~50/60 Hz
Material:

Luminous flux	490 lm
Lamp current	0.03 A
Colour rendering	90
Output	6 W

Variant	Prod. no.
● black 450 lm | 2700 K	**1005077**
● black 470 lm | 3000 K	**1005080**
● black 490 lm | 4000 K	**1005083**

LED QPAR51
GU10



220-240 V ~50/60 Hz
Material: plastic PC

Luminous flux	490 lm
Lamp current	0.03 A
Colour rendering	90
Output	6 W

Variant	Prod. no.
○ white 450 lm | 2700 K	**1005076**
○ white 470 lm | 3000 K	**1005079**
○ white 490 lm | 4000 K	**1005082**

LED QPAR51
GU10



220-240 V ~50/60 Hz
Material: plastic PC

Luminous flux	490 lm
Lamp current	0.03 A
Colour rendering	90
Output	6 W

Variant	Prod. no.
● grey 450 lm | 2700 K	**1005075**
● grey 470 lm | 3000 K	**1005078**
● grey 490 lm | 4000 K	**1005081**

LED QPAR51
GU10



220-240 V ~50/60 Hz
Material: glass
Ø: 5 cm | L: 5.4 cm

Luminous flux	230 lm
Lamp current	0.03 A
Colour rendering	80
Output	2.4 W

Variant	Prod. no.
○ transparent 2700 K	**1007230**
○ transparent 3000 K	**1007231**

LED PAR11
GU10

NEW



C,L IP20 36° 30000h L70B50

220-240 V ~50/60 Hz
Material: ceramic
Ø: 3.5 cm

Luminous flux	430 lm
Lamp current	0.03 A
Colour rendering	90
Output	4.9 W

Variant	Prod. no.
white 390 lm | 2700 K	**1011670**
white 430 lm | 3000 K	**1011671**

LED QPAR111
GU10



C,L IP20 55° 40000h L70B50

220-240 V ~50/60 Hz
Material: aluminium
Ø: 11 cm | L: 7 cm

Luminous flux	750 lm
Lamp current	0.05 A
Colour rendering	90
Output	12 W

Variant	Prod. no.
aluminium 670 lm | 2700 K	**1005297**
aluminium 680 lm | 3000 K	**1005298**
aluminium 750 lm | 4000 K	**1005299**

LED QPAR 111
GU10



C IP20 10° 25000h L70B50

220-240 V ~50/60 Hz
Material: aluminium
Ø: 11.1 cm | L: 7 cm

Luminous flux	1000 lm
Lamp current	0.06 A
Colour rendering	90
Output	12.5 W

Variant	Prod. no.
silver 900 lm | 2700 K | 10°	**1005275**
silver 650 lm | 3000 K | 12°	**1005278**
silver 1000 lm | 4000 K | 10°	**1005281**

LED QPAR 111
GU10



C IP20 30° 25000h L70B50

220-240 V ~50/60 Hz
Material: aluminium
Ø: 11.1 cm | L: 7 cm

Luminous flux	1000 lm
Lamp current	0.06 A
Colour rendering	90
Output	12.5 W

Variant	Prod. no.
silver 950 lm | 2700 K	**1005276**
silver 950 lm | 3000 K	**1005279**
silver 1000 lm | 4000 K	**1005282**

LED QPAR 111
GU10



C,L IP20 60° 25000h L70B50

Material: aluminium
Ø: 11.1 cm | L: 7 cm

Luminous flux	1100 lm
Lamp current	0.06 A
Colour rendering	90
Output	12.5 W

Variant	Prod. no.
silver 1000 lm | 2700 K	**1005277**
silver 1000 lm | 3000 K	**1005280**
silver 1100 lm | 4000 K	**1005283**

LED QPAR111
GU10



C,L IP20 38° 25000h L70B50

220-240 V ~50/60 Hz
Material: glass
Ø: 11.1 cm | L: 6.1 cm

Luminous flux	680 lm
Lamp current	0.05 A
Colour rendering	90
Output	8 W

Variant	Prod. no.
transparent 2700 K	**1005274**

LED A60
E27



220-240 V ~50/60 Hz
Material: plastic
Ø: 6 cm | L: 12 cm

Luminous flux	1300 lm
Lamp current	0.06 A
Colour rendering	90
Output	13.2 W

Variant	Prod. no.
○ white 2700 K	**1005302**

LED A60
E27, HIGH EFFICIENCY



220-240 V ~50/60 Hz
Material: glass
Ø: 6 cm | L: 10.8 cm

Luminous flux	830/860 lmn
Lamp current	0.04 A
Colour rendering	80
Output	4 W

Variant	Prod. no.
○ transparent 830 lm | 2700 K	**1008641**
○ transparent 860 lm | 3000 K	**1008642**

LED A60
E27



220-240 V ~50/60 Hz
Material: glass
Ø: 6 cm | L: 10.8 cm

Luminous flux	810 lm
Lamp current	0.05 A
Colour rendering	80
Output	8 W

Variant	Prod. no.
○ transparent 2700 K	**1008643**
○ transparent 3000 K	**1008644**

LED A60
E27




220-240 V ~50/60 Hz
Material: glass
Ø: 6 cm | L: 10.5 cm

Luminous flux	800 lm
Lamp current	0.04 A
Colour rendering	90
Output	7.5 W

Variant	Prod. no.
○ transparent 2700 K	**1005303**

LED GLOBE 150
E27, TWISTED SMOKEY GREY

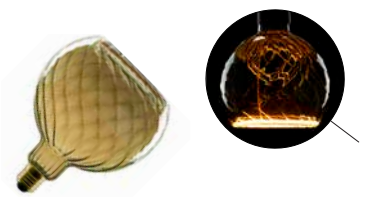


220-240 V ~50/60 Hz
Material: glass
Ø: 15 cm | L: 18.5 cm

Manufacturer	Segula
Luminous flux	230 lm
Lamp current	0.04 A
Colour rendering	85
Output	6 W

Variant	Prod. no.
● smoky grey 1900 K	**1008151**

LED GLOBE 125
E27, SOFT CURVE SMOKEY

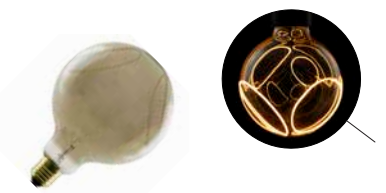


220-240 V ~50/60 Hz
Material: glass
Ø: 12.5 cm | L: 18 cm

Manufacturer	Segula
Luminous flux	400 lm
Lamp current	0.04 A
Colour rendering	90
Output	8 W

Variant	Prod. no.
● smoky grey 1900 K	**1008159**

LED GLOBE 125
E27, SLANTING TOP SMOKEY

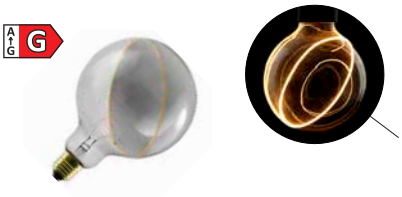


220-240 V ~50/60 Hz
Material: glass
Ø: 12.5 cm | L: 18 cm

Manufacturer	Segula
Luminous flux	350 lm
Lamp current	0.04 A
Colour rendering	90
Output	5 W

Variant	Prod. no.
smoky grey 2200 K	**1008160**

LED GLOBE 125
E27, CRESCENT SLANTING SMOKEY

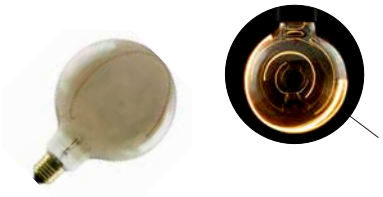

220-240 V ~50/60 Hz
Material: glass
Ø: 12.5 cm | L: 18 cm

Manufacturer	Segula
Luminous flux	310 lm
Lamp current	0.03 A
Colour rendering	90
Output	6 W

Variant	Prod. no.
smoky grey 1900 K	**1008161**

LED GLOBE 125
E27, BLACK SMOKEY



220-240 V ~50/60 Hz
Material: glass
Ø: 12.5 cm | L: 16.5 cm

Manufacturer	Segula
Luminous flux	220 lm
Lamp current	0.04 A
Colour rendering	85
Output	6 W

Variant	Prod. no.
smoky grey 1900 K	**1008155**

LED GLOBE 150
E27, BLACK SMOKEY




220-240 V ~50/60 Hz
Material: glass
Ø: 15 cm | L: 18.5 cm

Manufacturer	Segula
Luminous flux	260 lm
Lamp current	0.04 A
Colour rendering	85
Output	6 W

Variant	Prod. no.
smoky grey 1900 K	**1008163**

LED GLOBE 200
E27, BLACK SMOKEY

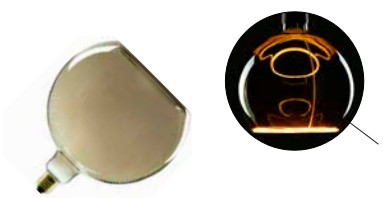


220-240 V ~50/60 Hz
Material: glass
Ø: 20 cm | L: 23 cm

Manufacturer	Segula
Luminous flux	300 lm
Lamp current	0.04 A
Colour rendering	85
Output	6 W

Variant	Prod. no.
smoky grey 1900 K	**1008164**

LED GLOBE 300
E27, BLACK SMOKEY

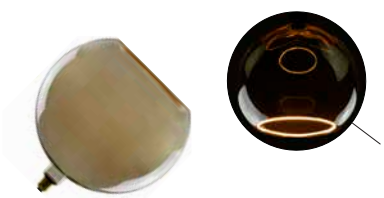

220-240 V ~50/60 Hz
Material: glass
Ø: 30 cm | L: 32 cm

Manufacturer	Segula
Luminous flux	350 lm
Lamp current	0.05 A
Colour rendering	85
Output	8 W

Variant	Prod. no.
smoky grey 1900 K	**1008165**

LED T32
E27, SOFT SPIRAL



220-240 V ~50/60 Hz
Material: glass
Ø: 3.2 cm | L: 19 cm

Manufacturer	Segula
Luminous flux	570 lm
Lamp current	0.04 A
Colour rendering	90
Output	6 W

Variant	Prod. no.
○ transparent 2200 K	**1008152**

LED T32
E27, SOFT TUBE



220-240 V ~50/60 Hz
Material: glass
Ø: 3.2 cm | L: 30 cm

Manufacturer	Segula
Luminous flux	400 lm
Lamp current	0.05 A
Colour rendering	90
Output	8 W

Variant	Prod. no.
○ transparent 1900 K	**1008374**

LED T38
E27



220-240 V ~50/60 Hz
Material: plastic
Ø: 3.8 cm | L: 11.6 cm

Luminous flux	880 lm
Lamp current	0.04 A
Colour rendering	90
Output	8 W

Variant	Prod. no.
○ white 3000 K	**1005289**

LED T45
E27



220-240 V ~50/60 Hz
Material: plastic
Ø: 4.5 cm | L: 14 cm

Luminous flux	1520 lm
Lamp current	0.06 A
Colour rendering	90
Output	13.5 W

Variant	Prod. no.
○ white 3000 K	**1005307**

LED T32
E27, SLIM TUBE



220-240 V ~50/60 Hz
Material: glass
Ø: 3.2 cm L: 17.5 cm

Manufacturer	Segula
Luminous flux	1250 lm
Lamp current	0.06 A
Colour rendering	90
Output	11 W

Variant	Prod. no.
○ transparent 2700 K	**1008162**

LED ST64
E27, GOLD



220-240 V ~50/60 Hz
Material: glass
Ø: 6.4 cm | L: 14.5 cm

Luminous flux	700 lm
Lamp current	0.04 A
Colour rendering	90
Output	7.5 W

Variant	Prod. no.
● gold 2500 K	**1005265**

LED ST64
E27, GOLD CURLY FILAMENT



220-240 V ~50/60 Hz
Material: glass
Ø: 6.4 cm | L: 14.2 cm

Luminous flux	300 lm
Lamp current	0.03 A
Colour rendering	80
Output	4 W

Variant	Prod. no.
gold/transparent 250 lm | 1800 K	**1008645**
gold/transparent 3000 lm | 2000 K	**1008646**

LED ST58
E27



220-240 V ~50/60 Hz
Material: glass
Ø: 5.8 cm | L: 14.2 cm

Luminous flux	800 lm
Lamp current	0.04 A
Colour rendering	90
Output	7.5 W

Variant	Prod. no.
transparent 2700 K	**1005268**

LED A60
E27, MIRRORHEAD CHROM



220-240 V ~50/60 Hz
Material: glass
Ø: 6 cm | L: 10.5 cm

Luminous flux	720 lm
Lamp current	0.04 A
Colour rendering	90
Output	7.5 W

Variant	Prod. no.
chrome 2700 K	**1005305**

LED GLOBE 125
E27



220-240 V ~50/60 Hz
Material: glass
Ø: 12.5 cm | L: 17.8 cm

Luminous flux	800 lm
Lamp current	0.04 A
Colour rendering	90
Output	7.5 W

Variant	Prod. no.
transparent 2700 K	**1005310**

LED GLOBE 125
E27, HALF MOON



220-240 V ~50/60 Hz
Material: glass
Ø: 12.5 cm | L: 18 cm

Manufacturer	Segula
Luminous flux	650 lm
Lamp current	0.04 A
Colour rendering	90
Output	6.5 W

Variant	Prod. no.
frosted 2700 K	**1008157**

SLVconnect®
LED PAR16 SMART
GU10, ZIGBEE 3.0

NEW



220-240 V ~50/60 Hz
Material: glass
Ø: 5 cm

Manufacturer	Ledvance
Luminous flux	350 lm
Lamp current	0.04 A
Colour rendering	80
Output	4.7 W

Variant	Prod. no.
○ transparent	**1012468**

SLVconnect®
LED PAR16 SMART
GU10, TUNABLE WHITE, ZIGBEE 3.0

NEW



220-240 V ~50/60 Hz
Material: glass
Ø: 5 cm

Manufacturer	Ledvance
Luminous flux	350 lm
Lamp current	0.04 A
Colour rendering	80
Output	4.7 W

Variant	Prod. no.
○ transparent	**1012469**

SLVconnect®
LED PAR16 SMART
GU10, RGBW, ZIGBEE 3.0

NEW



220-240 V ~50/60 Hz
Material: glass
Ø: 5 cm

Manufacturer	Ledvance
Luminous flux	300 lm
Lamp current	0.04 A
Colour rendering	80
Output	4.9 W

Variant	Prod. no.
○ transparent	**1012470**

SLVconnect®
LED A60 SMART
E27, ZIGBEE 3.0

NEW



220-240 V ~50/60 Hz
Material: plastic PC
Ø: 6 cm

Manufacturer	Ledvance
Luminous flux	806 lm
Lamp current	0.06 A
Colour rendering	80
Output	9 W

Variant	Prod. no.
○ white	**1012471**

SLVconnect®
LED A60 SMART
E27, RGBW, ZIGBEE 3.0

NEW



220-240 V ~50/60 Hz
Material: plastic PC
Ø: 6 cm

Manufacturer	Ledvance
Luminous flux	806 lm
Lamp current	0.06 A
Colour rendering	80
Output	9 W

Variant	Prod. no.
○ white	**1012472**


1008164 901
1008161 901



ACCESSORIES



TENSEO TRANSFORMER | 908



LED POWER SUPPLY | 908, 910–911



DALI INTERFACE | 908



CONVERTER | 908



BOX RELAY | 909



SLVconnect® BOX RELAY | 909



SLVconnect® G2 DIMMER BOX | 909



SLVconnect® DIN DIMMER | 909



CEILING OUTLET DIMMER | 909



SLVconnect® WHITE 5-BUTTON WIRELESS SWITCH | 910



CONTROLLER | 910



POWER ADAPTER | 912



DIMMABLE LED POWER SUPPLY | 912



LED DRIVER | 913–916



STRAIN RELIEF | 916–917



DALI DT8 CONTROLLER | 917



REMOTE CONTROL | 917



EMERGENCY LIGHT KIT | 917



CEILING HOOK | 918



CABLE CLAMP | 918



TEXTILE CABLE | 918



GU10 LED CONNECTION BOX | 918



CABLE | 918



GU10 FITTING | 918



CONNECTION BOX | 919



Y CONNECTION BOX | 919



48 V SYSTEM ROUND COVER PLATE | 919



48 V SYSTEM SQUARE COVER PLATE | 919

TENSEO
12V AC | 50VA CONVENTIONAL



IP20

220-240 V ~50/60 Hz
Ø: 11.1 cm
H: 11 cm
Material: steel/brass

Output voltage	12 V
Output up to	60 W
Number of sec. outputs	1

Variant	Prod. no.
● black	**1002691**
○ white	**1002692**
◑ chrome	**1002693**

TENSEO
12V AC | 105VA CONVENTIONAL



IP20

220-240 V ~50/60 Hz
Ø: 11.1 cm
H: 11 cm
Material: steel/brass

Output voltage	12 V
Output up to	105 W
Number of sec. outputs	1

Variant	Prod. no.
○ white	**138981**
◑ chrome	**138982**

TENSEO
12V AC | 210VA CONVENTIONAL



IP20

220-240 V ~50/60 Hz
Ø: 13.5 cm
H: 11 cm
Material: steel/brass

Output voltage	12 V
Output up to	210 W
Number of sec. outputs	1

Variant	Prod. no.
○ white	**138991**
◑ chrome	**138992**

LED POWER SUPPLY
12V AC | 50VA CONVENTIONAL



C,L IP20

220-240 V ~50/60 Hz
L: 10.6 cm
W: 3.3 cm
H: 2.2 cm

Output voltage	11.2–11.5 V
Output from	3 W
Output up to	60 W
Number of sec. outputs	1

Variant	Prod. no.
○ white	**1008675**

DALI INTERFACE
1-10V + ON/OFF



IP20

220-240 V ~50/60 Hz
L: 5.9 cm
W: 3.3 cm
H: 1.5 cm
Material: plastic

- Suitable for controlling electronic ballasts with 1-10 V control input
- Galvanic isolation of DALI input and 1-10 V output

Output voltage	0–250 V
Output up to	1000 W

Variant	Prod. no.
● grey	**1002218**

CONVERTER
DALI -> PHASE DIM



IP20

L: 4.6 cm
W: 4.5 cm
H: 2 cm
Material: polycarbonate (PC)

- The dimmer converter is a trailing-edge phase dimmer with DALI and push control interface

Output voltage	100–240 V
Output from	0 W
Output up to	200 W

Variant	Prod. no.
○ white	**1006452**

DALI INTERFACE
PUSH DIMM / DALI PCU TW G2



NEW

220-240 V ~50/60 Hz
L: 4.9 cm
W: 4.8 cm
H: 2.2 cm
Material: plastic PC

- Can be combined with our 48 V track system
- Integrated bus power supply that generates a DALI signal
- Dimming: PUSH, DALI

Variant	Prod. no.
○ white	**1011655**

BOX RELAY
DALI



NEW

100–240 V ~50/60 Hz | 5 V
L: 4.6 cm
W: 4.5 cm
H: 2.1 cm
Material: plastic PC

- Dali relay module, 300 W LED / 1000 W conventional incandescent and halogen bulbs

Output up to	1000 W
Number of sec. outputs	1

Variant	Prod. no.
● blue	**3009280**

SLVconnect® BOX RELAY
ZIGBEE 3.0



NEW

100–240 V ~50/60 Hz | 5 V
L: 4.6 cm
W: 4.5 cm
H: 2.1 cm
Material: plastic PC

- Zigbee 3.0
- Load: LED 0–200 W / Halogen 0–400 W

Output from	0 W
Output up to	400 W

Variant	Prod. no.
● blue	**3009282**

Product	Prod. no.
Accessories Box	
● blue	**3009310**

SLVconnect®
G2 DIMMER BOX
ZIGBEE 3.0



NEW

100–240 V ~50/60 Hz | 5 V
L: 4.2 cm
W: 3.8 cm
H: 1.6 cm
Material: plastic PC

- Zigbee 3.0 trailing-edge phase dimmer
- Trailing-edge phase dimming: 5–200 W LED (with neutral wire) Trailing-edge phase dimming: 20–200 W LED (without neutral wire)

Output from	5 W
Output up to	200 W

Variant	Prod. no.
● blue	**3009286**

SLVconnect®
DIN DIMMER
ZIGBEE 3.0



NEW

100–240 V ~50/60 Hz | 5 V
L: 6.6 cm
W: 1.8 cm
H: 9 cm
Material: plastic PC

- Zigbee 3.0 trailing-edge phase dimmer, for mounting on a Din Rail,
- Trailing-edge phase dimming: 5–200 W LED (with neutral wire) Trailing-edge phase dimming: 20–200 W LED (without neutral wire)

Output from	5 W
Output up to	200 W

Variant	Prod. no.
● blue	**3009285**

CEILING OUTLET DIMMER
ZIGBEE 3.0



NEW

100–240 V ~50/60 Hz | 5 V
Ø: 8.3 cm
H: 3 cm
Material: plastic PC

- Zigbee 3.0 trailing-edge phase dimmer module for flush-mounted sockets

Variant	Prod. no.
◑ white/blue	**3009389**

SLVconnect® WHITE 5-BUTTON WIRELESS SWITCH
ZIGBEE 3.0



NEW

IP20 zigbee

L: 5.6 cm
W: 5.6 cm
H: 1.2 cm
Material: polycarbonate (PC)

- RGB+CCT+DIM Zigbee remote control, based on ZigBee 3.0, supports one group for connecting up to 30 lighting devices via TouchLink or a Zigbee hub

Variant	Prod. no.
○ white	**3009287** ●

CONTROLLER
LED STRIP CCT / RGBW



IP20

12–24 V
L: 14.5 cm
W: 4.7 cm
H: 1.6 cm
Material: polycarbonate (PC)

- Brightness control for single-colour LED strips
- Colour temperature control for CCT strips and full colour control of RGB+CCT strips
- Controllable via Zigbee radio protocol

Output voltage	12–24 V
Output from	48 W
Output up to	96 W

Variant	Prod. no.
○ white	**1006348**

LED POWER SUPPLY
24V | 24W



IP20

220-240 V ~50/60 Hz
L: 13.7 cm
W: 5 cm
H: 1.6 cm

- Ultra-slim design
- strain relief included

Output voltage	24 V
Output up to	24 W
Number of sec. outputs	1

Variant	Prod. no.
○ white	**1008653**

LED POWER SUPPLY
24V | 36W



IP20

220-240 V ~50/60 Hz
L: 17 cm
W: 5.7 cm
H: 1.8 cm

- Ultra-slim design
- strain relief included

Output voltage	24 V
Output up to	36 W
Number of sec. outputs	1

Variant	Prod. no.
○ white	**1008654**

LED POWER SUPPLY
24V | 60W



IP20

220-240 V ~50/60 Hz
L: 17 cm
W: 5.7 cm
H: 1.8 cm

- Ultra-slim design
- strain relief included

Output voltage	24 V
Output up to	60 W
Number of sec. outputs	1

Variant	Prod. no.
○ white	**1008655**

LED POWER SUPPLY
12V | 24W, ROUND



IP20

220-240 V ~50/60 Hz
Ø: 5.5 cm
H: 2.5 cm

- Suitable for box installation
- strain relief not included

Output voltage	12 V
Output from	1.2 W
Output up to	24 W
Number of sec. outputs	1

Variant	Prod. no.
○ white	**1008651**

LED POWER SUPPLY
24V | 25W, ROUND



IP20

220-240 V ~50/60 Hz
Ø: 5.5 cm
H: 2.5 cm

- Suitable for box installation
- strain relief not included

Output voltage	24 V
Output from	1.2 W
Output up to	25 W
Number of sec. outputs	1

Variant	Prod. no.
○ white	**1008652**

LED POWER SUPPLY
30W | 24V DC STRAIN RELIEF INCLUDED



IP20

220-240 V ~50/60 Hz
L: 30 cm
W: 3 cm
H: 1.6 cm
Material: polycarbonate (PC)

Output voltage	24 V
Output from	0 W
Output up to	30 W
Number of sec. outputs	1

Variant	Prod. no.
○ white	**1007250**

LED POWER SUPPLY
100W | 24V DC STRAIN RELIEF INCLUDED



IP20

220-240 V ~50/60 Hz
L: 35 cm
W: 3 cm
H: 1.8 cm
Material: polycarbonate (PC)

Output voltage	24 V
Output from	0 W
Output up to	100 W
Number of sec. outputs	1

Variant	Prod. no.
○ white	**1007251**

LED POWER SUPPLY
150W | 24V DC STRAIN RELIEF INCLUDED



IP20

220-240 V ~50/60 Hz
L: 35 cm
W: 3 cm
H: 1.8 cm
Material: polycarbonate (PC)

Output voltage	24 V
Output from	0 W
Output up to	150 W
Number of sec. outputs	1

Variant	Prod. no.
○ white	**1007252**

LED POWER SUPPLY
250W | 24V DC STRAIN RELIEF INCLUDED



IP20

220-240 V ~50/60 Hz
L: 40 cm
W: 4 cm
H: 2.2 cm
Material: polycarbonate (PC)

Output voltage	24 V
Output from	0 W
Output up to	250 W
Number of sec. outputs	1

Variant	Prod. no.
○ white	**1007253**

LED POWER SUPPLY
25W | 24V



C,L IP20

220-240 V ~50/60 Hz
L: 12.8 cm
W: 5.2 cm
H: 3 cm
Material: polycarbonate (PC)

Output voltage	24 V
Output from	9.6 W
Output up to	25 W
Number of sec. outputs	1

Variant	Prod. no.
○● white/blue	**1006336**

POWER ADAPTER
50W | 24V



220-240 V ~50/60 Hz
L: 18.4 cm
W: 6.1 cm
H: 3.2 cm
Material: polycarbonate (PC)

Output voltage	24 V
Output from	12 W
Output up to	50 W
Number of sec. outputs	1

Variant	Prod. no.
white/blue	**1003104**

POWER ADAPTER
100W | 24V DC



220-240 V ~50/60 Hz
L: 21 cm
W: 6.7 cm
H: 3.4 cm
Material: polycarbonate (PC)

Output voltage	24 V
Output from	33 W
Output up to	100 W
Number of sec. outputs	1

Variant	Prod. no.
white/blue	**1003105**

LED POWER SUPPLY
30W | 24V DC DALI DIMMABLE
INCLUDING STRAIN RELIEF



220-240 V ~50/60 Hz
L: 30 cm
W: 3 cm
H: 1.6 cm
Material: polycarbonate (PC)

Output voltage	24 V
Output from	12 W
Output up to	30 W
Number of sec. outputs	1

Variant	Prod. no.
white	**1007254**

LED POWER SUPPLYL
100W | 24V DC DALI DIMMABLE
INCLUDING STRAIN RELIEF



220-240 V ~50/60 Hz
L: 35 cm
W: 3 cm
H: 1.8 cm
Material: polycarbonate (PC)

Output voltage	24 V
Output from	30 W
Output up to	100 W
Number of sec. outputs	1

Variant	Prod. no.
white	**1007255**

LED POWER SUPPLY
150W | 24V DC DALI DIMMABLE
INCLUDING STRAIN RELIEF



220-240 V ~50/60 Hz
L: 35 cm
W: 3 cm
H: 1.8 cm
Material: polycarbonate (PC)

Output voltage	24 V
Output from	45 W
Output up to	150 W
Number of sec. outputs	1

Variant	Prod. no.
white	**1007256**

LED POWER SUPPLY
250W | 24V DC DALI DIMMABLE
INCLUDING STRAIN RELIEF



220-240 V ~50/60 Hz
L: 40 cm
W: 4 cm
H: 2.2 cm
Material: polycarbonate (PC)

Output voltage	24 V
Output from	75 W
Output up to	250 W
Number of sec. outputs	1

Variant	Prod. no.
white	**1007257**

LED DRIVER
4W | 350MA



IP20

100–240 V ~50/60 Hz | 5 V
L: 4.75 cm
W: 4.72 cm
H: 2 cm
Material: plastic PC

Output voltage	2.7–9.5 V
Output from	1 W
Output up to	3.32 W

Variant	Prod. no.
○ white	**1008656**

LED DRIVER
4W | 700MA



IP20

100–240 V ~50/60 Hz | 5 V
L: 4.75 cm
W: 2.72 cm
H: 2 cm
Material: plastic PC

Output voltage	2.7–4.5 V
Output from	1.9 W
Output up to	3.15 W

Variant	Prod. no.
○ white	**1008657**

LED DRIVER
10W | 350MA ROUND



C,L IP20

100–240 V ~50/60 Hz | 5 V
Ø: 5.1 cm
H: 2.2 cm
Material: plastic PC

Output voltage	19–28 V
Output from	6.5 W
Output up to	15 W

Variant	Prod. no.
○ white	**1008658**

LED DRIVER
15W | 700MA ROUND



IP44

100–240 V ~50/60 Hz | 5 V
Ø: 5 cm
H: 2.1 cm
Material: plastic PC

Output voltage	13–21 V
Output from	9.1 W
Output up to	14.7 W
Thermal protection	110 °C

Variant	Prod. no.
○ white	**1008659**

LED DRIVER
20 W | 350MA



IP20

220-240 V ~50/60 Hz
L: 11.6 cm
W: 4.1 cm
H: 2.5 cm
Material: polycarbonate (PC)

Output voltage	2–54 V
Output from	0.7 W
Output up to	19 W
Number of sec. outputs	1

Variant	Prod. no.
○ white	**1007225**

LED DRIVER
21W | 150-500MA



220-240 V ~50/60 Hz
L: 9.8 cm
W: 4.4 cm
H: 2.3 cm
Material: plastic PC

Output voltage	15–45 V
Output from	2.3 W
Output up to	22.5 W
Number of sec. outputs	1

Variant	Prod. no.
○ white	**1008699**

Product	Prod. no.
Standard strain relief	
○ white	**1008670**
Through-wire strain relief	
○ white	**1008671**

LED DRIVER
44W | 700-1050MA



220–240 V ~50/60 Hz
L: 9.8 cm
W: 4.4 cm
H: 2.3 cm
Material: plastic PC

Output voltage	27–45 V
Output from	18.9 W
Output up to	44.1 W
Number of sec. outputs	1

Variant	Prod. no.
○ white	**1008701**

Product	Prod. no.
Standard strain relief	
○ white	**1008670**
Through-wirable strain relief	
○ white	**1008671**

LED DRIVER
21W | 500MA STRAIN RELIEF INCLUDED



220-240 V ~50/60 Hz
L: 11.6 cm
W: 4.1 cm
H: 2.5 cm
Material: polycarbonate (PC)

Output voltage	2–42 V
Output from	1 W
Output up to	21 W
Number of sec. outputs	1

Variant	Prod. no.
○ white	**1007226**

LED DRIVER
20W | 350MA | PHASE



220-240 V ~50/60 Hz
L: 11.6 cm
W: 4.1 cm
H: 2.5 cm
Material: polycarbonate (PC)

Output voltage	28–50 V
Output from	9.8 W
Output up to	17.5 W
Number of sec. outputs	1

Variant	Prod. no.
○ white	**1007228**

LED DRIVER
20W | 350MA/500MA | PHASE



220-240 V ~50/60 Hz
L: 11.6 cm
W: 4.1 cm
H: 2.5 cm
Material: polycarbonate (PC)

Output voltage	10–30 V
Output from	3.5 W
Output up to	15 W
Number of sec. outputs	1

Variant	Prod. no.
○ white	**1007227**

LED DRIVER
10W | 180-270MA PHASE



220-240 V ~50/60 Hz
L: 12.2 cm
W: 4.1 cm
H: 2.3 cm
Material: plastic PC

Output voltage	26–38 V
Output from	4.68 W
Output up to	10 W

Variant	Prod. no.
○ white	**1008660**

LED DRIVER
10W | 500-700MA PHASE



220-240 V ~50/60 Hz
L: 12.2 cm
W: 4.1 cm
H: 2.3 cm
Material: plastic PC

Output voltage	8–14 V
Output from	4 W
Output up to	9.8 W

Variant	Prod. no.
○ white	**1008661**

LED DRIVER
15W | 200-350MA PHASE



220-240 V ~50/60 Hz
L: 12.2 cm
W: 4.1 cm
H: 2.3 cm
Material: plastic PC

Output voltage	12–42 V
Output from	5.2 W
Output up to	14.7 W
Number of sec. outputs	1

Variant	Prod. no.
○ white	**1008662**

LED DRIVER
20W | 350-500MA PHASE



220-240 V ~50/60 Hz
L: 13.8 cm
W: 4.4 cm
H: 3 cm
Material: plastic PC

Output voltage	26–38 V
Output from	9.1 W
Output up to	19 W

Variant	Prod. no.
○ white	**1008663**

LED DRIVER
30W | 500-700MA PHASE



220-240 V ~50/60 Hz
L: 13.8 cm
W: 4.4 cm
H: 3 cm
Material: plastic PC

Output voltage	26–42 V
Output from	13 W
Output up to	30 W

Variant	Prod. no.
○ white	**1008664**

LED DRIVER
40W | 700-1050MA PHASE



220-240 V ~50/60 Hz
L: 17.2 cm
W: 4.4 cm
H: 3 cm
Material: polycarbonate (PC)

Output voltage	27–38 V
Output from	26.6 W
Output up to	39.9 W

Variant	Prod. no.
○ white	**1008665**

LED DRIVER
25W | 150-700MA | DALI DIMMABLE



220-240 V ~50/60 Hz
L: 11.9 cm
W: 5.2 cm
H: 2.3 cm
Material: polycarbonate (PC)

Output voltage	2–42 V
Output from	0.3 W
Output up to	25 W
Number of sec. outputs	1

Variant	Prod. no.
○ white	**1007229**

LED DRIVER
15W | 100-700MA DALI



220-240 V ~50/60 Hz
L: 10.3 cm
W: 3 cm
H: 2.1 cm
Material: plastic PC

Output voltage	2.5–46 V
Output from	0.25 W
Output up to	14.7 W

Variant	Prod. no.
○ white	**1008666**

Product	Prod. no.
Standard strain relief for DALI	
○ white	**1008672**

LED DRIVER
23W | 100-700MA DALI



220-240 V ~50/60 Hz
L: 10.3 cm
W: 3 cm
H: 2.1 cm
Material: plastic PC

Output voltage	2.5–46 V
Output from	0.25 W
Output up to	23.1 W

Variant	Prod. no.
○ white	**1008667**

⊕

Product	Prod. no.
Standard strain relief for DALI	
○ white	**1008672**
Through-wire DALI strain relief	
○ white	**1008673**

LED DRIVER
36W | 100-900MA DALI



220-240 V ~50/60 Hz
L: 12.8 cm
W: 30 cm
H: 2.1 cm
Material: plastic PC

Output voltage	2.5 50
Output from	0.37 W
Output up to	36 W

Variant	Prod. no.
○ white	**1008668**

⊕

Product	Prod. no.
Standard strain relief for DALI	
○ white	**1008672**
Through-wire DALI strain relief	
○ white	**1008673**

LED DRIVER
53W | 650-1400MA DALI



220-240 V ~50/60 Hz
L: 9.7 cm
W: 4.3 cm
H: 3 cm
Material: plastic PC

Output voltage	2.5 44
Output from	1.62 W
Output up to	53.2 W

Variant	Prod. no.
○ white	**1008669**

⊕

Product	Prod. no.
Through-wire strain relief for DALI	
○ white	**1008673**
Standard 1008669 DALI strain relief	
○ white	**1008674**

STRAIN RELIEF



220 V
L: 3.8 cm
W: 3 cm
H: 2.1 cm
Material: plastic PC

- For DALI dimmable drivers: 1008666, 1008667, 1008668

Variant	Prod. no.
○ white	**1008672**

STRAIN RELIEF



220 V
L: 3.8 cm
W: 3.5 cm
H: 3 cm
Material: plastic PC

- For DALI dimmable drivers: 1008669

Variant	Prod. no.
○ white	**1008674**

STRAIN RELIEF
THROUGH-WIRE



220 V
L: 10.6 cm
W: 5.6 cm
H: 2.1 cm
Material: plastic PC

- For DALI dimmable drivers: 1008666, 1008667, 1008668

Variant	Prod. no.
○ white	**1008673**

STRAIN RELIEF
THROUGH-WIRE



220–240 V ~50/60 Hz
L: 10.7 cm
W: 5.6 cm
H: 3 cm
Material: plastic PC

Variant	Prod. no.
○ white	**1008702** ●

STRAIN RELIEF
STANDARD



220 V
L: 3.4 cm
W: 3.6 cm
H: 2.3 cm
Material: plastic PC

- For non-dimmable drivers: 1008699, 1008701

Variant	Prod. no.
○ white	**1008670**

STRAIN RELIEF
THROUGH-WIRE



220 V
L: 8.9 cm
W: 5.8 cm
H: 2.4 cm
Material: plastic PC

- For non-dimmable drivers: 1008699, 1008701

Variant	Prod. no.
○ white	**1008671**

CONTROLLER DALI, DT8
5 CHANNEL



Dali IP20

12–36 V
L: 17 cm
W: 5.3 cm
H: 2.8 cm
Material: polycarbonate (PC)

Output voltage	12–36 V
Output from	60 W
Output up to	180 W
Number of sec. outputs	5

Variant	Prod. no.
○ white	**1007997**

REMOTE CONTROL
ZIGBEE, CCT/RGBW



IP20

L: 14 cm
W: 4.4 cm
H: 1.7 cm
Material: polycarbonate (PC)

- Zigbee 3.0 supports three groups for connecting up to 30 lighting devices via Touch Link or a Zigbee hub

Variant	Prod. no.
○ white	**1007827**

EMERGENCY LIGHT KIT
DALI 2



IP20 IK02

Material: polycarbonate (PC)

- for use with and without DALI control line for remote status monitoring
- Data in emergency lighting mode: 6–54 V, 383–42@3.2 V
- Light output: 2.3 W

Variant	Prod. no.
○ white	**1007892**

FITU
CEILING HOOK



IP20

Ø: 1.8 cm
L: 4.6 cm
Material: aluminium

Variant	Prod. no.
● black	**132670**
○ white	**132671**

FITU
CABLE CLAMP



IP20

Ø: 1.4 cm
L: 3.1 cm
Material: aluminium

Variant	Prod. no.
● black	**132680**
○ white	**132681**

TEXTILE CABLE
10 M




IP20

Ø: 0.6 cm
L: 1,000 cm
Material: polyvinyl chloride (PVC)/textile

Max. voltage 300

Variant	Prod. no.
● black	**961270**

GU10 LED CONNECTION BOX
WITH BASEL, MAX. 10W



IP20

220-240 V ~50/60 Hz
L: 3.8 cm
W: 3.1 cm
H: 1.7 cm
Material: plastic

Variant	Prod. no.
● black	**1007283**

CABLE
3-PIN, 3 X 0,75 MMA^2, 10 M



L: 1,000 cm

Max. voltage 300

Variant	Prod. no.
○ transparent	**961250**

GU10 FITTING



IP20

Ø: 2.8 cm
H: 1.6 cm
Material: ceramic

Variant	Prod. no.
○ white	**955135**

CONNECTION BOX
IP68, 3-PIN



IP68

Ø: 2.7 cm
L: 11.5 cm
Material: polyamide (PA)

Max. voltage	450
Max. current load	17,5

Variant	Prod. no.
● black	**228730**

Y CONNECTION BOX
IP68, 3-PIN



IP68

L: 11 cm
W: 6.4 cm
H: 3 cm
Material: polyamide (PA)

Max. voltage	500
Max. current load	17,5

Variant	Prod. no.
● black	**228726**

CONNECTION BOX
IP68, 5-PIN



IP68

Ø: 3.2 cm
L: 13 cm
Material: polyamide (PA)

Max. voltage	450
Max. current load	32

Variant	Prod. no.
● black	**228725**

CONNECTION BOX
5-PIN, DALI



IP68

L: 18 cm
W: 6.3 cm
H: 3.3 cm
Material: polyamide 66 (PA)

Max. current load	16

Variant	Prod. no.
● black	**1006453**

48 V SYSTEM ROUND COVER PLATE
R80 MM




Ø: 8 cm
H: 0.1 cm
Material: steel

- Compatible with standard flush-mounted boxes with a diameter of 68 mm.
- supplied with two screws – with painted heads

Variant	Prod. no.	
● black	**1012352**	●
○ white	**1012353**	●

48 V SYSTEM SQUARE COVER PLATE
86 MM X 86 MM



L: 8.6 cm
W: 8.6 cm
H: 0.1 cm
Material: steel

- Compatible with standard flush-mounted boxes with a diameter of 68 mm.
- supplied with two screws – with painted heads


Variant	Prod. no.	
● black	**1012350**	●
○ white	**1012351**	●




HAVEN
1011685


MOTUNA
1010366


INDOOR RECESSED CEILING LIGHTS



UNIVERSAL DOWNLIGHT SLIM | 12



UNIVERSAL DOWNLIGHT FIX | 12



UNIVERSAL DOWNLIGHT MOVE | 12



KADUX | 14





KADUX | 15





KADUX | 15



KADUX | 16–17



NUMINOS® | 18–26



NUMINOS® MOVE | 28–36



NUMINOS® GIMBLE | 38–46





DYSKO | 57



NEW TRIA® | 58–63, 66–73



NEW TRIA® UNIVERSAL | 64–65



NEW TRIA® | 86



NEW TRIA® | 87



GLENOS® PRO | 87



MEDO® | 88–89



HORN MINI | 90



HORN | 91–93



HORN 1 | 92



HORN T | 93



HORN MAGNA

SENSER 2.0 | 94–101



DOWNLIGHT VARIO | 102–103

VERLUX | 104



DL 126 | 105



PIKA | 105



OCULUS | 107



OCCULDAS | 107

NEW



ENOLA® 2.0 | 108–109

NEW



ENOLA® 2.0 | 108–109



KARPO | 110

NEW



GRIP! | 111



GRIP! | 111





PLASTRA | 113



VARU | 113





DOLIX OUT | 114–115



KINI | 115

AKALO D83 | 115

FRAME BASIC | 116–117



FRAME CURVE | 117

NOTAPO | 119



DOWNUNDER PUR | 120–121



MOBALA | 121

WORO | 121



PATTA-I | 122



PATTA-I | 122–123





PATTA-F | 123


CONCRETO
1006406

OUTDOOR RECESSED WALL LIGHTS




CONCRETO | 865



ADI | 866




DOWNUNDER OUT | 867



BRICK MESH | 868




BRICK | 868



SOCKET

BRICK DOWNUNDER | 869


DASAR® S
1007680

OUTDOOR RECESSED FLOOR LIGHTS



DASAR® | 873



DASAR® | 874–877



DASAR® FLAT | 880



DASAR® | 880–881



DASAR® 920 | 881



DASAR® 115 | 882







DASAR® EXACT 116 | 883



DASAR® 215 | 885



DASAR® 215 | 885



DASAR® 370 | 885





TRAIL-LITE® | 886





POWER TRAIL-LITE® | 887



SMALL PLOT | 888



BIG PLOT | 889





ROCCI | 890





ROCCI 200 | 891





SOLASTO | 893



TAHA II 45
1010197



GALEN PRO 120
1009108

INDOOR CEILING LIGHTS



SUN | 126



MIX match

VARYT | 127



TRILEDO | 128





TRILEDO | 128



TRILEDO | 129





TRILEDO | 128



NUMINOS® | 130–137

NEW



ENOLA® 2.0 | 136–141



NEW

GRIP! | 144–147



OCULUS | 148



ASTO TUBE | 149



OCCULDAS | 150–151



ALTRA DICE | 151



ALTRA DICE | 151





KARDAMOD | 153



FENDA | 155



TENORA | 157



SOPRANA | 157



PLASTRA | 158



PLASTRA | 158



PLASTRA 105 | 158

PLASTRA 104 | 159

FERA 25 |159



DECONA | 160–163

NEW



MOTUNA | 163



MARONA | 163

NEW



OVANA |164– 165

NEW



GLENOS® 2.0 | 167



GLENOS® PRO |167

PANEL 60 | 169

OUTDOOR CEILING LIGHTS



SOCKET

PHOTONI CYL | 754



SOCKET

PHOTONI | 754



NEW

SOCKET

SEJERO | 755



LED

CUBE | 757



LED

ESKINA FRAME | 757



LED

ENOLA® OCULUS | 758



LED


ENOLA® ROUND | 759



LED

ENOLA® SQUARE | 760–761





LED SOCKET

BIG THEO | 761



LED

OVALISK | 763



SOCKET

MOLAT | 763



SOCKET

SITRA | 765





SOCKET

ROX | 765

INDOOR PENDANT LIGHTS



SOCKET

HAVEN | 175



LED

QUIMERA | 177



SOCKET

MIX match

VARYT | 179





SOCKET

WUD | 181



SOCKET

SUN | 182



SOCKET

OLYPSO | 183



SOCKET

MAGICO |185



LED

NUMINOS® | 186–193



LED

GRIP! S | 195



LED

MOTUNA | 197



LED

OVANA 44 | 197



LED

SLVconnect®
OVANA 44 | 197



LED

MEDO® 2 SLIM |
198–201



LED

MEDO® HYVE |
202–203



LED

MEDO® RING |
206–207



LED

MEDO® PRO | 208–213



LED

SOCKET

LALU® SET | 216–221



LED

DYSKO | 221



LED

ONE FLAT | 223



LED

ONE VERTICAL | 224



LED

ONE CUBE | 225



LED

ONE CUBE UP/DOWN |
225



LED

ONE | 227–229



LED

ONE DOUBLE | 231



LED

ONE TRIPLE | 231



LED

ONE LINEAR | 233



LED

LINIUS | 234–237



SOCKET

PANTILO ROPE | 239



SOCKET

PANTILO OVAL | 240



SOCKET

PANTILO | 240



SOCKET

PANTILO CONVEX | 241



SOCKET

LIGHT EYE® | 243



SOCKET

ENOLA® 2.0 | 244–245



SOCKET

ASTO TUBE | 247



LED

GLENOS® 2.0 | 248–249



LED

GLENOS® PRO | 249



LED

WORKLIGHT PRO | 251



LED

WORKLIGHT | 251

LED

PANEL | 253



LED

GRIP! FLAT | 255



LED

OCULUS | 257



SOCKET

FITU | 258



SOCKET

FENDA | 260–261



LED

HELIA | 264–265



SOCKET

PARA CONE | 265



SOCKET

PHELIA | 267



SOCKET

FORCHINI | 268–269



SOCKET

ROTOBALL | 271



SOCKET

PARA DOME | 273



SOCKET

PARA 380 PD | 273




MANA
1008206

INDOOR WALL AND CEILING LIGHTS


QUIMERA | 279


LYGANT | 279


SUN MIRROR | 281


MIX match
VARYT | 285


SUN | 286–287


DYSKO | 289


NUMINOS® | 290–297

NEW
MEDO® 2 SLIM | 298–301


NEW
MEDO® HYVE | 302–303


MEDO® PRO | 304–309


ONE | 310–311


ONE LINEAR | 312–313


ONE | 313


TRUKKO | 314–315


SEDO | 316–317


ARLINA | 317


WL | 318–319


MIBO UP/DOWN | 319


MAGANDA | 319


DORISA | 320

NEW
GLENOS® 2.0 | 320

Q-LINE® | 321

L-LINE 60 | 321


PANTILO ROPE | 322


ENOLA® 2.0 | 324–327


NEW
GRIP! | 328–329


NEW
GRIP! FLAT | 329



ASTO TUBE | 331


MANA | 333–335

INDOOR WALL AND CEILING LIGHTS



OCULUS |



PLASTRA | 338–339



PLASTRA | 340



PLASTRA | 340



PLASTRA 101 | 341

PLASTRA | 341

PLASTRA 104 | 341



WUD | 343



LOGS IN | 344–345



QUAD FRAME | 346

WL 149 | 347



SHELL 30 | 347



ASSO 300 | 348–349



OSSA7 349



CARISO | 351

CHROMBO | 351

DIRETO 60 | 353



DENA 30 | 353

BASKET | 353



FITU | 354



THEO UP/DOWN | 354



SOLID CUBE | 354



FENDA | 355



KENKUA SPOT | 355



COUPA | 356



KARPO MAGN | 356



KARPO GOOSE | 356



KARPO 30 | 357



KARPO | 357



SOMNILA SPOT | 358



SOMNILA FLEX | 358–359



DIO FLEX PLATE | 359



PHELIA | 361



MERADO FLOOD | 361



DISPLAY ADL 50 | 361



PURI 2.0 TUBE | 362–363



SOCKET

PURI 2.0 CONE | 364–365



SOCKET

PURI 2.0 DOME | 366–367



NEW

LED

NOBLO® | 371–373

LED

KALU 2.0 | 374

SOCKET

PANTILO ROPE | 375

SOCKET

MOTUNA | 375



LED

CYFT | 376–379

SOCKET

ASTO TUBE | 381

SOCKET

KALU | 383



NEW

SOCKET

KALU | 383

SOCKET

ALTRA DICE | 385

SOCKET

SPOT 79 | 385

LED

SENSER 2.0 | 386–389



NEW

LED

LIPSY® 2.0 | 390–393

LED

SIMA | 394

SOCKET

MELAN | 395

LED

BATTEN | 395



ENOLA® OCULUS
1006328

OUTDOOR WALL AND CEILING LIGHTS



SOCKET
SEJERO | 771



LED
ALEGRIA | 773


LED
AINOS SLIDE | 774–775



LED
AINOS SLIDE | 774–775



LED
QUADRASYL PRO | 777



LED
S-CUBE | 778



LED
R-CUBE | 778


LED
MODELA | 778


SOCKET
PHOTONI CYL | 779


SOCKET
PHOTONI | 779



LED
LID I | 780–781



LED
LID II | 781


LED
Q-RING | 782


LED
I-RING | 783


LED
D-RING | 783


LED
OVAL | 784


LED
CONCRETO | 785



LED
RASTERLYS | 787



SOCKET
T-TUBE | 788–789


SOCKET
S-TUBE | 791


LED
FLATT II | 793


LED
FLATT | 794


SOCKET
THEO UP/DOWN | 795


LED
SOCKET
BIG THEO | 795–796


SOCKET
THEO | 796


LED
BIG THEO FLOOD


LED
SOCKET
BIG THEO | 797


LED
THEO PRO | 798–801


LED
HELIA PRO | 802–805


LED
SITRA | 807–809



SOCKET
SITRA CUBE | 809


LED
BIG QUAD | 810

OUTDOOR WALL AND CEILING LIGHTS



QUAD | 811





RUSTY® UP/DOWN | 812



ENOLA® OCULUS | 813



ENOLA® ROUND | 816–817



ENOLA® SQUARE | 818–819





GRAFIT | 822–823



SQUARE | 824







QUADRULO | 824–825



MERIDIAN | 826



MERIDIAN BOX | 827





ESKINA FRAME | 829



BOOKAT | 830




TAHA II | 830



OVALISK SENSOR | 831







PEMA® | 832–833



ASTINA | 834



ASTINA STEEL | 834



ANGOLUX | 835



VILUA | 837



MYRA UP/DOWN | 839





SITRA | 839



ROX | 840



DELWA | 840



WALLYX | 840





DOWNUNDER OUT | 841



ABRIDOR | 843



NEW

ORDI | 844



ORDI II | 845



BOX-L | 846



BOX | 846



LOGS | 487



OUT-BEAM UP/
FLOOD DOWN | 847



L-LINE OUT | 847



PHOTONIA | 848



MOLAT | 848



GLOO PURE | 848




F-POL | 849



IPERI | 849



QUADRASYL | 849



SQUARE TURN | 850



TODAY PRO | 850



ESKINA D | 851



MYRA DISPLAY | 851



MYRA | 851



LED SPOT | 853



NAUTILUS | 853



MYRA | 853



ESKINA SPOT | 855



SITRA 360 | 856



THEO BRACKET | 856





HELIA | 857





AINOS | 858–859



TERANG 200 | 861



BULAN | 861



BULAN GRID | 861



VARYT
1008113 + 1008023

INDOOR TABLE AND FLOOR LIGHTS


SOCKET
WUD TL | 399


SOCKET
MIX match
VARYT | 401


LED
QUIMERA | 403


LED
ONE STRAIGHT | 405


LED
ONE BOW | 405


SOCKET
SUN | 407


SOCKET
PANTILO SLIM | 408


SOCKET
PANTILO | 409


SOCKET
PANTILO ROPE | 409


SOCKET
MIX match
FENDA | 411–413


NEW

LED
MECANICA 2.0 | 414


LED
KARPO | 415


SOCKET
PHELIA | 415


LED
WORKLIGHT EASY | 417

NEW

LED
WORKLIGHT | 417


LED
WORKLIGHT PRO | 419



LOGS 40
232115


FLATT II 62
1010106

OUTDOOR MOBILE LIGHTS AND FLOOR LIGHTS


GRID CUBE | 639


GRID SUN | 539


ADEGAN| 641


NEW
SEJERO | 643


NEW
ALEGRIA | 645


NEW
QUADRASYL PRO | 645


S-TUBE | 646


T-TUBE | 646–647


PHOTONI CYL | 648–469


PHOTONI | 649


S-CUBE | 650–651


R-CUBE | 651


I-RING 65 | 653


LID I | 654


QUAD PRO | 655


M-POL | 660–667


CONCRETE | 670


CONCRETO | 671


RASTERLYS 70 | 673


FLATT II | 674–675


FLATT | 675


ESKINA FRAME | 676–677


LOGS | 679


GRAFIT | 681


GRAFIT | 683


QUADRULO | 685


RUSTY® SLOT | 686–687


RUSTY® PATHLIGHT | 688


RUSTY® CONE | 689


RUSTY® | 692–693


RUSTY® | 693


ARROCK GRANITE 40 | 694


ARROCK ARC | 694


ARROCK STONE | 695


SOCKET
ARROCK SLOT | 695


LED
L-LINE OUT | 696–697


LED
TAHA II | 698–699


LED
OVALISK | 701


SOCKET
GLOO PURE 27 | 702


SOCKET
ROTOBALL | 703


SOCKET
PHOTONIA | 705


SOCKET
OTOS GLAS | 705


SOCKET
CUBIX | 705


SOCKET
CONE | 707


MOLAT | 707


SOCKET
LISENNE | 708


ALPA MUSHROOM | 709


SOCKET
ALPA CONE 100 | 709


LED
APONI | 710–711


LED
TRUST | 711


SOCKET
BIG NAILS | 712


SOCKET
ROX ACRYL | 713


SOCKET
VAP SLIM | 714


SOCKET
C-POL 90 | 715


SOCKET
F-POL 85 | 715


SOCKET
SQUARE | 717


LED
SLOTS | 719


LED
H-POL | 720


LED
SLOTBOX | 721


LED
ORDI II | 723


LED
ABRIDOR HYBRID | 724


LED
ABRIDOR | 725


LED
IPERI 50 | 726


SOCKET
QUADRASYL 75 | 726


SOCKET
QUAD | 726


SOCKET
MYRA SPOT | 727


SOCKET
SITRA 360 | 727


SOCKET
THEO PATHLIGHT 73 | 729


SAMRINA
1004757

OUTDOOR SPOTLIGHTS



SYNA WIDE | 732



SYNA SHADE | 732



SYNA PLANT | 733



SYNA GARDEN | 733



SYNA | 733

NEW



PL-BEAM PRO | 734 – 735



GALEN | 738



GALEN PRO | 739



HELIA SPOT | 740



FLAC BEAM | 741



SAMRINA | 741



NAUTILUS 10 | 742



NAUTILUS 10 | 743



BIG NAUTILUS | 743



NAUTILUS | 744





NAUTILUS 10 SPOT | 744



DASAR® PROJECTOR | 745



DASAR® 920 | 745



HELIA SLIM | 747



THEO BRACKET | 749



LED SPIKE | 749



SITRA 360 SPIKE | 751



GRIP! FLAT
1009014

48 V INDOOR SYSTEMS



KALU 2.0 | 439



LIGHT EYE® 2.0 | 439



DYSKO | 441





NUMINOS® | 442–449



IN-LINE | 450–453





FIX-IT! | 454–457





GRIP! FLAT | 459



GRIP! S | 460–461



GRIP! S | 463



GRIP! S MINI | 463



GRIP! M | 465



LALU® SET | 466–467

INDOOR LOW-VOLTAGE SYSTEMS



ASMARA | 475



TELESKOP | 475




COSMIC | 477



DURNO | 477



NOBLO® SPOT | 477

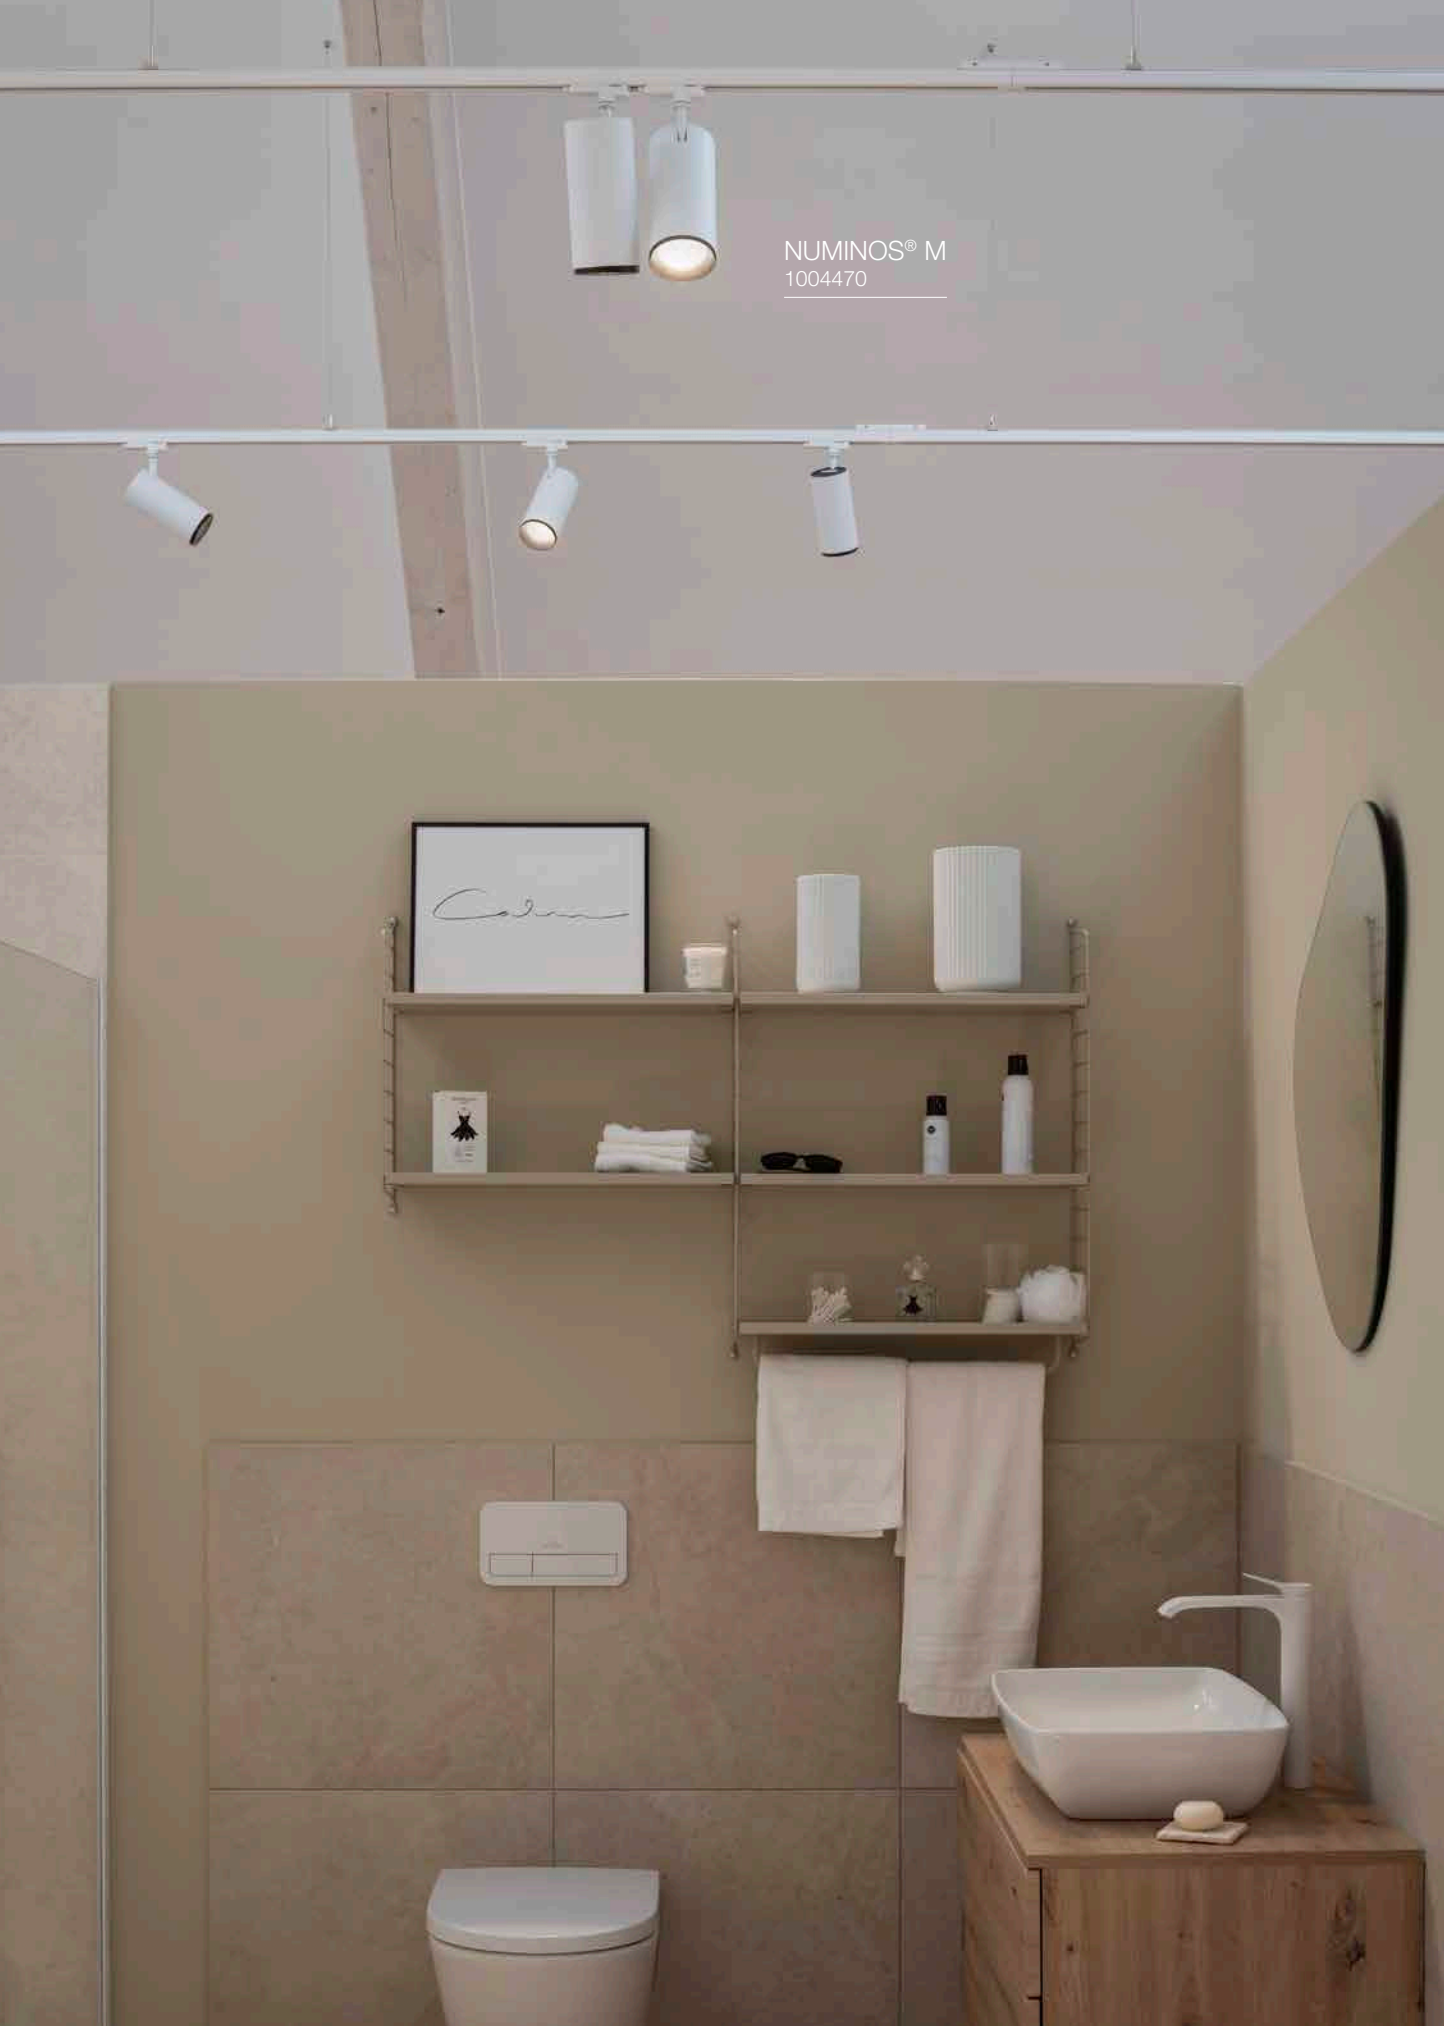

NUMINOS® M
1004470

INDOOR SINGLE-PHASE SYSTEMS



SOCKET

HAVEN 25 | 487



LED

QUIMERA | 489



SOCKET

FORCHINI M 40 TRACK | 489



LED

LALU® SET | 491–493



SOCKET

PURI 2.0 TUBE | 495–497



SOCKET

PURI 2.0 CONE | 495–497



SOCKET

PURI 2.0 DOME | 495–459



SOCKET

PURI 2.0 | 498



SOCKET

ENOLA® 2.0 | 500–501



SOCKET

BIMA 2.0 | 503



LED
SOCKET

GRIP! | 505–509



LED

GRIP! FLAT | 511



LED

DYSKO | 513



LED
SOCKET

LIGHT EYE® | 514–517



LED

KALU 2.0 | 519



SOCKET

KALU TRACK | 519



LED

NOBLO® SPOT | 521



SOCKET

ASTO TUBE | 523



SOCKET

PARA CONE GL | 525



SOCKET

PARA CONE 14 | 525



LED

HELIA 50 TRACK | 527



LED

PANEL TRACK | 527



LED

PANEL TRACK | 527



SOCKET

EURO SPOT TRACK | 529



SOCKET

ALTRA DICE TRACK | 529



NUMINOS® M
1004459

INDOOR THREE-PHASE SYSTEMS



SOCKET

HAVEN 25 | 555



SOCKET

PURI 2.0 TUBE | 557–561



SOCKET

PURI 2.0 CONE | 557–561



SOCKET

PURI 2.0 DOME | 557–561



SOCKET

BIMA 2.0 | 563



SOCKET

ENOLA® 2.0 S | 564–565



SOCKET

GRIP! | 566–569



NUMINOS® | 572–579



NUMINOS® ZOOM | 580–581



UNIVERSAL TRACKSPOT | 583



NOBLO® SPOT | 585



EURO CUBE 2 | 586–587



KALU 2.0 | 589



SOCKET

KALU TRACK | 589



SIGHT EVO | 590–591



SIGHT PANEL | 592

SIGHT EASY | 593

SIGHT TRACK | 594



SIGHT MOVE | 595



SOCKET

PARA CONE 14 | 596–597



SOCKET

PARA CONE GL | 597



SOCKET

FORCHINI M 40 TRACK | 599



SOCKET

LIGHT EYE® | 600–601



SOCKET

EURO SPOT TRACK | 603



HELIA 50 TRACK | 605



LEDSTRIP IP
1000465 + 1004726


PROFILES AND LED STRIPS

SETS



S

LED STRIP SETS –
LED STRIP S + DRIVER | 612



S

PROFILE SETS –
S SURFACE-MOUNTED PROFILE + DIFFUSER | 613

LED STRIPS



XS

COB LED STRIPS | 614



XS

SMD LED STRIPS | 615



S

COB LED STRIPS | 616



S

SMD LED STRIPS | 617



S

LED STRIPS COB
TW & RGBW | 618



S

LED STRIPS SMD
TW & RGBW | 619



S

LED STRIPS COB IP67 |
620



S

LED STRIPS SMD IP67 |
621



M

COB LED STRIPS | 622



M

SMD LED STRIPS | 623



ACCESSORIES |
624–625

PROFILES




XS

PROFILE SETS
AND ACCESSORIES |
626–627



S

PROFILE SETS
AND ACCESSORIES |
628–629



M

PROFILE SETS
AND ACCESSORIES |
630–631



L

RECESSED PROFILE
AND ACCESSORIES |
632


ONE
1002909

Please note: 7-digit product no. can be found from page 961

111000
111262 117
111292 117
111382 87

112000
112221 105
112222 105
112225 105
112682 104
112692 104
112720 116
112721 116
112780 116, 117
112781 116, 117
112910 92
112911 92

113000
113140 91
113141 91
113150 91
113151 91
113160 92
113161 92
113170 93
113171 93
113262 117
113292 117
113540 86
113541 87
113550 86
113830 87
113840 87
113841 87
113930 128
113931 128
113940 128
113941 128

114000
114420 122
114421 122
114426 122
114430 123
114431 123
114436 123
114440 123
114441 123
114450 123
114451 123

115000
115510 16
115511 16
115520 16
115521 16
115530 16
115531 16
115540 17
115541 17
115550 17
115551 17

117000
117100 153
117101 153
117110 153
117111 153
117311 107
117321 151
117331 107
117351 150

132000
132020 385
132021 385
132024 385
132600 181, 182, 185, 259, 597
132601 181, 182, 185, 259, 597
132605 181, 182, 259, 273, 597
132610 259
132611 259
132660 260
132661 260
132670 918
132671 918
132680 918
132681 918
132690 258
132691 258
132835 705

135000
135250 304, 305, 306, 307, 308, 309
135251 304, 305, 306, 307, 308, 309

138000
138981 908
138982 908
138991 908
138992 908

139000
139024 470, 471
139030 470, 471
139031 470, 471
139070 475
139071 475
139072 475
139080 475
139081 475
139082 475
139090 477
139091 477
139092 477

143000
143010 481
143011 481
143012 481
143020 481
143021 481
143022 481
143030 482
143031 482
143032 482
143040 482
143041 482
143042 482
143050 483
143051 483
143052 483
143060 483
143061 483
143062 483
143070 483
143071 483
143072 483
143080 483
143081 483
143082 483
143090 483
143091 483
143092 483
143100 483
143101 483
143102 483
143110 483
143111 483
143112 483
143120 182, 185, 259, 482, 485, 597
143121 182, 185, 259, 482, 485, 597
143124 185, 259, 273, 482, 485, 597
143130 483
143131 483
143132 483
143151 483
143152 483
143160 483
143161 483
143162 483
143169 483
143170 482, 485
143171 482, 485
143172 482, 485
143221 485
143230 485
143231 485
143241 485
143251 485
143261 485
143271 485
143281 485
143350 529
143351 529
143540 519
143541 519
143544 519
143580 527
143581 527
143811 529

145000
145100 549
145102 549
145200 549
145202 549
145300 549
145302 549
145510 550
145514 550
145520 550
145524 550
145530 550
145534 550
145551 553
145560 551
145564 551
145580 551
145584 551
145590 551
145594 551
145600 551
145604 551
145630 551
145634 551
145640 551
145644 551
145660 550
145664 550
145670 551
145674 551
145680 551
145684 551
145690 551
145694 551

145000
145700 551

145710 551
145714 551
145720 551
145724 551
145730 551
145734 551
145830 551
145834 551
145990 181, 182, 185, 259, 551, 597
145994 182, 185, 259, 273, 551, 597

146000
146010 415
146332 361
146682 359
146692 359

147000
147301 383
147306 383
147311 383
147316 383
147321 383
147326 383
147529 353

148000
148001 158
148002 159
148004 158
148005 158
148010 339
148012 341
148013 341
148016 341
148018 338
148019 340
148060 340
148070 113
148071 113
148091 340
148540 361

149000
149452 356
149471 347
149511 347
149762 315
149772 315

151000
151049 243, 359, 515, 600, 601
151271 348
151275 348
151282 319
151320 344
151321 344
151410 349
151411 349
151450 349
151451 349
151511 151
151531 151, 385
151591 353
151710 351
151711 351
151740 351
151741 351
151781 316
151786 316
151791 317
151796 317
151950 120
151952 121
151960 120
151962 121

152000
152330 357
152331 357
152340 357
152341 357
152360 264
152370 265
152380 110
152381 110
152610 589
152611 589
152960 605
152961 605

153000
153420 603
153421 603
153850 603
153851 603

155000
155156 163
155236 395
155373 157
155490 413
155540 411
155550 155
155551 155
155582 155, 261, 413
155583 155, 261, 413
155592 155, 261, 413
155780 411
155790 411

156000
156050 157
156051 157
156100 155, 261, 413
156111 155, 261, 413
156113 155, 261, 413
156122 155, 261, 413

161000
161461 159

165000
165359 273
165390 271
165400 271
165410 271

175000
175010 537
175020 537
175030 537
175040 538
175050 538
175060 539, 543
175070 539
175080 539, 543
175090 539
175100 539
175110 538
175120 538
175130 539
175140 539
175150 539
175160 539, 543
175180 539, 543
175190 539, 543
175200 539
175210 539, 543

181000
181530 473
181531 473
181532 473

186000
186300 473
186301 473
186302 473
186310 473
186311 473
186312 473
186330 473
186331 473
186332 473
186340 473
186341 473
186342 473
186350 473
186351 473
186352 473
186360 473
186361 473
186362 473
186640 473
186641 473
186642 473

210000
210064 273

227000
227195 840
227219 703
227220 703
227221 703
227410 743
227418 743
227462 886
227505 733
227600 890
227604 890
227680 893
227684 893
227922 711, 712

228000
228100 711
228110 711
228130 711
228332 887
228342 887
228412 880
228430 883
228434 883
228555 740
228560 740
228712 701, 709, 727
228722 701, 709
228725 919
228726 919
228730 919
228752 709, 727
228753 653, 705
228754 679, 683
228771 834

228775 834
228776 834
228925 709
228935 709
228945 709

229000
229020 693
229021 693
229022 693
229062 869
229071 861
229072 861
229075 861
229081 861
229085 861
229090 744
229162 712
229172 712
229230 885
229234 885
229320 882
229324 882
229374 882
229381 881
229383 880
229410 687
229411 687
229420 692
229421 693
229422 688, 692, 693, 694, 708
229423 689
229430 689
229431 689
229432 689
229524 796
229525 796
229531 795
229532 795
229535 795
229551 761
229554 761
229555 761
229564 797
229565 797
229574 796
229575 796
229664 847
229665 847
229702 869
229740 743
229741 744
229931 861
229935 861
229961 858
229965 858
229971 859
229975 859

230000
230030 833
230034 833
230044 827
230045 827
230060 665, 666, 667, 707, 714, 727
230061 714
230063 714
230066 714
230069 714
230085 827
230090 688
230355 839
230365 839
230435 707
230444 826
230445 826
230465 705
230655 827
230657 827

231000
231010 832
231012 832
231015 832
231035 742
231072 741
231205 823
231215 683
231225 683
231230 679, 683, 686, 687
231231 726
231233 694
231234 702, 713, 717
231235 695
231305 726
231315 849
231351 835
231355 835
231370 695
231371 695
231410 694
231411 694
231420 694
231440 695
231455 719
231457 719
231475 715
231505 727
231515 856
231525 751
231535 751
231541 765
231545 765
231585 849
231595 715
231815 719
231817 719
231960 738
231961 738

232000
232045 848
232075 705
232085 705
232101 847
232105 847
232115 679
232119 679
232125 679
232135 721
232145 721
232155 720
232165 720
232185 720
232195 720
232285 849
232294 726
232295 726
232431 810
232435 810
232441 811
232445 811
232461 811
232465 811
232485 846
232491 846
232495 846
232497 846
232531 809
232535 809
232537 809

233000
233095 851
233104 853
233105 853
233114 839
233115 839
233134 851
233135 851
233145 727
233165 727
233185 727
233215 839, 851, 853
233245 857
233255 857
233302 834
233427 692
233437 692
233447 686
233457 687
233500 881
233520 881
233540 885
233570 745
233571 745
233580 745
233582 745
233601 867
233605 867
233615 867
233621 867
233625 867
233635 866
233639 866
233650 868
233660 868

234000
234350 734, 735, 737, 739
234505 796
234515 795
234525 797
234535 761

900000
900011 744, 745

955000
955135 918

961000
961250 918
961270 918

1000300
1000327 354
1000329 354
1000330 354
1000332 765
1000334 840
1000335 850
1000336 824
1000339 765
1000340 840
1000342 840

1000343 717
1000344 717
1000345 717
1000346 717
1000398 707

1000400
1000423 347
1000449 711

1000500
1000574 117
1000575 117
1000576 116
1000577 116
1000579 155, 261, 413
1000580 155, 261, 413

1000600
1000634 349
1000638 344
1000639 344
1000665 708
1000666 708
1000668 321
1000669 321
1000670 321
1000682 710
1000683 711

1000700
1000702 383
1000703 383
1000704 383
1000714 105
1000715 105
1000716 105
1000717 105
1000718 105
1000719 105
1000720 105
1000721 105
1000735 740
1000736 727, 740
1000773 261
1000777 320
1000780 320

1000800
1000820 848
1000821 707
1000822 707
1000823 763
1000833 115
1000880 850
1000881 850

1000900
1000910 354
1000911 354
1000914 90
1000915 90
1000917 90
1000957 155, 261, 413

1001100
1001165 114
1001166 114
1001167 114
1001168 114
1001169 115
1001171 115
1001172 115

1001200
1001254 889
1001255 889
1001262 889
1001263 889
1001264 115
1001272 355
1001273 355
1001274 355
1001275 355
1001276 355
1001299 321

1001300
1001300 321
1001303 321
1001304 321
1001375 537
1001376 537
1001377 537
1001378 539
1001379 538
1001380 539, 543
1001381 538
1001382 539, 543
1001383 539
1001384 539
1001385 538
1001386 538
1001387 539
1001388 539
1001389 539
1001390 539, 543
1001392 539, 543
1001393 539, 543
1001394 539
1001395 539, 543

1001400
1001461 415
1001463 415
1001468 361
1001472 361
1001488 713
1001489 713
1001490 713
1001494 713

1001500
1001510 549
1001511 549
1001512 549
1001513 550
1001514 550
1001515 550
1001516 551
1001517 550
1001518 551
1001519 551
1001520 551
1001521 551
1001522 551
1001523 551
1001524 551
1001525 551
1001526 551
1001527 551
1001528 551
1001529 551
1001530 551
1001531 553
1001532 553
1001533 553
1001534 553
1001536 553
1001537 553
1001538 553
1001539 553
1001542 182, 185, 259, 551, 553, 597
1001574 897
1001575 897

1001800
1001861 529

1001900
1001930 113
1001931 113
1001939 159
1001950 304, 305, 306, 307, 308, 309
1001952 304, 305, 306, 307, 308, 309
1001962 744
1001963 744
1001964 743
1001965 743
1001969 835
1001970 835
1001999 702

1002000
1002000 702
1002001 702
1002002 848
1002003 128
1002004 129
1002005 129
1002006 129
1002008 128
1002010 129
1002011 129
1002012 129
1002013 129
1002015 129
1002023 383
1002024 383
1002025 383
1002032 807
1002033 807
1002034 807
1002035 846
1002069 833
1002070 833
1002098 122
1002099 122

1002100
1002100 122
1002101 122
1002102 122
1002118 359
1002140 357
1002151 481
1002152 481
1002153 481
1002163 181, 182, 259

1002200
1002201 749
1002203 749
1002216 151
1002218 908
1002228 318
1002229 319
1002238 339
1002239 317
1002240 317

1002400
1002402 824
1002403 825
1002430 359
1002431 359

1002500
1002503 837
1002504 837
1002505 837
1002591 93
1002592 93
1002594 93
1002596 93

1002600
1002602 470
1002603 470
1002604 470
1002607 359
1002608 359
1002631 541
1002632 541
1002633 541
1002634 541
1002635 541
1002636 541
1002637 542
1002638 543
1002639 542
1002640 543
1002641 543, 547
1002642 543, 547
1002643 543
1002644 543
1002645 543
1002646 543
1002655 543
1002656 543
1002657 539, 543
1002658 539, 543
1002659 543, 547
1002660 543, 547
1002691 473, 908
1002692 473, 908
1002693 473, 908
1002694 477
1002695 477
1002696 477
1002697 473
1002698 473
1002699 473

1002700
1002700 473
1002701 473
1002702 473
1002703 473
1002704 473
1002705 473

1002800
1002842 345
1002844 345
1002845 483, 539, 543, 551
1002853 817, 818, 819, 848, 851, 857
1002855 355
1002860 361
1002861 477
1002862 477
1002863 477
1002867 853
1002868 841
1002869 841
1002871 729
1002884 853

1002900
1002903 855
1002904 855
1002905 851
1002909 227
1002910 227
1002911 229
1002912 229
1002913 231
1002914 231
1002915 313
1002917 313
1002918 313
1002922 121
1002928 345
1002929 345
1002949 267
1002950 267
1002951 267
1002952 794
1002953 794
1002954 794
1002955 794
1002956 675
1002957 675
1002958 675
1002959 675
1002967 159
1002968 159
1002979 119
1002980 119
1002981 119
1002982 121
1002983 121
1002984 121
1002989 843
1002990 843
1002991 725
1002992 725

1003000
1003001 726
1003004 240
1003005 240
1003006 240
1003007 240

1003100
1003104 912
1003105 912

1003300
1003316 351

1003400
1003416 818
1003417 818
1003418 819
1003419 819
1003420 760
1003421 761
1003422 816
1003423 816
1003424 817
1003425 817
1003426 759
1003427 759
1003437 818
1003438 819
1003440 816
1003441 817
1003442 759
1003443 241
1003444 241
1003447 738
1003448 738
1003449 859
1003450 859
1003451 859
1003452 859
1003453 833
1003454 833
1003455 358
1003456 358
1003457 358
1003458 358
1003459 358
1003460 359
1003467 346
1003468 346
1003479 758, 759, 760, 761

1003500
1003535 697
1003536 696
1003537 697
1003538 697
1003539 847

1004000
1004074 572
1004098 290
1004194 292
1004290 294

1004100
1004122 130
1004146 186
1004170 574

1004200
1004218 132
1004242 188
1004266 576

1004300
1004314 134
1004338 190
1004362 572
1004386 290

1004400
1004410 130
1004434 186
1004458 574
1004482 292

1004500
1004506 132
1004530 188
1004554 576
1004578 294

1004600
1004602 134
1004626 190
1004649 853
1004650 812
1004651 812
1004652 749
1004653 856
1004660 334

1004661 334
1004662 334
1004663 334
1004666 148
1004667 148
1004668 107
1004669 107
1004670 337
1004671 337
1004672 257
1004673 257
1004674 181, 185, 259, 597
1004675 181, 185, 259, 597
1004676 273
1004677 763
1004678 831
1004679 831
1004680 701
1004681 701
1004682 354
1004684 543
1004685 543
1004686 595
1004687 595
1004688 595
1004689 595
1004690 595
1004691 595
1004692 595
1004693 595

1004700
1004706 356
1004730 314
1004731 314
1004732 339
1004740 353
1004741 353
1004744 181, 185, 259, 597
1004745 244, 245, 259
1004747 829
1004748 829
1004749 676
1004750 676
1004751 676
1004757 741
1004759 227
1004760 227
1004761 227
1004762 227
1004763 229
1004764 229
1004765 231
1004766 231
1004767 231
1004768 231
1004774 155, 261, 413
1004775 155, 261, 413

1004800
1004783 483
1004784 483
1004785 483
1004786 444, 448
1004787 444, 448
1004788 444, 448
1004789 444, 448

1004900
1004905 632
1004906 632
1004907 632
1004908 632
1004909 632
1004910 632
1004911 632
1004914 632
1004915 632
1004916 632
1004917 632
1004933 527
1004934 527
1004935 527
1004936 527
1004937 541
1004938 541
1004939 539, 543
1004940 539, 543
1004957 853
1004969 334
1004971 319

1005000
1005075 898
1005076 898
1005077 898
1005078 898
1005079 898
1005080 898
1005081 898
1005082 898
1005083 898
1005087 394
1005088 394

1005100
1005125 810
1005126 810
1005148 807
1005149 807
1005150 807
1005151 809
1005153 809
1005154 809
1005155 809
1005156 809
1005157 809
1005177 227
1005178 231

1005200
1005201 824
1005202 825
1005205 761, 816, 817, 818, 819, 821
1005206 760, 761, 816, 817, 818, 819
1005207 761, 816, 817, 818, 819, 821
1005214 273
1005215 273
1005216 273
1005217 273
1005218 273
1005248 121
1005262 816, 817, 818, 819, 821
1005263 902
1005265 902
1005268 903
1005269 897
1005271 897
1005272 897
1005273 898
1005274 899
1005275 899
1005276 899
1005277 899
1005278 899
1005279 899
1005280 899
1005281 899
1005282 899
1005283 899
1005284 896
1005285 897
1005286 896
1005287 896
1005288 896
1005289 902
1005297 899
1005298 899
1005299 899

1005300
1005302 900
1005303 900
1005305 903
1005307 902
1005310 903
1005395 251
1005396 251
1005397 594
1005399 594

1005400
1005400 594
1005401 594
1005402 594
1005435 93
1005436 93
1005439 677
1005440 677
1005442 685
1005443 830

1005600
1005612 19, 29, 39, 442, 446
1005613 19, 29, 39, 442, 446
1005614 19, 29, 39, 442, 446
1005615 19, 29, 39, 442, 446
1005687 136

1005700
1005705 192
1005723 578
1005741 296
1005759 136
1005777 192
1005795 578

1006000
1006083 296

1006100
1006104 891
1006105 891
1006106 880
1006108 580
1006114 580
1006121 91
1006122 91
1006123 395
1006124 395
1006125 395
1006126 395
1006127 395
1006128 395
1006136 53
1006138 53
1006140 53
1006142 53
1006144 53

1006146 53
1006148 53
1006150 53
1006152 53
1006154 53
1006155 525
1006156 525
1006157 597
1006158 597
1006159 597
1006160 597
1006161 356
1006162 356
1006167 130, 186, 290, 572
1006168 132, 188, 292, 574
1006169 134, 190, 294, 576
1006170 136, 192, 296, 578
1006171 888
1006172 888
1006173 888
1006174 888
1006175 888
1006176 888
1006178 823
1006179 822
1006180 681
1006181 681
1006182 681
1006183 823
1006184 683
1006185 233
1006188 233
1006189 233
1006190 233

1006300
1006307 337
1006308 337
1006314 829
1006316 757
1006319 333
1006321 897
1006327 758
1006328 813
1006329 813
1006336 624, 911
1006345 251
1006346 688
1006347 688
1006348 625, 910
1006350 405
1006351 405
1006352 405
1006353 405
1006354 405
1006355 405
1006377 259
1006378 259
1006379 661, 662, 663, 664, 665, 667
1006380 661, 662, 663, 664, 665, 667
1006381 661, 662, 663, 664, 665, 667
1006382 662, 663, 664, 665, 666, 667
1006383 661
1006384 663
1006385 662
1006386 665
1006387 662
1006388 664
1006389 661
1006390 663
1006391 663
1006392 665
1006393 662
1006394 665
1006395 240
1006396 240
1006397 240
1006398 240
1006399 240

1006400
1006400 240
1006402 240
1006403 240
1006404 785
1006405 785
1006406 865
1006407 865
1006408 671
1006409 671
1006410 273
1006423 381
1006424 381
1006425 381
1006426 381
1006427 381
1006428 381
1006429 381
1006430 381
1006431 247
1006432 247
1006433 247
1006434 247
1006435 247
1006436 247
1006437 247
1006438 247
1006439 149
1006440 149
1006441 331
1006442 331
1006443 331
1006444 331
1006445 523
1006446 523
1006449 149, 247, 331, 381, 523
1006450 149, 247, 331, 381, 523
1006451 149, 247, 331, 381, 523
1006452 908
1006453 919

1006500
1006511 545
1006512 545
1006513 545
1006514 545
1006515 545
1006516 545
1006517 545
1006518 545
1006519 547
1006520 547
1006521 547
1006522 547
1006523 547
1006524 547
1006525 547
1006526 547
1006527 547
1006528 547
1006529 547
1006530 547
1006531 547
1006532 547
1006533 547
1006534 547
1006535 547
1006536 547
1006537 547
1006538 547
1006539 547
1006540 547
1006541 424
1006542 424
1006543 424
1006544 424
1006545 424
1006546 424
1006547 424
1006548 424
1006549 430
1006550 430
1006551 430
1006552 430
1006553 430
1006554 430
1006555 430
1006556 430
1006557 434
1006558 434
1006559 434
1006560 434
1006561 434
1006562 434
1006563 434
1006564 434
1006565 428, 432, 436
1006566 428, 432, 436
1006567 428, 432, 436
1006568 428, 432, 436
1006569 428, 432, 437
1006570 428, 432, 437
1006571 428, 432, 436
1006572 428, 432, 436
1006573 429, 433, 437
1006574 429, 433, 437
1006575 428
1006576 428
1006577 428
1006578 428
1006579 428
1006580 428
1006581 432
1006582 432
1006583 432
1006584 432
1006585 432
1006586 432
1006587 436
1006588 436
1006589 436
1006590 436
1006591 436
1006592 436
1006593 429
1006594 429
1006595 433
1006596 433
1006597 437
1006598 437
1006599 429, 433

1006600
1006600 429, 433
1006601 429, 433
1006602 429, 433
1006603 429, 433
1006604 429, 433
1006605 429, 433

1006606 429, 433
1006607 429, 433
1006608 429, 433
1006609 429, 433
1006610 437
1006611 429
1006612 429
1006613 429, 433, 437
1006614 429, 433, 437
1006615 450
1006616 450
1006617 450
1006618 450
1006619 450
1006620 450
1006621 451
1006622 451
1006623 451
1006624 451
1006625 451
1006626 451
1006627 450
1006628 450
1006629 450
1006630 450
1006631 450
1006632 450
1006633 451
1006634 451
1006635 451
1006636 451
1006637 451
1006638 451
1006639 453
1006640 453
1006641 453
1006642 453
1006643 453
1006644 453
1006645 453
1006646 453
1006647 453
1006648 453
1006649 453
1006650 453
1006651 442
1006705 444
1006759 446
1006813 448

1007000
1007091 13
1007092 13
1007093 13

1007100
1007142 784
1007143 784
1007144 784
1007145 784
1007146 733
1007147 733
1007184 13
1007185 13
1007186 13
1007188 433, 437
1007189 433, 437
1007190 149, 247, 331, 381, 523
1007191 13
1007194 13
1007195 873
1007196 873
1007197 873
1007198 873

1007200
1007200 315
1007201 314
1007202 315
1007207 824
1007225 913
1007226 914
1007227 914
1007228 914
1007229 915
1007230 898
1007231 898
1007232 660
1007233 660
1007234 660
1007235 661
1007236 783
1007237 653
1007238 875, 876, 877
1007239 875, 876, 877
1007240 875, 876, 877
1007241 876
1007242 877
1007243 875
1007244 875
1007245 875, 876
1007246 876, 877
1007250 911
1007251 911
1007252 911
1007253 911
1007254 912
1007255 912
1007256 912
1007257 912
1007281 781
1007282 781
1007283 74, 918
1007284 208, 304
1007285 208, 304
1007286 210, 307
1007287 210, 307
1007288 208, 305
1007289 208, 305
1007290 211, 307
1007291 211, 307
1007292 208, 305
1007293 208, 305
1007294 211, 308
1007295 211, 308
1007296 209, 305
1007297 209, 305
1007298 211, 308
1007299 211, 308

1007300
1007300 209, 306
1007301 209, 306
1007302 212, 308
1007303 212, 308
1007304 209, 306
1007305 209, 306
1007306 213, 309
1007307 213, 309
1007308 210, 306
1007309 210, 306
1007310 213, 309
1007311 213, 309
1007312 210, 307
1007313 210, 307
1007314 213, 309
1007315 213, 309
1007328 76
1007329 76
1007330 76
1007331 76
1007332 76
1007333 76
1007334 76
1007335 76
1007336 77
1007337 77
1007338 77
1007339 77
1007340 79
1007341 79
1007342 79
1007343 79
1007344 79
1007345 77
1007346 77
1007347 77
1007348 77
1007349 79
1007350 79
1007351 79
1007352 521
1007353 521
1007354 521
1007355 585
1007356 585
1007368 69
1007369 69
1007370 69
1007371 69
1007372 69
1007373 69
1007374 71
1007375 71
1007376 71
1007377 71
1007378 71
1007379 71
1007381 75
1007382 75
1007383 75
1007384 75
1007385 59
1007386 59
1007387 59
1007388 59
1007389 59
1007390 59
1007391 59
1007392 59
1007393 59
1007394 59
1007395 59
1007396 59
1007397 59
1007398 59
1007399 59

1007400
1007400 59
1007401 61
1007402 61
1007403 61
1007404 61
1007405 61
1007406 61
1007407 61
1007408 61
1007409 81

1007410 81
1007411 81
1007412 81
1007421 75
1007422 75
1007423 63
1007424 63
1007425 63
1007426 63
1007427 63
1007428 63
1007429 63
1007430 63
1007431 75
1007432 75
1007433 65
1007434 65
1007435 65
1007436 65
1007437 65
1007438 65
1007439 65
1007440 65
1007441 65
1007442 65
1007443 81
1007444 81
1007445 81
1007446 81
1007447 81
1007448 81
1007449 79
1007450 79
1007451 77
1007452 81
1007453 77
1007454 81
1007455 896
1007458 778
1007459 651
1007460 650
1007461 757
1007462 419
1007463 419
1007464 419
1007465 419
1007466 419
1007467 419
1007468 251
1007469 251
1007470 251
1007471 251
1007472 251
1007473 251
1007488 79
1007489 79

1007500
1007511 778
1007512 651
1007513 651
1007551 15
1007552 15
1007559 15
1007560 15
1007567 15
1007568 15
1007580 649
1007581 779
1007582 754
1007583 649
1007584 649
1007585 779
1007586 754
1007587 649
1007588 239
1007589 239
1007590 375
1007591 375
1007592 375
1007593 375
1007594 322
1007595 322
1007596 239
1007597 239
1007598 239
1007599 239

1007600
1007608 377
1007609 377
1007610 377
1007611 377
1007612 279
1007614 279
1007615 279
1007616 279
1007618 279
1007619 279
1007624 71
1007625 71
1007626 71
1007627 71
1007628 71
1007629 71
1007630 79
1007631 79
1007632 79
1007633 79
1007634 79
1007635 79
1007636 79
1007637 79
1007638 521
1007639 521
1007640 521
1007641 521
1007642 521
1007643 521
1007644 585
1007645 585
1007646 585
1007647 585
1007648 585
1007649 585
1007651 646
1007652 646

1007600
1007653 791
1007654 583
1007655 583
1007656 583
1007657 583
1007661 225
1007662 225
1007663 225
1007664 225
1007665 225
1007666 225
1007667 780
1007668 781
1007669 654
1007670 654
1007671 225
1007672 225
1007673 521
1007674 521
1007680 874
1007681 874
1007682 874
1007683 874, 875
1007684 874, 875
1007685 874, 875
1007701 223
1007702 223
1007703 223
1007746 225, 229

1007800
1007806 778
1007807 778
1007808 778
1007809 778
1007810 874
1007811 875
1007816 542
1007817 542
1007818 542
1007819 542
1007820 542
1007821 542
1007822 874, 875
1007827 625, 917
1007855 223
1007856 223
1007857 223
1007858 127, 179, 285, 401
1007859 127, 179, 285, 401
1007860 127, 179, 285, 401
1007868 747
1007869 747
1007874 429, 433, 437
1007875 429, 433, 437
1007876 241
1007877 241
1007878 241
1007879 241
1007880 241
1007881 241
1007891 225, 229
1007892 917

1007900
1007911 783
1007912 783
1007913 783
1007914 783
1007916 782
1007917 782
1007918 782
1007919 782
1007926 483
1007927 483
1007928 483
1007997 917

1008000
1008000 889
1008001 889
1008002 224
1008003 224
1008004 224
1008005 83
1008006 83
1008007 83
1008008 83
1008009 83
1008010 788

1008011 789
1008012 789
1008013 789
1008014 646
1008015 647
1008016 647
1008017 647
1008023 127, 179, 285, 401
1008024 376
1008025 377
1008026 377
1008032 177
1008033 177
1008034 177
1008035 279
1008036 279
1008037 279
1008038 403
1008039 403
1008040 403
1008041 489
1008042 489
1008043 489
1008045 181
1008047 181
1008052 525
1008053 525
1008054 525
1008055 596
1008056 596
1008057 596
1008058 525
1008059 525
1008060 525
1008061 597
1008062 597
1008063 597
1008067 13
1008068 13
1008069 13
1008070 13
1008071 351
1008081 313
1008082 313
1008083 313
1008084 312
1008085 312
1008086 312
1008095 13
1008096 13
1008097 13
1008098 13
1008099 127

1008100

1008100 127
1008101 127
1008102 127
1008103 127
1008104 285
1008105 285
1008106 285
1008107 285
1008108 285
1008109 401
1008110 401
1008111 401
1008112 401
1008113 401
1008114 179
1008115 179
1008116 179
1008117 179
1008118 179
1008119 127, 179, 285, 401
1008123 286
1008124 287
1008125 126
1008126 126
1008127 126
1008128 126
1008129 265
1008130 265
1008131 265
1008132 265
1008136 182
1008137 182
1008138 182
1008139 182
1008140 130, 186, 290, 572
1008141 132, 188, 292, 574
1008142 134, 190, 294, 576
1008143 136, 192, 296, 578
1008144 130, 186, 290, 572
1008145 132, 188, 292, 574
1008146 134, 190, 294, 576
1008147 136, 192, 296, 578
1008148 483
1008149 483
1008150 483
1008151 900
1008152 902
1008154 897
1008155 901
1008157 903
1008159 900
1008160 901
1008161 901
1008162 902
1008163 901
1008164 901
1008165 901
1008168 515
1008169 515
1008170 600
1008171 600
1008172 243
1008173 243
1008174 515
1008175 515
1008176 601
1008177 601
1008178 243
1008179 243
1008180 514
1008181 514
1008182 514
1008183 514
1008184 601
1008185 601
1008186 243, 515, 600, 601
1008187 243, 515, 600, 601
1008188 243, 515, 600, 601
1008189 243, 515, 601
1008190 243, 515, 601
1008191 243, 515, 601
1008192 243, 515, 601
1008193 649
1008194 649
1008195 648
1008196 648
1008197 779
1008198 779
1008199 754

1008200

1008200 754
1008201 335
1008202 335
1008203 335
1008204 335
1008205 335
1008206 335
1008213 369, 499, 561
1008214 369, 499, 561
1008215 369, 499, 561
1008216 369, 499, 561
1008217 369, 499, 561
1008218 369, 499, 561
1008219 369, 499, 561
1008220 369, 499, 561
1008221 369, 499, 561
1008222 369, 499, 561
1008223 369, 499, 561
1008224 369, 499, 561
1008225 369, 499, 561
1008226 369, 499, 561
1008227 369, 499, 561
1008242 495
1008243 495
1008244 495
1008245 495
1008246 495
1008247 495
1008248 495
1008249 495
1008250 495
1008251 495
1008252 495
1008253 495
1008254 497
1008255 497
1008256 497
1008257 497
1008258 497
1008259 497
1008260 497
1008261 497
1008262 497
1008263 497
1008264 497
1008265 497
1008266 557
1008267 557
1008268 557
1008269 557
1008270 557
1008271 557
1008272 557
1008273 557
1008274 557
1008275 559
1008276 559
1008277 559
1008278 559
1008279 559
1008280 559
1008281 559
1008282 559
1008283 559
1008284 363
1008285 363
1008286 363
1008287 363
1008288 365
1008289 365
1008290 365

1008291 365
1008292 367
1008293 367
1008294 367
1008295 367
1008296 363
1008297 363
1008298 363
1008299 363

1008300
1008300 365
1008301 365
1008302 365
1008303 365
1008304 367
1008305 367
1008306 367
1008307 367
1008308 363
1008309 363
1008310 363
1008311 363
1008312 365
1008313 365
1008314 365
1008315 365
1008316 367
1008317 367
1008318 367
1008319 367
1008320 363
1008321 363
1008322 363
1008323 363
1008324 365
1008325 365
1008326 365
1008327 365
1008328 367
1008329 367
1008330 367
1008331 367
1008332 363
1008333 363
1008334 363
1008335 363
1008336 365
1008337 365
1008338 365
1008339 365
1008340 367
1008341 367
1008342 367
1008343 367
1008344 363
1008345 363
1008346 363
1008347 363
1008348 365
1008349 365
1008350 365
1008351 365
1008352 367
1008353 367
1008354 367
1008355 367
1008361 362
1008362 362
1008363 362
1008364 362
1008365 364
1008366 364
1008367 364
1008368 364
1008369 366
1008370 366
1008371 366
1008372 366
1008374 902
1008375 897
1008376 369, 499, 561
1008377 369, 499, 561
1008378 369, 499, 561
1008382 429, 433, 437
1008383 429, 433, 437
1008384 787
1008385 673
1008386 641
1008387 641
1008388 641
1008389 641
1008390 505
1008392 505
1008393 505
1008394 505
1008395 505
1008397 505
1008398 505
1008399 505

1008400
1008400 505
1008402 505
1008403 505
1008404 505
1008405 460
1008407 460
1008408 460
1008409 460
1008410 460
1008412 460
1008413 460
1008414 460
1008415 461
1008417 461
1008418 461
1008419 461
1008420 506
1008422 506
1008423 506
1008424 506
1008425 506
1008427 506
1008428 506
1008429 506
1008430 506
1008432 506
1008433 506
1008434 506
1008435 566
1008436 566
1008437 566
1008438 566
1008439 566
1008440 566
1008441 567
1008442 567
1008443 567
1008444 567
1008445 567
1008446 567
1008447 507
1008449 507
1008450 507
1008451 507
1008452 569
1008453 569
1008454 463
1008456 463
1008457 463
1008458 463
1008459 463
1008461 463
1008462 463
1008463 463
1008464 463
1008466 463
1008467 463
1008468 463
1008469 507
1008471 507
1008472 507
1008473 507
1008474 661, 662, 663, 664, 665, 666
1008475 666
1008476 639
1008477 639
1008478 732
1008479 732
1008480 732
1008481 868
1008482 371, 373, 521, 585
1008483 371, 373, 521, 585
1008484 371, 373, 521, 585
1008485 371, 373, 521, 585
1008486 371, 373, 521, 585
1008487 371, 373, 521, 585
1008496 147, 329, 509, 569
1008497 147, 329, 509, 569
1008498 147, 329, 509, 569
1008499 147, 329, 509, 569

1008500
1008500 185
1008501 185
1008502 185
1008503 185
1008504 185
1008505 185
1008506 185
1008507 185
1008508 185
1008509 73
1008510 73
1008511 73
1008512 73
1008513 73
1008514 73
1008533 182
1008534 182
1008535 268
1008536 269
1008537 269
1008538 269
1008539 489
1008540 489
1008541 599
1008542 843
1008543 724
1008544 724
1008545 310
1008546 310
1008547 310
1008548 311
1008549 311

1008550 311
1008551 311
1008552 311
1008553 311
1008554 311
1008555 311
1008556 311
1008567 14
1008568 14
1008569 14
1008570 14
1008571 14
1008572 14
1008573 14
1008574 14
1008577 160
1008578 160
1008579 160
1008580 160
1008581 161
1008582 161
1008583 161
1008584 161
1008585 161, 162
1008586 163
1008587 163
1008588 161, 163
1008589 206
1008590 206
1008591 207
1008592 207
1008593 207
1008594 207
1008595 207
1008596 207

1008600
1008612 337
1008613 337
1008614 337
1008615 257
1008616 257
1008617 257
1008618 148
1008619 148
1008620 148
1008629 88
1008631 89
1008633 89
1008635 89
1008641 900
1008642 900
1008643 900
1008644 900
1008645 903
1008646 903
1008647 896
1008648 896
1008649 896
1008650 896
1008651 910
1008652 911
1008653 910
1008654 910
1008655 910
1008656 913
1008657 913
1008658 913
1008659 913
1008660 914
1008661 914
1008662 915
1008663 915
1008664 915
1008665 915
1008666 915
1008667 916
1008668 916
1008669 916
1008670 917
1008671 917
1008672 916
1008673 916
1008674 89, 916
1008675 908
1008676 593
1008677 593
1008678 593
1008679 593
1008699 88, 89, 913

1008700
1008701 89, 914
1008702 89, 917
1008703 371
1008704 371
1008705 371
1008706 371
1008707 371
1008708 371
1008709 373
1008710 373
1008711 373
1008712 373
1008713 373
1008714 373
1008715 373
1008716 373
1008717 373
1008718 373
1008719 373
1008720 373
1008721 845
1008722 845
1008723 845
1008724 845
1008725 723
1008726 723
1008727 723
1008728 593
1008729 593
1008730 593
1008731 593

1008800
1008838 670
1008839 670
1008841 886
1008842 886
1008843 886, 887

1008900
1008902 498
1008903 498
1008904 498
1008917 160
1008918 160
1008919 160
1008920 160
1008921 162
1008922 162
1008923 162
1008924 162
1008925 160
1008926 161
1008927 161
1008928 162
1008941 376
1008943 377
1008944 377
1008945 454
1008946 454
1008947 454
1008948 454
1008949 454
1008950 454
1008951 454
1008952 454
1008953 455
1008954 455
1008955 455
1008956 455
1008957 455
1008958 455
1008959 455
1008960 455
1008961 455
1008962 455
1008963 455
1008964 455
1008965 455
1008966 455
1008967 455
1008968 455
1008969 456
1008970 456
1008971 456
1008972 456
1008973 456
1008974 456
1008975 456
1008976 456
1008977 457
1008978 457
1008979 457
1008980 457
1008981 457
1008982 457
1008983 457
1008984 457
1008985 457
1008986 457
1008987 457
1008988 457
1008989 457
1008990 457
1008991 457
1008992 457
1008993 454, 455
1008994 454, 455
1008995 454, 455
1008996 454, 455
1008997 456, 457
1008998 456, 457
1008999 456, 457

1009000
1009000 456, 457
1009001 429, 433, 437
1009002 73
1009003 73
1009004 73
1009005 73
1009012 429, 433, 437
1009014 255
1009015 255
1009016 459
1009017 459
1009018 459

1009019 459
1009020 67
1009021 67
1009022 67
1009023 67
1009024 461
1009025 461
1009026 461
1009027 461
1009028 461
1009029 461
1009030 461
1009031 461
1009032 461
1009033 461
1009034 461
1009035 461
1009036 144
1009037 144
1009038 144
1009039 144
1009040 144
1009041 144
1009042 144
1009043 144
1009044 144
1009045 144
1009046 144
1009047 144
1009048 144
1009049 144
1009050 144
1009051 144
1009052 111
1009053 111
1009054 111
1009055 111
1009056 111
1009057 111
1009058 111
1009059 111
1009060 195
1009061 195
1009062 195
1009063 195
1009064 195
1009065 195
1009066 195
1009067 195
1009068 145
1009069 145
1009070 145
1009071 145
1009072 145
1009073 145
1009074 145
1009075 145
1009076 145
1009077 145
1009078 145
1009079 145
1009080 145
1009081 145
1009082 145
1009083 145
1009084 111
1009085 111
1009086 111
1009087 111
1009088 111
1009089 111
1009090 111
1009091 111
1009092 147
1009093 147
1009094 147
1009095 147
1009096 147
1009097 147
1009098 147
1009099 147

1009100

1009100 329
1009101 329
1009102 329, 459, 511
1009103 329, 459, 511
1009104 329, 459, 511
1009107 739
1009108 739
1009131 511
1009132 511
1009133 511
1009134 511
1009135 185
1009136 185
1009137 185
1009138 525
1009139 596
1009140 525
1009141 597
1009142 407
1009143 407
1009144 287
1009145 287
1009146 592
1009147 592
1009148 592
1009149 592
1009150 592
1009151 592
1009152 592
1009153 592
1009168 876
1009169 876
1009170 877
1009171 877

1009200

1009271 18

1009300

1009325 28
1009379 40

1009400

1009433 20
1009487 30
1009541 42

1009500

1009595 22

1009600

1009649 32

1009700

1009703 44
1009757 24

1009800

1009810 34
1009864 46

1009900

1009918 26
1009972 36

1010000

1010026 38
1010099 523

1010100

1010100 523
1010101 793
1010102 793
1010103 674
1010104 674
1010105 675
1010106 675
1010107 793
1010108 793
1010125 18, 28, 38
1010126 18, 28, 38
1010127 20, 30, 40
1010128 20, 30, 40
1010129 22, 32, 42
1010130 22, 32, 42
1010131 24, 34, 44
1010132 24, 34, 44
1010133 26, 36, 46
1010134 26, 36, 46
1010135 374, 519, 589
1010136 374, 519, 589
1010138 374, 519, 589
1010139 374, 519, 589
1010140 374, 519, 589
1010141 374, 519, 589
1010142 374, 519, 589
1010143 374, 519, 589
1010144 590
1010145 590
1010146 590
1010147 590
1010148 590
1010149 590
1010150 590
1010151 590
1010152 590
1010153 590
1010154 590
1010155 590
1010156 591
1010157 591
1010158 591
1010159 591
1010161 802
1010162 802
1010163 802
1010164 802
1010165 803
1010166 803
1010167 803
1010168 803
1010169 804
1010170 804
1010171 804
1010172 804
1010173 805
1010174 805
1010175 805
1010176 805
1010177 798
1010178 798
1010179 798
1010180 798
1010181 798
1010182 798
1010183 799

1010184 799
1010185 799
1010186 799
1010187 799
1010188 799
1010189 801
1010190 801
1010191 801
1010192 801
1010193 281
1010194 281
1010195 830
1010196 830
1010197 698
1010198 698
1010199 698

1010200
1010200 699
1010201 699
1010202 655
1010203 655
1010204 655
1010205 655
1010206 409
1010207 409
1010208 409
1010209 409
1010210 379
1010211 379
1010212 379
1010213 379
1010214 379
1010215 379
1010216 197
1010217 163, 375
1010222 519
1010224 519
1010226 519
1010228 519
1010230 519
1010232 519
1010234 589
1010236 589
1010237 589
1010239 589
1010240 589
1010242 589
1010243 589
1010245 589
1010246 589
1010248 589
1010249 589
1010251 589
1010252 439
1010254 439
1010255 439
1010257 439
1010258 374
1010260 374
1010261 374
1010263 374
1010264 374
1010266 374
1010267 374
1010269 374
1010270 374
1010272 374
1010273 374
1010275 374

1010300
1010300 289
1010301 289
1010302 289
1010306 289
1010307 289
1010308 289
1010312 289
1010313 289
1010318 513
1010319 513
1010320 513
1010324 513
1010325 513
1010326 513
1010330 441
1010331 441
1010332 441
1010336 441
1010337 441
1010338 441
1010345 408
1010346 408
1010347 408
1010348 408
1010349 409
1010350 409
1010351 409
1010352 409
1010353 57
1010354 57
1010355 57
1010359 57, 221
1010360 57, 221
1010361 221
1010365 163, 375
1010366 197
1010375 441
1010376 441
1010377 441
1010381 591
1010382 591
1010383 591
1010384 591
1010385 591
1010386 591
1010387 591
1010388 591
1010393 417
1010394 417
1010397 102
1010398 103
1010399 103

1010400
1010400 103
1010401 343
1010402 399
1010403 255, 459, 511
1010404 255, 459, 511
1010405 255, 459, 511
1010406 255, 459, 511
1010407 255, 459, 511
1010408 255, 459, 511
1010413 183
1010414 183
1010415 183
1010416 183
1010417 258
1010418 258
1010419 258
1010420 258
1010421 258
1010422 169
1010423 169
1010424 169
1010425 169
1010426 253
1010427 253
1010428 253
1010429 253
1010446 429, 433, 437
1010447 429, 433, 437
1010448 517
1010449 517
1010450 517
1010451 517
1010452 517
1010453 517
1010454 517
1010455 517
1010456 439
1010457 439
1010458 439
1010459 439
1010460 439
1010461 439
1010462 439
1010463 439

1010500
1010509 249
1010510 249
1010511 249
1010512 249
1010513 249
1010514 249
1010515 249
1010516 249
1010517 167
1010518 167
1010519 167
1010520 167
1010521 87
1010522 87
1010523 87
1010524 87

1010600
1010679 21, 31, 41
1010680 21, 31, 41
1010681 21, 31, 41
1010682 21, 31, 41
1010683 23, 33, 43
1010684 23, 33, 43
1010685 23, 33, 43
1010686 23, 33, 43
1010687 25, 35, 45
1010688 25, 35, 45
1010689 25, 35, 45
1010690 25, 35, 45
1010691 27, 37, 47
1010692 27, 37, 47
1010693 27, 37, 47
1010694 27, 37, 47
1010695 48
1010696 49
1010697 50
1010698 51
1010699 48

1010700
1010700 49
1010701 50
1010702 51
1010703 48
1010704 49
1010705 50

1010706 51
1010785 216
1010786 217
1010787 217
1010788 217
1010789 218
1010790 219
1010791 219
1010792 219
1010793 220
1010794 220
1010795 220
1010796 221
1010797 493
1010798 491
1010799 491

1010800
1010800 493
1010801 466
1010802 467
1010803 467
1010804 467
1010840 586
1010841 586
1010842 586
1010843 586
1010844 586
1010845 586
1010846 586
1010847 586
1010848 587
1010849 587
1010850 587
1010851 587
1010852 587
1010853 587
1010854 587
1010855 587
1010856 586
1010857 586
1010858 587
1010859 587

1010900
1010939 798, 799, 802, 803
1010940 799, 801, 804, 805

1011000
1011020 787
1011021 771
1011022 771
1011023 643
1011024 643
1011025 755
1011026 755
1011033 747
1011034 747

1011200
1011208 12
1011209 12
1011210 12
1011211 12
1011260 774
1011261 775
1011262 775
1011263 775

1011500
1011572 844
1011573 844
1011598 733
1011599 733

1011600
1011655 909
1011670 899
1011671 899
1011681 175
1011682 175
1011683 175
1011684 175
1011685 175
1011686 175
1011687 555
1011688 555
1011689 555
1011690 487
1011691 487
1011692 487
1011693 198, 298
1011694 198, 298
1011695 199, 299
1011696 199, 299
1011697 199, 299
1011698 199, 299
1011699 199, 299

1011700
1011700 199, 299
1011701 200, 300
1011702 200, 300
1011703 201, 300
1011704 201, 300
1011705 201, 300
1011706 201, 300
1011707 201, 301
1011708 201, 301
1011709 569
1011710 569
1011711 565
1011712 565
1011713 501
1011714 501
1011715 565
1011716 565
1011717 501
1011718 501
1011719 140
1011720 140
1011721 564
1011722 564
1011723 500
1011724 500
1011725 564
1011726 564
1011727 500
1011728 500
1011747 347
1011748 347
1011749 326, 327, 501, 503, 563, 565
1011750 326, 327, 501, 503, 563, 565
1011751 326, 327, 501, 503, 563, 565
1011752 326, 327, 501, 503, 563, 565
1011753 244, 245, 323, 325, 500, 564
1011754 244, 245, 323, 325, 500, 564
1011755 244, 245, 323, 325, 500, 564
1011756 244, 245, 323, 325, 500, 564
1011757 320
1011758 320
1011759 503
1011760 503
1011761 503
1011762 503
1011763 563
1011764 563
1011765 563
1011766 563
1011779 298, 299, 300, 301, 302, 303
1011780 298, 299, 300, 301, 302, 303
1011781 298, 299, 300, 301, 302, 303
1011782 298, 299, 300, 301, 302, 303
1011783 298, 299, 300, 301, 302, 303
1011784 298, 299, 300, 301, 302, 303

1011800
1011829 195, 328, 460, 461, 463, 509
1011830 195, 328, 460, 461, 463, 509
1011831 195, 328, 460, 461, 463, 509
1011832 195, 328, 460, 461, 463, 509
1011833 111, 145, 465, 509, 566, 567
1011834 111, 145, 465, 509, 566, 567
1011835 111, 145, 465, 509, 566, 567
1011836 111, 145, 465, 509, 566, 567
1011837 144, 195, 328, 460, 461, 463
1011838 111, 145, 465, 566, 567
1011839 147, 329, 569
1011846 147
1011847 147
1011848 147
1011849 147
1011850 202, 302
1011851 202, 302
1011852 202, 302
1011853 202, 302
1011854 202, 302
1011855 202, 302
1011856 203, 303
1011857 203, 303
1011858 203, 303
1011859 203, 303
1011860 203, 303
1011861 203, 303
1011865 345
1011866 345
1011877 329
1011878 329
1011879 329
1011880 329
1011881 329
1011882 329
1011883 329
1011884 329
1011885 141
1011886 141
1011887 141
1011888 141
1011889 143
1011890 143
1011891 143
1011892 143
1011893 326
1011894 326
1011895 326
1011896 326
1011897 141
1011898 141
1011899 109

1011900
1011900 109
1011901 109
1011902 109
1011903 327
1011904 327
1011905 327
1011906 327
1011907 245

1011908 245
1011909 245
1011910 245
1011911 139
1011912 139
1011913 139
1011914 139
1011915 323
1011916 323
1011917 323
1011918 323
1011919 108
1011920 108
1011921 108
1011922 108
1011923 323
1011924 323
1011925 325
1011926 325
1011927 325
1011928 325
1011929 244
1011930 244
1011931 138
1011932 138
1011934 234
1011935 234
1011936 234
1011937 234
1011938 235
1011939 235
1011940 235
1011941 235
1011942 236
1011943 236
1011944 236
1011945 236
1011946 237
1011947 237
1011948 237
1011949 237
1011950 235
1011951 235
1011952 235
1011953 235
1011954 235
1011955 235
1011956 235
1011957 235
1011958 237
1011959 237
1011960 237
1011961 237
1011962 237
1011963 237
1011964 237
1011965 237
1011991 197
1011992 197
1011993 165
1011994 165
1011995 165
1011996 165
1011997 197
1011998 197
1011999 164

1012000

1012000 164
1012001 165
1012002 165
1012003 414
1012004 414
1012005 414

1012100

1012113 734
1012114 734
1012115 734
1012116 734
1012117 734
1012118 734
1012119 735
1012120 735
1012121 735
1012122 735
1012123 735
1012124 735
1012125 734
1012126 735
1012127 734
1012128 734
1012129 735
1012130 735
1012131 734, 735, 737
1012132 735, 737
1012133 734, 735, 737
1012134 735, 737
1012135 734, 735, 737
1012138 645
1012140 773
1012141 645
1012142 645
1012144 777
1012145 777
1012146 777
1012147 777
1012154 248
1012155 248
1012156 248
1012157 248
1012158 249
1012159 249
1012160 249
1012161 249
1012162 167
1012163 167
1012164 167
1012165 167
1012166 320
1012167 320
1012168 320
1012169 320
1012170 463
1012171 463
1012172 463
1012173 463
1012174 328
1012175 328
1012176 328
1012178 328
1012179 328
1012180 328
1012182 390
1012183 392
1012184 390
1012185 392
1012186 391
1012187 393
1012188 391
1012189 393
1012190 391
1012191 393
1012192 417
1012193 417
1012194 417
1012195 417
1012196 417
1012197 417
1012198 96
1012199 94

1012200

1012200 97
1012201 95
1012202 97
1012203 95
1012204 97
1012205 95
1012206 100
1012207 98
1012208 101
1012209 101
1012210 99
1012211 101
1012212 99
1012213 386
1012214 386
1012215 387
1012216 387
1012217 387
1012218 387
1012219 387
1012220 387
1012221 388
1012222 388
1012223 389
1012224 389
1012225 389
1012226 389
1012227 389
1012228 389
1012229 99
1012239 614
1012240 614
1012241 614
1012242 616
1012243 616
1012244 616
1012245 616
1012246 616
1012247 616
1012248 622
1012249 622
1012250 622
1012251 618
1012252 620
1012253 618
1012254 620
1012255 620
1012256 620
1012257 620
1012258 620
1012259 615
1012260 615
1012261 615
1012262 617
1012263 617
1012264 617
1012265 617
1012266 617
1012267 617
1012268 617
1012269 617
1012270 617
1012272 623
1012273 623
1012274 623
1012275 619

1012276 621
1012277 619
1012278 621
1012279 621
1012280 621
1012281 621
1012282 621
1012283 614
1012284 616
1012286 618
1012287 618
1012288 614
1012289 616
1012291 618
1012292 618
1012293 614
1012294 616
1012296 618
1012297 618
1012298 614
1012299 616

1012300
1012303 625
1012304 615
1012305 617
1012306 617
1012307 619
1012308 619
1012309 615
1012310 617
1012311 617
1012312 619
1012313 619
1012314 615
1012315 617
1012316 617
1012317 619
1012318 619
1012319 615
1012320 617
1012321 617
1012322 619
1012323 619
1012325 625
1012328 625
1012329 625
1012330 626
1012331 626
1012332 628
1012333 628
1012334 630
1012335 630
1012336 628
1012337 628
1012338 630
1012339 630
1012340 628
1012341 628
1012342 630
1012343 630
1012344 628
1012345 628
1012346 630
1012347 630
1012348 626
1012349 626
1012350 919
1012351 919
1012352 919
1012353 919
1012354 732
1012363 111
1012364 111
1012365 111
1012375 465
1012376 465
1012377 465
1012378 465

1012400
1012422 429
1012423 429
1012430 428
1012431 428
1012432 428
1012433 428
1012434 428
1012435 428
1012436 428
1012437 428
1012438 428
1012439 428
1012440 428
1012441 428
1012442 432
1012443 432
1012444 432
1012445 432
1012446 432
1012447 432
1012448 432
1012449 432
1012450 436
1012451 436
1012452 439
1012453 436
1012454 436
1012455 436
1012456 436
1012457 436
1012458 428
1012459 428
1012460 432
1012461 432
1012462 436
1012463 436
1012464 612
1012465 612
1012466 612
1012467 612
1012468 904
1012469 904
1012470 904
1012471 904
1012472 904
1012473 612
1012474 612
1012475 612
1012476 612
1012477 613
1012478 613
1012479 613
1012480 613

1012500
1012536 626
1012538 626
1012539 627
1012541 627
1012545 628
1012547 628
1012548 630
1012550 630
1012551 631
1012553 631
1012554 626
1012555 626
1012556 627
1012557 627
1012558 628
1012559 628
1012560 628
1012561 628
1012562 629
1012563 629
1012564 629
1012565 629
1012566 630
1012567 630
1012568 630
1012569 630
1012570 631
1012571 631
1012572 631
1012573 631
1012574 626
1012576 628
1012577 629
1012578 629
1012579 630
1012580 630
1012581 631
1012582 631
1012583 626, 629, 630
1012584 628

1012600
1012603 625
1012604 625
1012605 625
1012623 12
1012624 12

300000
3009280 909
3009282 909
3009285 909
3009286 909
3009287 910
3009310 909
3009389 909


SIGHT EASY
1008730

1-PHASE

1-PHASE SYSTEM MOUNTING TRACK 481
1-PHASE SYSTEM MOUNTING TRACK, ACCESSORIES 482, 483
1-PHASE SYSTEM MOUNTING TRACK, 2 M 485
1-PHASE SYSTEM MOUNTING TRACK, 2 M, ACCESSORIES 485

3-PHASE

EUTRAC® 3-PHASE, SURFACE-MOUNTED TRACK, 2 M 549
EUTRAC® 3-PHASE, SURFACE-MOUNTED TRACK, 2 M, ACCESSORIES 550, 551
EUTRAC® 3-PHASE, RECESSED TRACK, 3 M 553
EUTRAC® 3-PHASE, RECESSED TRACK, 3 M, ACCESSORIES 553
S-TRACK 3-PHASE SURFACE-MOUNTED TRACK, ON/OFF 537
S-TRACK 3-PHASE SURFACE-MOUNTED TRACK, ON/OFF, ACCESSORIES 538, 539
S-TRACK 3-PHASE SURFACE-MOUNTED TRACK, PHASE & DALI 541
S-TRACK 3-PHASE SURFACE-MOUNTED TRACK, PHASE & DALI, ACCESSORIES 542, 543
S-TRACK 3-PHASE RECESSED TRACK, PHASE & DALI 545
S-TRACK 3-PHASE RECESSED TRACK, PHASE & DALI, ACCESSORIES 547

48 V SYSTEMS

48 V STANDARD SURFACE-MOUNTED TRACK SYSTEM, DALI 424
48 V STANDARD SURFACE-MOUNTED TRACK SYSTEM, DALI, ACCESSORIES 428, 429
48 V STANDARD SURFACE-MOUNTED TRACK SYSTEM, CURVED, DALI 426
48 V DEEP SURFACE-MOUNTED TRACK SYSTEM, DALI 430
48 V DEEP SURFACE-MOUNTED TRACK SYSTEM, DALI, ACCESSORIES 432, 433
48 V RECESSED TRACK SYSTEM, DALI 434
48 V RECESSED TRACK SYSTEM, DALI, ACCESSORIES 436, 437

A

ABRIDOR 100 POLE 725
ABRIDOR 60 POLE 725
ABRIDOR HYBRID 100 POLE 724
ABRIDOR HYBRID 60 POLE 724
ABRIDOR HYBRID WL 843
ABRIDOR SENSOR WL 843
ABRIDOR WL 843
ADEGAN FL, FLAT SOLAR 641
ADEGAN FL, SOLAR 641
ADI EL 866
AINOS CW 858
AINOS CW, SQUARE 859
AINOS CW, SENSOR 859
AINOS CW, SENSOR, SQUARE 859
AINOS SLIDE WL, ROUND, PHASE 775
AINOS SLIDE WL, ROUND, SENSOR 775
AINOS SLIDE WL, SQUARE, PHASE 774
AINOS SLIDE WL, SQUARE, SENSOR 775
AKALO D83 EL 115
ALEGRIA 75 POLE, TRIAC 645
ALEGRIA WL, TRIAC 773
ALPA CONE 100 POLE, E27 709
ALPA MUSHROOM 45 POLE, E27 709
ALPA MUSHROOM 75 POLE, E27 709
ALTRA DICE CL, QPAR51 151
ALTRA DICE CW, DOUBLE, QPAR51 151, 385
ALTRA DICE TRACK SINGLE-PHASE, QPAR51 529
ANGOLUX SENSOR WL 835
ANGOLUX WL 835
APONI 120 POLE, PHASE 711
APONI 90 POLE, PHASE 710
ARLINA 130 WL 317
ARLINA 60 WL 317
ARROCK ARC POLE, QPAR51 694
ARROCK GRANITE 40 POLE, SQUARE, E27 694
ARROCK GRANITE 70 POLE, SQUARE, E27 694
ARROCK SLOT POLE, QPAR51 695
ARROCK STONE 50 POLE 695
ARROCK STONE 75 POLE 695
ASMARA LV, QR-C51 475
ASSO 300 WL, PHASE 348, 349
ASTINA STEEL WL, QPAR51 834
ASTINA WL, QPAR51 834
ASTO TUBE SINGLE-PHASE, GU10 523
ASTO TUBE SINGLE-PHASE, PD, GU10 523
ASTO TUBE CL, SINGLE, GU10 149
ASTO TUBE CW, DOUBLE, GU10 381
ASTO TUBE CW, GU10 381
ASTO TUBE CW, QUADRUPLE, GU10 381
ASTO TUBE CW, SINGLE, GU10 381
ASTO TUBE CW, TRIPLE, GU10 381
ASTO TUBE DECORATIVE REFLECTOR 149, 247, 331, 381, 523
ASTO TUBE PD, DOUBLE, GU 10 247
ASTO TUBE PD, GU 10 247
ASTO TUBE PD, QUADRUPLE, GU 10 247
ASTO TUBE PD, SINGLE, GU 10 247
ASTO TUBE PD, TRIPLE, GU 10 247
ASTO TUBE WL, SINGLE, GU10 331
ASTO TUBE WL, UP/DOWN, GU10 331

ACCESSORIES

3-PIN IP68 CONNECTION BOX 919
3-PIN IP68 Y CONNECTION BOX 919
48V SYSTEM ROUND COVER PLATE R80 MM 919
48V SYSTEM SQUARE COVER PLATE 86 MM × 86 MM 919
5-PIN CONNECTION BOX, DALI 919
5-PIN IP68 CONNECTION BOX 919
BOX RELAY DALI 909
CEILING OUTLET DIMMER ZIGBEE 3.0 909
CONTROLLER DALI, DT8 5 CHANNEL 917
CONTROLLER LED STRIP CCT / RGBW 910
CONVERTER DALI -> PHASE DIM 908
DALI INTERFACE 1-10V + ON/OFF 908
DALI INTERFACE PUSH DIMM / DALI PCU TW G2 909
EMERGENCY LIGHT FEATURE DALI 2 917
FITU CABLE CLAMP 918
FITU CEILING HOOK 918
GU10 FITTING 918
GU10 LED CONNECTION BOX WITH BASE, MAX. 10 W 918
LED DRIVER 10W | 180-270MA PHASE 914
LED DRIVER 10W | 500-700MA PHASE 914
LED DRIVER 10W |350MA ROUND 913
LED DRIVER 15W | 100-700MA DALI 915
LED DRIVER 15W | 200-350MA PHASE 915
LED DRIVER 15W | 700MA ROUND 913
LED DRIVER 20 W | 350MA 913
LED DRIVER 20W | 350-500MA PHASE 915
LED DRIVER 20W | 350MA PHASE 914
LED DRIVER 20W | 350MA/500MA PHASE 914
LED DRIVER 21W | 150-500MA 913
LED DRIVER 21W | 500MA STRAIN RELIEF INCLUDED 914
LED DRIVER 23W | 100-700MA DALI 916
LED DRIVER 25W | 150-700MA DALI DIMMABLE 915
LED DRIVER 30W | 500-700MA PHASE 915
LED DRIVER 36W | 100-900MA DALI 916
LED DRIVER 40W | 700-1050MA PHASE 915
LED DRIVER 44W | 700-1050MA 914
LED DRIVER 4W | 350MA 913
LED DRIVER 4W | 700MA 913
LED DRIVER 53W | 650-1400MA DALI 916
LED POWER SUPPLY 100W | 24V DC DALI DIMMABLE INCLUDING STRAIN RELIEF 912
LED POWER SUPPLY 100W | 24V DC STRAIN RELIEF INCLUDED 911
LED POWER SUPPLY 12V | 24W, ROUND 910
LED POWER SUPPLY 12V AC | 50VA CONVENTIONAL 908
LED POWER SUPPLY 150W | 24V DC DALI DIMMABLE INCLUDING STRAIN RELIEF 912
LED POWER SUPPLY 150W | 24V DC STRAIN RELIEF INCLUDED 911
LED POWER SUPPLY 24V | 24W 910
LED POWER SUPPLY 24V | 25W, ROUND 911
LED POWER SUPPLY 24V | 36W 910
LED POWER SUPPLY 24V | 60W 910
LED POWER SUPPLY 250W | 24V DC DALI DIMMABLE INCLUDING STRAIN RELIEF 912
LED POWER SUPPLY 250W | 24V DC STRAIN RELIEF INCLUDED 911
LED POWER SUPPLY 25W | 24V 911
LED POWER SUPPLY 30W | 24V DC DALI DIMMABLE INCLUDING STRAIN RELIEF 912
LED POWER SUPPLY 30W | 24V DC STRAIN RELIEF INCLUDED 911
POWER ADAPTER 100W | 24V DC 912
POWER ADAPTER 50W | 24V 912
REMOTE CONTROL ZIGBEE, CCT/RGBW 917
SLVconnect® BOX RELAY ZIGBEE 3.0 909
SLVconnect® DIN DIMMER ZIGBEE 3.0 909
SLVconnect® G2 DIMMER BOX ZIGBEE 3.0 909
SLVconnect® WHITE 5-BUTTON WIRELESS SWITCH ZIGBEE 3.0 910
STANDARD STRAIN RELIEF 917
STRAIN RELIEF 916
TENSEO 12V AC | 105VA CONVENTIONAL 908
TENSEO 12V AC | 210VA CONVENTIONAL 908
TENSEO 12V AC | 50VA CONVENTIONAL 908
TEXTILE CABLE 10 M 918
THROUGH-WIRABLE STRAIN RELIEF 916, 917

B

BASKET WL, E27 353
BATTEN 120 CW 395
BATTEN 60 CW 395
BIG NAILS 50 POLE, E27 712
BIG NAILS 80 POLE, E27 712
BIG NAUTILUS SP, ROUND, QPAR51 743
BIG PLOT COVER, 2-PACK 889
BIG PLOT COVER, 4-PACK 889
BIG PLOT MODULE 889
BIG QUAD UP/DOWN WL 810
BIG QUAD WL 810
BIG THEO CL 761
BIG THEO CL, QPAR111 761
BIG THEO FLOOD WL, UP/DOWN 796
BIG THEO UP/DOWN WL, QPAR111 796
BIG THEO WL 797
BIG THEO WL, BEAM UP FLOOD DOWN 795
BIG THEO WL, QPAR111 797

BIMA 2.0 SINGLE-PHASE, DOUBLE, QPAR51 503
BIMA 2.0 SINGLE-PHASE, SINGLE, QPAR51 503
BIMA 2.0 THREE-PHASE, DOUBLE, QPAR51 563
BIMA 2.0 THREE-PHASE, SINGLE, QPAR51 563
BOOKAT WL 830
BOX WL, UP/DOWN, QT-DE12 846
BOX-L WL 846
BOX-L WL, E27 846
BRICK DOWNUNDER EL 869
BRICK DOWNUNDER EL, E14 869
BRICK EL, ASYMMETRICAL 868
BRICK EL, SYMMETRICAL 868
BRICK MESH EL 868
BULAN CW, E14 861
BULAN GRID CW, E27 861

C

C-POL 90 POLE, E27 715
CARISO WL, PHASE 351
CHROMBO WL, PHASE 351
CONCRETE 35 POLE, PHASE 670
CONCRETE 55 POLE, PHASE 670
CONCRETO EL, CUT 865
CONCRETO EL, WING 865
CONCRETO FL, ANGULAR, QPAR51 671
CONCRETO FL, ROUND, QPAR 51 671
CONCRETO L WL 785
CONCRETO M WL 785
CONE FL, E27 707
COSMIC LV, QR-C51 477
COUPA WL 356
CUBE CL, PHASE 757
CUBIX FL, QPAR51 705
CYFT CW, PHASE 377
CYFT DECORATIVE RING 377
CYFT DOME CW, PHASE 377
CYFT WAVE CW, PHASE 376
CYFT WAVE XL CW, PHASE 379
CYFT XL CW, PHASE 379
CYFT XL DECORATIVE RING 379

D

D-RING M WL, PHASE 783
D-RING S WL, PHASE 783
DASAR® 115 RL, SQUARE, QPAR51 882
DASAR® 115 RL, ROUND, QPAR51 882
DASAR® 1200 EL, DALI 873
DASAR® 215 RL, SQUARE, QPAR111 885
DASAR® 215 RL, ROUND, QPAR111 885
DASAR® 255 EL 880, 881
DASAR® 370 EL, ROUND 885
DASAR® 600 EL, DALI 873
DASAR® 920 EL 881
DASAR® 920 SP, 230V 745
DASAR® EXACT 116 EL, SQUARE, QPAR51 883
DASAR® EXACT 116 EL, ROUND, QPAR51 883
DASAR® FLAT 120 EL 880
DASAR® FLAT 80 EL 880
DASAR® L RL, ASYM, SQUARE, DALI 876
DASAR® L RL, ASYM, ROUND, DALI 876
DASAR® L RL, SQUARE, DALI 875
DASAR® L RL, ROUND, DALI 875
DASAR® M RL, SQUARE, DALI 875
DASAR® M RL, ROUND, DALI 874
DASAR® PROJECTOR SP, 12/24V 745
DASAR® S RL, ANGULAR 874
DASAR® S RL, ROUND 874
DASAR® XL RL, SQUARE, DALI 877
DASAR® XL RL, ROUND, DALI 876
DASAR® XL, RL, ASYM, ROUND, DALI 877
DASAR® XL, RL, ASYM, SQUARE, DALI 877
DECONA 30 CL, PHASE 160
DECONA 30 CL, SENSOR 160, 161
DECONA 42 CL, PHASE 161, 162
DECONA 42 CL, SENSOR 161, 162
DECONA SUSPENSION KIT, 1.50 M 163
DECONA MOUNTING FRAME 310 MM 162
DECONA MOUNTING FRAME 430 MM 163
DELWA WL 840
DENA 30 WL, E14 353
DIO FLEX PLATE WL 359
DIO FLEX PLATE WL QPAR51 359
DIRETO 60 WL, PHASE 353
DISPLAY ADL 50 QPAR51 361
DL 126 EL 105
DOLIX OUT EL, SQUARE, QPAR51 115
DOLIX OUT EL, ROUND, QPAR51 114
DORISA 30 WL 320
DORISA 50 WL 320
DOWNLIGHT VARIO 220 22 830/840 WH ML 102
DOWNLIGHT VARIO 220 22 830/840 WH ML PIR 103
DOWNLIGHT VARIO 290 28 830/840 WH ML 103
DOWNLIGHT VARIO 290 28 830/840 WH ML PIR 103
DOWNUNDER OUT L EL 867
DOWNUNDER OUT M EL 867
DOWNUNDER OUT S EL 867
DOWNUNDER OUT WL, SQUARE 841
DOWNUNDER OUT WL, ROUND 841
DOWNUNDER PUR 150 EL 121
DOWNUNDER PUR 80 EL 120
DURNO LV 477
DYSKO SINGLE-PHASE, PD, PHASE 513
DYSKO SINGLE-PHASE, PHASE 513
DYSKO 48V, DALI, DEEP & RECESSED TRACK 441
DYSKO 48V, DALI, STANDARD SURFACE MOUNTED TRACK 441
DYSKO 48V, PD, DALI 441
DYSKO CW, DOUBLE, PHASE 289
DYSKO CW, SINGLE, PHASE 289
DYSKO CW, SWITCH, SINGLE, PHASE 289
DYSKO DL, ROUND, PHASE 57
DYSKO PD, PHASE 57, 221

E

ENOLA® 2.0 M SINGLE-PHASE, PD, SINGLE, GU10, QPAR51 501
ENOLA® 2.0 M SINGLE-PHASE, SINGLE, GU10, QPAR51 501
ENOLA® 2.0 M THREE-PHASE, PD, SINGLE, GU10, QPAR51 565
ENOLA® 2.0 M THREE-PHASE, SINGLE, GU10, QPAR51 565
ENOLA® 2.0 M CL, QUAD., GU10, QPAR51, LONG 143
ENOLA® 2.0 M CL, SINGLE, GU10, QPAR51 140
ENOLA® 2.0 M CL, SIX., GU10, QPAR51, LONG 143
ENOLA® 2.0 M CL, TRIPLE, GU10, QPAR51, LONG 141
ENOLA® 2.0 M CL. DOUBLE, GU10, QPAR51 141
ENOLA® 2.0 M CL. DOUBLE, GU10, QPAR51, LONG 141
ENOLA® 2.0 M CW, SINGLE, GU10, QPAR51, ROUND 326
ENOLA® 2.0 M CW, SINGLE, GU10, QPAR51, SQUARED 326
ENOLA® 2.0 M PD, SINGLE, GU10, QPAR51 245
ENOLA® 2.0 M PD, SIX., LONG, GU10, QPAR51 245
ENOLA® 2.0 M RL, DOUBLE, GU10, QPAR51 109
ENOLA® 2.0 M RL, SINGLE, GU10, QPAR51 109
ENOLA® 2.0 M WL, DOUBLE, GU10, QPAR51 327
ENOLA® 2.0 M WL, SINGLE, GU10, QPAR51 327
ENOLA® 2.0 S SINGLE-PHASE, PD, SINGLE, GU10 MINI, PAR11 500
ENOLA® 2.0 S SINGLE-PHASE, SINGLE, GU10 MINI, PAR11 500
ENOLA® 2.0 S THREE-PHASE, PD, SINGLE, GU10 MINI, PAR11 564
ENOLA® 2.0 S THREE-PHASE, SINGLE, GU10 MINI, PAR11 564
ENOLA® 2.0 S CL, DOUBLE, GU10 MINI, PAR11 138
ENOLA® 2.0 S CL, DOUBLE, GU10 MINI, PAR11, LONG 139
ENOLA® 2.0 S CL, TRIPLE, GU10 MINI, PAR11, LONG 139
ENOLA® 2.0 S CW, SINGLE, GU10 MINI, PAR11, ROUND 323
ENOLA® 2.0 S CW, SINGLE, GU10 MINI, PAR11, SQUARED 323
ENOLA® 2.0 S DECORATIVE RING 108, 139, 245, 325, 500, 564
ENOLA® 2.0 S PD, SINGLE, GU10 MINI, PAR11 244
ENOLA® 2.0 S RL, DOUBLE, GU10 MINI, PAR11 108
ENOLA® 2.0 S RL, SINGLE, GU10 MINI, PAR11 108
ENOLA® 2.0 S WL, DOUBLE, GU10 MINI, PAR11 325
ENOLA® 2.0 S WL, SINGLE, GU10 MINI, PAR11 325
ENOLA® 2.0 S WL, SINGLE, GU10 MINI, PAR11, BEDSIDE, USBC 323
ENOLA® 2.0/BIMA 2.0 M DECORATIVE RING 109, 143, 245, 327, 501, 565
ENOLA® M LENS 19° 821
ENOLA® OCULUS CL 758
ENOLA® OCULUS WL, SINGLE 813
ENOLA® OCULUS WL, UP/DOWN 813
ENOLA® ROUND L CL 759
ENOLA® ROUND L WL, SINGLE 816
ENOLA® ROUND L WL, UP/DOWN 817
ENOLA® ROUND M CL 759
ENOLA® ROUND M WL, SINGLE 816
ENOLA® ROUND M WL, UP/DOWN 817
ENOLA® ROUND S CL 759
ENOLA® ROUND S WL, SINGLE 816
ENOLA® ROUND S WL, UP/DOWN 817
ENOLA® S/M/L REFLECTOR 821
ENOLA® SQUARE L WL, SINGLE 818
ENOLA® SQUARE L WL, UP/DOWN 819
ENOLA® SQUARE M CL 761
ENOLA® SQUARE M WL, SINGLE 818
ENOLA® SQUARE M WL, UP/DOWN 819
ENOLA® SQUARE S CL 760
ENOLA® SQUARE S WL, SINGLE 818
ENOLA® SQUARE S WL, UP/DOWN 819
ESKINA D DISPLAY, PHASE 851
ESKINA FRAME 125 POLE, DOUBLE 677

ESKINA FRAME 175 POLE, DOUBLE 677
ESKINA FRAME 45 POLE, SINGLE 676
ESKINA FRAME 75 POLE, DOUBLE 676
ESKINA FRAME 75 POLE, SINGLE 676
ESKINA FRAME CL, SINGLE, PHASE 757
ESKINA FRAME WL 829
ESKINA FRAME WL, DOUBLE 829
ESKINA SPOT CW, PHASE 855
ESKINA SPOT SENSOR CW, PHASE 855
EURO CUBE 2 L THREE-PHASE, DALI 587
EURO CUBE 2 L THREE-PHASE, PHASE 587
EURO CUBE 2 L HONEYCOMB 587
EURO CUBE 2 L OVAL FILTER 587
EURO CUBE 2 M THREE-PHASE, DALI 586
EURO CUBE 2 M THREE-PHASE, PHASE 586
EURO CUBE 2 M HONEYCOMB 586
EURO CUBE 2 M OVAL FILTER 586
EURO SPOT TRACK SINGLE-PHASE, QPAR51 529
EURO SPOT TRACK THREE-PHASE, QPAR111 603
EURO SPOT TRACK THREE-PHASE, QPAR51 603

F

F-POL 85 POLE, E27 715
F-POL WL, E27 849
FENDA 30 CM, ROUND 155, 261, 413
FENDA 45 CM, ROUND 155, 413
FENDA 70 CM, ROUND 155, 413
FENDA CEILING ROSETTE, E27 155
FENDA FL, E27 411, 413
FENDA GLASS SHADE 12.5 CM, ROUND 261
FENDA Ø 45 CM, ROUND 261
FENDA Ø 70 CM, ROUND 261
FENDA PD, E27 260
FENDA TL, E27 411
FENDA WL BASE, E27 355
FERA 25 CL 159
FERA 25 CL, DALI 159
FITU PD, E27 258
FITU PD, E27 RIBBED 258
FITU PD, E27 STONE 258
FITU WALL BRACKET 354
FIX-IT! 48V, DALI, ROUND, DEEP SURFACE MOUNTED TRACK 455
FIX-IT! 48V, DALI, ROUND, STANDARD SURFACE MOUNTED TRACK 454, 455
FIX-IT! 48V, DALI, SQUARE, DEEP SURFACE MOUNTED TRACK 457
FIX-IT! 48V, DALI, SQUARE, STANDARD SURFACE MOUNTED TRACK 456, 457
FLAC BEAM SP 741
FLATT 100 POLE 675
FLATT 65 POLE 675
FLATT II 36 POLE, PHASE 674
FLATT II 62 POLE, PHASE 675
FLATT II WL, UP/DOWN, PHASE 793
FLATT II WL, UP/DOWN, SENSOR 793
FLATT SENSOR WL 794
FLATT WL 794
FORCHINI 50 PD, E27 268
FORCHINI 70 PD, E27 269
FORCHINI M 40 PD, E27 269
FORCHINI M 40 TRACK SINGLE-PHASE, E27 489
FORCHINI M 40 TRACK THREE-PHASE, PD, E27 599
FORCHINI M 50 PD, E27 269
FRAME BASIC RL 116, 117
FRAME BASIC RL, HV 116
FRAME CURVE EL 117

G

GALEN 120 SP 738
GALEN 60 SP 738
GALEN PRO 120 WL, DALI 739
GALEN PRO 60 WL, DALI 739
GLENOS® 2.0 CL, 1,2 M, DALI, UGR22 167
GLENOS® 2.0 PD, 1,2 M, DALI, UGR19 248
GLENOS® 2.0 PD, 1,5 M, DALI, UGR19 249
GLENOS® 2.0 WL, 1,5M, DALI, UGR22 320
GLENOS® PRO CL, 1,2 M, DALI, UGR19 167
GLENOS® PRO PD, 1,2 M, DALI, UGR16 249
GLENOS® PRO PD, 1,5M, DALI, UGR16 249
GLENOS® PRO RL, 1,2 M, DALI, UGR19 87
GLOO PURE 27 POLE, E27 702
GLOO PURE 44 POLE, E27 702
GLOO PURE 70 POLE, E27 702
GLOO PURE WL, E27 848
GRAFIT 30 POLE, E27 683
GRAFIT 30 POLE, ROUND, E27 681
GRAFIT 60 POLE, E27 683
GRAFIT 60 POLE, ROUND, E27 681
GRAFIT 90 POLE, E27 683
GRAFIT 90 POLE, ROUND, E27 681
GRAFIT WL, ANGULAR, E27 823
GRAFIT WL, SQUARE, SENSOR, E27 823
GRAFIT WL, ROUND, E27 823
GRAFIT WL, ROUND, SENSOR, E27 822
GRAZIA 60 | RECESSED PROFILE 632
GRAZIA 60 | RECESSED PROFILE, ACCESSORIES 632
GRID CUBE FL 639
GRID SUN FL 639
GRIP! FLAT SINGLE-PHASE, PD, PHASE 511
GRIP! FLAT SINGLE-PHASE, PHASE 511
GRIP! FLAT 48V, DALI 459
GRIP! FLAT 48V, PD, DALI 459
GRIP! FLAT CL, PHASE 329
GRIP! FLAT PD, PHASE 255
GRIP! L SINGLE-PHASE, PD, QPAR51, Ø 5,7 CM 507
GRIP! L SINGLE-PHASE, QPAR51, Ø 5,7 CM 507
GRIP! L THREE-PHASE, PD, QPAR51, Ø 5,7 CM 569
GRIP! L THREE-PHASE, QPAR51, Ø 5,7 CM 569
GRIP! L CL, DOUBLE, QPAR51, Ø 5,7 CM 147
GRIP! L CL, QPAR51, Ø 5,7 CM 147
GRIP! L CL, SINGLE, QPAR51, Ø 5,7 CM 147
GRIP! L DECORATIVE RING 509, 569
GRIP! L WL, UP OR DOWN, 1X QPAR51, Ø 5,7 CM 329
GRIP! L WL, UP/DOWN, 2X QPAR51, Ø 5,7 CM 329
GRIP! M SINGLE-PHASE, PHASE, Ø 4,3 CM 506
GRIP! M THREE-PHASE, DALI, Ø 4,3 CM 566
GRIP! M THREE-PHASE, PHASE, Ø 4,3 CM 567
GRIP! M 48V, DALI, DEEP & RECESSED TRACK, Ø 4,3 CM 465
GRIP! M CL, DOUBLE, PHASE, Ø 4,3 CM 145
GRIP! M CL, SINGLE, PHASE, Ø 4,3 CM 145
GRIP! M DECORATIVE RING 145, 567
GRIP! M DECORATIVE RING + SPACER 509
GRIP! M EL, PHASE, Ø 4,3 CM 111
GRIP! S SINGLE-PHASE, PHASE, Ø 3,0 CM 505
GRIP! S 48V, DALI, DEEP & RECESSED TRACK, Ø 3,0 CM 461
GRIP! S 48V, DALI, STANDARD TRACK, Ø 3,0 CM 460, 461
GRIP! S 48V, PD, DALI, Ø 3,0 CM 463
GRIP! S CL, DOUBLE, PHASE, Ø 3,0 CM 144
GRIP! S CL, SINGLE, PHASE, Ø 3,0 CM 144
GRIP! S DECORATIVE RING + SPACER 509
GRIP! S EL, PHASE, Ø 3,0 CM 111
GRIP! S MINI 48V, DALI, SHORT, STANDARD TRACK, Ø 3,0 CM 463
GRIP! S PD, PHASE, Ø 3,0 CM 195
GRIP! S WL, Ø 3,0 CM, ON/OFF SWITCH 328
GRIP! S WL, PHASE, UP/DOWN, Ø 3,0 CM 328
GRIP! S WL, RECESSED, Ø 3,0 CM 111

H

H-POL 30 POLE 720
H-POL 60 POLE 720
H-POL TWIN 60 POLE 720
HAVEN 25 SINGLE-PHASE, E27 487
HAVEN 25 THREE-PHASE, E27 555
HAVEN 35 PD, E27 175
HAVEN 50 PD, E27 175
HELIA 30 PD, PHASE 264
HELIA 40 PD, PHASE 265
HELIA 50 TRACK SINGLE-PHASE 527
HELIA 50 TRACK THREE-PHASE 605
HELIA CW, DOUBLE 857
HELIA CW, SINGLE 857
HELIA PRO L WL, SINGLE, DALI P1 804
HELIA PRO L WL, SINGLE, DALI P2 805
HELIA PRO L WL, UP/DOWN, DALI P1 804
HELIA PRO L WL, UP/DOWN, DALI P2 805
HELIA PRO S WL, SINGLE, DALI P1 802
HELIA PRO S WL, SINGLE, DALI P2 803
HELIA PRO S WL, UP/DOWN, DALI P1 802
HELIA PRO S WL, UP/DOWN, DALI P2 803
HELIA SLIM POLE, DOUBLE 747
HELIA SLIM POLE, SINGLE 747
HELIA SPOT L SP, SINGLE, PHASE 740
HELIA SPOT S SP, SINGLE 740
HORN 1 EL, SINGLE, QPAR51 92
HORN DL, DOUBLE, QPAR51 91
HORN DL, GU10, BLOWER DOOR TESTED 93
HORN DL, SINGLE, ASYMMETRICAL, QPAR51 91
HORN DL, SINGLE, QPAR51 91, 92
HORN MAGNA EL 93
HORN MINI EL 90
HORN T EL, QPAR111 93

I

I-RING 65 POLE 653
I-RING WL 783
IN-LINE 22 48V, DARKLIGHT REFLECTOR, DALI 450
IN-LINE 22 48V, OPAL, DALI 450
IN-LINE 24 48V, MOVE, DARKLIGHT REFLECTOR, DALI 453
IN-LINE 44 48V, DARKLIGHT REFLECTOR, DALI 451
IN-LINE 44 48V, OPAL, DALI 451
IN-LINE 46 48V, MOVE, DARKLIGHT REFLECTOR, DALI 453
IPERI 50 POLE 726
IPERI WL 849

K

KADUX DL, DOUBLE, DALI 14
KADUX DL, DOUBLE, PHASE 15
KADUX DL, SINGLE, DALI 14
KADUX DL, SINGLE, PHASE 15

KADUX DL, TRIPLE, PHASE 15
KADUX EL, DOUBLE, QPAR111 17
KADUX EL, DOUBLE, QPAR51 16
KADUX EL, SINGLE, QPAR111 17
KADUX EL, SINGLE, QPAR51 16
KADUX EL, TRIPLE, QPAR51 16
KALU 2.0 SINGLE-PHASE, PHASE 519
KALU 2.0 THREE-PHASE, DALI 589
KALU 2.0 THREE-PHASE, PHASE 589
KALU 2.0 48V, DALI, STANDARD SURFACE MOUNTED TRACK 439
KALU 2.0 CW, DOUBLE LONG, PHASE 374
KALU 2.0 CW, SINGLE, PHASE 374
KALU 2.0 CW, TRIPLE LONG, PHASE 374
KALU CW, DOUBLE, QPAR111 383
KALU CW, QPAR111 383
KALU CW, QUAD, QPAR111 383
KALU CW, SINGLE, QPAR111 383
KALU CW, TRIPLE, QPAR111 383
KALU TRACK SINGLE-PHASE, QPAR111 519
KALU TRACK THREE-PHASE, QPAR111 589
KARDAMOD CL, DOUBLE, SQUARE, QPAR111 153
KARDAMOD CL, SINGLE, SQUARE, QPAR111 153
KARPO 30 CW, SINGLE 357
KARPO 30 EL 110
KARPO 30 WL, SINGLE 357
KARPO FL 415
KARPO GOOSE WL 356
KARPO MAGN CW, SINGLE, PHASE 356
KARPO TL 415
KARPO WL 357
KENKUA SPOT WL, E27 355
KINI EL, PHASE 115

L

L-LINE 120 WL 321
L-LINE 60 WL 321
L-LINE OUT 30 FL, HORIZONTAL 696
L-LINE OUT 50 POLE 697
L-LINE OUT 60 FL, HORIZONTAL 697
L-LINE OUT 80 POLE 697
L-LINE OUT WL 847
LALU® SET SINGLE-PHASE, PD, LED BASE, PHASE 491, 493
LALU® SET 48V, PD, LED BASE, DALI 466, 467
LALU® SET PD, E27 BASE 216, 217
LALU® SET PD, LED BASE, PHASE 218, 219
LALU® SET PD, LED BASE, PHASE, RECESSED 220, 221
LED SPIKE SP 749
LED SPOT SP 853
LED STRIP COB | M 622
LED STRIP COB | S 616
LED STRIP COB | XS 614
LED STRIP COB IP67 | S 620
LED STRIP COB IP67 RGBW | S 620
LED STRIP COB IP67 TW | S 620
LED STRIP COB RGBW | S 618
LED STRIP COB TW | S 618
LED STRIP PROFILE CORNER | M 630
LED STRIP PROFILE CORNER | S 628
LED STRIP PROFILE RECESSED | M 630
LED STRIP PROFILE RECESSED | S 628
LED STRIP PROFILE RECESSED PLASTER | XS 626
LED STRIP PROFILE RECESSED TILES | XS 626
LED STRIP PROFILE SURFACE | M 630
LED STRIP PROFILE SURFACE | S 628
LED STRIP PROFILE SURFACE | XS 626
LED STRIP PROFILE SURFACE FLAT | M 630
LED STRIP PROFILE SURFACE FLAT | S 628
SMD LED STRIP | M 623
SMD LED STRIP | S 617
SMD LED STRIP | XS 615
IP67 SMD LED STRIP | S 621
RGBW SMD LED STRIP | S 619, 621
TW SMD LED STRIP | S 619, 621
LED STRIP, ACCESSORIES 624, 625
LED STRIP PROFILES, ACCESSORIES 618–625
LID I 45 POLE, SINGLE, PHASE 654
LID I 75 POLE, DOUBLE, PHASE 654
LID I WL, DOUBLE, PHASE 781
LID I WL, SINGLE, PHASE 780
LID II WL, SINGLE, PHASE 781
LID II WL. UP/DOWN, PHASE 781
LIGHT EYE® 150 SINGLE-PHASE, PD, QPAR111 515
LIGHT EYE® 150 SINGLE-PHASE, QPAR111 514
LIGHT EYE® 150 THREE-PHASE, PD, QPAR111 601
LIGHT EYE® 150 THREE-PHASE, QPAR111 601
LIGHT EYE® 150 DECORATIVE RING Ø 13,6 CM 243, 515, 601
LIGHT EYE® 150 PD, QPAR111 243
LIGHT EYE® 2.0 SINGLE-PHASE, PD, Ø 7,5 CM 517
LIGHT EYE® 2.0 SINGLE-PHASE, PHASE, Ø 7,5 CM 517
LIGHT EYE® 2.0 48V, DALI, Ø 7,5 CM 439
LIGHT EYE® 2.0 48V, PD, DALI, Ø 7,5 CM 439
LIGHT EYE® 90 SINGLE-PHASE, PD, QPAR51 515
LIGHT EYE® 90 SINGLE-PHASE, QPAR51 514
LIGHT EYE® 90 THREE-PHASE, PD, QPAR51 600
LIGHT EYE® 90 DECORATIVE RING Ø 5,7 CM 243, 515, 601
LIGHT EYE® 90 PD, QPAR51 243
LINIUS 120 PD, DALI, CANOPY 235
LINIUS 120 PD, DALI, RECESSED 235
LINIUS 120 PD, PHASE, CANOPY 234
LINIUS 120 PD, PHASE, RECESSED 235
LINIUS 150 PD, DALI, CANOPY 237
LINIUS 150 PD, DALI, RECESSED 237
LINIUS 150 PD, PHASE, CANOPY 236
LINIUS 150 PD, PHASE, RECESSED 237
LIPSY® 2.0 30 CW, DOME 390
LIPSY® 2.0 30 CW, DRUM 392
LIPSY® 2.0 30 CW, HF, DOME 390
LIPSY® 2.0 30 CW, HF, DRUM 392
LIPSY® 2.0 40 CW, 3H EM, DOME 391
LIPSY® 2.0 40 CW, 3H EM, DRUM 393
LIPSY® 2.0 40 CW, DOME 391
LIPSY® 2.0 40 CW, DRUM 393
LIPSY® 2.0 40 CW, HF, DOME 391
LIPSY® 2.0 40 CW, HF, DRUM 393
LISENNE 40 POLE, E27 708
LISENNE 70 POLE, E27 708
LOGS 40 POLE 679
LOGS 70 POLE 679
LOGS IN L WL, DALI 345
LOGS IN L WL, PHASE 345
LOGS IN WL 344
LOGS IN WL, PHASE 344
LOGS WL 847
LYGANT WL, DOUBLE 279
LYGANT WL, SINGLE 279

LIGHT BULB

LED A60 E27 900
LED A60 E27, HIGH EFFICIENCY 900
LED A60 E27, MIRRORHEAD CHROM 903
LED A60 GU10 897
LED C35 E14 896, 897
LED C35 E14, GOLD CURLY FILAMENT 896
LED G45 E14, GOLD CURLY FILAMENT 896
LED GLOBE 125 E27 903
LED GLOBE 125 E27, BLACK SMOKEY 901
LED GLOBE 125 E27, CRESCENT SLANTING SMOKEY 901
LED GLOBE 125 E27, HALF MOON 903
LED GLOBE 125 E27, SLANTING TOP SMOKEY 901
LED GLOBE 125 E27, SOFT CURVE SMOKEY 900
LED GLOBE 150 E27, BLACK SMOKEY 901
LED GLOBE 150 E27, TWISTED SMOKEY GREY 900
LED GLOBE 200 E27, BLACK SMOKEY 901
LED GLOBE 300 E27, BLACK SMOKEY 901
LED QPAR 111 GU10 899
LED QPAR111 GU10 899
LED QPAR51 GU10 898
LED QR51 GU5.3 897
LED QT-DE12 R7S, 118 MM 896
LED QT-DE12 R7S, 78 MM 896
LED QT14 G9 896
LED ST58 E27 903
LED ST64 E27, GOLD 902
LED ST64 E27, GOLD CURLY FILAMENT 903
LED T32 E27, SLIM TUBE 902
LED T32 E27, SOFT SPIRAL 902
LED T32 E27, SOFT TUBE 902
LED T32 GU10 897
LED T38 E27 902
LED T45 E27 902
LED TCR-TSE GX53 897
LED, PAR11 GU10 899
SLVconnect® LED A60 SMART E27, RGBW, ZIGBEE 3.0 904
SLVconnect® LED A60 SMART E27, ZIGBEE 3.0 904
SLVconnect® LED PAR16 SMART GU10, RGBW, ZIGBEE 3.0 904
SLVconnect® LED PAR16 SMART GU10, TUNABLE WHITE, ZIGBEE 3.0 904
SLVconnect® LED PAR16 SMART GU10, ZIGBEE 3.0 904

M

M-POL 30 POLE 667
M-POL 60 POLE 667
M-POL 60 POLE, SOCKET 666
M-POL 90 POLE 667
M-POL COVER 666
M-POL M POLEHEAD 663
M-POL M POLEHEAD, DALI 663
M-POL M POLEHEAD, LOUVER 665
M-POL M POLEHEAD, LOUVER, DALI 665
M-POL M POLEHEAD, SHADER 664
M-POL M POLEHEAD, SHADER, DALI 665
M-POL S POLEHEAD 661
M-POL S POLEHEAD 180°, GLARE-FREE 660
M-POL S POLEHEAD 180°, GLARE-FREE, DALI 661
M-POL S POLEHEAD 360°, GLARE-FREE 660
M-POL S POLEHEAD 360°, GLARE-FREE, DALI 660
M-POL S POLEHEAD, DALI 661
M-POL S POLEHEAD, LOUVER 662
M-POL S POLEHEAD, LOUVER, DALI 663
M-POL S POLEHEAD, SHADER 662

M-POL S POLEHEAD, SHADER, DALI 662
MAGANDA WL 319
MAGICO 20 PD, E27 185
MAGICO 38 PD, E27 185
MAGICO 55 PD, E27 185
MANA 40 SHADE, ROUND 335
MANA 40 SHADE, ROUND, ACOUSTIC FELT 334
MANA 40 SHADE, ROUND, MOON STRUCTURE 335
MANA 60 SHADE, ROUND 335
MANA 60 SHADE, ROUND, ACOUSTIC FELT 334
MANA 60 SHADE, ROUND, MOON STRUCTURE 335
MANA BASE ROUND 334
MANA BASE WL, ROUND, PHASE 333
MARONA CL, PHASE 163
MECANICA 2.0 TL, LED, CCT 414
MEDO® 2.0 SLIM 30 CL, DALI 200, 300
MEDO® 2.0 SLIM 30 CL, PHASE 198, 298
MEDO® 2.0 SLIM 40 CL, DALI 201, 300
MEDO® 2.0 SLIM 40 CL, PHASE 199, 299
MEDO® 2.0 SLIM 60 CL, DALI 201, 300
MEDO® 2.0 SLIM 60 CL, PHASE 199, 299
MEDO® 2.0 SLIM 80 CL, DALI 201, 301
MEDO® 2.0 SLIM 80 CL, PHASE 199, 299
MEDO® 2.0 SUSPENSION KIT 1.5 M CENTRAL SUSPENSION KIT 205, 301
MEDO® 2.0 SUSPENSION KIT 3 M PARALLEL SUSPENSION KIT 205, 301
MEDO® 2.0 SUSPENSION KIT 5 M CENTRAL SUSPENSION KIT 205, 301
MEDO® 30 RL, FRAME 88
MEDO® 40 RL, FRAME 89
MEDO® 60 RL, FRAME 89
MEDO® 90 RL, FRAME 89
MEDO® 2.0 HYVE 40 CL, DALI 202, 302
MEDO® 2.0 HYVE 40 CL, PHASE 202, 302
MEDO® 2.0 HYVE 60 CL, DALI 203, 303
MEDO® 2.0 HYVE 60 CL, PHASE 202, 302
MEDO® 2.0 HYVE 80 CL, DALI 203, 303
MEDO® 2.0 HYVE 80 CL, PHASE 203, 303
MEDO® PRO 30 CW, DALI 210, 307
MEDO® PRO 30 CW, DALI, UGR<19 208, 304
MEDO® PRO 30 CW, PHASE 211, 307
MEDO® PRO 30 CW, PHASE, UGR<19 208, 305
MEDO® PRO 40 CW, DALI 211, 308
MEDO® PRO 40 CW, DALI, UGR<19 208, 305
MEDO® PRO 40 CW, PHASE 211, 308
MEDO® PRO 40 CW, PHASE, UGR<19 209, 305
MEDO® PRO 60 CW, DALI 212, 308
MEDO® PRO 60 CW, DALI, UGR<19 209, 306
MEDO® PRO 60 CW, PHASE 213, 309
MEDO® PRO 60 CW, PHASE, UGR<19 209, 306
MEDO® PRO 90 CL, DALI 213, 309
MEDO® PRO 90 CL, DALI, UGR<19 210, 306
MEDO® PRO 90 CL, PHASE 213, 309
MEDO® PRO 90 CL, PHASE, UGR<19 210, 307
MEDO® RING 60 PD, DALI 206
MEDO® RING 60 PD, PHASE 207
MEDO® RING 90 PD, DALI 207
MEDO® RING 90 PD, PHASE 207
MELAN CW, E27 395
MERADO FLOOD WL, PHASE 361
MERIDIAN BOX WL, E27 827
MERIDIAN BOX WL, E27, SENSOR 827
MERIDIAN WL, E27 826
MIBO UP/DOWN WL, QT14 319
MOBALA EL 121
MODELA WL, UP/DOWN, PHASE 778
MOLAT 100 POLE, E27 707
MOLAT CL, E27 763
MOLAT PD, E27 707
MOLAT WL, E27 848
MOTUNA CW, PHASE 163, 375
MOTUNA PD, PHASE 197
MYRA CW, SINGLE, QPAR51 853
MYRA DISPLAY WL, CURVED, QPAR51 851
MYRA SPOT DOUBLE, GU10 727
MYRA UP/DOWN WL, QPAR51 839
MYRA WL, DOUBLE, QPAR51 851
NAUTILUS 10 SP, SQUARE 742
NAUTILUS 10 SP, ROUND, QPAR51 743
NAUTILUS 10 SPOT SP, LED 744
NAUTILUS 10 SPOT SP, QPAR51 744
NAUTILUS SP, QR-C51 744
NAUTILUS WL QPAR51 853

N

NEW TRIA® 64
NEW TRIA® 150 DL, ROUND, QPAR111 86
NEW TRIA® 155 DL, DOUBLE 73
NEW TRIA® 155 DL, DOUBLE, QPAR51 73
NEW TRIA® 155 RING, DOUBLE, SQUARE GU10/LED MODULE 83
NEW TRIA® 300 DL, ANGULAR, QPAR111 87
NEW TRIA® 45 DL, ROUND 73
NEW TRIA® 68 DL, DTW, PHASE 62
NEW TRIA® 68 DL, PHASE 58, 60
NEW TRIA® 68 DL, PHASE, AIRTIGHT 66
NEW TRIA® 68 DL, QPAR51 68
NEW TRIA® 68 RING, ROUND, GU10/LED MODULE 77
NEW TRIA® 68 RING, ROUND, GU10/LED-MODULE 76, 77
NEW TRIA® 68 RING, SQUARE, GU10/LED MODULE 77
NEW TRIA® 68 RING, SQUARE, GU10/LED-MODULE 76, 77
NEW TRIA® 75 / XL DL, QPAR51 70
NEW TRIA® 75 DL, ROUND, PHASE 60
NEW TRIA® 75 RING, ROUND, GU10/LED MODULES 79
NEW TRIA® 75 RING, ROUND, GU10/LED MODULES 79
NEW TRIA® 75 RING, SQUARE, GU10/LED MODULES 79
NEW TRIA® 75 XL RING, ROUND, GU10/LED MODULES 79
NEW TRIA® 75 XL RING, SQUARE, GU10/LED MODULES 79
NEW TRIA® 95 RING, ROUND, LED MODULES 81
NEW TRIA® 95 RING, SQUARE, LED MODULES 81
NEW TRIA® DL, DOUBLE, LED MODULE, PHASE 83
NEW TRIA® DL, DOUBLE, QPAR111 87
NEW TRIA® DL, LED MODULE, DTW, PHASE 75
NEW TRIA® DL, LED MODULE, PHASE 75, 81
NEW TRIA® UNIVERSAL DL, LED MODULE, PHASE 75
NOBLO® CW, DOUBLE, PHASE 373
NOBLO® CW, DOUBLE, PHASE, DTW 371
NOBLO® CW, SINGLE, PHASE 373
NOBLO® CW, SINGLE, PHASE, DTW 371
NOBLO® CW, TRIPLE, PHASE 373
NOBLO® CW, TRIPLE, PHASE, DTW 371
NOBLO® SPOT SINGLE-PHASE, PHASE 521
NOBLO® SPOT SINGLE-PHASE, TRIPLE TRACK SET 521
NOBLO® SPOT THREE-PHASE, PHASE 585
NOBLO® SPOT LV, ROPE TRACK 477
NOTAPO L RL 119
NOTAPO S RL 119
NUMINOS® GIMBLE L 44
NUMINOS® GIMBLE M 42
NUMINOS® GIMBLE S 40
NUMINOS® GIMBLE XL 46
NUMINOS® GIMBLE XS 38
NUMINOS® L DL 24
NUMINOS® L THREE-PHASE, PHASE 576
NUMINOS® L CL 134
NUMINOS® L CL, PHASE 294
NUMINOS® L PD, PHASE 190
NUMINOS® M DL 22
NUMINOS® M THREE-PHASE, PHASE 574
NUMINOS® M CL 132
NUMINOS® M CL, PHASE 292
NUMINOS® M PD, PHASE 188
NUMINOS® MOVE L 34
NUMINOS® MOVE M 32
NUMINOS® MOVE S 30
NUMINOS® MOVE XL 36
NUMINOS® MOVE XS 28
NUMINOS® S DL 20
NUMINOS® S THREE-PHASE, PHASE 572
NUMINOS® S 48V, DALI 444, 448
NUMINOS® S CL 130
NUMINOS® S CW, PHASE 290
NUMINOS® S PD, PHASE 186
NUMINOS® XL DL 26
NUMINOS® XL THREE-PHASE, PHASE 578
NUMINOS® XL CL 136
NUMINOS® XL CL, PHASE 296
NUMINOS® XL PD, DALI 192
NUMINOS® XS DL 18
NUMINOS® XS 48V, DALI 442, 446
NUMINOS® ZOOM M THREE-PHASE PHASE 580

O

OCCULDAS 13 CL, INDIRECT, PHASE 150
OCCULDAS 14 EL, INDIRECT, PHASE 107
OCCULDAS 23 CL, INDIRECT, PHASE 151
OCCULDAS 23 EL, INDIRECT, PHASE 107
OCULUS CL DTW, PVD 148
OCULUS CL, MOVE, PHASE 107
OCULUS CL, PHASE 148
OCULUS PD DTW, PVD 257
OCULUS PD, SINGLE, PHASE 257
OCULUS UP/DOWN WL, PHASE 337
OCULUS WL UP/DOWN DTW, PVD 337
OCULUS WL, SINGLE, PHASE 337
OLYPSO 40 PD, E27 183
OLYPSO 50 PD, E27 183
ONE 40 CW, DALI 313
ONE 40 CW, DALI, UP/DOWN 311
ONE 40 CW, PHASE, UP/DOWN 310
ONE 60 CW, DALI 313
ONE 60 CW, DALI, UP/DOWN 311
ONE 60 CW, PHASE, UP/DOWN 311
ONE 60 PD, DALI 227
ONE 60 PD, DALI, UP/DOWN 227
ONE 60 PD, PHASE, UP/DOWN 227
ONE 80 PD, DALI 229
ONE 80 PD, DALI, UP/DOWN 229
ONE BOW FL 405
ONE CUBE PD, DALI 225
ONE CUBE UP/DOWN PD, DALI, UP/DOWN 225
ONE DOUBLE PD, DALI, UP/DOWN 231
ONE DOUBLE PD, PHASE, UP/DOWN 231

ONE FELT PLATE, ACOUSTIC FELT, FOR ONE 80/ ONE CUBE 225, 229
ONE FLAT PD, DALI, TRIPLE 223
ONE FLAT PD, PHASE, SINGLE 223
ONE LINEAR 100 PD, PHASE, UP/DOWN 233
ONE LINEAR 140 PD, PHASE, UP/DOWN 233
ONE LINEAR 50 WL, PHASE, UP/DOWN 312
ONE LINEAR 70 WL, PHASE, UP/DOWN 313
ONE STRAIGHT FL 405
ONE TRIPLE PD, DALI 231
ONE VERTICAL PD, PHASE 224
ORDI II 45 POLE, PHASE 723
ORDI II 70 POLE, PHASE 723
ORDI II 70 POLE, SENSOR 723
ORDI II WL, PHASE 845
ORDI II WL, SENSOR 845
ORDI WL 844
ORDI WL, SENSOR 844
OSSA 180 WL, QT-DE12 349
OSSA 300 WL, QT-DE12 349
OTOS GLAS POLE, E27 705
OUT-BEAM UP/ FLOOD DOWN WL, UP/FLOOD DOWN 847
OVAL 14 WL, UP/DOWN 784
OVAL 18 WL, UP/DOWN 784
OVALISK 100 POLE 701
OVALISK 75 POLE 701
OVALISK CL 763
OVALISK SENSOR WL 831
OVALISK WL 831
OVANA 30 CL, LED, PHASE, CCT 165
OVANA 30 CL, LED, ZIGBEE, TW 164
OVANA 44 CL, LED, PHASE, CCT 165
OVANA 44 CL, LED, ZIGBEE, TW 165
OVANA 44 PD, LED, PHASE, CCT 197

P

PANEL 60 CL, ROUND, DALI 169
PANEL 60 CL, ROUND, PHASE 169
PANEL 60 PD, ROUND, DALI 253
PANEL 60 PD, ROUND, PHASE 253
PANEL TRACK SINGLE-PHASE, SQUARE 527
PANEL TRACK SINGLE-PHASE, ROUND 527
PANTILO 20 PD, E27 240
PANTILO 28 PD, E27 240
PANTILO CONVEX 29 PD, E27 241
PANTILO CONVEX 40 PD, E27 241
PANTILO OVAL PD, E27 240
PANTILO ROPE 19 TL, E27 409
PANTILO ROPE 19 CW, E27 375
PANTILO ROPE 19 PD, E27 239
PANTILO ROPE 20 PD, E27 239
PANTILO ROPE 27 CW, E27 375
PANTILO ROPE 27 FL, E27 409
PANTILO ROPE 27 PD, E27 239
PANTILO ROPE WL, G9 322
PANTILO SLIM TL, E27 408
PANTILO TL, E27 409
PARA 380 PD E27 273
PARA CONE 14 SINGLE-PHASE, GU10 525
PARA CONE 14 SINGLE-PHASE, PD, GU10 525
PARA CONE 14 THREE-PHASE, GU10 596
PARA CONE 14 THREE-PHASE, PD, GU10 597
PARA CONE 20 PD, E27 265
PARA CONE 30 PD, E27 265
PARA CONE GL SINGLE-PHASE, GU10 525
PARA CONE GL THREE-PHASE, GU10 597
PARA CONE GL PD, GU10 597
PARA DOME PD, E27 273
PARA DOME SHADE 273
PATTA-F EL, SQUARE, PHASE 123
PATTA-F EL, ROUND, PHASE 123
PATTA-I DL, ANGULAR, PHASE 122
PATTA-I EL, SQUARE, PHASE 123
PATTA-I EL, ROUND, PHASE 122
PEMA® WL 832, 833
PEMA® WL, E27 833
PHELIA 10 PD, E27 267
PHELIA 25 PD, E27 267
PHELIA 30 PD, E27 267
PHELIA FL, E27 415
PHELIA WL, QPAR51 361
PHOTONI 45 POLE, E27 649
PHOTONI 75 POLE, E27 649
PHOTONI CL, E27 754
PHOTONI CYL 45 POLE, E27 648
PHOTONI CYL 75 POLE, E27 649
PHOTONI CYL CL, E27 754
PHOTONI CYL WL, E27 779
PHOTONI WL, E27 779
PHOTONIA POLE, E27 705
PHOTONIA WL, E27 848
PIKA DL, ROUND, QPAR51, PIVOTING 105
PIKA DL, ROUND, QPAR51, FIXED 105
PL-BEAM PRO M LAMP SHIELD 737
PL-BEAM PRO M SP, DALI 735
PL-BEAM PRO M SP, DALI, ASYM 735
PL-BEAM PRO M HONEYCOMB GRID 737
PL-BEAM PRO S LAMP SHIELD 737
PL-BEAM PRO S SP, DALI 734
PL-BEAM PRO S SP, DALI, ASYM 734
PL-BEAM PRO S HONEYCOMB GRID 737
PL-BEAM PRO S/M MAST CLAMP 737
PL-BEAM WALL BRACKET 737
PLASTRA 101 WL, E14 341
PLASTRA 104 CL, E27 159
PLASTRA 104 WL, QT14 341
PLASTRA 105 CL, E27 158
PLASTRA CL, PHASE 158
PLASTRA CL, QPAR51 158
PLASTRA RL, SQUARE, QPAR51 113
PLASTRA RL, ROUND, QPAR51 113
PLASTRA WL, CUBE, QT14 338
PLASTRA WL, CURVE, QT-DE12 341
PLASTRA WL, E14 339
PLASTRA WL, ANGULAR 340
PLASTRA WL, SEMICIRCULAR 339
PLASTRA WL, QPAR51 340
PLASTRA WL, RECTANGULAR, QT-DE12 339
PLASTRA WL, ROUND SHIELD 340
POWER TRAIL-LITE® EL, SQUARE 887
POWER TRAIL-LITE® EL, ROUND 887
PROFIL SETS | S SURFACE-MOUNTED PROFILE + DIFFUSER 613
PURI 2.0 SINGLE-PHASE, TRIPLE TRACK SET, QPAR51 498
PURI 2.0 CONE SINGLE-PHASE, PD, QPAR51 497
PURI 2.0 CONE SINGLE-PHASE, QPAR51 495
PURI 2.0 CONE THREE-PHASE, PD, QPAR51 559
PURI 2.0 CONE THREE-PHASE, QPAR51 557
PURI 2.0 CONE CW, DOUBLE ASYM., QPAR51 365
PURI 2.0 CONE CW, DOUBLE LONG, QPAR51 364
PURI 2.0 CONE CW, QPAR51 364
PURI 2.0 CONE CW, QUADRUPLE LONG, QPAR51 365
PURI 2.0 CONE CW, SWITCH, SINGLE, QPAR51 365
PURI 2.0 CONE CW, SINGLE, QPAR51 365
PURI 2.0 CONE CW, TRIPLE LONG, QPAR51 365
PURI 2.0 CONE CW, TRIPLE ROUND, QPAR51 365
PURI 2.0 CONE SHADE 369, 499, 561
PURI 2.0 DOME SINGLE-PHASE, QPAR51 495, 497
PURI 2.0 DOME THREE-PHASE, PD, QPAR51 559
PURI 2.0 DOME THREE-PHASE, QPAR51 557
PURI 2.0 DOME CW, DOUBLE ASYM., QPAR51 367
PURI 2.0 DOME CW, DOUBLE LONG, QPAR51 366
PURI 2.0 DOME CW, QPAR51 366
PURI 2.0 DOME CW, QUADRUPLE LONG, QPAR51 367
PURI 2.0 DOME CW, SWITCH, SINGLE, QPAR51 367
PURI 2.0 DOME CW, SINGLE, QPAR51 367
PURI 2.0 DOME CW, TRIPLE LONG, QPAR51 367
PURI 2.0 DOME CW, TRIPLE ROUND, QPAR51 367
PURI 2.0 DOME SHADE 369, 499, 561
PURI 2.0 TUBE SINGLE-PHASE, PD, QPAR51 497
PURI 2.0 TUBE SINGLE-PHASE, QPAR51 495
PURI 2.0 TUBE THREE-PHASE, PD, QPAR51 559
PURI 2.0 TUBE THREE-PHASE, QPAR51 557
PURI 2.0 TUBE CW, DOUBLE ASYM., QPAR51 363
PURI 2.0 TUBE CW, DOUBLE LONG, QPAR51 362
PURI 2.0 TUBE CW, QPAR51 362
PURI 2.0 TUBE CW, QUADRUPLE LONG, QPAR51 363
PURI 2.0 TUBE CW, SWITCH, SINGLE, QPAR51 363
PURI 2.0 TUBE CW, SINGLE, QPAR51 363
PURI 2.0 TUBE CW, TRIPLE LONG, QPAR51 363
PURI 2.0 TUBE CW, TRIPLE ROUND, QPAR51 363
PURI 2.0 TUBE SHADE 369, 499, 561

Q

Q-LINE® WL 321
Q-RING WL, PHASE 782
Q-RING WL, SENSOR 782
QUAD FRAME 14 WL 346
QUAD FRAME 19 WL 346
QUAD POLE 726
QUAD PRO 60 POLE, DALI 655
QUAD PRO 90 POLE, DALI 655
QUAD UP/DOWN 15 WL 811
QUAD WL 811
QUADRASYL 75 POLE, TCR-TSE 726
QUADRASYL PRO 70 POLE, DALI 645
QUADRASYL PRO 90 POLE, DALI 645
QUADRASYL PRO WL, SINGLE, DALI, ASYM 777
QUADRASYL PRO WL, UP/DOWN, DALI 777
QUADRASYL WL, TCR-TSE 849
QUADRULO CL 825
QUADRULO FL 685
QUADRULO SENSOR WL, E27 824
QUADRULO WL 824
QUADRULO WL, E27 825
QUIMERA SINGLE-PHASE, PD 489

QUIMERA PD, PHASE 177
QUIMERA TL 403
QUIMERA WL, PHASE 279

R
R-CUBE 35 POLE, PHASE 651
R-CUBE 75 POLE, PHASE 651
R-CUBE WL, PHASE 778
RASTERLYS 70 POLE, PHASE 673
RASTERLYS WL, PHASE 787
RASTERLYS WL, UP/DOWN, PHASE 787
ROCCI 200 EL, ANGULAR 891
ROCCI 200 EL, ROUND 891
ROCCI EL, SQUARE 890
ROCCI EL, ROUND 890
ROTOBALL 25 FL, E27 703
ROTOBALL 25 PD, E27 271
ROTOBALL 40 FL, E27 703
ROTOBALL 40 PD, E27 271
ROTOBALL 50 FL, E27 703
ROTOBALL 50 PD, E27 271
ROX ACRYL 30 POLE, E27 713
ROX ACRYL 60 POLE, E27 713
ROX ACRYL 90 POLE, E27 713
ROX CL, GX53 765
ROX CL, QPAR111 765
ROX WL, UP/DOWN, QPAR111 840
RUSTY® 40 POLE 692
RUSTY® 40 POLE, E27 692, 693
RUSTY® 70 POLE 692
RUSTY® 70 POLE, E27 693
RUSTY® CONE 24 FL, E14 689
RUSTY® CONE 40 POLE, E27 689
RUSTY® CONE 70 POLE, E27 689
RUSTY® PATHLIGHT 40 POLE 688
RUSTY® PATHLIGHT 70 POLE 688
RUSTY® PATHLIGHT POLE, TCR-TSE 688
RUSTY® SLOT 50 POLE 686
RUSTY® SLOT 50 POLE, E27 687
RUSTY® SLOT 80 POLE 687
RUSTY® SLOT 80 POLE, E27 687
RUSTY® UP/DOWN WL, SQUARE 812
RUSTY® UP/DOWN WL, ROUND 812

S
S-CUBE 35 POLE, PHASE 650
S-CUBE 75 POLE, PHASE 651
S-CUBE CW, PHASE 778
S-TUBE 32 POLE, GU10 646
S-TUBE 75 POLE, GU10 646
S-TUBE CW 791
SAMRINA SP, SINGLE, GU10 741
SEDO 14 WL 316
SEDO 21 WL 317
SEJERO 90 POLE, E27 643
SEJERO PD, E27 755
SEJERO WL, E27 771
SENSER 2.0 12 CW, ROUND, DALI 388
SENSER 2.0 12 CW, ROUND, PHASE 386
SENSER 2.0 12 CW, SQUARE, DALI 388
SENSER 2.0 12 CW, SQUARE, PHASE 386
SENSER 2.0 12 RL, ROUND, DALI 100
SENSER 2.0 12 RL, ROUND, PHASE 96
SENSER 2.0 12 RL, SQUARE, DALI 98
SENSER 2.0 12 RL, SQUARE, PHASE 94
SENSER 2.0 18 CW, ROUND, DALI 389
SENSER 2.0 18 CW, ROUND, PHASE 387
SENSER 2.0 18 CW, SQUARE, DALI 389
SENSER 2.0 18 CW, SQUARE, PHASE 387
SENSER 2.0 18 RL, ROUND, DALI 101
SENSER 2.0 18 RL, ROUND, PHASE 97
SENSER 2.0 18 RL, SQUARE, DALI 99
SENSER 2.0 18 RL, SQUARE, PHASE 95
SENSER 2.0 24 CW, ROUND, DALI 389
SENSER 2.0 24 CW, ROUND, PHASE 387
SENSER 2.0 24 CW, SQUARE, DALI 389
SENSER 2.0 24 CW, SQUARE, PHASE 387
SENSER 2.0 24 RL, ROUND, DALI 101
SENSER 2.0 24 RL, ROUND, PHASE 97
SENSER 2.0 24 RL, SQUARE, DALI 99
SENSER 2.0 24 RL, SQUARE, PHASE 95
SENSER 2.0 30 CW, ROUND, DALI 389
SENSER 2.0 30 CW, ROUND, PHASE 387
SENSER 2.0 30 CW, SQUARE, DALI 389
SENSER 2.0 30 CW, SQUARE, PHASE 387
SENSER 2.0 30 RL, ROUND, DALI 101
SENSER 2.0 30 RL, ROUND, PHASE 97
SENSER 2.0 30 RL, SQUARE, DALI 99
SENSER 2.0 30 RL, SQUARE, PHASE 95
SHELL 30 WL, PHASE 347
SIGHT EASY THREE-PHASE 593
SIGHT EASY THREE-PHASE, DALI 593
SIGHT EVO 1200 THREE-PHASE, SINGLE 590
SIGHT EVO 1200 THREE-PHASE, SINGLE DALI 591
SIGHT EVO 600 THREE-PHASE, DOUBLE 590
SIGHT EVO 600 THREE-PHASE, DOUBLE DALI 591
SIGHT EVO 600 THREE-PHASE, SINGLE 590
SIGHT EVO 600 THREE-PHASE, SINGLE DALI 591
SIGHT MOVE THREE-PHASE 595
SIGHT MOVE THREE-PHASE, DALI 595
SIGHT PANEL THREE-PHASE 592
SIGHT PANEL THREE-PHASE, DALI 592
SIGHT TRACK THREE-PHASE 594
SIGHT TRACK THREE-PHASE, DALI 594
SIMA CW, SQUARE, PHASE 394
SIMA CW, SQUARE, SENSOR 394
SITRA 360 CW, TCR-TSE 856
SITRA 360 POLE, TCR-TSE 727
SITRA 360 SPIKE SP, DOUBLE, TCR-TSE 751
SITRA 360 SPIKE SP, SINGLE, TCR-TSE 751
SITRA CL, TCR-TSE 765
SITRA CUBE WL, TCR-TSE 809
SITRA L WL, UP/DOWN, ANGULAR 809
SITRA M WL, UP/DOWN 809
SITRA S WL, SINGLE 807
SITRA S WL, UP/DOWN 807
SITRA WL, TCR-TSE 839
SITRA WL, UP/DOWN, TCR-TSE 839
SLOTBOX 40 POLE 721
SLOTBOX 70 POLE 721
SLOTS 45 POLE 719
SLOTS 65 POLE 719
SLVconnect® OVANA 44 PD, LED, ZIGBEE, TW 197
SMALL PLOT COVER, 2-PACK 888
SMALL PLOT COVER, 4-PACK 888
SMALL PLOT MODULE 888
SOLASTO EL, SQUARE 893
SOLASTO EL, ROUND 893
SOLID CUBE WL, QT14 354
SOMNILA FLEX WL, LEFT 358
SOMNILA FLEX WL, RIGHT 359
SOMNILA SPOT WL, LEFT 358
SOMNILA SPOT WL, RIGHT 358
SOPRANA CL, E27 157
SPOT 79 CW, QPAR51 385
SQUARE 30 POLE, E27 717
SQUARE 60 POLE, E27 717
SQUARE 90 POLE, E27 717
SQUARE TURN WL, G9 850
SQUARE WL, E27 824
STRIP SETS | S STRIP + DRIVER 612
SUN 20 CL, E27 126
SUN 20 PD, E27 182
SUN 30 CL, E27 126
SUN 30 PD, E27 182
SUN 40 PD, E27 182
SUN FL, G9 407
SUN MIRROR WL, QUAD 281
SUN MIRROR WL, TRIPLE 281
SUN TL, G9 407
SUN WL, DOUBLE, G9, ANGULAR 287
SUN WL, G9, ANGULAR 286
SUN WL, G9, CURVED 287
SUN WL, UP, G9, ANGULAR 287
SYNA GARDEN SP 733
SYNA PLANT SP 733
SYNA SHADE SP, GU10 732
SYNA SP 733
SYNA WIDE SP 732

T
T-TUBE 70 POLE, GU10, DOUBLE 647
T-TUBE 70 POLE, GU10, DOUBLE, SENSOR 647
T-TUBE 70 POLE, GU10, SINGLE 647
T-TUBE 70 POLE, GU10, SINGLE, SENSOR 646
T-TUBE WL GU10, DOUBLE 789
T-TUBE WL GU10, DOUBLE, SENSOR 789
T-TUBE WL GU10, SINGLE 789
T-TUBE WL GU10, SINGLE, SENSOR 788
TAHA II 45 POLE, PHASE 698
TAHA II 70 POLE, SENSOR 699
TAHA II 70 POLE, PHASE 698
TAHA II 90 POLE, SENSOR 699
TAHA II 90 POLE, PHASE 698
TAHA II WL, PHASE 830
TAHA II WL, SENSOR 830
TELESKOP LV, QR-C51 475
TENORA CL, E27 157
TERANG 200 CW 861
THEO BRACKET CW 856
THEO BRACKET SP 749
THEO PATHLIGHT 73 POLE, DOUBLE 729
THEO PRO L WL, SINGLE, DALI P1 799
THEO PRO L WL, SINGLE, DALI P2 801
THEO PRO L WL, UP/DOWN, DALI P1 799
THEO PRO L WL, UP/DOWN, DALI P2 801
THEO PRO S WL, SINGLE, DALI P1 798
THEO PRO S WL, SINGLE, DALI P2 798
THEO PRO S WL, UP/DOWN, DALI P1 798
THEO PRO S WL, UP/DOWN, DALI P2 799
THEO UP/DOWN WL, QPAR51 354, 795
THEO WL, QPAR51 796
TODAY PRO DISPLAY 850
TRAIL-LITE® 60 EL 886
TRAIL-LITE® 60 POWER SUPPLY 887
TRAIL-LITE® 60 SET EL 886
TRAIL-LITE® 60 SINGLE EL 886
TRILEDO CL CL, DOUBLE, SQUARE 128
TRILEDO CL, DOUBLE, SQUARE, QPAR51 129
TRILEDO CL, SINGLE, SQUARE 128
TRILEDO CL, SINGLE, SQUARE, QPAR51 129
TRILEDO CL, SINGLE, ROUND 128
TRILEDO CL, SINGLE, ROUND, QPAR51 129
TRUKKO 60 WL 315
TRUKKO 80 WL, ROUND 315
TRUKKO 90 WL 315

TRUKKO WL, ROUND 314
TRUKKO WL, RECTANGULAR 314
TRUST 30 POLE 711
TRUST 60 POLE 711

U

UNIVERSAL 68 DL, PHASE 64
UNIVERSAL DOWNLIGHT COVER, PIVOTING, SQUARE, IP20 13
UNIVERSAL DOWNLIGHT COVER, PIVOTING, ROUND, IP20 13
UNIVERSAL DOWNLIGHT COVER, FIXED, SQUARE, IP65 13
UNIVERSAL DOWNLIGHT COVER, FIXED, ROUND, IP65 13
UNIVERSAL DOWNLIGHT FIX RL, LED, PHASE, IP65 12
UNIVERSAL DOWNLIGHT MOVE RL, LED, PHASE 12
UNIVERSAL DOWNLIGHT SLIM RL, PHASE 12
UNIVERSAL TRACKSPOT THREE-PHASE L, 24/28/32/36W 927/930/940 24°...60° 583
UNIVERSAL TRACKSPOT THREE-PHASE M, 12/16/20/24W 927/930/940 24°...60° 583

V

VAP SLIM 30 POLE, E27 714
VAP SLIM 60 POLE, E27 714
VAP SLIM 90 POLE, E27 714
VARU EL, QPAR51 113
VARYT CL, E14 127
VARYT DIAMOND GLASS SHADE 127, 179, 285, 401
VARYT GLOBE GLASS SHADE 127, 179, 285, 401
VARYT LINED GLASS SHADE 127, 179, 285, 401
VARYT PLEATED GLASS SHADE 127, 179, 285, 401
VARYT PD, E14 179
VARYT TL, E14 401
VARYT WL, E14 285
VERLUX EL, SQUARE, PHASE 104
VILUA L WL 837
VILUA S WL 837
VILUA WL, UP/DOWN 837

W

WALLYX WL, QPAR51 840
WL 106 E14 318, 319
WL 149 WL, PHASE 347
WL 149 WL, QT-DE12 347
WORKLIGHT EASY FL 940 417
WORKLIGHT FL 417
WORKLIGHT PD, DALI 251
WORKLIGHT PRO 120 PD, DALI 251
WORKLIGHT PRO 150 PD, DALI 251
WORKLIGHT PRO FL, DOUBLE 419
WORKLIGHT PRO FL, SINGLE 419
WORKLIGHT TL 417
WORO EL 121
WUD PD, E27, CYLINDRICAL 181
WUD PD, E27, SEMICIRCULAR 181
WUD TL, E27, CYLINDRICAL 399
WUD WL, E27, CYLINDRICAL 343



SUN
1009144

SYMBOLS KEY



Recommendations
Displays accessories and recommended light bulbs for the chosen products




Mix & Match
Indicates products that can be combined



Energy efficiency class
"This light is suitable for bulbs with an energy efficiency rating of ..."



Protection classes
- Protection class I / Protective conductor
- Protection class II/ Protection by double or reinforced insulation
- Protection class III/ Protection by extra-low voltage



Dimmable with:
- **C** = Trailing-edge phase dimmer
- **L** = Leading-edge phase dimmer
- **Uni** = Universal dimmer
- **1–10 V**
- **Dali** = DALI bus system
- **Switch** = Switch/button or touch control on the light
- **Touch** = Simple, stepless operation; responds to touch




IP protection rating:
Indicates the suitability of electrical equipment for different environmental conditions.



IK impact resistance rating:
The IK impact resistance rating is a measure of the resistance of housings for electrical equipment to mechanical stress, especially impact stress.



Half-diffusion angle:
Describes the beam angle in degrees. The smaller the angle, the more concentrated the light will be.



Rotation and pivoting capacity in degrees:
- Rotation range
- Pivot range
- Gimballed




Preservation of luminous flux:
Describes the amount by which the luminous flux of an LED decreases during a specified period.



Unified **G**lare **R**ating:
The lower the UGR value, the lower the psychological glare.




Pendant cable length
in cm



Cable length:
Mains plugs, connectors and supply cables (with open cable end) in cm



Through-wiring possible



Shape of the installation opening



Specification of the installation depth



Drive-over capability of the product ensured



Weight-bearing capacity of the product up to the specified value in tonnes. Measurements based on installation in concrete.



Sea-air resistant coating



Independent converter:
Control equipment also for use outside of lights



Short-circuit protected safety control equipment



Light colour temperature in Kelvin (K)



Luminous flux in lumens (lm)



Dark Sky
Indicates that the light emits almost no light into the upper half-space (ULOR < 2 %). Reduces light pollution and ensures targeted, needs-based illumination of the usable area.



Primary/Replica
Indicates lights with integrated primary/replica function. A sensor light (primary) controls downstream lights (replica) via a switched phase, enabling simple, networked lighting control without additional bus or control systems.



Connected lighting:
Indicates smart products that use the following protocols:
- Zigbee®
- DALI
- Bluetooth



Allows the installation of electrical control equipment on materials whose flammability is not known.




CCT switch:
By means of an integrated CCT switch, the light colour can be changed from 2700 K, 3000 K, 4000 K to 6500 K during installation.



Dim-to-warm:
With dimmers, the light colour can be altered from cold white to warm white.



Indicates lights with RGB+W and RGB
(Red-Green-Blue + White and Red-Green-Blue)



Indicates lights with motion sensors
(Microwaves (MR) - Technology / Infrared / Radio)



Products with integrated LEDs



Products with light socket

STAY WELL-INFORMED

Scan the QR code, select your country and get our latest prices. Visit us at **slv.com**

Unless otherwise agreed, all deliveries and services are subject to our General Terms and Conditions, which can be viewed on our website at **slv.com**

SLV is entitled to adjust the respective price list to changing market conditions, in the event of significant changes in procurement costs, changes in value-added tax or procurement prices.

*Please note the guarantee conditions available at slv.com → Service → Downloads → Guarantee conditions.

Many of the products shown in this catalogue are protected by trademarks, registered designs, utility models or patents. Any violation of these property rights or the use of text and layout design or copyrighted images without our authorisation will be prosecuted. The illustrations and information contained in this catalogue are for illustrative purposes only and are not legally binding in terms of colour, shape, design or technical details. All product descriptions/information are therefore subject to change and errors excepted.
All products in our range are subject to our strict quality assurance procedures and comply with generally applicable standards. This catalogue contains a general range and is not country-specific. Any deviations from country-specific guidelines must be clarified before ordering. SLV cannot be held responsible for any deviations in terms of technical standards. All weights and dimensions are given in kg and cm respectively unless stated otherwise. We reserve the right to make technical changes.

The presentation of our lights with realistic photos showing them in use is possible thanks to the kind cooperation and agreement of the owners or designers of the settings depicted in the images. We would like to take this opportunity to thank all those who consented to having photos taken and used.

The publication of this catalogue invalidates the prices specified in previous lists and catalogues. SLV is entitled to adjust the respective price list to changing market conditions, in the event of significant changes in procurement costs, changes in value-added tax or procurement prices.

All prices are recommended retail prices (RRP) and indicated without VAT.

Publisher
SLV GmbH, Germany
Daimlerstrasse 21-23
52531 Übach-Palenberg
T +49 (0) 2451 4833 - 0
slv.com

Copyright
© SLV GmbH, 2026

FSC
www.fsc.org
MIX
Paper | Supporting responsible forestry
FSC® C011124

SLV GmbH
Daimlerstraße 21-23, 52531 Übach-Palenberg
Germany | +49 (0) 2451 4833 - 333 | info@slv.de

SLV Österreich GmbH
Zaunergasse 4/4. Stock, 1030 Wien
Austria | +49 (0)2451 4833 - 355 | info@slv.de

SLV Belgium N.V.
Herentalsebaan 429, 2160 Wommelgem
Belgium | +32 (0)3 385 30 08 | info.be@slv.com

SLV Czech s.r.o.
V Sedlci 28/17, 160 00 Praha 6 - Sedlec
Czech Republic | +420 739 282 151 | info@cz.slv.com

SLV France S.A.S.
88 rue Henri Dépagneux, ZAC du Martelet - Bât B, 69400 Limas
France | +33 4 74 02 71 20 | infofr@slv.com

SLV Italia s.r.l.
Via Lecco, 19/D, 23896 Bevera di Sirtori (LC)
Italy | +39 039 5983575 | infoit@slv.com

SLV Nederland BV
Sint Jansweg 15, 5928 RC Venlo
The Netherlands | +31 773204343 | info.nl@slv.com

SLV Poland sp. z.o.o. ul.
Aleje Jerozolimskie 200, 02-486 Warsaw
Poland | +48 22 722-49-75 | slv@slv.pl

SLV Portugal, LDA.
Rua Margarida de Abreu N°15 - B, Casal Vistoso, 1900-410 Lisboa
Portugal | +351 210 185 961 | info@pt.slv.com

SLV d.o.o.
Barjanska cesta 50, 1000 Ljubljana
Slovenia | +386 1 2009 730 | info.si@slv.com

Soluciones Luminotécnicas Visulales, S.L.
Antic Camí Ral de Valencia, 38, L17, 8860 Castelldefels Barcelona
Spain | +34 931 168 161 | info@slv.es

SLV Swiss SA
Route du Bey 6, 1847 Rennaz
Switzerland | +41 218113232 | info@slv-swiss.ch

SLV Lighting UK Ltd.
Unit E Chiltern Park, Boscombe Road, LU5 4LT Dunstable
UK | +44 (0)203 968 11 00 | info@uk.slv.com

SLV Nordics
Daimlerstraße 21-23, 52531 Übach-Palenberg
Germany | +46 70 854 9770 | info@nordics.slv.com



slv.com